14

PATENT COOPERATION TREATY

PCT

REC'D 30 OCT 2001

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference CJL 301A	FOR FURTHER ACTION	See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)
International application No. PCT/US00/12795	International filing date *(day/month/year)* 10 MAY 2000	Priority date *(day/month/year)* 10 MAY 1999
International Patent Classification (IPC) or national classification and IPC IPC(7): E04B 1/343 and US Cl.: 52/1, 64, 573.1		
Applicant CROWELL, JAMES H.		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.

2. This REPORT consists of a total of 6 sheets.

☐ This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority. (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of _____ sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of report with regard to novelty, inventive step or industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☐ Certain defects in the international application
- VIII ☒ Certain observations on the international application

Date of submission of the demand	Date of completion of this report
11 DECEMBER 2000	01 OCTOBER 2001
Name and mailing address of the IPEA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer MICHAEL SAFAVI Telephone No. (703) 308-2168

Form PCT/IPEA/409 (cover sheet) (July 1998)★

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/US00/12795

I. Basis of the report

1. With regard to the **elements** of the international application:*

[X] the international application as originally filed

[X] the description:
pages 1-186, as originally filed
pages NONE, filed with the demand
pages NONE, filed with the letter of

[X] the claims:
pages 187-194, as originally filed
pages NONE, as amended (together with any statement) under Article 19
pages NONE, filed with the demand
pages NONE, filed with the letter of

[X] the drawings:
pages 1-19, as originally filed
pages NONE, filed with the demand
pages NONE, filed with the letter of

[X] the sequence listing part of the description:
pages NONE, as originally filed
pages NONE, filed with the demand
pages NONE, filed with the letter of

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.
These elements were available or furnished to this Authority in the following language ______ which is:

[ ] the language of a translation furnished for the purposes of international search (under Rule 23.1(b)).

[ ] the language of publication of the international application (under Rule 48.3(b)).

[ ] the language of the translation furnished for the purposes of international preliminary examination (under Rules 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

[ ] contained in the international application in printed form.

[ ] filed together with the international application in computer readable form.

[ ] furnished subsequently to this Authority in written form.

[ ] furnished subsequently to this Authority in computer readable form.

[ ] The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

[ ] The statement that the information recorded in computer readable form is identical to the writen sequence listing has been furnished.

4. [X] The amendments have resulted in the cancellation of:

[X] the description, pages NONE

[X] the claims, Nos. NONE

[X] the drawings, sheets/~~fig~~ NONE

5. [ ] This report has been drawn as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the Supplemental Box (Rule 70.2(c)).**

* *Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17).*

***Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.*

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.
PCT/US00/12795

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. statement

Novelty (N)	Claims	NONE	YES
	Claims	1-26	NO
Inventive Step (IS)	Claims	NONE	YES
	Claims	1-26	NO
Industrial Applicability (IA)	Claims	1-26	YES
	Claims	NONE	NO

2. citations and explanations (Rule 70.7)

Claims 1-26 lack novelty under PCT Article 33(2) as being anticipated by Boozer.

Boozer discloses, for example at Figs. 3, 2A, 4, 6, 7, 8, 10, and 15, a modular building system having interconnected structures operatively associated with, and interconnecting, respective building components, operable with the application of external load, and in direct response to the specific and instantaneous characteristics of such a load, to create a related, specific, load bearing path through the building between the point of the load application and the ground. Boozer, as well, discloses building components organized to form an overall building, at least some of which components are intended to carry loads that are related to different externally applied loads. and interconnect structures operatively interconnecting said components, and capable of defining variably, and for different specific externally applied loads, which ones of said components will form parts in a reaction, load-bearing path between the point of external load application and the ground, with the interconnected structures thus effectively holding to a minimum the overall time that certain ones of said components and interconnect structure operate as parts of such reaction path. Relative-motion-accommodating interconnect structures operating adaptively, selectively and dynamically with respect to external applied loads, and via the relative-motion accommodation accorded to selected interconnected building components and interconnect structures, to create different, responsive load-bearing paths through the building matrix between the point of such external load application and the ground are disclosed, as well. The elements of Boozer could be associated in any varying manner to create any varying design including connections affording relative motion which may be a direct result of temperature, pressure, load, etc.

Claims 1-26 lack novelty under PCT Article 33(2) as being anticipated by Bergeron et al.

Bergeron et al. discloses, including Figs. 2 and 3, a modular (Continued on Supplemental Sheet.)

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.
PCT/US00/12795

VIII. Certain observations on the international application

The following observations on the clarity of the claims, description, and drawings or on the question whether the claims are fully supported by the description, are made:

Claims 1-26 are objected to under PCT Rule 66.2(a)(v) as lacking clarity under PCT Article 6 because the claims are indefinite for the following reason(s): The language of claims 1-26, and particularly independent claims 1-4, fails to clearly set forth the elements which go to make up the inventive concept of the instant application. Further, no clear and complete relationship is ever set forth with respect to any and all elements which may be recited. There appears only language directed to desired effect or intended utilization or presumed consequence of any general aspects that are recited. There is no clear structure or article of manufacture set forth in the language of claims 1-26.

Supplemental Box
(To be used when the space in any of the preceding boxes is not sufficient)

Continuation of: Boxes I - VIII

Sheet 10

V. 2. REASONED STATEMENTS - CITATIONS AND EXPLANATIONS (Continued):
building system having interconnected structures operatively associated with, and interconnecting, respective building components, operable with the application of external load, and in direct response to the specific and instantaneous characteristics of such a load, to create a related, specific, load bearing path through the building between the point of the load application and the ground. Boozer, as well, discloses building components organized to form an overall building, at least some of which components are intended to carry loads that are related to different externally applied loads. and interconnect structures operatively interconnecting said components, and capable of defining variably, and for different specific externally applied loads, which ones of said components will form parts in a reaction, load-bearing path between the point of external load application and the ground, with the interconnected structures thus effectively holding to a minimum the overall time that certain ones of said components and interconnect structure operate as parts of such reaction path. Relative-motion-accommodating interconnect structures operating adaptively, selectively and dynamically with respect to external applied loads, and via the relative-motion accommodation accorded to selected interconnected building components and interconnect structures, to create different, responsive load-bearing paths through the building matrix between the point of such external load application and the ground are disclosed, as well. The elements of bergeron et al. could be associated in any varying manner to create any varying design including connections affording relative motion which may be a direct result of temperature, pressure, load, etc.

Claims 1-26 lack novelty under PCT Article 33(2) as being anticipated by Palumbo.

Palumbo discloses, including Figs. 1 and 2, a modular building system having interconnected structures operatively associated with, and interconnecting, respective building components, operable with the application of external load, and in direct response to the specific and instantaneous characteristics of such a load, to create a related, specific, load bearing path through the building between the point of the load application and the ground. Boozer, as well, discloses building components organized to form an overall building, at least some of which components are intended to carry loads that are related to different externally applied loads. and interconnect structures operatively interconnecting said components, and capable of defining variably, and for different specific externally applied loads, which ones of said components will form parts in a reaction, load-bearing path between the point of external load application and the ground, with the interconnected structures thus effectively holding to a minimum the overall time that certain ones of said components and interconnect structure operate as parts of such reaction path. Relative-motion-accommodating interconnect structures operating adaptively, selectively and dynamically with respect to external applied loads, and via the relative-motion accommodation accorded to selected interconnected building components and interconnect structures, to create different, responsive load-bearing paths through the building matrix between the point of such external load application and the ground are disclosed, as well. The elements of Palumbo could be associated in any varying manner to create any varying design including connections affording relative motion which may be a direct result of temperature, pressure, load, etc.

Claims 1-26 lack novelty under PCT Article 33(2) as being anticipated by Ting.

Ting discloses, for example at Figs. 1-26, a modular building system having interconnected structures operatively associated with, and interconnecting, respective building components, operable with the application of external load, and in direct response to the specific and instantaneous characteristics of such a load, to create a related, specific, load bearing path through the building between the point of the load application and the ground. Boozer, as well, discloses building components organized to form an overall building, at least some of which components are intended to carry loads that are related to different externally applied loads. and interconnect structures operatively interconnecting said components, and capable of defining variably, and for different specific externally applied loads, which ones of said components will form parts in a reaction, load-bearing path between the point of external load application and the ground, with the interconnected structures thus effectively holding to a minimum the overall time that certain ones of said components and interconnect structure operate as parts of such reaction path. Relative-motion-accommodating interconnect structures operating adaptively, selectively and dynamically with respect to external applied loads, and via the relative-motion accommodation accorded to selected interconnected building components and interconnect structures, to create different, responsive load-bearing paths through the building matrix between the point of such external load application and the ground are disclosed, as well. The elements of Ting could be associated in any varying manner to create any varying design including connections affording relative motion which may be a direct result of temperature, pressure, load, etc.

Claims 1-26 lack novelty under PCT Article 33(2) as being anticipated by Fiehler.

Fiehler discloses, including Figs. 1-5, a modular building system having interconnected structures operatively associated with, and interconnecting, respective building components, operable with the application of external load, and in direct response to the specific and instantaneous characteristics of such a load, to create a related, specific, load bearing path through the

Supplemental Box
(To be used when the space in any of the preceding boxes is not sufficient)

Continuation of: Boxes I - VIII

Sheet 11

building between the point of the load application and the ground. Boozer, as well, discloses building components organized to form an overall building, at least some of which components are intended to carry loads that are related to different externally applied loads. and interconnect structures operatively interconnecting said components, and capable of defining variably. and for different specific externally applied loads, which ones of said components will form parts in a reaction, load-bearing path between the point of external load application and the ground, with the interconnected structures thus effectively holding to a minimum the overall time that certain ones of said components and interconnect structure operate as parts of such reaction path. Relative-motion-accommodating interconnect structures operating adaptively, selectively and dynamically with respect to external applied loads, and via the relative-motion accommodation accorded to selected interconnected building components and interconnect structures, to create different, responsive load-bearing paths through the building matrix between the point of such external load application and the ground are disclosed, as well. The elements of Fiehler could be associated in any varying manner to create any varying design including connections affording relative motion which may be a direct result of temperature, pressure, load, etc.

-------------------- NEW CITATIONS --------------------
NONE

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/12795

A. CLASSIFICATION OF SUBJECT MATTER
IPC(7) :E04B 1/343
US CL :52/1, 64, 573.1
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
U.S. : 52/1, 64, 65, 67, 68, 69, 173.1, 573.1

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
NONE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 1,605,513 A (CONNERY) 02 November 1926, Figs. 5-8.	1-26
Y	US 3,812,631 A (CRUSE) 28 May 1974, Fig. 1.	1-26
Y	US 3,998,016 A (TING) 21 December 1976, Figs. 1, 8, and 26.	1-26
Y	US 4,688,364 A (FIEHLER) 25 August 1987, Fig. 1.	1-26
Y	US 5,129,204 A (PALUMBO) 14 July 1992, Figs. 1-4.	1-26
Y	US 5,640,823 A (BERGERON et al.) 24 June 1997, Figs. 2 and 3.	1-26

[X] Further documents are listed in the continuation of Box C. [ ] See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier document published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search 02 OCTOBER 2000	Date of mailing of the international search report 24 OCT 2000
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer MICHAEL SAFAVI Telephone No. (703) 308-2168

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,743,063 A (BOOZER) 28 April 1998, Figs. 2-8, 14, and 16.	1-26

PCT WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : E04B 1/343	A1	(11) International Publication Number: WO 00/68523 (43) International Publication Date: 16 November 2000 (16.11.00)

(21) International Application Number: PCT/US00/12795

(22) International Filing Date: 10 May 2000 (10.05.00)

(30) Priority Data:
60/133,306 10 May 1999 (10.05.99) US
Not furnished 25 February 2000 (25.02.00) US

(71)(72) Applicant and Inventor: CROWELL, James, H. [US/US]; 4629 S.W. Lakeview Blvd., Lake Oswego, OR 97035 (US).

(74) Agents: KOLISCH, J., Pierre et al.; Kolisch Hartwell Dickinson McCormack & Heuser, 520 S.W. Yamhill Street, Suite 200, Portland, OR 97204 (US).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published
With international search report.
Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: MODULAR BUILDING SYSTEM

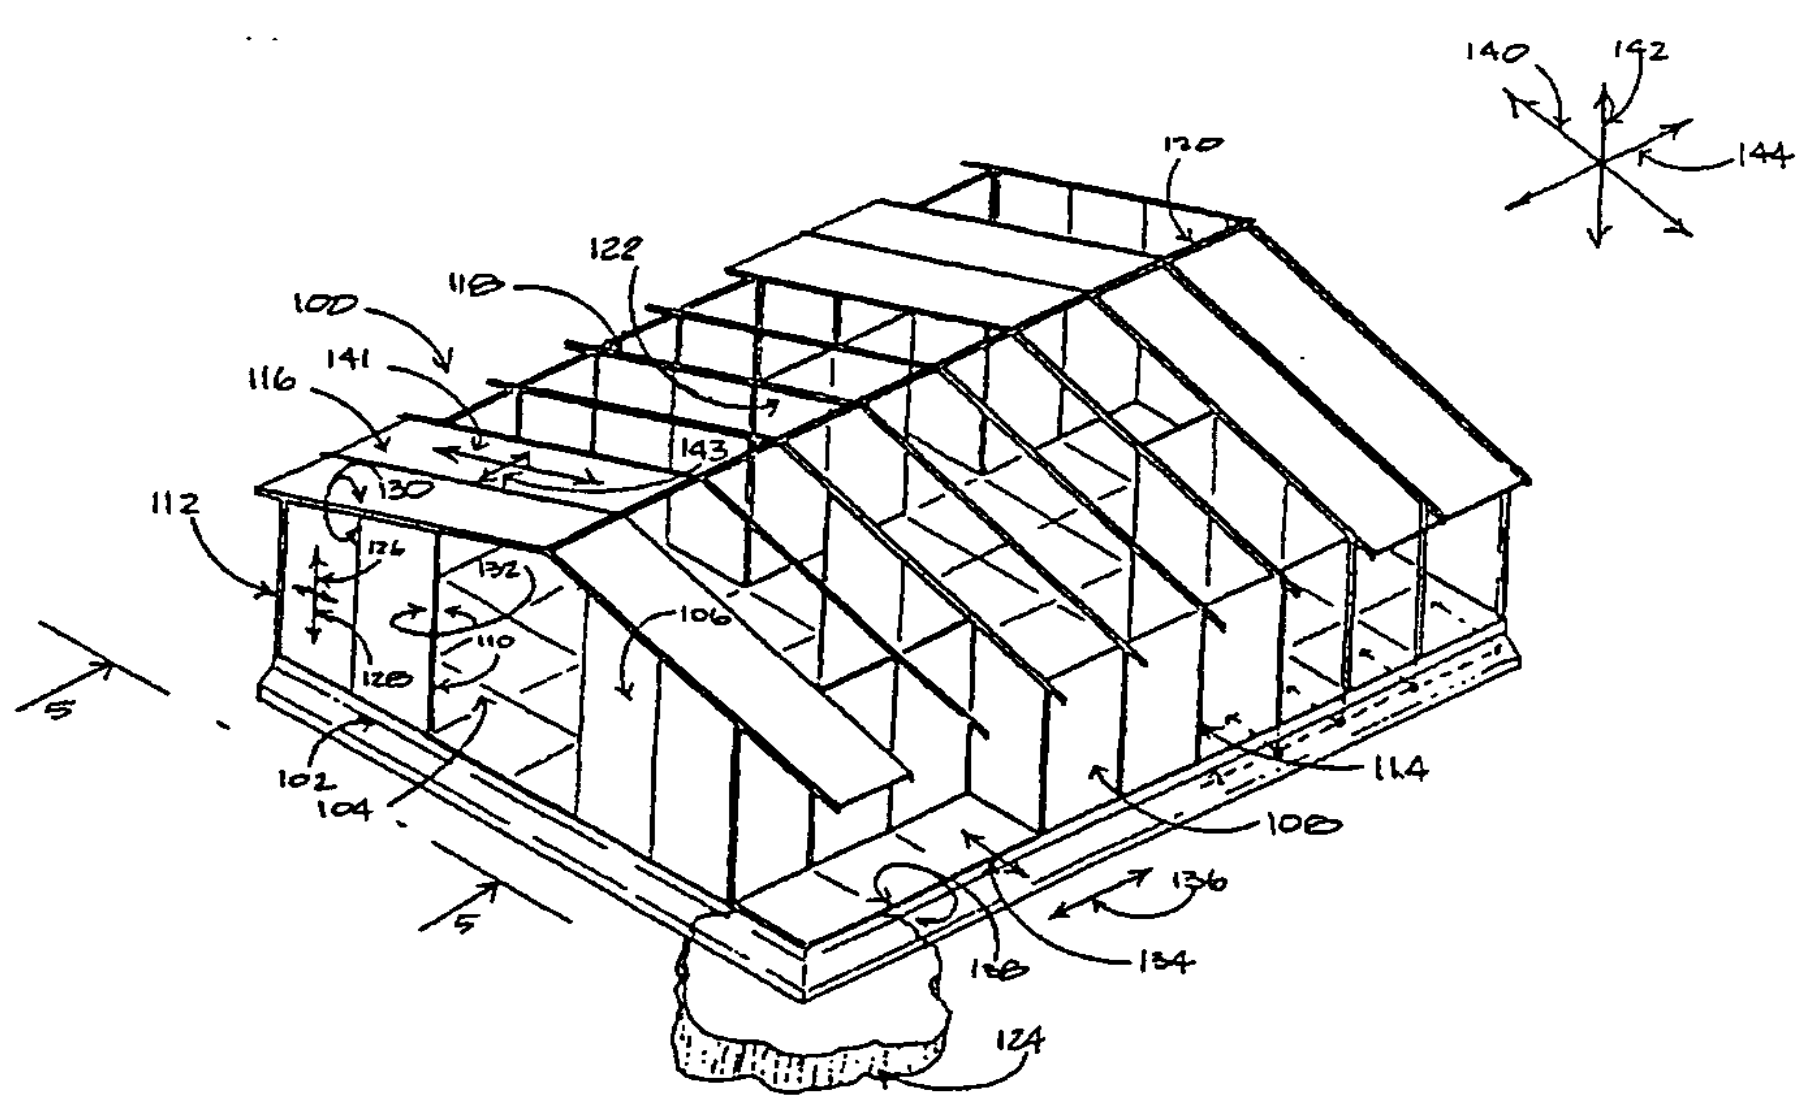

(57) Abstract

A modular building system (100) including preformed extrusion–molded polymeric material (116). Parts include integral connector elements (160, 162) which can be slidably and snappingly reversibly interconnected to form the basic frame (102) and panel structures (108) of an overall building. The interconnected region permits limited ranges of angular as well as translational relative motion between adjacent, connected elements. Parts are assembled simply and quickly in the field, without requiring skilled labor or specialized tools, to form a functionally solid and stable building which responds to loads and temperature changes with yieldable, accommodating deformations that minimize the likelihood of building structural damage, and effectively transmit necessary loads to the ground via load–transfer paths through the building.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania
AM	Armenia
AT	Austria
AU	Australia
AZ	Azerbaijan
BA	Bosnia and Herzegovina
BB	Barbados
BE	Belgium
BF	Burkina Faso
BG	Bulgaria
BJ	Benin
BR	Brazil
BY	Belarus
CA	Canada
CF	Central African Republic
CG	Congo
CH	Switzerland
CI	Côte d'Ivoire
CM	Cameroon
CN	China
CU	Cuba
CZ	Czech Republic
DE	Germany
DK	Denmark
EE	Estonia
ES	Spain
FI	Finland
FR	France
GA	Gabon
GB	United Kingdom
GE	Georgia
GH	Ghana
GN	Guinea
GR	Greece
HU	Hungary
IE	Ireland
IL	Israel
IS	Iceland
IT	Italy
JP	Japan
KE	Kenya
KG	Kyrgyzstan
KP	Democratic People's Republic of Korea
KR	Republic of Korea
KZ	Kazakstan
LC	Saint Lucia
LI	Liechtenstein
LK	Sri Lanka
LR	Liberia
LS	Lesotho
LT	Lithuania
LU	Luxembourg
LV	Latvia
MC	Monaco
MD	Republic of Moldova
MG	Madagascar
MK	The former Yugoslav Republic of Macedonia
ML	Mali
MN	Mongolia
MR	Mauritania
MW	Malawi
MX	Mexico
NE	Niger
NL	Netherlands
NO	Norway
NZ	New Zealand
PL	Poland
PT	Portugal
RO	Romania
RU	Russian Federation
SD	Sudan
SE	Sweden
SG	Singapore
SI	Slovenia
SK	Slovakia
SN	Senegal
SZ	Swaziland
TD	Chad
TG	Togo
TJ	Tajikistan
TM	Turkmenistan
TR	Turkey
TT	Trinidad and Tobago
UA	Ukraine
UG	Uganda
US	United States of America
UZ	Uzbekistan
VN	Viet Nam
YU	Yugoslavia
ZW	Zimbabwe

MODULAR BUILDING SYSTEM

Cross-Reference to Related Application(s)

This application claims the benefit of prior-filed U.S. provisional applications Serial No. 60/133,306, filed May 10, 1999, entitled "Polytech Systems Construction Method", and Serial No. ______________, filed February __, 2000, entitled "Insulated Shallow Foundation System". The entire contents of these two provisional applications are hereby fully incorporated by reference into the disclosure of this case.

Background and Summary of the Invention

This invention pertains generally to a unique modular building system, and to buildings which can be constructed from the modular elements of that system. In particular, the invention relates to such a system which includes a relatively small number of different parts, many of which are preferably formed of an extrusion-molded polymeric plastic material. Such extrusion-formation of these system parts is especially promoted by the fact that the proposed structural elements in this system, or at least most of them, are slender elongate elements which have uniform cross sections throughout their entire respective lengths. Certain ones of the building components, or elements, of the present invention are employable interchangeably and differentially in different specific operational settings in a building constructed in accordance with the invention, including in settings with one another wherein they are joined to form and coact as structural frame components, such as columns, beams, rafters, etc. These special invention components thus lead to an overall system which requires only a modest inventory of differentiated parts, and which, nevertheless, produces a system offering a large range of operational versatility in terms of the constructions of different kinds of final overall buildings.

In general terms, the system of the present invention includes, in an assembled overall building, a skeletal framework structure formed of long slender parts, and of cooperative assemblies of plural, selected ones of such parts, that act, *inter alia*, as horizontal foundation components, as upright columns, as horizontal beams, as inclined rafters, as perimetral boundary frame elements for and in different kinds of

planar, framework-spanning panels (spanner elements), and as connective interfaces along the confronting long edges of adjacent panels.

Extending integrally along selected sides or edges of these parts are nominally exposed and accessible connector elements which can selectively coact, in a reversible, relatively sliding and/or snap-together fashion, with counterpart connector elements present in adjacent parts, all for the purpose of joining such adjacent parts. Such joined/interconnected parts can be thought of (from one point of view) as being joined through what are sometimes referred to herein as being receptive-channel, received-flange-type connectors.

Assembled slid/snapped-together parts, in relation to the kinds of configurations proposed for their associated connector elements according to the invention, are intentionally permitted certain limited ranges of angular and/or translational (in several directions) relative motion. The important reasons for making such limited relative motions possible will be described more fully shortly. This snap/slide-together kind of assembly procedure is quickly and easily performed to assemble individual parts into the forms of framework elements, such as the previously-mentioned columns, rafters, panel frames, etc., and to join such frame structural components with selected, different, broad-area panel structures. Easy component assembly (which is, for the most part, non-destructive reversible assembly) can be performed by relatively unskilled labor, and with no requirement for specialized tools. Whole buildings are easily put together with relative ease on different kinds of selected building sites, with foundation placement made especially easy because of certain convenient leveling and stabilizing features offered by the system of the invention.

Panels which are assembled to span different generally planar spaces that are defined, and which exist, between different stretches or groups of elongate framework parts, are floatingly (for permitted relative-motion purposes) and reversibly, though captively, disposed in such spaces. Importantly, and as distinguished from related prior art structures, such floating but captured dispositions for such panels promotes, in an overall building constructed with components made in accordance with this invention, a significant relative-motion response capability in

that building with respect to both different kinds of externally applied loads, and to the effects on materials of changes in ambient temperature.

The facts that substantially all of the fundamental building elements of the system can be formed, and preferably are formed, by an extrusion-molded polymer material, and that a high degree of interchangeability and multiple-use possibility attaches to these elements, lead to a system which not only is relatively simple in fundamental construction, but also one which, from many points of view, is very inexpensive, and can lead to the constructions of buildings which also are relatively and strikingly inexpensive.

The fundamental modular building components in the system of this invention are, because of the presences of the above-mentioned slide/snap-together connector elements, easily and quickly assembled in varieties of different ways to form myriad types of buildings without the need for additional fasteners. Because of these novel connector elements, a building formed in accordance with the system of the invention can be assembled, on site, by relatively unskilled labor (as was earlier mentioned), and in a very short period of time in relation to conventional building approaches.

Very interestingly, when components constructed in accordance with this invention are fitted together (interconnected) on a job site to create a building, the interconnected components effectively snap and slide together into final, properly structurally and soundly connected relationship. Ultimately in a completed building, the components in each pair of adjacent components are permitted certain limited ranges of unrestrained relative motion with respect to one another.

One important consequence of this condition is that a building constructed in accordance with this invention is internally shiftable and changeable in configuration. Such a building can effectively change its size both in an enlargement sense and in a shrinkage sense in response to an applied external load, and to other phenomena, such as ambient temperature changes. These operational and performance qualities thus produce a building structure which reacts and responds in very unique ways regarding external phenomena of the types just generally mentioned.

Thus, and with very few exceptions, all interconnections created in a building so constructed are intentionally established through clearly load-bearing-capable,

though relative-motion-permitting, interlock connections – a feature sharply distinguishing this system from prior art systems wherein interconnected components (or elements) are, for the most part, fixedly anchored to one another against any permitted relative motion. These connections offer substantial structural integrity in the sense of vigorously resisting accidental disconnection.

Not only do the components of the present system thus create a unique shiftable-configuration overall building, but also they create a building which, in response to an applied external load, adaptively self-selects a most-appropriate load-bearing path through the system, which path is uniquely and directly related to the nature, size and point of application of such a load. For example, differently directed loads applied to the very same point of application in a building constructed in accordance with this invention will seek different load-bearing paths through the structure. This unique behavior is especially promoted by the ubiquitous relative-motion interconnection characteristic of the building, and by the natural, resulting selective "bottoming-out" (ending of relative-motion capability) between relevant, adjacent, affected components that define the resulting load-bearing path. The building thus "chooses" different, most-appropriate load-reaction paths "on the fly", so-to-speak, as loads are exerted on the building.

A number of important consequences flow from this path-choosing capability. One is that the most appropriate load-reaction path required for a given applied load will substantially always be selected. Since such a path is basically selected through a particular combination of (but not all) interconnected building elements, there are always other elements not required for use in such a load-reaction path. These other elements are therefore effectively unloaded by that load, and thus are in "dwell" periods regarding load transmission. Accordingly, over time, each component in a building constructed in accordance with the system of this invention is called upon perhaps only infrequently to carry a load, and thus potentially has a significantly longer effective operational life-span than would a comparable component in a more conventional structure where rigid interconnection is "the rule of the day".

When deformation-creating loads are applied to a building constructed with components offered by the system of this invention, various interlock connections

that are present between adjacent components in the building effectively tighten and become more "solid" and "robust". Associated panels are placed more fully in tension to carry and distribute such loads, and accordingly, these panels offer what can be thought of as high-level reactive responses to such loads. The term "high-level" is employed herein to emphasize the fact that a panel so placed in tension operates desirably in what may well be, and often is, its maximum-capability load-handling mode of behavior. In other instances, a panel may bow in its perimeter frame to accommodate a load. Such bowing is freely permitted by the fact that the panel expanse effectively floats in its perimeter frame.

Also proposed by the system of the present invention are several distinct embodiments of ground-engaging foundation structures, certain ones of which result in the superstructure in the building, i.e., that structure which rests upon the foundation, being elevated above the ground (for low-level ventilation), and other ones of which permit the superstructure of the building to rest simultaneously both on the foundation and upon the underlying ground. These several different modifications include both ground-penetrating and non-ground-penetrating possibilities for foundation construction.

Delivery structures (fluid conduits, wires, etc.) employed for conducting and conveying conventional utilities which may be furnished in a particular building such as water, electricity, gas, heating and cooling, fire suppression, television, cable and telephone lines, and so on, are accommodated by self-establishing and pre-configured ways and chases provided, by intentional design, within the various building components. Such ways and chases are pre-designed, according to the invention, into, and with respect to, these building components, and they effectively come together into an organized whole automatically as interconnecting components are brought together to form a building. These utility-accommodating passages form a logical vertical and horizontal utility distribution network throughout a building, and this network is constructed in a manner which makes the ways and chases readily accessible both during initial building construction, and later on if and when utility routing changes are desired. Preferably, and at appropriate locations within a building

constructed in accordance with the invention, different required utilities are distributed in what is referred to herein as a manifold-delivery way.

Void spaces intentionally provided in wall panel structures, and in columns and regions of joinder between two adjacent panels, allow for the ready flow of air, and drainage of water. Draining water both from such wall, column and joinder regions, as well as any water that requires drainage from within a building's floor structure, flows by design downwardly into passages made directly accessible in the foundation structure, thus to allow for confident, automatic water discharge from regions in a building where it could eventually (or even in a short period of time) cause serious problems.

The various different building structures whose assemblies are made possible by the system of present invention can uniquely include a number of additional, very interesting features. For example, the novel foundation structure proposed by the invention is one which can be equipped with appropriately controllable vents or ports that allow for the flow of air under flooring in the system, and for the containment (in large reservoirs) of stored water which may be employed for fire-suppression purposes, for heat-sinking and temperature-stability purposes, and for anchor-weighting of a building which may, for example, sit directly on top of the ground.

A structure constructed in accordance with the system of this invention also allows for easy incorporation into a building of various moveable structures, such as moveable panels/screens which can control the amount of light admitted at different locations, and for other purposes. Buildings can, because of convenient system modularity and versatility, be differently rendered in different climates to achieve maximum environmental (such as solar) efficiency. Walls within the overall building (internal walls), as well as external walls, can easily be removed, added, repositioned, etc. substantially without any destructive consequences, and freely at will over time. The respective placements or positions of certain panels can be changed as desired. For example, a panel containing a window and/or a door may readily be positionally switched with another kind of panel.

According to a preferred embodiment of a foundation structure constructed in accordance with this invention, the same takes the form of a two-component

organization including a central solid core, preferably formed of poured concrete, and rigid-plate jacketing structure, preferably formed with several components created out of molded and extruded polymeric material. This jacketing structure coacts with the core to transmit overhead superstructure loads to the ground. Such two-component foundation structure preferably has a lateral outward flare, or splay, progressing downwardly through it from the region of the superstructure to the ground. With such a flare, and because of the presence of the lateral jacketing structure, this kind of foundation structure delivers load to the ground in a unique fashion. Specifically, such a foundation employs and permits various respective and differentiated reactions to loads that need to be transmitted to the ground, all as determined by the direction and character of such a load, and all in relation to the cooperative but differentiated handling of loads, on the one hand by the core, and on the other hand by the jacketing structure. A foundation structure constructed in this fashion itself offers a degree of variable selection of the most efficient and effective path through the foundation for the transmission of loads to the ground.

The use of polymer plastics to form substantially all of the fundamental building components proposed in accordance with this invention results in a created building construction which is especially resistant to decay, to other deterioration, to insect invasion, and to other invasive and lifetime-shortening problems that are associated with many of the usual materials found in a conventional building structure.

As was mentioned earlier, building assembly (construction) in the field is characterized by quick and easy slide/snap-together interfitting of components. Such activity, as has already been stated, requires no specialized tools or costly labor. It also avoids conventional time-consuming on-site fabrication procedures, such as the cutting and fitting of parts.

Components that are shipped to a job site for assembly into a building can be shipped very handily in “disassembled”, low-volume-occupying space, and thus can be transported effectively as a pile or collection of components stacked, for example, in conventional load containers.

Many other features and advantages that are realized and offered by the system of the present invention will become apparent as the description which now follows is read in conjunction with the accompanying drawings.

Description of the Drawings

Fig. 1 is a simplified, fragmentary top-perspective view of a building constructed with modular building components formed in accordance with the present invention. Only certain selected parts and regions of this building are shown in this figure (others being removed/omitted) in order to use this figure generally and effectively to offer a general overview of an organization of structural components illustrating the versatility of the invention.

Fig. 2 is another fragmentary view of the building of Fig. 1, illustrating reactive load-handling responses produced by that building in relation to the application of two different specifically applied "overhead" external (on the roof structure) loads.

Fig. 3 is a simplified, block/schematic, story-telling view illustrating how building components constructed according to the present invention, incorporated into the building of Figs. 1 and 2, respond to create different, specific, load-bearing paths through the building between the point of external load application and the ground.

Fig. 4 is a simplified, block/schematic, story-telling view illustrating, under two different conditions of external load application, unique configurational-change, and size-change, responses that are offered by the building of Figs. 1 and 2 in accordance with the performance of parts made according to the present invention.

Fig. 5 is a fragmentary, elevational cross section taken generally along the line 5-5 in Fig. 1, illustrating the organization of certain components visible in a transverse vertical plane intersecting the building of Figs. 1 and 2.

Fig. 6 is an isolated and detached perspective view of three different illustrative kinds of panel structures which are constructed in accordance with the present invention -- which panel structures may form part of the building shown in Figs. 1, 2 and 5.

Fig. 7 is an enlarged, fragmentary and somewhat exploded and disassembled view isolating, and further showing, details of construction of certain invention component elements present in the building structure of Figs. 1, 2 and 5.

Fig. 8 is a view, on roughly the same scale employed in Fig. 7, illustrating certain details of construction in a region where the foundation, external wall and floor structures in the building of Figs. 1, 2, 5 and 7 come together.

Fig. 9 is a view which is very similar to that presented in Fig. 8, here illustrating a particular preferable set of features provided in the foundation structure of the building so far illustrated, and specifically showing features which address both radon-venting, and water-drainage.

Figs. 10 and 11 are two different views isolating and illustrating certain components that form portions of the foundation structure pictured for and in the building of Figs. 1, 2, 4 and 7. These views are presented on a larger scale than that which is used, for example, in Fig. 9.

Fig. 12 is a fragmentary view, on a somewhat larger scale than that employed in Figs. 10 and 11, illustrating in further detail (relative to Fig. 10) employment and use of a special foundation threaded-rod and foot component, referred to herein as an "octopus" structure, which allows for convenient temporary stabilization of unfinished foundation structure on and with respect to an underlying protrusion from the ground, such as the top of an exposed, ground-embedded rock.

Fig. 13 is a multi-element exploded view generally picturing the organization of certain components or parts created in accordance with the present invention and utilized (in an interconnected fashion) to form the foundation for the building illustrated in Figs. 1, 2, 5 and 7.

Fig. 14 is a more detailed view, roughly on the same scale as that which is employed in Fig. 13, showing, in fragmentary and perspective manners, and with portions broken away to illustrate details of construction, the construction of floor structure and related frame structure provided in the building of Figs. 1, 2, 5 and 7.

Fig. 15 is a somewhat enlarged, fragmentary, cross-sectional view, taken generally along the line 15-15 in Fig. 14.

Fig. 16 is a view somewhat like that presented in Fig. 15, taken generally inwardly in the building from the point of view presented in Fig. 15, and specifically in a region which is toward the lower right corner of Fig. 15, illustrating the region of joinder or interconnection which exists between a pair of modular floor-panels (or tiles) employed in the building of Figs. 1, 2, 5 and 7.

Fig. 17 is a cross-sectional view, on about the same scale as that employed in Fig. 14, illustrating, selectively (i.e., employed herein variously to picture two different kinds of otherwise similar structure), two different cross-sectional regions present in the building so far mentioned herein -- one of such regions being examined from the point of view of looking downwardly at the cross section of an external, upright column and of associated, joined (interconnected) panel structures in that building, and the other region being examined from the point of view of looking along the long axis of an overhead rafter structure, and specifically where such rafter structure joins with two, spaced roof panels that form part of the mentioned building.

Fig. 18 is an enlarged, fragmentary detail illustrating one form of mateable, interconnectable connector elements that form one style of relative-motion-accommodating interconnect structure employed in accordance with the present invention. These connector elements are formed as integral portions of various different modular building components formed in accordance with the invention.

Fig. 19 is a fragmentary, cross-sectional view taken generally in the region embraced by the two curved arrows marked 19(20,22)-19(20,22) in Fig. 5, specifically showing the region of interconnection which exists in the building of Fig. 5 at the location where an external column and outside wall panels join with a rafter.

Fig. 20 is taken from a point of view and in a region also generally embraced by the two curved arrows 19(20,22)-19(20,22) in Fig. 5, looking at and within a different plane of view which is displaced from, and generally parallel to, the respective planes of Figs. 5 and 19.

Fig. 21 is a view, on about the same scale as that employed in Figs. 19 and 20, showing a region of intersection between a portion of an interior wall in the building of Figs. 1, 2, 5 and 7, and part of the roof structure in this building. This region of

intersection is one that permits relative sliding motion (of the stress-relief kind generally required by temperature changes) between such a wall and roof structure.

Fig. 22 is an enlarged, fragmentary, cross-sectional view, also taken generally in the region embraced by curved arrows 19(20,22)-19(20,22) in Fig. 5, and looking into a plane which extends through that region with a disposition that is substantially normal to the plane of Fig. 5.

Figs. 23, 24 and 25 are fragmentary, cross-sectional views generally illustrating a typical region of intersection and interconnection between a rafter, roof structure and a wall structure.

Figs. 26A, 26B are simplified and isolated views illustrating, respectively, a plan view and an elevation view of the point of connection existing at the region of joinder between two building end wall panels in the building of Figs. 1, 2, 5 and 7, and at the location generally of the floor structure and the underlying supporting foundation structure.

Fig. 27 is an enlarged, fragmentary view illustrating a portion of one style of a roof panel employed in the building structure depicted so far, such panel being characterized by two different kinds of panel subsections that are joined within the illustrated overall panel.

Fig. 28 is a view taken generally in the region of curved arrows 28-28 in Fig. 7 illustrating details of construction of one embodiment of ridge structure, including optional panel, screen, etc. motion structure, constructed in accordance with the invention, and present in the building of Figs. 1, 2, 5 and 7.

Figs. 29, 30 are isolated and functionally related fragmentary details illustrating other component structure which is associated with the motion structure that is pictured in Fig. 28.

Fig. 31 is a fragmentary cross-section taken generally along the line 31-31 in Fig. 28.

Figs. 32, 33 are isolated and fragmentary details illustrating other components in the motion structure generally otherwise pictured in previously-mentioned Figs. 28, 29 and 30.

Fig. 34 and 35 are enlarged, fragmentary views illustrating, respectively, a vertical section and a horizontal plan view of portions of a water-reservoir system constructed according to one modification of a system implemented in accordance with the present invention.

Figs. 36, 37 individually, and Figs. 38, 39 collectively, illustrate several different alternative embodiments of foundation structure for a building which is otherwise like the building pictured in Figs. 1, 2, 5 and 7. These different embodiments deal specifically with different specific ground-contacting, and structure-elevating, approaches to building construction.

Figs 40-42, inclusive, are fragmentary details, each very much like the detail pictured in previously-discussed Fig. 18, showing three different modifications of connector elements that can be employed in interconnect structure prepared in accordance with the features of the present invention.

Figs. 43, 44 are, respectively, vertical-plane and horizontal-plane sectional views illustrating components in vertical wall structure employed to create motions in shutters or screen modifications that are employable in a building constructed with the system of the present invention. Fig. 44 is taken generally along the line 44-44 in Fig. 43.

Figs. 45-48, inclusive, are different fragmentary views generally illustrating certain components constructed in accordance with the present invention, and usable in a modified form of building construction which also employs certain otherwise conventional building materials. These views generally show and suggest how various such other materials can integrate easily into a building constructed in accordance with the invention.

Figs. 49, 50A, 50B and 51 are simplified, and in certain instances exploded and fragmented, views of the construction of a panel structure which can be built substantially completely by extrusion molding, and as a whole (a singularity), in accordance with the present invention.

Fig. 52 is a fragmentary, enlarged detail illustrating a novel power- conductor bundle arrangement employed according to the present invention in a building such as the building illustrated in Figs. 1, 2, 5 and 7.

Detailed Description of, and Best Mode
for Carrying Out, the Invention

Turning attention now to a detailed description of the present invention, the same is specifically illustrated and especially described herein in conjunction with the several numbered drawings views which have just been identified above. As will be appreciated by those generally skilled in the arts which are relevant to the field of the present invention, these drawings, or at least many of them, have been prepared substantially at the level of conventional architectural/engineering building drawings, with clearly sufficient detail to inform such people exactly how the pictured structures are formed and inter-related. Not all of the details thus specifically presented in these more detailed drawings views need necessarily be described with any elaboration in order for one to understand the elements and principles of the present invention, and accordingly, and in order to maximize clarity and minimize having to deal with unnecessary excess information, such additional details pictured in the drawings are not specifically talked about in the text which now follows. Also, where the same or different particular drawings views illustrate constructional features of the present invention which appear at several locations in the drawings, while these locations are selectively pointed out herein, unnecessary repetitive detailed description for each has been intentionally omitted, also with the intention of promoting clarity in the exposition of this invention.

As an additional matter accompanying the specification, claims, text and abstract in this application is a section identified as an Appendix which contains a collection of unnumbered architectural/engineering drawings views, some of which have been employed in an extracted and focused fashion to create the specifically numbered drawings views mentioned above. These Appendix drawings provide an additional rich and fully expressive collection of material further aiding in disclosing the character and scope of the present invention. These drawings, just as is true with certain ones of the numbered drawings views herein, are in a conventional form, and are easily read and understood by persons in the category mentioned above as being those generally skilled in the fields of art associated with the instant invention.

Pictured in Fig. 1 in the drawings is an overall building 100 which has been constructed utilizing components constructed in accordance with the present invention. Building 100 includes a foundation structure 102, a floor structure 104 resting on the foundation structure, outside end wall and side wall structures, such as those shown at 106, 108, respectively, rising upwardly from the foundation and floor structures, upright outside end wall, corner and side wall columns, such as those shown respectively at 110, 112, 114, roof panel structure 116, roof-supporting elongate rafter structure 118, roof ridge beam structure 120, and interior wall panel structure, such as that shown generally at 122, extending generally between floor structure 104 and roof panel structure 116.

In general terms, the various building structural elements or components progressing from the floor structure upwardly to and including the ridge beam structure are collectively referred to herein as superstructure, and these are, of course, supported, at least in part, on foundation structure 102. In the particular building, building structure 100, illustrated in Fig. 1, foundation structure 102 resides in a category referred to herein as a ground-contacting, ground-penetrating structure which is embedded into the ground in such a fashion that, essentially, the bottom expanse of building 100 immediately underneath the floor structure rests, as will soon be described, on the underlying ground which may be prepared, for leveling and adequate support purposes, with a particulate material such as sand and/or gravel. Embedment, thus, of foundation structure 102 is illustrated and suggested by the fragmentary showing at the lower side of Fig. 1 of the underlying ground, pictured generally at 124.

Briefly mentioning at this point several other things which are illustrated in Fig. 1, toward the left side of Fig. 1 there are shown two double-ended crossed arrows 126, 128, and a pair of double-ended curved arrows 130, 132. Toward the lower side of Fig. 1 are shown two differently directed double-ended straight arrows 134, 136, and a double-ended curved arrow 138. Toward the upper right corner of Fig. 1 there are shown three orthogonally intersecting double-ended straight arrows 140, 142, 144. On the left side of the roof structure pictured in Fig. 1, appear two orthogonally intersecting arrows 141, 143. As will become more fully apparent in the description

text given below, these arrows will be understood to be illustrative of relative-motion and related configurational-change activities that are permitted to occur in building 100.

Specifically, these several straight and curved arrows are employed herein to explain and describe certain relative-motion and configurational-change behaviors that are uniquely exhibited by the system of the present invention in the form, as now being described, of building 100 under circumstances when that building is subjected to various potentially deformation-creating forces, such as wind forces, earthquake forces, ambient temperature changes, falling and otherwise impacting objects, and other kinds of circumstances. These relative-motion and configurational-change capabilities are furnished as a consequence of the unique manners in which all of the several basic component parts of the system of this invention which make up building 100 join with one another in the final overall building structure.

Illustrated near the right side of Fig. 1, and pictured fragmentarily and specifically in a lower corner region of building 100 by dashed lines which intersect at enlarged dots, there is shown a portion of one of the several different utility distribution structures that are furnished in building 100 in the manner which is referred to herein as a manifold distribution manner. As an illustration, these several dashed lines might, for example, reflect the positions of manifold delivery conduits associated with a fresh water delivery systems. As will become apparent from the description which follows below, and from a review of the various drawings presented in the specification, void spaces that are present in various ones of the several building components that make up a building like building 100 afford adequate and versatile space for the incorporation of such manifold structure.

Turning now for a moment to Figs. 2, 3 and 4, these three views further illustrate load-response characteristics of a building such as building 100. Fig. 2 specifically illustrates building 100 in a somewhat more completed form, and demonstrates certain kinds of load responses which are performed by this building as a consequence of two differently applied roof loads pictured generally at 146, 148 in Fig. 2. These roof loads came bowing deflection of the related underlying roof panels,

and delivery of loads to the ground along different paths through the structure of building 100. Such paths are pictured in Fig. 2 by arrays of arrows.

Fig. 3 illustrates in an exaggerated and story-telling way how the components, or certain ones of the components, in building 100 coact according to the invention to define different load-reaction paths through the building between a single point of overhead external load application with respect to which two differently directed loads, labeled L_1, L_2, are applied. Load L_1 in Fig. 3 is reacted to by relative motion activities in a certain collection of parts and components in building 100 to create what can be thought of as a stacked collection of building components with respect to which bottoming out has occurred, i.e., relative motion has reached the limits of possibility, to establish a load-transfer path P_1 between load L_1 and ground point G_1. The "stacked" components are represented by the small rectangles aligned along path P_1.

Reaction to load L_2 takes place through another "stacked collection" of interengaged components in building 100 to define another load-reaction path P_2 which extends through building 100 from the point of application of load L_2 to a different ground point, designated G_2 in Fig. 3. Building 100 thus effectively chooses, on the fly, the most appropriate load-reaction path to employ for handling each one of loads L_1 and L_2, and effectively requires only the best suited limited number of building components to transfer these loads. Other components in the building are effectively unloaded specifically by these loads, and thus are in the mentioned dwell periods respecting times of load transmission experienced throughout the life of building 100 by the various elemental building components in the building.

Fig. 4 is also a schematic story-telling view illustrating another response characteristic of building 100 promoted by the features of the present invention. Here, two differently located loads L_1, L_2 are pictured applying loads, respectively, to the upper portion and to the right-side portion of the building as such is pictured in simplified block form in Fig. 4. Upper load L_1 is represented by a dashed-line arrow, and load L_2 by a dash-dot line arrow.

The building in an unresponsive state with respect to either one of loads L_1, L_2 is represented by the rectangular solid outline presented for the building

schematically in Fig. 4. Response by the building to load L_1 is pictured in a highly exaggerated fashion by the dashed-line distortion shown at 100_{L1}. Similarly, distortion and load-response reaction of the building under the influence of load L_2 is pictured by the dash-dot line designated 100_{L2}.

These two exaggerated, but accurately otherwise, representative pictures of building distortion show that building 100 reacts variously to an applied load, such as loads L_1, L_2 by changing its overall configuration, and where appropriate, by shrinking and/or enlarging in overall size in various regions of the building. These responses are uniquely promoted by the relative-motion interconnect structures featured as an important contribution of the system of the present invention.

Continuing now with a focus directed toward Figs. 5-13, inclusive, the section view presented in Fig. 5 of building 100 further shows the organization in that building of foundation 102, floor structure 104 (exploded vertically), an outside wall column structure 114, an outside wall panel structure 108, an inclined rafter structure 118, and a roof panel structure 116. An inside wall panel structure is shown generally at 122.

Also generally illustrated in Fig. 5, and pointed to very generally by arrows 123, is an exploded representation of various components in utilities distribution structures in the categories mentioned earlier, which structures are threaded through appropriate accommodating spaces in the various building components in building 100 such as the floor structure, the wall structure, the column structure and the rafter structure.

Fig. 6 pictures, in perspective, three isolated different panel structures constructed in accordance with this invention, generally aligned in side-by-side horizontal relationship, and including a door panel structure 150, a solid, non-light-passing panel structure 152, and a transparent light-passing panel structure 154. Particularly relevant to the present invention in relation to these three panel structures is that each of these panel structures is formed around its perimeter by a bounding frame or framework, such as the frame shown generally at 156 surrounding the central spanner portion of panel structure 154. As will be more fully explained shortly, this perimeter frame structure is constructed from elongate, extrusion-molded

polymer components that are built strictly in accordance with the present invention, and that are appropriately interconnected to create a completely encircling panel frame structure.

Fig. 7 is a partially disassembled exploded view which further pictures certain components also pictured in the section view of Fig. 5. Thus, in Fig. 7, the following previously-mentioned structural components are illustrated: foundation structure 102, column 114, and rafter 118. An internal eave beam structure is shown disposed beneath rafter 118 at 156, and the ridge region in building 100 is resident generally within the area embraced by the two curved arrows labeled 28-28 in Fig. 7.

Referring now very specifically to Figs. 7, 8 and 10-13, collectively, foundation structure 102 takes the form of a two-component foundation structure built in accordance with a preferred embodiment of the present invention. Specifically, foundation structure 102 effectively supports the superstructure in building 100 so that it rests both on this foundation structure and on the underlying ground 124. The components that make up what can be thought of as the outside structural portions of foundation structure 102 are formed of molded polymeric material, and are interconnected with one another in a manner shortly to be described to form a perimeter frame that rests solidly on and within the underlying ground to support building 100.

Foundation structure 102 includes a plurality of groupings of laterally spaced outer jacketing lateral structures, such as those shown at 158 that are formed with generally parallel, spaced, rigidly connected angular planar plate portions such as the three plate portions shown at 158a, 158b, 158c that are disposed relative to one another in a somewhat flattened Z-shaped configuration. Preferably, these structures that are numbered generally 158 include substantially matching counterpart upper and lower portions that are brought together to form the overall shape, and this construction is shown especially in Fig. 11 in the drawings. The upper and lower components which collectively form these now-being-described parts of the foundation structure are suitably joined to one another in any appropriate manner.

As can be seen especially in the exploded illustration presented in Fig. 13, these angular lateral structures form the opposite outer jacketing sides of the overall

foundation structure, and they are joined to one another preferably in a telescopic fashion by appropriate linear and angular telescopic connectors, such as the two shown at 160, 162 in Fig. 13. Within the overall foundation structure, these several components, whose respective constructions are quite self-evident as pictured in Fig. 13, are suitably anchored relative to one another by any appropriate joining mechanism, such as by locking pins like those shown generally at 164 in Fig. 13.

Along the sides and ends of the foundation structure with the components therein just described in their appropriate positions relative to one another, open spaces, such as that generally pointed to at 166, expose the regions between Z-shaped side components, thus enabling these components to accommodate the pouring of what will become a solid core material in the foundation, such as concrete. After pouring and curing of such concrete, the foundation structure essentially becomes a two-component structure including a core and lateral jacketing structure, which jacketing structure splays outwardly progressing downwardly through the foundation structure to transfer loads to the ground differentially through each of these two basic component contributors in the foundation structure. Significantly aiding in speeding up the process of construction of a building made in accordance with the present invention, it will be apparent that the lateral perimetral jacketing structures just described can easily and quickly be put into place on or within the appropriate ground site. Concrete can then poured into the spaces just mentioned, with the lateral jacketing structure acting effectively as a form for pouring, and permitting other important construction activities, such as the back-filling of earth in and around the foundation, to take place immediately, inasmuch as these foundation components which will become permanent parts of the ending foundation fully protect the curing concrete core material.

Elongate bolts, such as those shown at 168, 170 in Figs. 7, 10 and 12, extend vertically through suitable accommodating bores provided in selected ones of similarly shaped, related angular foundation components and downwardly into the region where concrete is poured, to become securely anchored in the foundation when poured concrete has in fact cured. These bolts, through the adding of appropriate sets of nuts along their lengths allow for very easy and convenient and

accurate permanent leveling of the overall foundation structure on the selected building site.

Shown generally at 172 in Figs. 10, 12 and 13 are shelf-like holders that are carried as shown on the just-mentioned bolts to hold conventional reinforcing rebars within the concrete core – such rebars being shown generally at 174 in Fig. 12.

Cured concrete in foundation structure 102 is shown generally at 176.

Disposed according to one unique feature of the present invention at the lower end of bolt 170 in Figs. 7, 10 and 12 is a moderately broad adaptive foot, also referred to herein as an octopus 178. Octopus 178 is formed with downwardly extending elastomer tentacles that can be driven downwardly against a projecting underlying structure, such as the rock shown at 180 in Fig. 12, to accommodate free positioning of the overall foundation structure even where it directly overlies such a protruding structure. In Fig. 12, octopus 178 is shown in a condition thus engaging the top projecting surface of rock 180. The presence of the mentioned elastomeric downwardly extending tentacles in the octopus accommodate confident stabilizing of bolts, such as bolt 170, in a vertical sense during pouring and curing of the concrete core material in the foundation.

Appropriately and preferably positioned within the otherwise void spaces that exist in the regions laterally bounded by portions 158b in the Z-shaped foundation structures mentioned earlier, are elongate runs of any suitable thermal insulating material, such as the blocks of insulating material shown generally at 182 in Figs. 7, 8 and 11.

Fig. 9, with respect to foundation structure 102, illustrates how radon evacuation and water drainage can be provided in and with respect to the foundation structure. Specifically, indicated generally at 184 in Fig. 9 is an appropriate radon venting structure organization, and at 186 is water drainage structure. These structures may conveniently and appropriately be positioned at several different selected locations around the foundation structure.

Considering now Figs. 14-16, inclusive, here one can see how a preferred embodiment of foundation and ground-supported floor structure in building 100 are constructed. While there are many different ways in which a floor structure which is

usable according to the teachings of the present invention, in building 100 floor structure 104 is, as a whole, an expansive layered structure that is made up of a plurality of generally rectangular flooring tiles which are themselves layered structures. A description generally of one only of these tiles will serve to describe this floor structure.

In the particular embodiment now being described in which the superstructure in building 100 rests at least in part on the underlying ground, lying immediately beneath floor structure 104, as a thin, distributed web of material, is a blanket 188 taking the form of a metallic foil outer material which contains inside it an insulating material. This blanket simply lies by gravity on the space over the ground spanned by foundation structure 102, and specifically and preferably lies on an underlying ground surface which has been prepared for the appropriate grade by spreading and grading thereon of a particulate material such as sand or gravel. The specific material employed in blanket 188 takes the form of a commercially available insulating material which is often used in the walls of buildings, in space suits, and in other applications. Disposed immediately above blanket 188 are polymer-extruded shaped components, such as component 190, which are preferably formed by extrusion molding. Disposed above these floor base components, and also preferably formed by molding, are overlying structures such as the one shown generally at 192 which are configured internally with void spaces that are useful to create ways and chases for the feeding of various utility structures in different directions for routing in building 100. The exact internal configurations of structures 192 may be made differently to suit different applications, and accordingly, the precise details of construction here are not further elaborated, inasmuch as they do not form a portion of the present invention.

In Fig. 14, shown generally at 194 are appropriate elongate runs of manifold-like utility feed structure required in building 100, such as feed structure for water, gas, high and low voltage electricity, telephone, cable, fire suppression and other things.

Immediately overlying structures 192 are tiles, such as the one shown at 196, which, in the particular building construction now being described, constitute the

interior finished floor. In building 100, tiles 196 are formed of a conventionally available, so-called phase-change material which is effective to evenize the temperature inside building 100.

Focussing attention specifically on Figs. 15 and 16, one can see that the lateral edges of tile structures 192 in the overall floor structure are formed with the special angular configuration pictured generally at 192a in Figs. 15 and 16. Where the edges of the tile come essentially to the outside wall portion of building 100, these configured edge structures interlock with a molded extruded structure such as the one pictured at 198 in Fig. 15, each of which has the cross-sectional configuration clearly pictured in Fig. 15. Interconnection here, which is a reversible interconnection according to the invention between the outer edge of tile 192 and a structural member 198, is pictured at 200 in Fig. 15.

Where adjacent floor tile components meet within the interior of the building, such a meeting being generally pictured fragmentarily in Fig. 16, tile units 192 are interlocked with one another as is pictured generally at 202 in Fig. 16. Completing a description of what is shown in Figs. 15 and 16, where previously mentioned wall panel structure 108 comes down to the foundation structure in the building, one of the outer defining frame members in that wall panel structure, shown at 204 in Fig. 15, which frame structure is made in accordance with the invention of an extrusion-molded polymeric material, the cross section of this part, clearly illustrated in Fig. 16, interlocks sturdily yet reversibly as shown generally at 206 with the immediately underlying confronting portions of the edge of tile 192 and member 198. Generally speaking, the type of interconnect connection which has just been mentioned at 206 in Fig. 15 is formed by confronting and mating connector elements having the respective cross-sectional shapes pictured in Fig. 18 in the drawings. While this arrangement of interconnecting connector components is pictured with one particular orientation in Fig. 15, and in a different particular orientation in Fig. 18, it will be apparent to those skilled in the art that this type of interconnect connection will be used at many points of component interconnection sites throughout the structure of building 100. A review of the drawing figures so far described, coupled with reviews of various drawing figures not yet specifically described, will show those skilled in

the art clearly how and where such interconnect structures are distributed within building 100.

Looking again fairly specifically at Figs. 15 and 16, one will note that, in the regions of connections previously identified with the reference numeral 202, the matingly interconnecting extruded components there pictured form an elongate, bounded void space within which various utility components, such as pipes and wires if desired, can be contained.

Still remaining with Figs. 15 and 16, illustrated near the left sides of those two figures by elongate dashed lines which terminate with an arrow head, paths for water drainage that are provided both from upright wall and column structure and from horizontal floor structure downwardly into and through the foundation structure are illustrated. These drainage paths, which paths can also accommodate the normal flow of air, play an important role in minimizing the possibility in building 100 of an accumulation of water that can cause damage.

Focussing attention just for a minute again on the nature of the interconnection pictured especially in Fig. 18, one can see that this interconnection is designed in such a fashion that it will permit relative rotation, as for example within the plane of Fig. 18, between the associated integral components in the system, and additionally, can accommodate, within limited ranges, translational motion in all orthogonal directions. It is this feature of all the interconnect structures that form part of the present invention which produces the capability of interconnected components to move relative to one another by certain limited amounts, to accommodate the handling of matters such as externally applied loads and environmental temperature changes experienced by building 100.

Considering now together Figs. 17, 19 and 20, and especially considering what is shown in Fig. 17 as being a view initially taken vertically along the axis of previously-mentioned column structure 114, that column structure includes what can be thought of as a central, elongate, extrusion-molded component which is given the reference numeral herein 208. Figure 17 clearly shows the preferred cross section for this member, and one will notice that distributed at various locations on and about the outside of the perimeter of the cross section in this member are extending, integral

connector elements like those pictured in previously-discussed Fig. 18. The outside portion of member 208 is capped by another extrusion-molded member 210, and the inner side of the column member is joined with another elongate, extrusion-molded member 212. Each of members 210, 212 is formed in accordance with the teachings of this invention to have the cross-sectional shapes clearly evidenced in Fig. 17, and when they are put into operative positions relative to member 208, they latch releasably and interconnect with that member as is shown in Fig. 17. Each of these connections, just as was true in the case of previously-mentioned connection 206, is characterized by offering limited ranges of relative angular and/or translational motion between components 208, 210, 212.

The right side of previously-mentioned wall panel structure 108 in Fig. 17 is effectively joined to column structure 114 through its right-side perimetral frame member 204 which is the same in cross-sectional configuration as was pictured for this kind of member at 204 in Fig. 15.

Shown on the right side of Fig. 17 is another panel structure 214 which is different in specific internal construction relative to panel structure 108, but which also includes a perimeter frame formed effectively of previously-mentioned members 204. The connection between column structure 114 and panel structure 214 are also clearly evident in Fig. 17.

Just as was true with respect to the operative interconnections established between components 208, 210, 212 as these are seen in Fig. 17, the connections which effectively exist through molded, elongate components formed in accordance with this invention that snap together to unite column structure 114 with panel structures 108, 214, permit the same general kinds of limited, but nevertheless consciously permitted, relative angular and/or translational motions in the assembled structure.

Fig. 19 illustrates the location of a horizontal beam such as previously-mentioned beam 156 shown in Fig. 7. The cross-sectional configuration of beam 156 is displayed clearly in Fig. 19, and through an appropriately joined underside elongate element 216, this beam joins with the upper perimeter frame member 204 in panel structure 108. An upper flange shown in Fig. 19 in beam 156 slidably engages the

underside of a roof panel structure 116. Previously-mentioned rafter 118 is shown in the background of Fig. 19, and it will be evident from this, that beam 156, and all other like beams distributed in and throughout building 100, extend between adjacent rafters, lying immediately beneath and slidingly contacting the immediate overlying undersurface of the respective associated overhead roof panel structure.

The several interlocked connections pictured in Fig. 19, between the underside of beam 156 and the upper portion of panel structure 108, have the same relative-motion-accommodating qualities mentioned heretofore with respect to other specific structures.

As was mentioned earlier, Fig. 17 can be viewed as one that pictures a cross-sectional view of a rafter, such as rafter 118, joined with a pair of roof panel structures which may in construction be very much like panel structures 108, 214 which are illustrated in Fig. 17. At this location in the structure of building 100, it will thus be evident that the interconnections which thus exist at the locations of the rafter structures and the associated, laterally adjacent roof panel structures are relative motion interconnections having all of the qualities and performance characteristics of the other like interconnections mentioned so far herein specifically.

On another note with respect to what is shown in Fig. 17, if one now uses Figure 17 to illustrate a view taken generally upwardly and toward the peak of building 100 and along a rafter such as rafter 118, three cross-hatched pairs of lines, pictured in what are shown as void spaces in the cross section of the central rafter element, represent the locations of appropriate resin-set bolts that anchor the inner, upper central ends of the rafters to previously-mentioned ridge structure which is contained in the area of curved arrows 28-28 in Fig. 7.

It should thus now be growingly apparent, that there are formed in accordance with this invention, for incorporation at different locations, and for different specific purposes within an overall building structure, such as building 100, elongate, preferably extrusion-molded polymeric structural elements equipped with integral, somewhat hook-like connector elements that are brought together in a snap-together fashion during building assembly to create structurally sturdy interconnections

between relevant components in a building, and which also furnish the desired limited-range capability for angular and/or translational relative motion.

Fig. 21 illustrates the confronting condition which exists along the upper edges of internal wall structures in building 100. Specifically, shown at 218 in Fig. 21 is a plastic-molded configured member which is snap fit to the upper frame member, like previously-mentioned frame members 204, in the associated wall, to extend upwardly and provide for sliding engagement with the underside of the immediate overlying roof structure. Member 218 is appropriately formed with an upwardly facing elongate socket, such as that pictured generally at 218a in Fig. 21. This socket receives an appropriate cushioning element pictured generally at 220 in Fig. 21. It should be understood that the specific kind of snap-fit interconnection which exists between member 218 and the associated underlying wall panel is not specifically illustrated in Fig. 21, but would take the form generally of interconnections of the sort pictured for example in Fig. 17 at the lower side of that figure.

In Fig. 22 we see a fragmentary vertical cross section through column structure 108 and other related, interconnected structures. Anchored in any suitable fashion, as by chemical bonding, in the upper reaches of the central stem portion of column 108 is a specially configured capping member 222 which joins as shown snappingly and in an interlocked condition with previously-mentioned rafter structure 118. Other components shown in Fig. 22 are several of those other components described in the descriptions just above with respect to Figs. 17, 19, 20 and 21.

Turning attention now to Figs. 23-25, inclusive, here what is pictured are several related views, sectional details, illustrating a region of interconnection between rafter structure 118, and a pair of laterally adjacent wall panels that reside immediately beneath this rafter. The two wall panels involved in these views are numbered 224, 226. The upper sides of these panels are appropriately angled, as the panels are viewed from the side, in order that they will match the angular configuration within the building at the location wherein they are installed. Accordingly, perimeter frame members 204, at the upper reaches of these wall panel structures, are appropriately angularly cut at their ends as are the upper ends of the laterally-defining panel frame members, so that these panel frame members come

together to form a matching coherent perimeter frame relative to the specific regions where they are intended to be used in building 100.

Referring especially to Fig. 25, yet another elongate, extrusion-molded polymer plastic component made in accordance with the invention, which component is employed at various appropriate locations to define part of a spanning interconnection between adjacent wall panels, is shown in two locations at 228 in Fig. 25. Components 228 which, as was just mentioned, are employed at various other locations distributed throughout the building 100, coact with the other components which they interconnect, and specifically components 204, as pictured in Fig. 25 to permit the same kind of limited-range relative motion discussed earlier.

Completing the description of interconnect structures pictured in Figs. 23-25, inclusive, shown at 230 in Figs. 23 and 24 are two independent molded plastic connectors having the cross-sectional configuration clearly pictured in Fig. 23, and operating to perform internal interconnections between upper panel frame members 204 and the inside of portions in rafter structure 118.

Pictured at 232 in Fig. 25 is another independent-molded plastic interconnect member which, as such is seen in Fig. 25, spans the space between wall panel structures 222, 226 to interconnect these two panel structures via internal engagement within what can be thought of as the exposed interiors of the two confronting panel frame members 204 that are clearly pictured in Fig. 25.

Finally, shown at two locations in Fig. 23 are additional independent interconnect members formed in accordance with the present invention, and these members, as such are shown in Fig. 23, interconnect connector elements exposed in the confronting portions of panel frame members 204 and rafter 118 as shown.

Digressing for a moment to another sort of structure which is present in building 100, indicated generally at 236 within the structure (interior) of rafter 118, are fluid flow components which make up a portion of a fire-suppression system which is conveniently routed through the structural elements of the present invention and within the confines of building 100.

Still referring to the structures of connectors 230, 232, one will note on looking at them in the drawings that they are formed effectively which would end up

to be accommodating clearance passageways toward their opposite ends which allow for the separation and routing of, for example, conduits carrying water and conductors carrying electricity. This important approach which leads to internal separation of such two potentially dangerously conflicting structures is made present throughout building 100 as accommodated by the unique cross sections of the various modular building elements formed in accordance with the invention.

Generally in the region of the location of capping structure 244, and if desired, appropriate openable and closeable vents or ports may be provided which will act with venturi behavior in building 100 to promote effective air flow into and through the building.

Figs. 26A, 26B illustrate, in plan and in elevation views respectively, and isolated from other structures, is an anchoring plate which is employed at the opposite gable ends of building 100, and immediately beneath the regions of joinder between adjacent outside end wall panels, to anchor the assemblage of these panels suitably to the underlying structure in foundation 102, without requiring a full column.

Turning attention now to Fig. 27, here there is shown in isolated fragmentary form a portion of previously-mentioned roof panel structure 116. This panel structure, as such is illustrated herein, is formed to have two different types of panel areas. Fig. 27 specifically illustrates how these two different panel areas, generally shown by arrows 116a, 116b in Fig. 27, are interconnected according to the use of extrusion molded components formed in conjunction with implementation of the present invention.

The exact natures of these two different characteristics in a single roof panel are completely a matter of choice, and Fig. 27 is simply provided as a general illustration of how such differentiated panel characteristics can be created in a single spanner panel constructed in accordance with this invention.

Focussing attention now specifically on Figs. 28-33, inclusive, here one finds a plurality of largely, self-explanatory views that illustrate one modification of ridge structure formed in accordance with the present invention, and included in building 100 generally in the region previously mentioned, and contained within curved arrows 28-28 in Fig. 7. What is specifically pictured in these several views is a ridge

structure which has been equipped, in accordance with an optional feature that happens to be included within building 100 to produce motorized motion and transport of various kinds of sliding panels and/or screens in the roof structure of building 100. All of the details of all of the componentry pictured in these figures are not specifically discussed herein, inasmuch as these views are, as was just mentioned, quite self-explanatory.

Assuming that the view presented in Fig. 28 is taken in the plane containing previously discussed rafter structure 118, one can see that this rafter structure (shown on the left side of Fig. 28) extends toward the ridge area in building 100 where it confronts a similarly extending rafter structure 119 that extends toward the ridge region of the building from the right side of Fig. 28. The confronting ends of these two rafter structures are anchored as by bolting to a pair of plates shown at 240 in Fig. 28, which plates are angularly disposed relative to one another as is shown, and form part of previously mentioned roof ridge beam structure 120. Appropriate ridge capping structure 244 extends over the ridge area along the length of the building.

Appropriately disposed within the upper reaches of the void space defined within the interior of ridge beam 120, and pointed to generally by arrow 246 in Fig. 28, is a motorized rotary take-up and pay-out drum and line structure, including lines that are shown extending toward opposite lateral sides of the building, generally at 248, 250. This line structure is connected to appropriately mounted roof panel structures that are designed for sliding motion back and forth within the roof structure. There are various and many ways in which such slidable and movable roof panel structure components can be fabricated, and accordingly, and since the details of these constructions form no particular part of the present invention, these details are omitted from illustration and discussion specifically herein.

Still with reference to Fig. 28, and now including additional reference specifically also to Figs. 29, 30, pictured generally at 247 in Fig. 28 is a motorized rotary take-up and pay-out drum and line structure which is employed in building 100 to control the motions of two laterally-disposed screens that are provided as an option in building 100. In many ways, this motorized structure is similar to the one previously and briefly discussed just above. Figs. 29 and 30 show, respectively, a

spring-loaded take-up and pay-out drum structure that is located basically at the left side of the building structure as such is pictured in Fig. 28, and specifically at the location of previously-mentioned eave beam 156. This structure functions to react against turning operation of a motorized structure 247 in Fig. 28.

Fig. 30 is a fragmentary view illustrating guideways that are provided on opposite sides of previously-mentioned rafter 118 to guide the sliding back-and-forth motions of two screens which, in Fig. 30, are shown at 249, 251.

Fig. 31 which is taken, as was mentioned, cross-sectionally along line 31-31 in Fig. 28, shows the interconnections between the various components which rise towards the ridge structure on the left side of Fig. 28, and illustrates a large collection of the same kind of relative motion interconnect structures previously described hereinabove. In addition, Fig. 31 offers a clear illustration of the defining operative boundary between non-moving roof structure, shown generally at 253 in Fig. 31, and slidably moveable roof structure shown at 255 in Fig. 31, all relative to previously-mentioned rafter 118.

Looking again for a moment to Fig. 31, indicated generally at 257 is an extrusion-molded component prepared in accordance with the present invention which acts as a way or guide for sliding movement of sliding roof structure 255. Pictured at 259 in Fig. 31 is an optional elongate internal reinforcing stiffener, preferably made of a suitable metal material, fitted within a region in rafter 118.

Returning for a moment to previously-mentioned lines 248, 250, these lines extend toward adjustable connector structures, pictured in two different appropriately usable forms in Figs. 32, 33 especially for line 248. As can be seen from looking at Figs. 32, 33, one can discern how it is possible to adjust the anchored outer ends of lines 248, 250 relative to the associated moving roof panel structures.

Turning attention now briefly to Figs. 34, 35, here illustrated fragmentarily in cross-sectional elevation and plan views, respectively, and looking generally into the region underlying floor structure 104, is what is referred to herein as water reservoir structure including water-containing bladders 256, 258. These bladders are appropriately fit into suitable accommodating spaces provided effectively either

within or underneath floor structure 104, and appropriate routed interconnect plumbing for these bladders is generally pictured at 260 in Fig. 35.

The exact constructions, configurations, locations and interconnections provided for such a water reservoir structure are, in their various possible details, no specific part of the present invention, can be constructed and rendered in a number of different ways at the choice of a building designer and in relation to a specific application, and accordingly, need not be, and are not, discussed in detail herein. Suffice it to say that such a water reservoir structure creates the opportunity to have a large volume of contained water located in a building, such as building 100, adjacent the floor and foundation in the building to function for various different purposes. Mentioned earlier herein are three of these purposes. One of them is to provide a water reservoir system which can couple through suitable appropriate fluid conduits that are extended within the confines of the building components of this system toward overhead plumbing, such as that which is pictured in Fig. 24 at 236, to furnish an integrated fire-suppression system. Another use is to furnish such a system through which appropriate heated pipes can be conducted to utilize stored water as a heat sink for the purpose of controlling environmental temperature within the confines of a building like building 100. Yet a further purpose is associated with furnishing substantial weight in an overall building structure to help anchor it against catastrophic motion relative to the underlying ground in a circumstance, for example, of a severe storm or a condition such as a hurricane or tornado, and especially with respect to a building which is supported on top of the ground, and without the presence of any ground-penetrating foundation structure, such as the ground-penetrating foundation structure 102 that has been discussed so far herein.

Figs. 36-39, inclusive, illustrate other kinds of appropriate foundation structures, including a pair of such foundation structures with respect to which the weighting possibilities of a water reservoir system may be especially useful.

Fig. 36 illustrates a non-ground penetrating and substantially ground-resting foundation structure 270 which is shown resting directly on the upper surface of ground 124.

Fig. 37 illustrates a foundation structure 272 which is also a ground-resting non-penetrating foundation structure that differs from the one pictured in Fig. 36 by providing for a predetermined desired elevation, such as that illustrated generally at E in Fig. 37, of the superstructure in the building relative to the upper surface of the ground.

Finally, Figs. 38, 39 collectively illustrate yet a third form of foundation structure 274 which is similar in many respects to foundation structure 102. Foundation structure 274 differs from structure 102 by including modular elevation components, such as that pictured at 276 in Figs. 38, 39, which additional elevational structure rests upon, and is appropriately anchored to, the upper portions of a foundation structure part which is very much like previously-described foundation parts 158.

Touching now just briefly on each one of the additional enumerated drawing figures presented herein, most of which, with simple introductory statements made herein, will become immediately understood by those skilled in the art reading these drawing figures, Figs. 40, 41, 42 show three different modifications of appropriate relative-motion accommodating interconnect structures that can be formed in the molded components in accordance with the present invention. The specific structures shown in detail in Figs. 40, 42 essentially illustrate interconnect structures wherein one side, so-to-speak, of the mating interconnecting componentry is split into two parts as shown. The structure illustrated in Fig. 41 is one wherein a locking key or element can be removably inserted into one of the two mating components to inhibit accidental disconnection or withdrawal of connection.

Figs. 43 and 44 illustrate in elevational-section and plan-section views, respectively, fragments of modified portions of a building structure wherein motion structure is provided within an upright wall panel structure. The motorized portion of such a modification is pointed to generally at 278 in Fig. 43. Fig. 44 shows yet another type of elongate extrusion molded polymer plastic component 280 which is formed in accordance with the present invention, and is snap fit into place in the region intermediate a pair of upright wall panel structures to provide connection channels 280a, 280b, wherein appropriate guides or slide-accommodating tracks, for

example, moveable screens can be driven by the motorized structure pictured at 278 in Fig. 43.

Fig. 45 illustrates in fragmentary cross section how several kinds of specifically cross-sectionally configured members constructed in accordance with this invention can be used to receive specially formed exterior building skin structure made in panels, such as the panels shown generally at 290 in Fig. 45.

Figs. 46, 47 illustrate the use of molded interconnect structures formed in accordance with the present invention adapted to receive, at different locations within a building such as building 100, conventional wall material, such as sheetrock material generally pictured at 292, 294 in Figs. 46, 47 respectively.

Fig. 48 is a fragmentary section taken in the region where two wall panel structures, for example, are joined through interconnect structure of the type described earlier herein, on the outside of which there are provided structural- tape-attached sheets of conventional sheetrock or wallboard, pictured at 296 in Fig. 48.

Figs. 50a, 50b illustrate, in different drawing scales, constructions of extrusion molded spanning panel structures that can be formed in accordance with the present invention, and Figs. 51, 49, in conjunction with these two other figures, picture how an overall panel structure including opposite facial spaced skin structures can be created.

Fig. 52 is a fragmentary view of a novel power-supplying cable bundle proposed for incorporation into a building in accordance with the present invention. In this bundle, there is provided but one single neutral line, one single ground line, and an appropriate plurality of higher-voltage lines.

It should now be apparent that a novel modular building system is proposed and has been illustrated and described with respect to the present invention. All of the important structural and other features offered by this system have been discussed very fully earlier in this specification, and are clearly contributions to the relevant art which promote the constructing of very versatile, easily and quickly installed, highly-efficient building structures.

IT IS DESIRED TO CLAIM AND SECURE BY LETTERS PATENT:

1. A multi-element, modular building system comprising

plural, selected, modular building components, including components such as (1) panels, (2) selected, related support structures therefor, and (3) other components, and

plural, selected interconnect structures operatively associated with said building components, and operable to interconnect the same reversibly and selectively in different patterns of connection to form an overall building which can be viewed as an interconnected matrix of space-defining, potentially load-bearing components,

at least certain ones of said interconnect structures, when (1) in operative conditions interconnecting adjacent building components that are distributed substantially throughout such an overall building, and (2) when responding to the influence of ambient temperature change, and/or to an externally applied load, intentionally accommodating limited ranges of relative angular and/or translational motion between such interconnected adjacent components as a specific reaction to such a change and/or load, with such relative motion occurring within such ranges, and being characterized (1) by dwell periods of load-transmission between different pairs of adjacent interconnected components, (2) by changes in actual relative positions between interconnected elements as a whole, and (3) by effective, reversible, bidirectional enlargement and shrinking of the building as a whole.

2. A modular building system comprising

plural, interconnectable, modular building components, and

interconnect structures, including relative-motion-accommodating interconnect structures, operatively interconnecting selected ones of said building components into a ground-supported, overall building which can be characterized as a matrix of space-defining, potentially load-bearing components,

said relative-motion-accommodating interconnect structures operating adaptively, selectively and dynamically with respect to externally applied loads, and via the relative- motion accommodation accorded to selected, interconnected building components and interconnect structures, to create different, responsive load-bearing paths through the building matrix between the point of such external load application and the ground,

said interconnect structures creating such differing paths in direct relation to the type, level and direction of externally applied loads, and so as to establish each such created path through a specific collection of building components and interconnect structures that are distributed between the point of load application and the ground, and between which, along said path, relative motion in response to a load has come to a stop.

3. A modular building system comprising

building components organized to form a ground-supported, overall building, and

interconnect structures operatively associated with, and interconnecting, said building components, operable, with the application of an external load, and in direct response to the specific and instantaneous characteristics of such a load, to create a related, specific, load-bearing path through the building between the point of load application and the ground.

4. A modular building system comprising

building components organized to form an overall building, at least some of which components are intended to carry (through the building) loads that are related to different externally applied loads, and

interconnect structures operatively interconnecting said components, and capable of defining variably, and for different specific externally applied loads, which ones of said components will form parts in a reaction, load-bearing path between the point of external load application and the ground,

said interconnect structures thus effectively holding to a minimum the overall time (during the life of a building) that certain ones of said components and interconnect structure operate as parts of such a reaction path.

5. The system of claims 1, 2, 3 or 4, wherein at least certain ones of said building components and interconnect structures are relatively positionally interchangeable in a building.

6. The system of claims 1, 2, 3 or 4, wherein selected ones of said building components and interconnect structures include internal way/chase structure adapted to receive selected utility-carrying structures, such as for water, electricity, gas, heating, waste products, telephone, cable, etc.

7. The system of claims 1, 2, 3 or 4, wherein at least certain ones of said building components and interconnect structure include pre-established, integral, interengageable connector elements.

8. The system of claims 1, 2, 3 or 4, wherein at least certain ones of said building components and interconnect structures are formed of a polymeric material.

9. The system of claim 8, wherein at least some of said at least certain ones of said building components and interconnect structures are formed by extrusion.

10. The system of claim 6, wherein, within the confines of selected building components and interconnect structures, utilities are distributed outwardly therefrom generally in a manifold fashion.

11. The system of claims 1, 2, 3 or 4, wherein the overall building includes air-flow venturi structure which communicates between the inside and the outside of the building.

12. The system of claims 1, 2, 3 or 4, wherein interlock integrity in certain regions in the overall building increases in response to certain applied external loads.

13. The system of claims 2, 3 or 4, wherein said building components include panels, and certain ones of said panels are organized in the building to carry load in tension.

14. The system of claims 1, 2, 3 or 4 which further includes elongate, twin-character, ground-engaging foundation structure which, as seen in long axial cross section, generally increases in lateral dimension progressing from the upper to the lower regions of that foundation structure, and wherein one of the twin-character elements includes a solid core, and the other includes different-material jacketing structure disposed on laterally opposites of said core.

15. The system of claim 14, wherein said core is formed of concrete which has been poured into space originally defined by said jacketing structure, and said jacketing structure takes the form of two generally planar, and angular, sheets of the mentioned different material.

16. The system of claim 15, wherein said sheets are formed of an extrusion-molded polymeric material.

17. A building formed of modular, interconnected building components designed to allow reversible increasing and decreasing of the overall size of the building in direct response to an applied external load.

18. A modular building system in operative condition comprising

a skeletal frame structure, and

panel structures floatingly connected to said frame structure in such a manner that the transmission of certain loads between selected ones of said panel structures and said frame structure is adaptive and intermittent, and comes about in direct response to the nature and direction of an externally applied load.

19. A modular building system, in operative, assembled condition forming an overall building comprising

a freely selected, operatively interconnected arrangement of plural, elongate frame elements, which elements generally define plural, substantially planar spaces that are at least partially perimetrally bounded by an interconnected plurality of said elements, each adjacent pair of interconnected frame elements being interconnected in a manner which permits, within preselected bounding ranges, unrestrained overall relative motion, and

plural, freely selected, generally planar spanner elements floatingly disposed in generally captured, but nevertheless range-bounded, relatively moveable, conditions within selected ones of said spaces.

20. The system of claim 19, wherein interconnected frame elements, and captured spanner elements, interact with one another (where connectively adjacent) through connections which are formed generally by elongate, slidingly and operatively interengaged, elongate, confronting, receptive-channel and received-flange structures.

21. The system of claims 1, 2, 3 or 4, wherein the mentioned building components, when assembled into an overall building, collectively constitute superstructure, and which further comprises foundation structure including plural foundation elements that fit together with telescopically inserted and received element portions, and wherein further, at each angular corner of the overall building, said foundation elements include a rigidly pre-angled element having elongate, angularly intersecting runs which reside at a committed and defining corner angle that operates in the overall building to hold and stabilize the angle at which superstructure components meet at the relevant corner of the building.

22. The system of claims 1, 2, 3 or 4 which further includes foundation structure that optionally, and where needed, includes an elongate vertically adjustable foot structure including a lower, broad-area, configurationally-adaptable footing expanse which is selectively engageable with a protrusion, such as the upper portion of a rock (or the like), that underlies the foundation structure.

23. The system of claim 22, wherein said footing expanse takes the form of a downwardly-facing cluster of elongate, elastomeric tentacles.

24. The system of claims 1, 2, 3 or 4 which further includes water-containing reservoir structure locatable adjacent the foundation of an overall building, and positioned in, and integrated with respect to, the building to furnish cooperative operational structure selected from the group consisting of (1) a source of water connected to plumbing in the building that forms part of a fire-suppression system, (2) a heat-sink for aiding in controlling temperature in a selected region or regions in the building, and (3) a stabilizing foundation weight for a building of the kind largely supported substantially entirely on top of the underlying ground (i.e., without any significant foundation ground-penetration).

25. The system of claims 1, 2, 3 or 4, wherein said building components include panel-like motion structures which are moveable selectively in a final, overall building to change, selectively, the effective character of a wall and/or roof expanse in the building.

26. The system of claims 1, 2, 3 or 4 which further includes ground-engaging foundation structure with elongate stretches possessing vertically adjustable components employable for leveling the foundation structure as a whole.

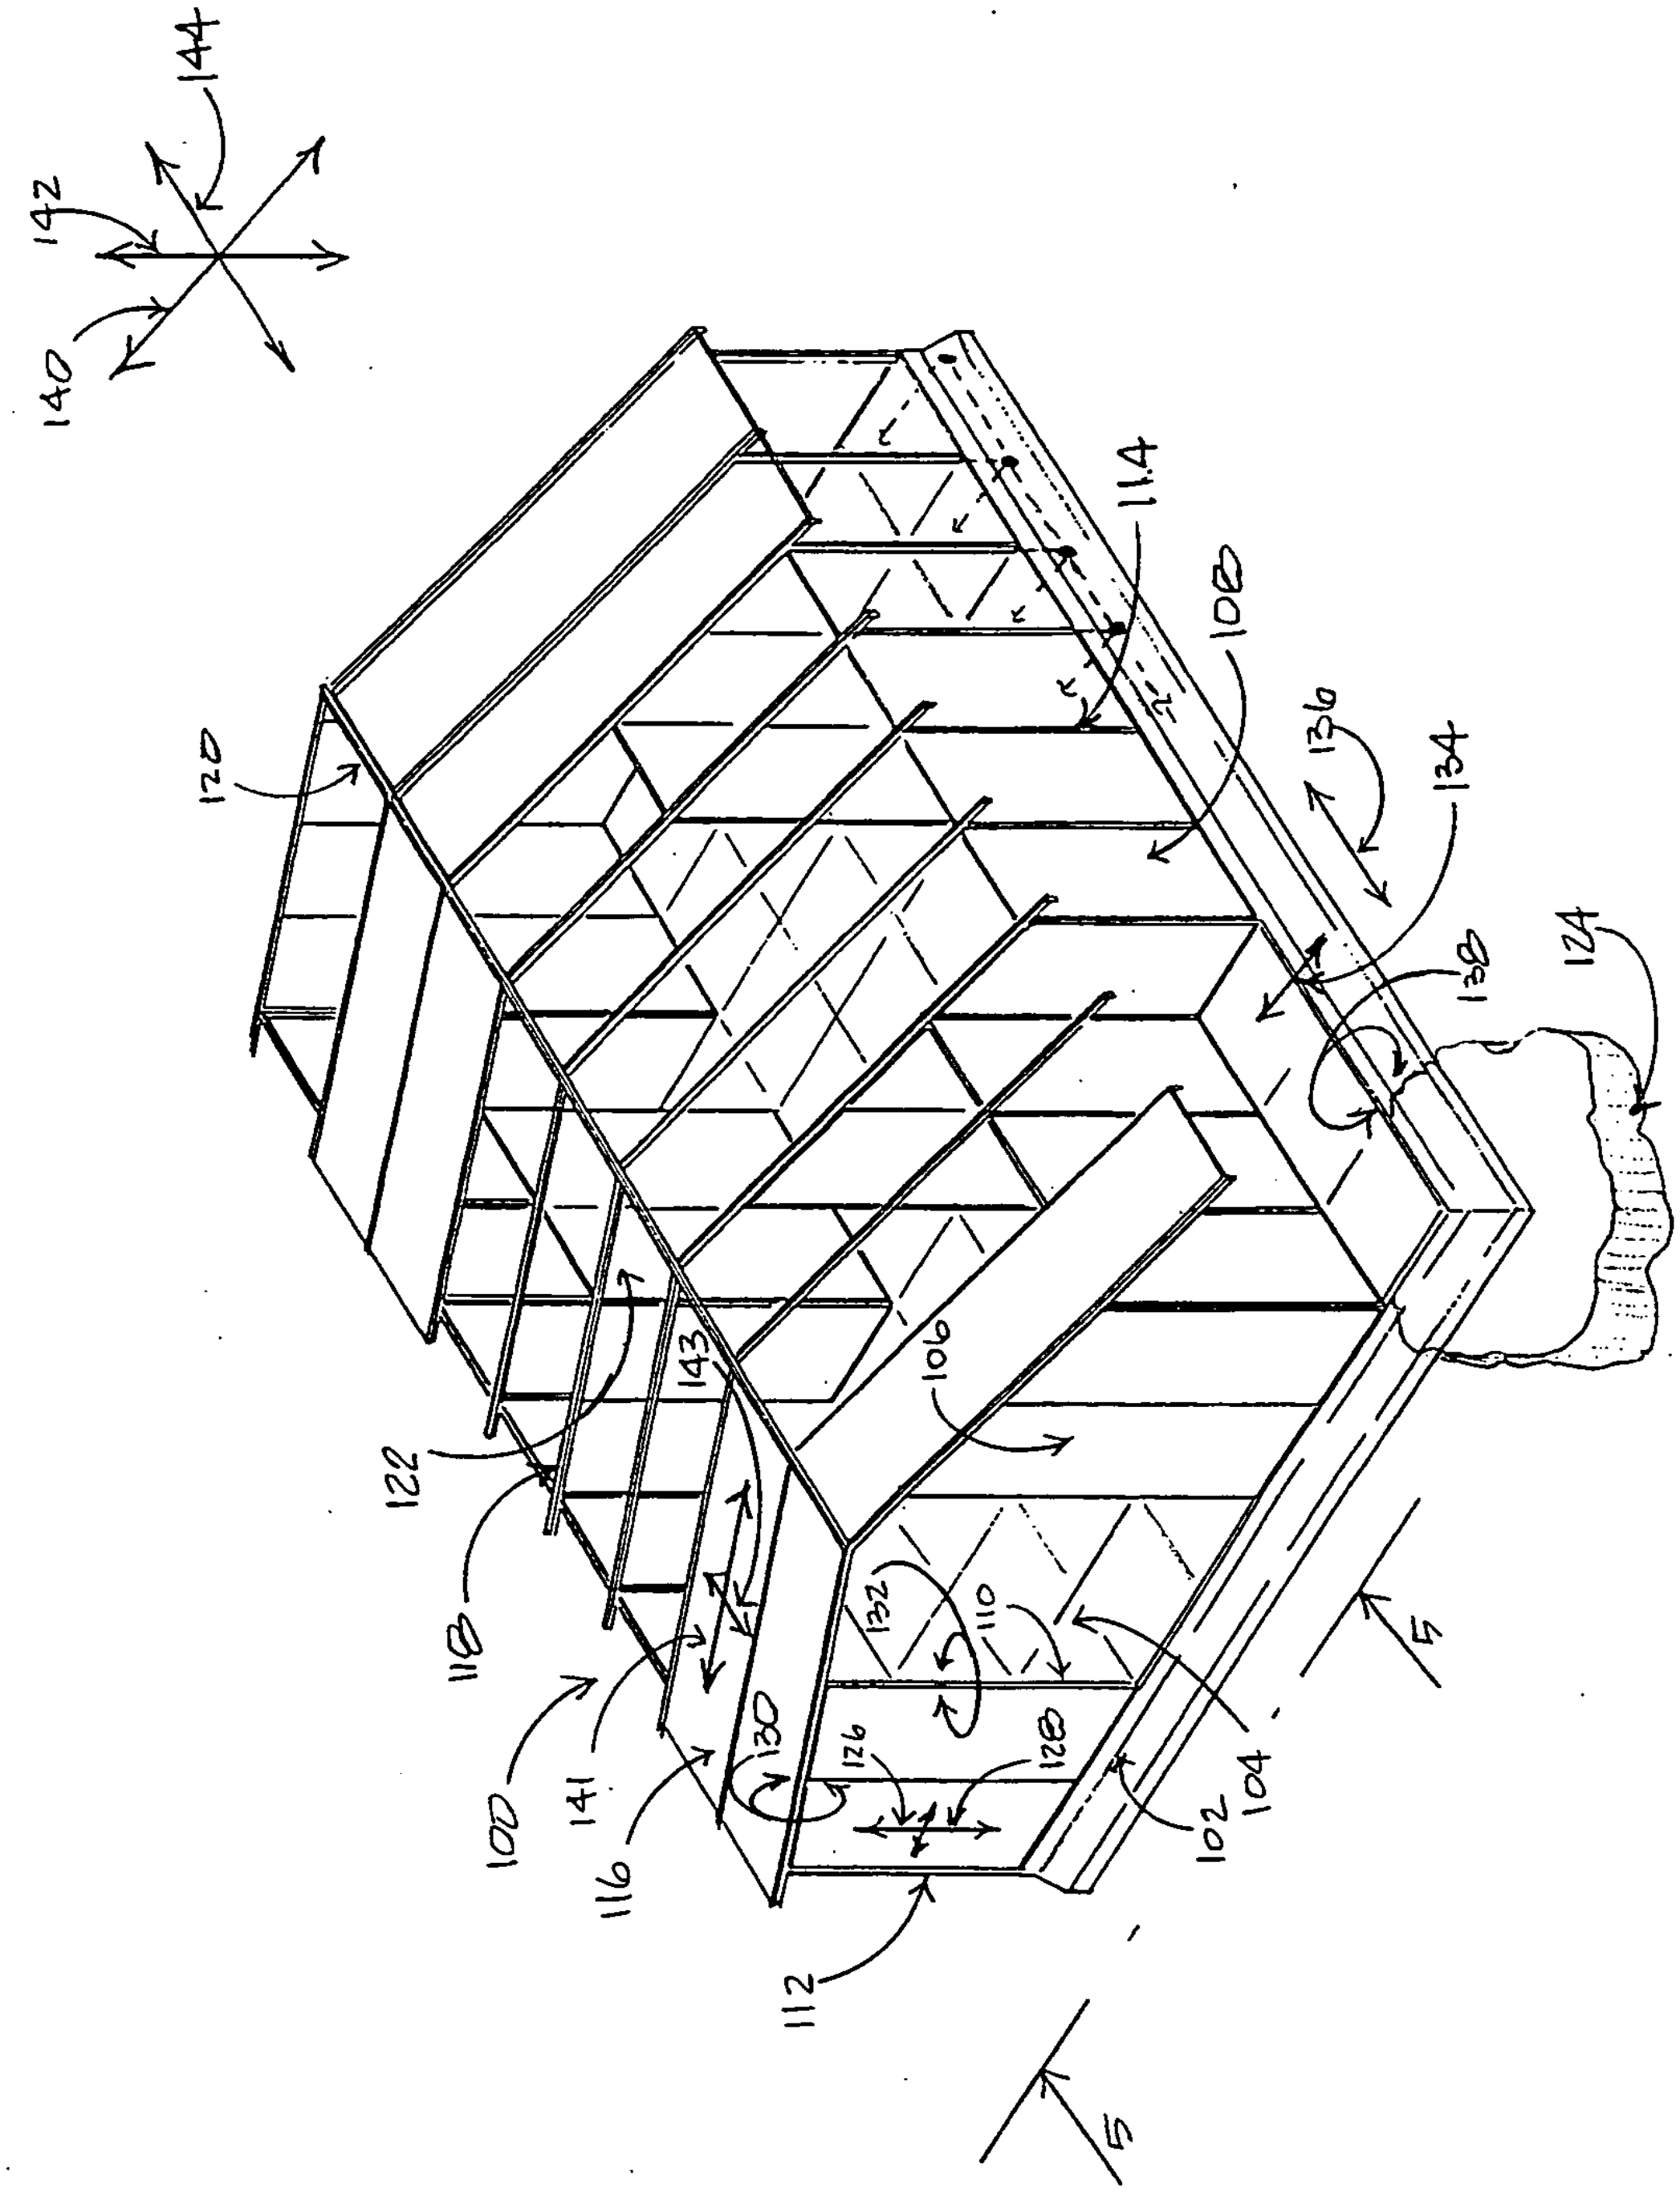
144
142
140
120
114
108
136
134
138
124
122
143
106
118
132
110
100
141
130
126
128
116
102
104
112
5
5

Fig. 1

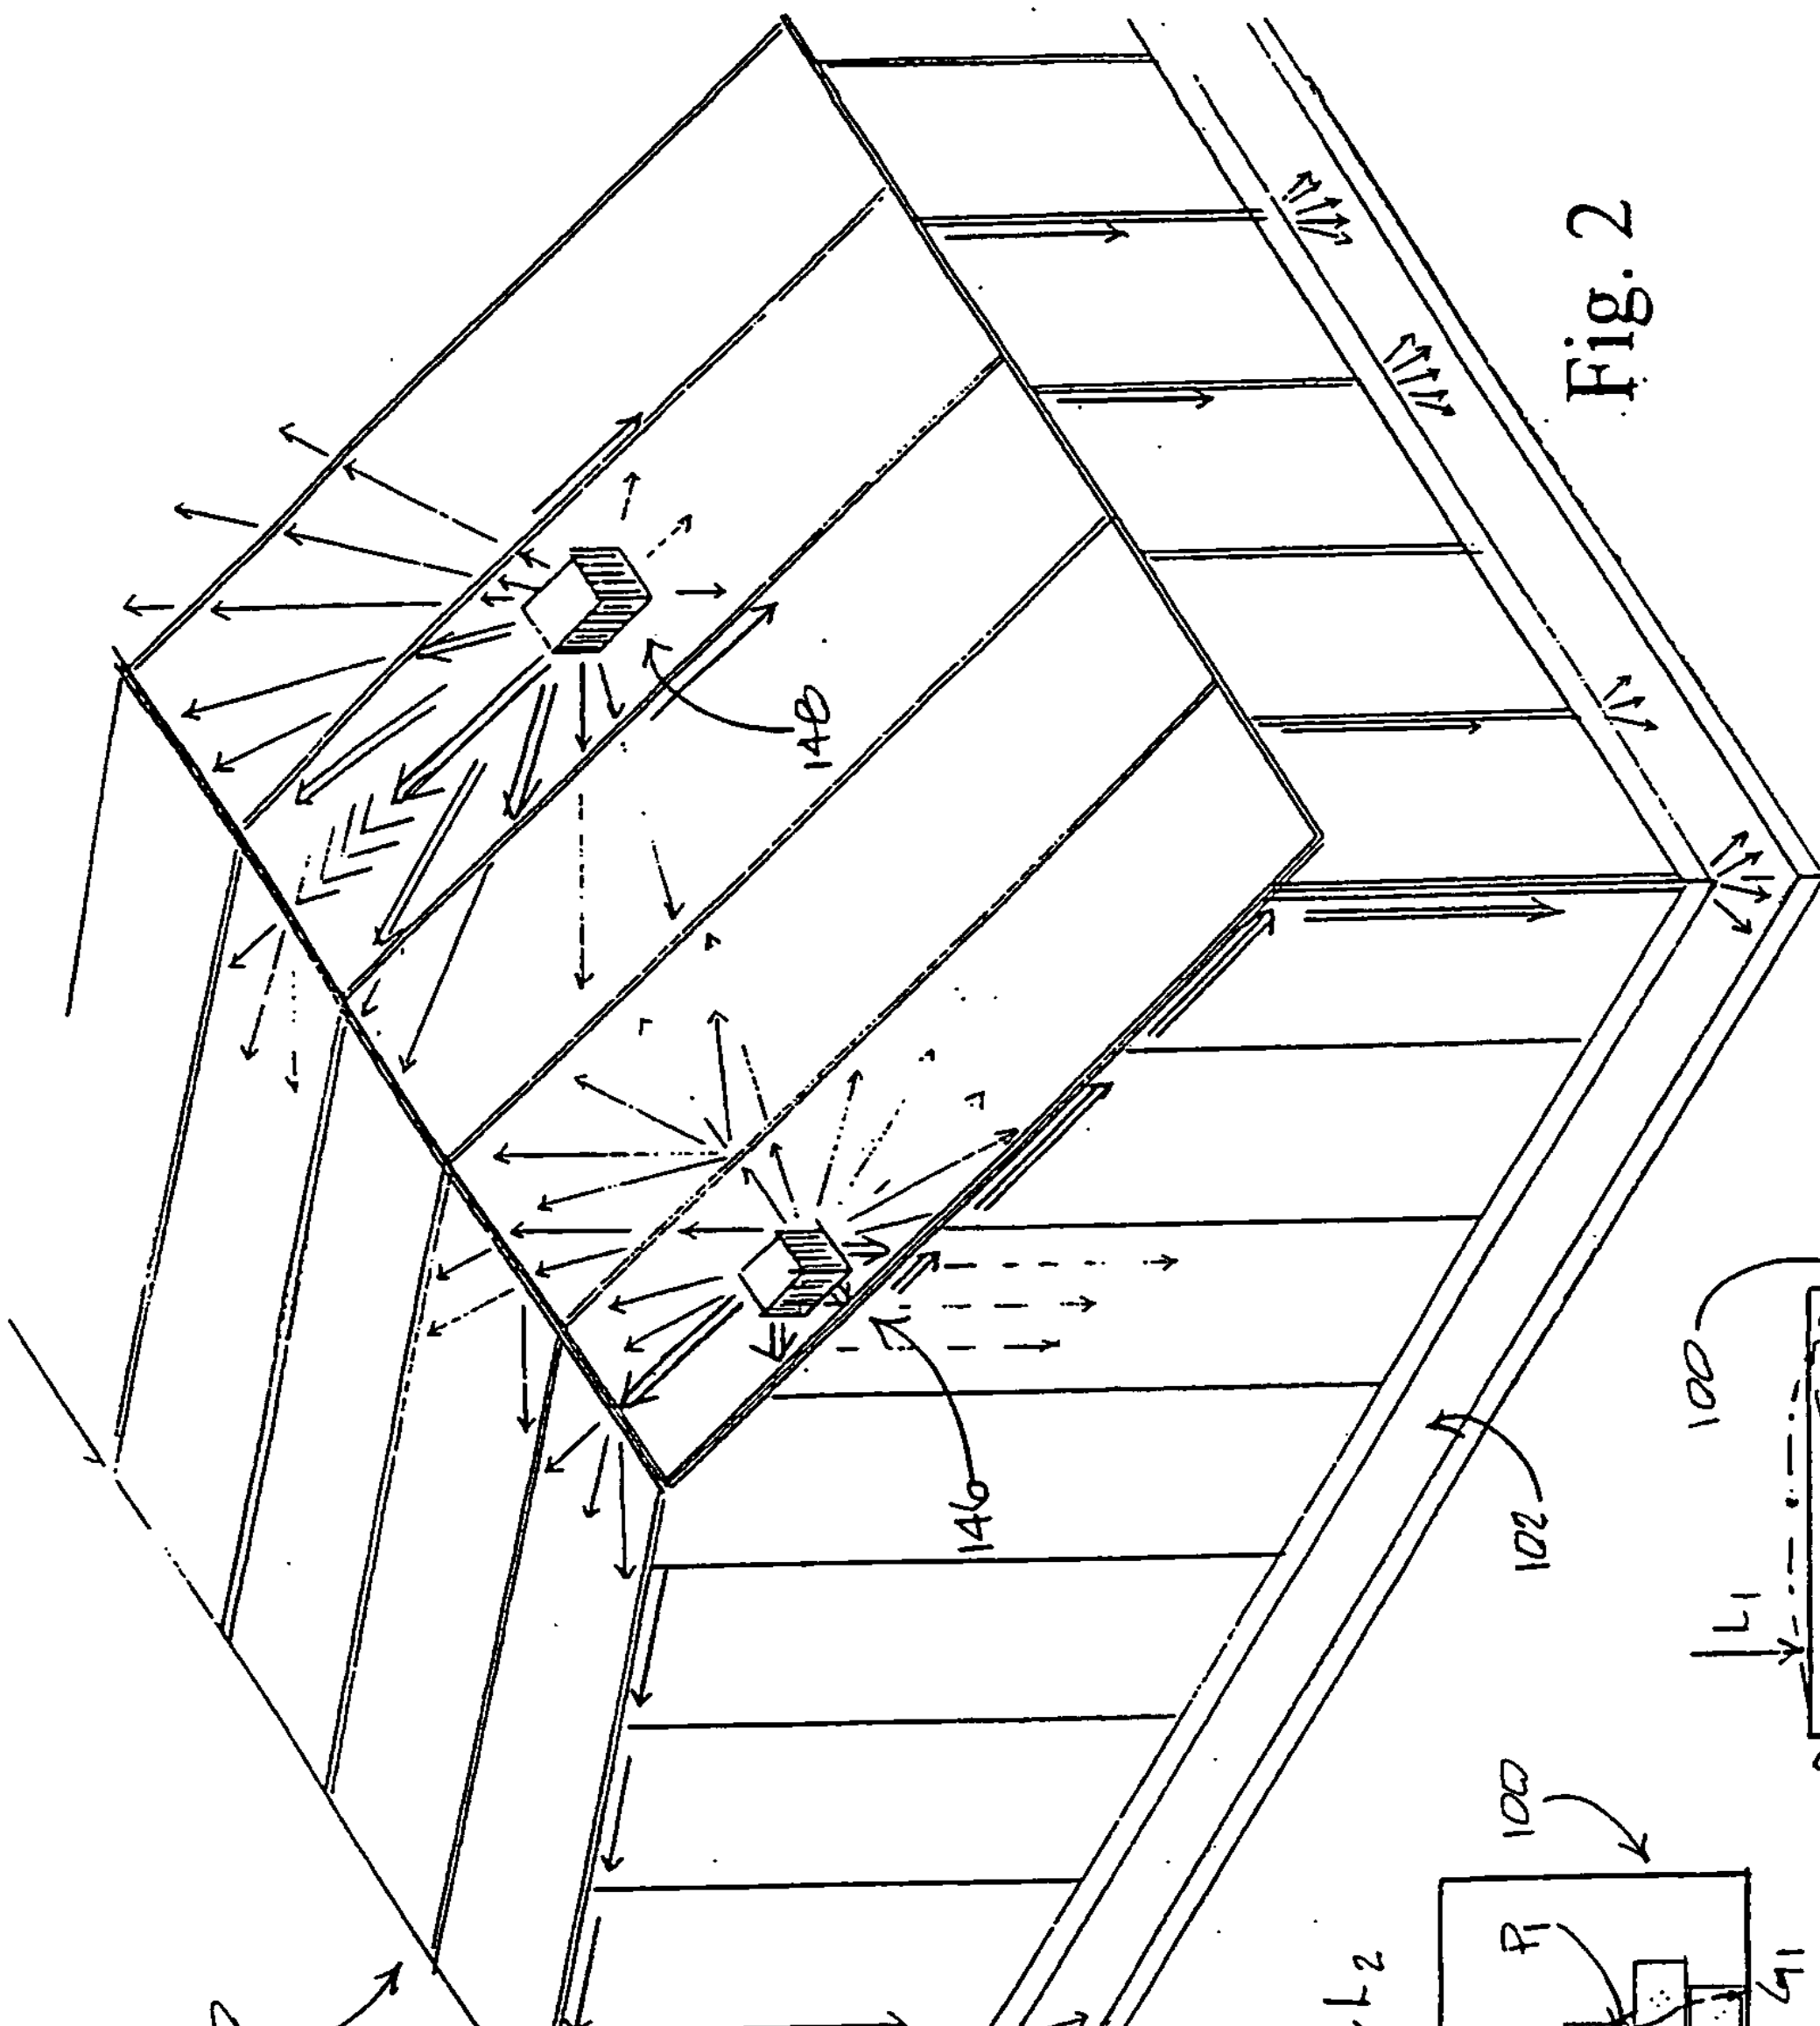

Fig. 2



Fig. 3

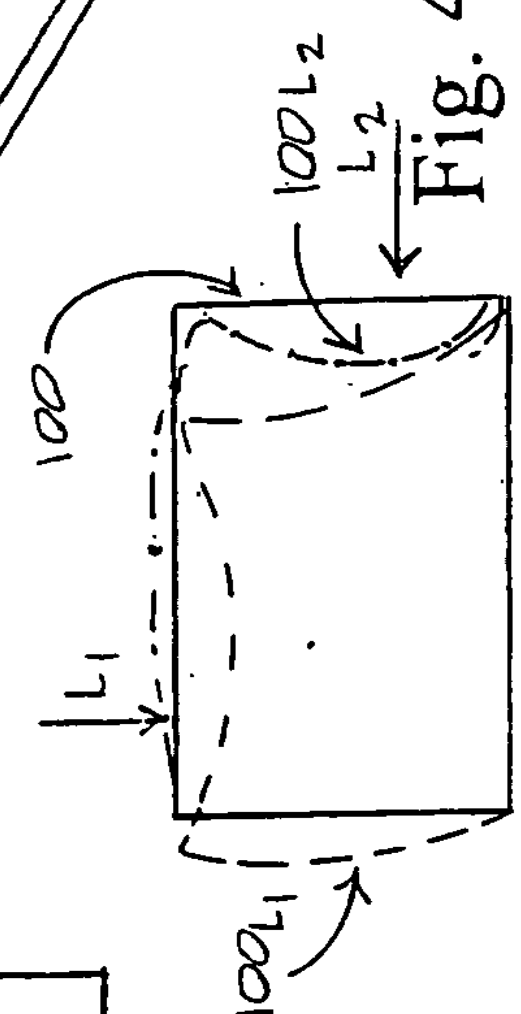

Fig. 4

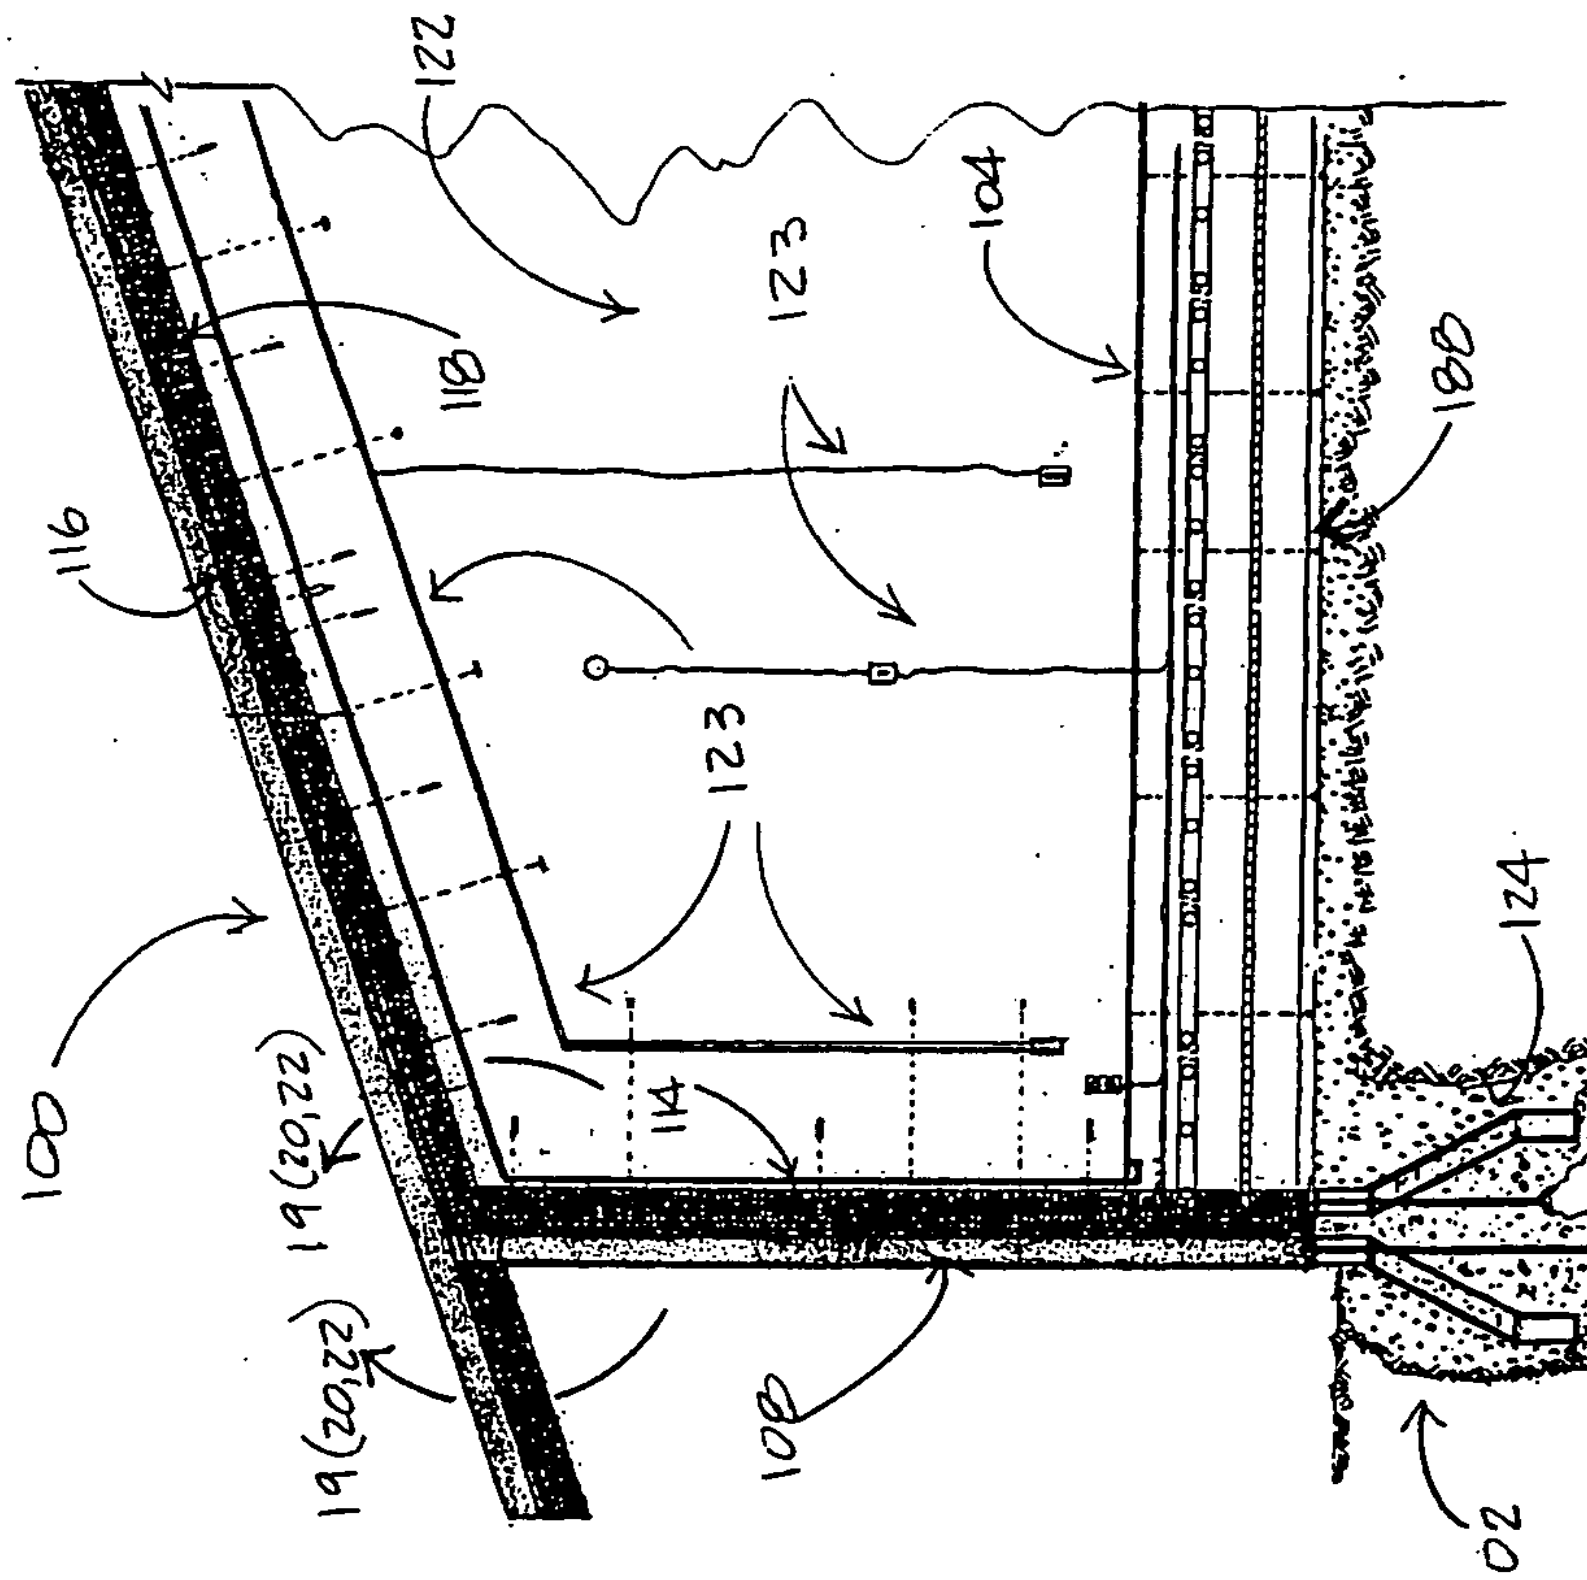
100
19(20,22)
19(20,22)
108
102
124
180
104
123
122
118
116
114
123

Fig. 5

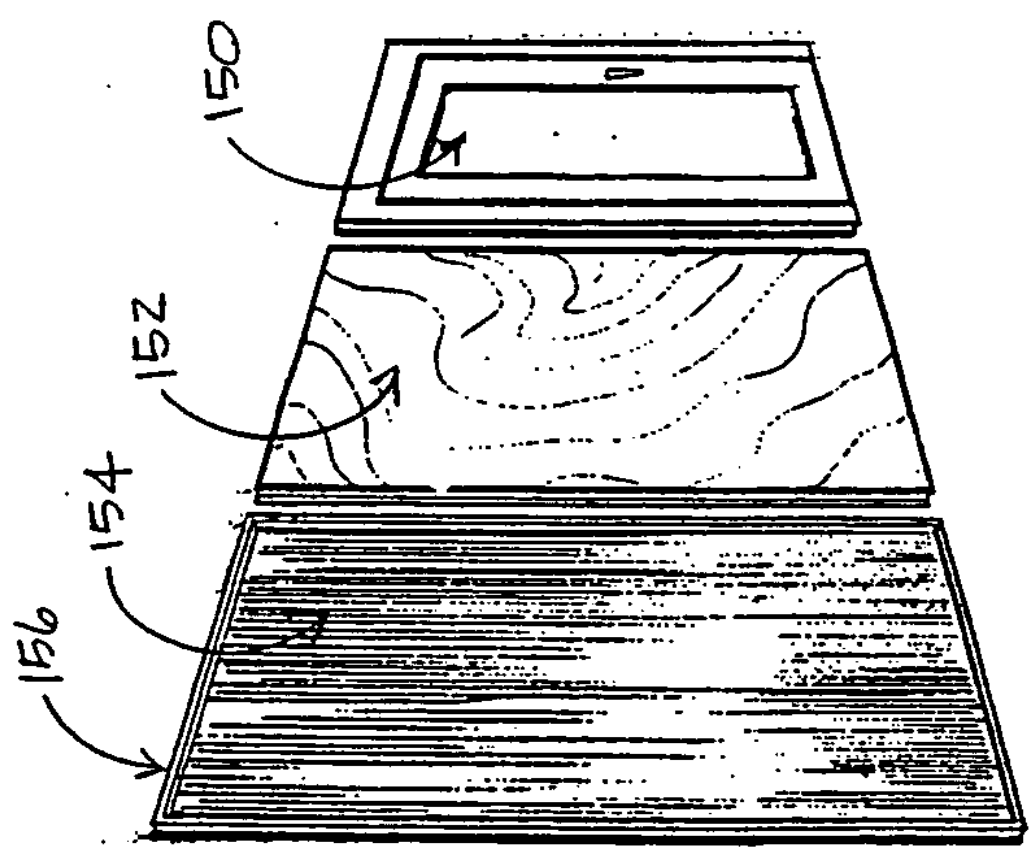
150
152
154
156

Fig. 6

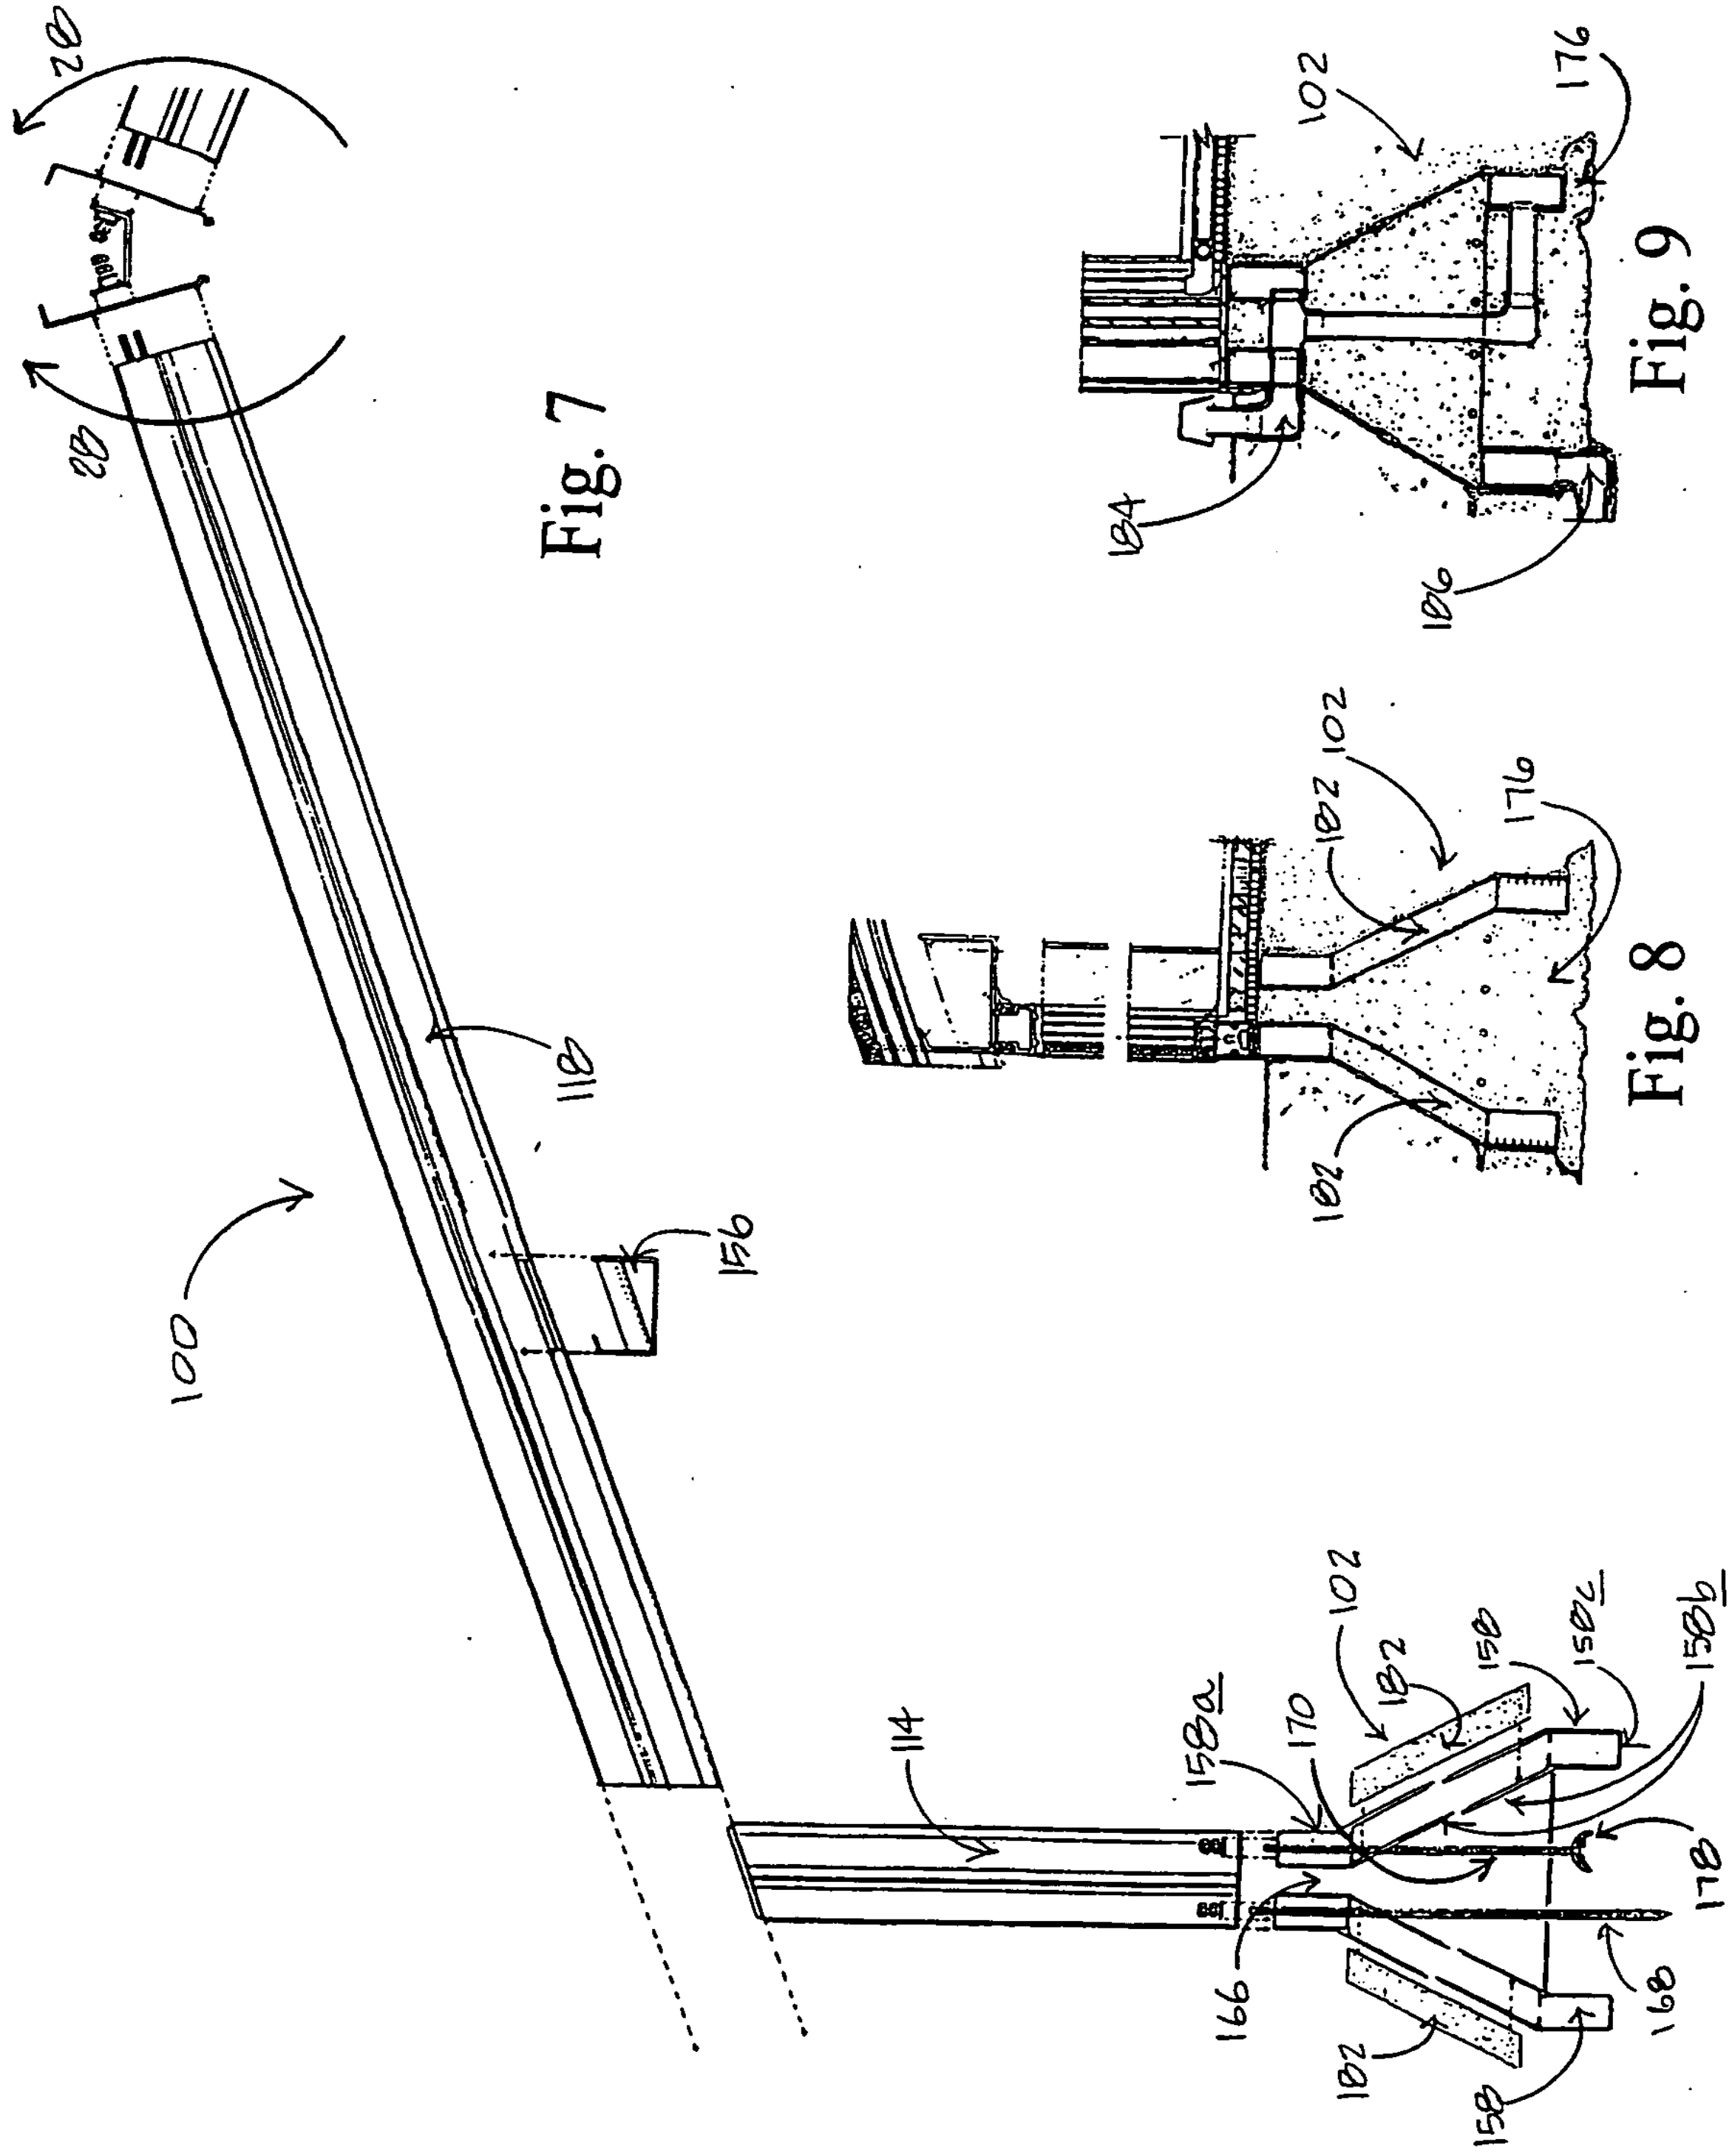

Fig. 7

Fig. 8

Fig. 9

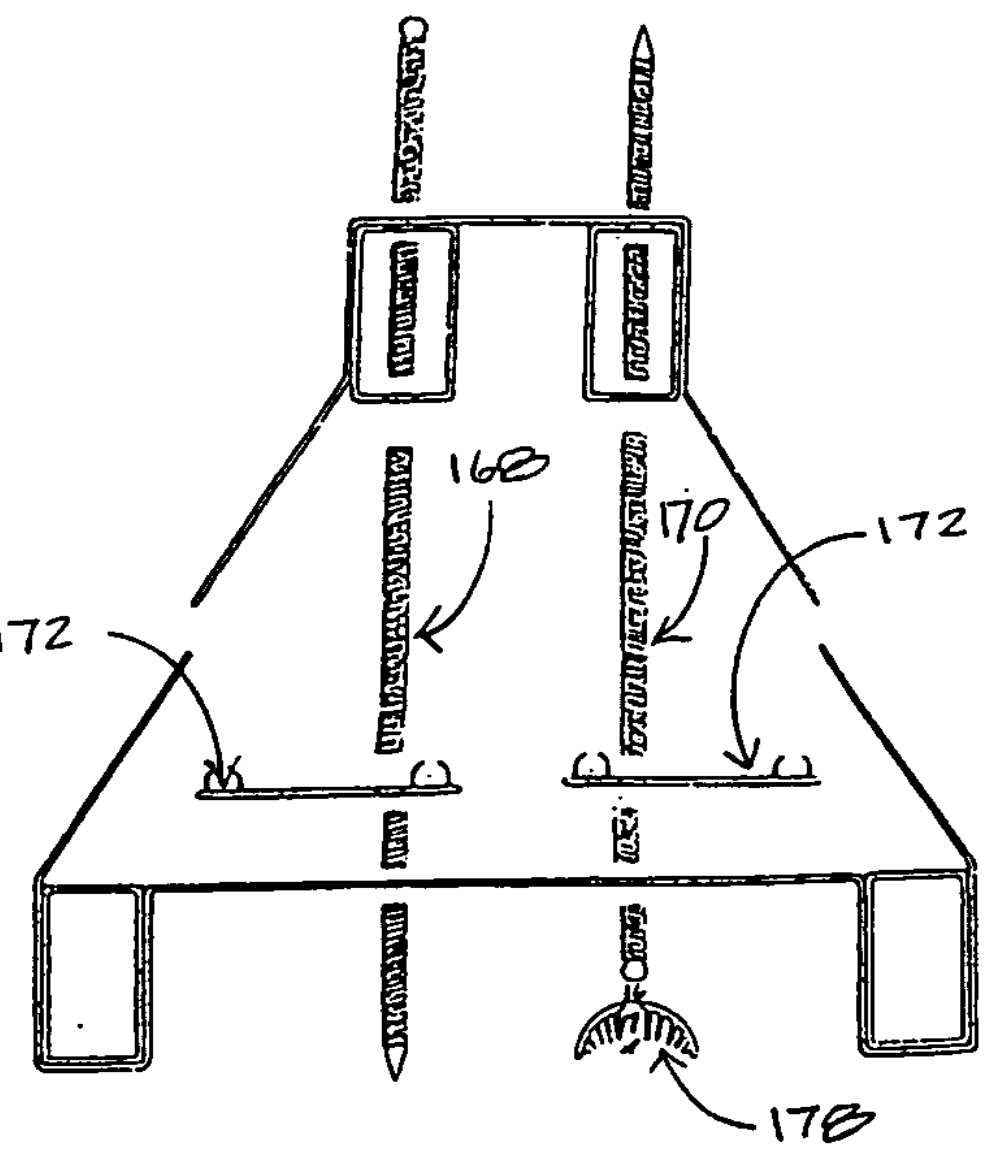

Fig. 10

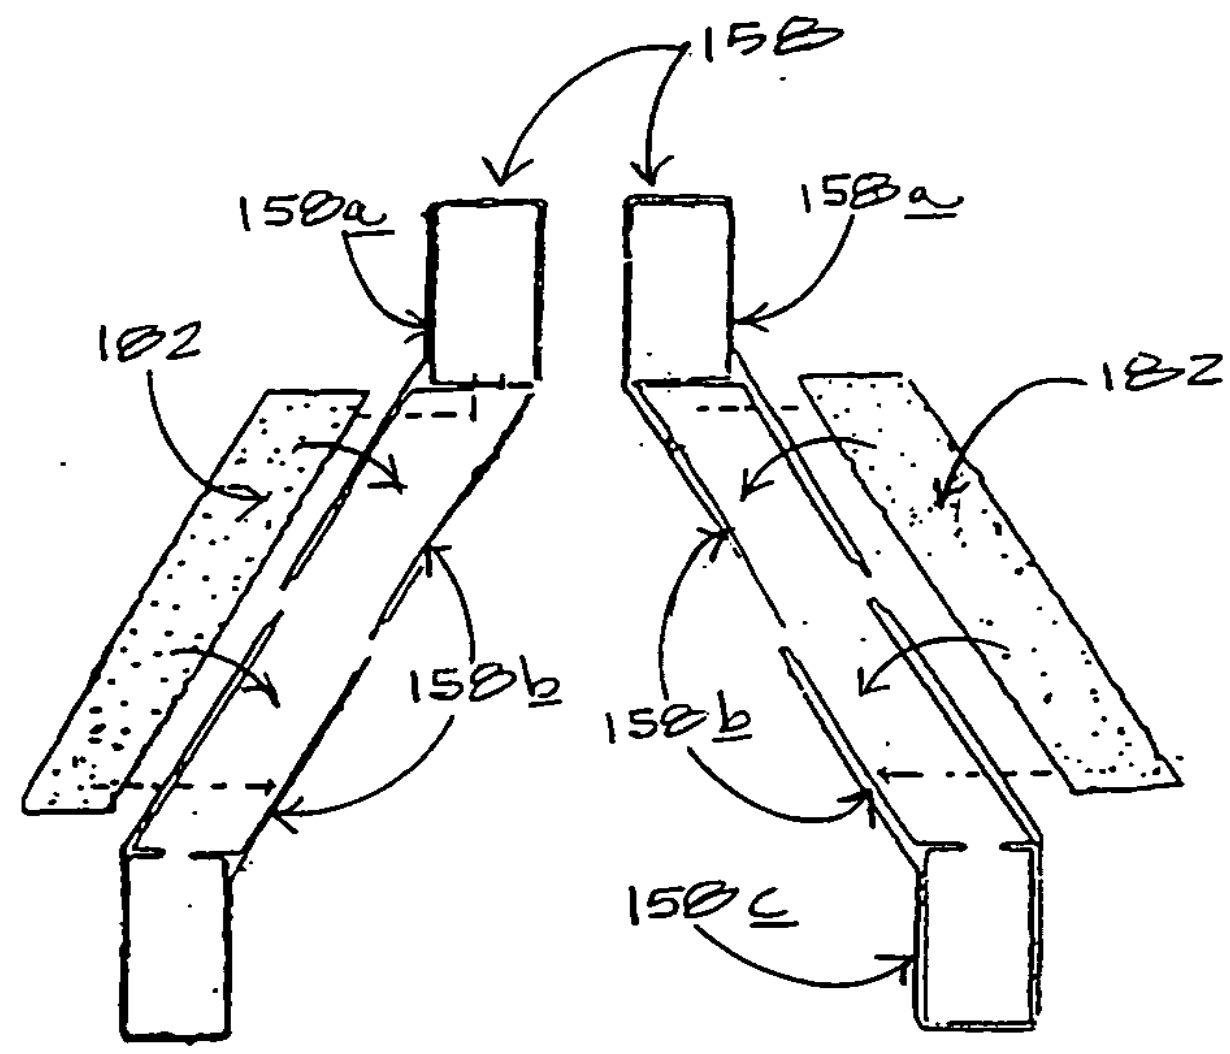

Fig. 11

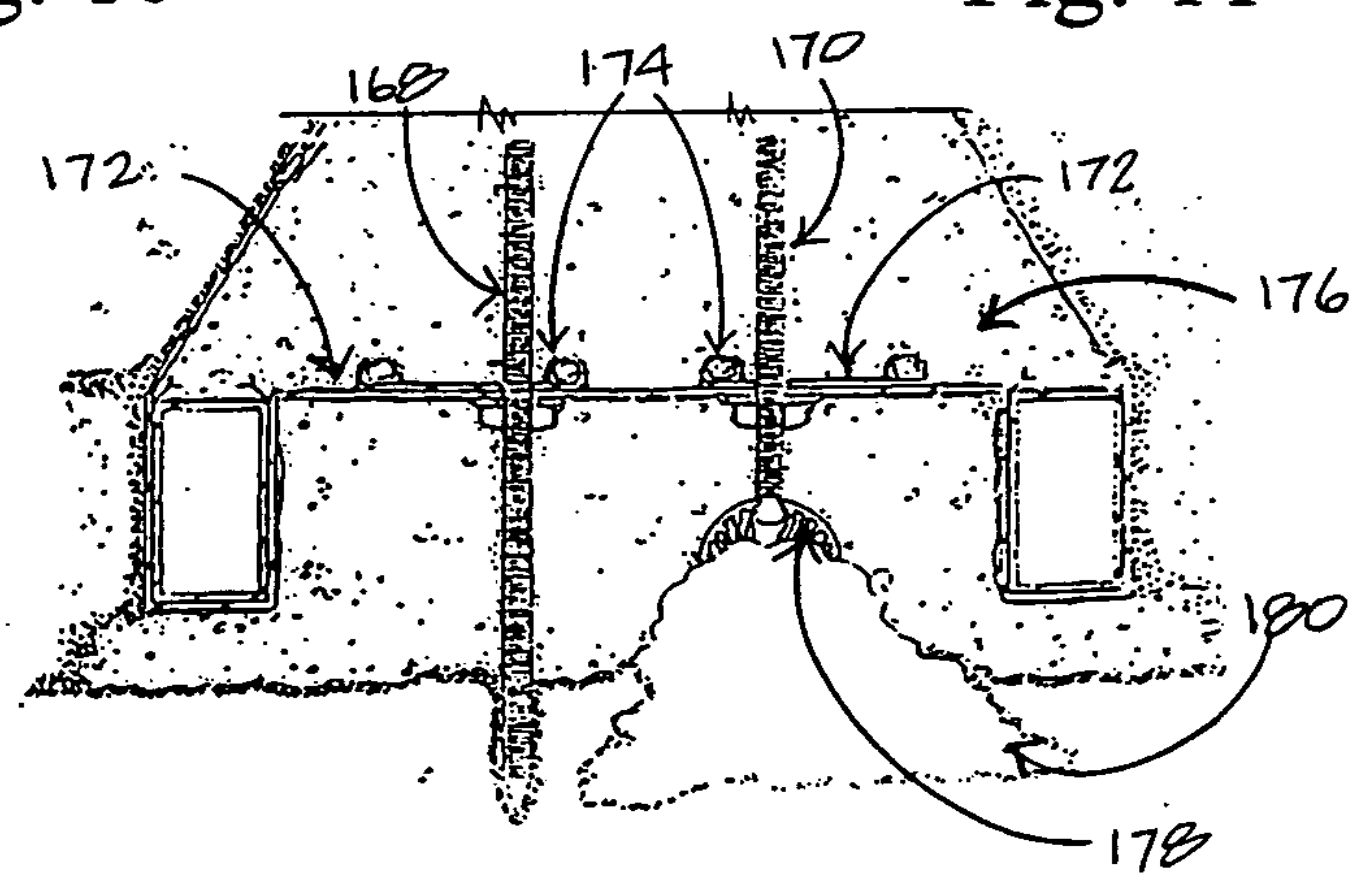

Fig. 12

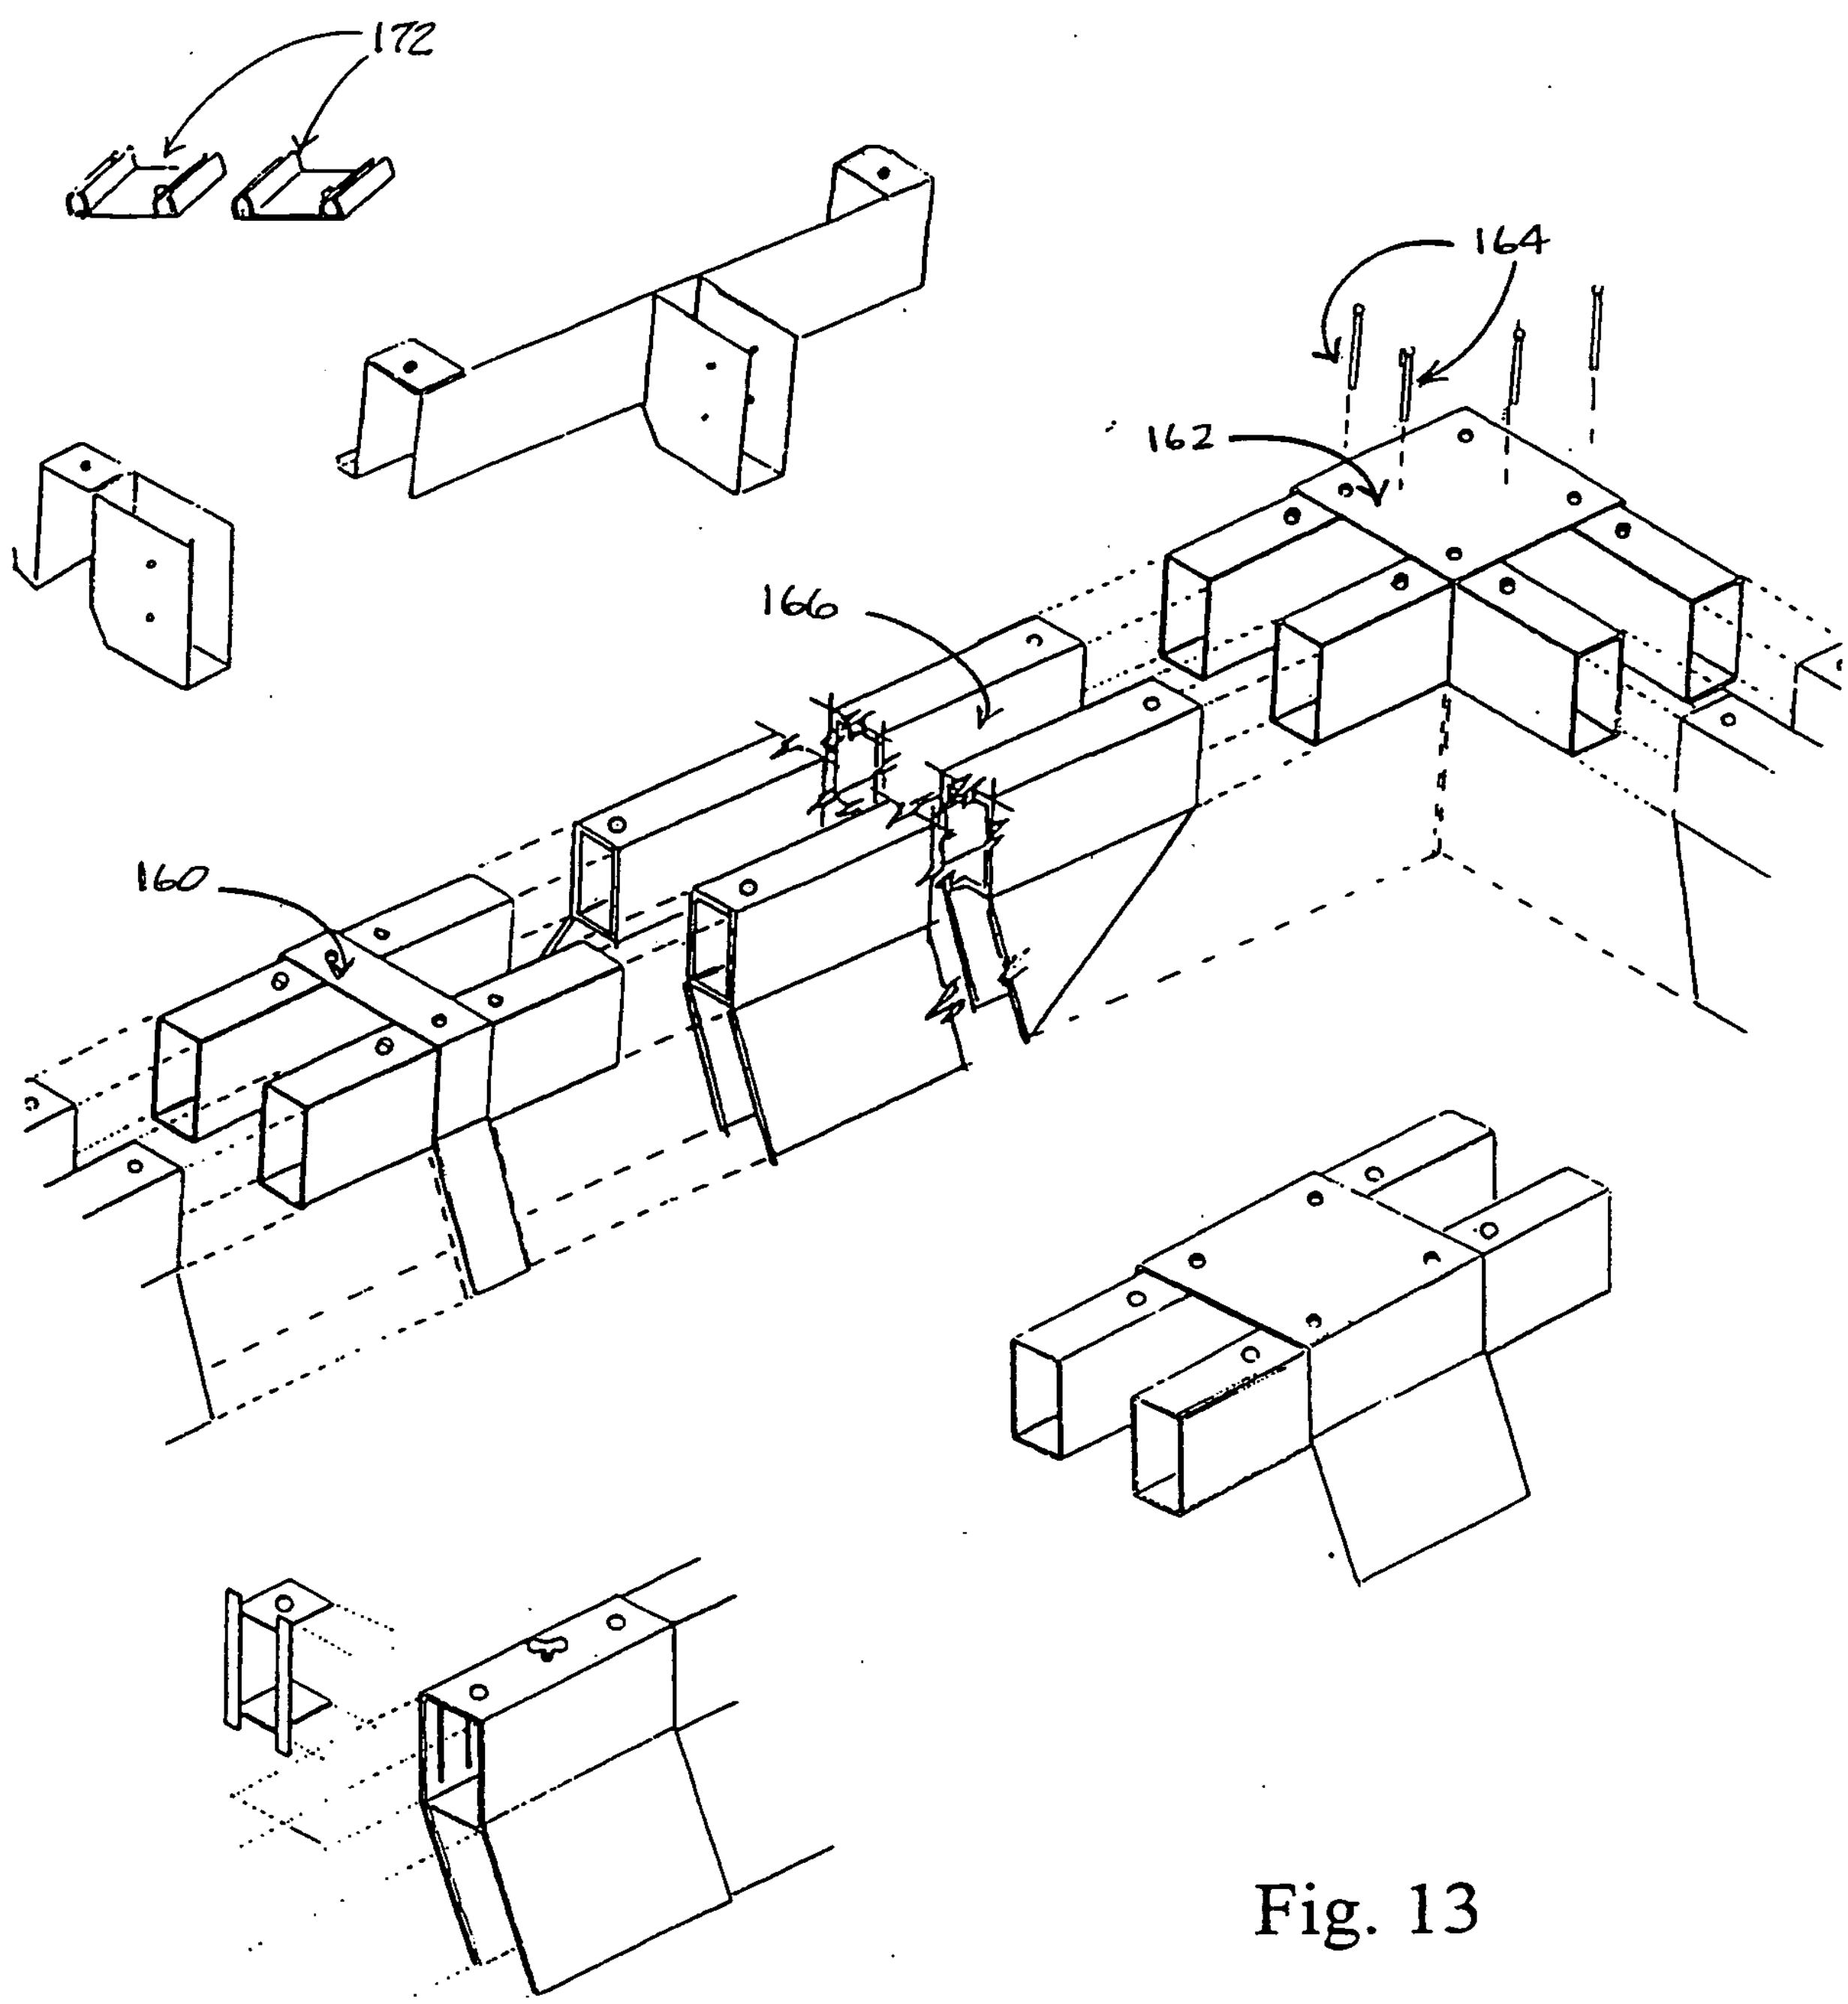

Fig. 13

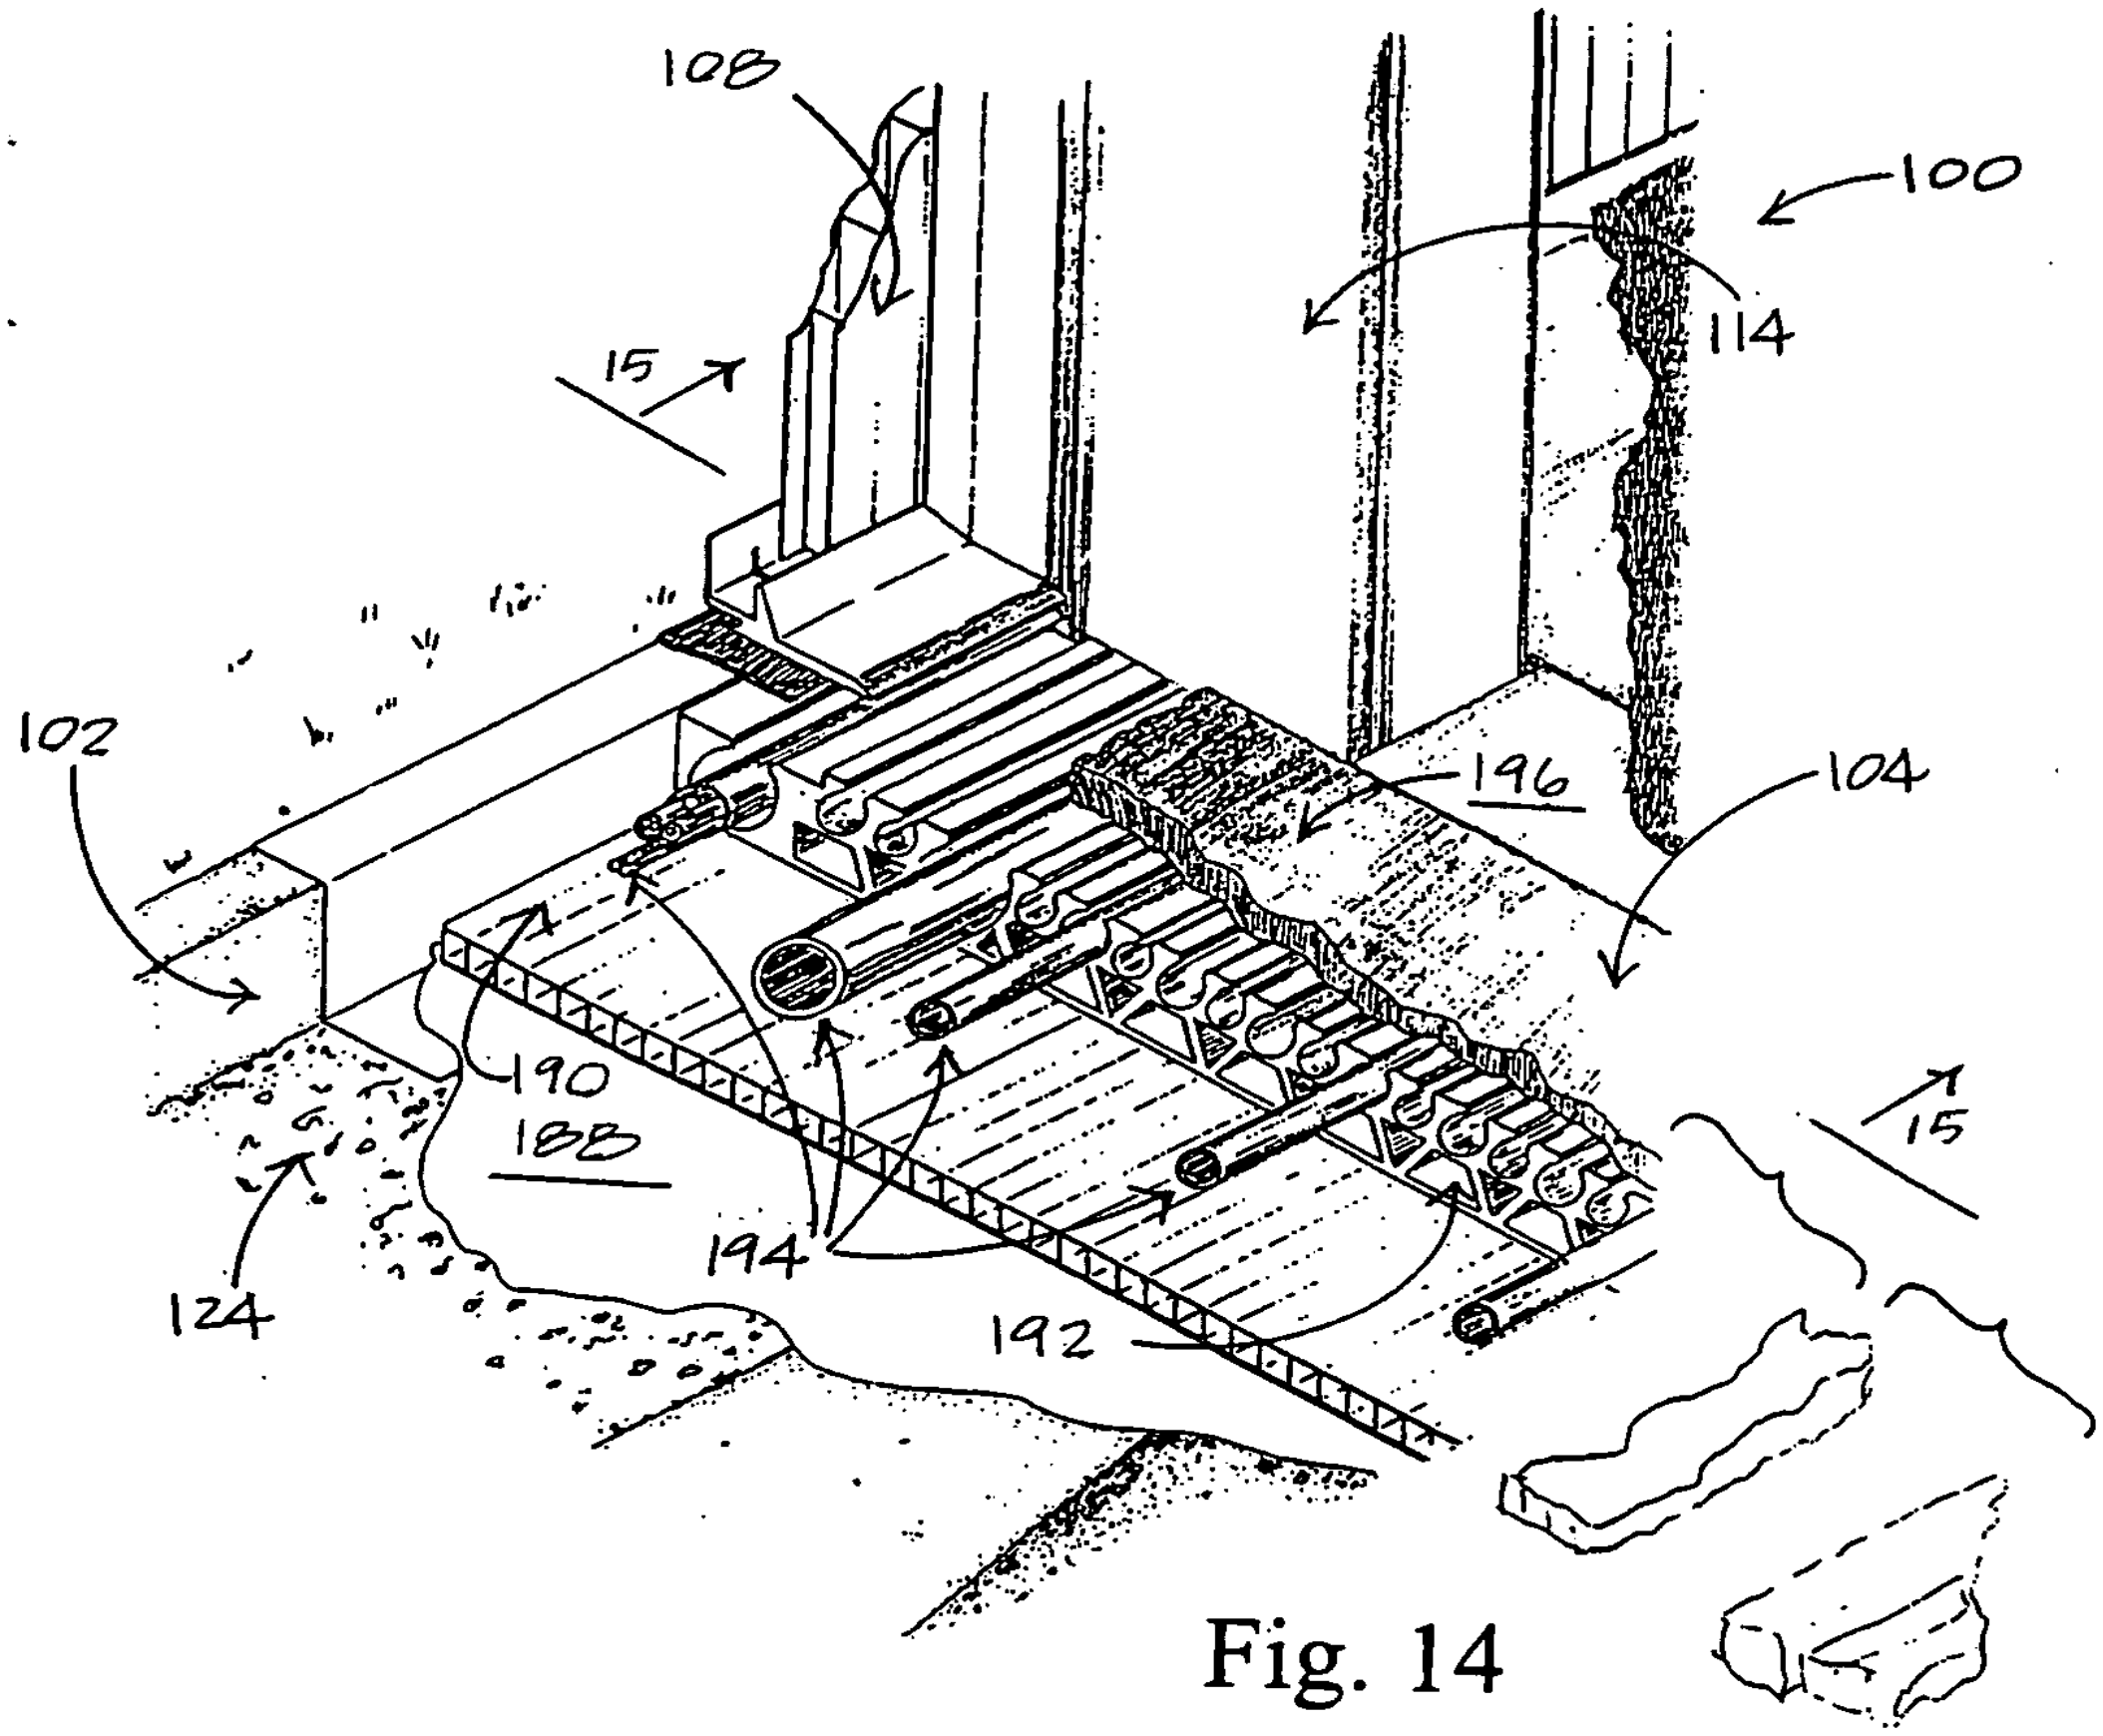

Fig. 14

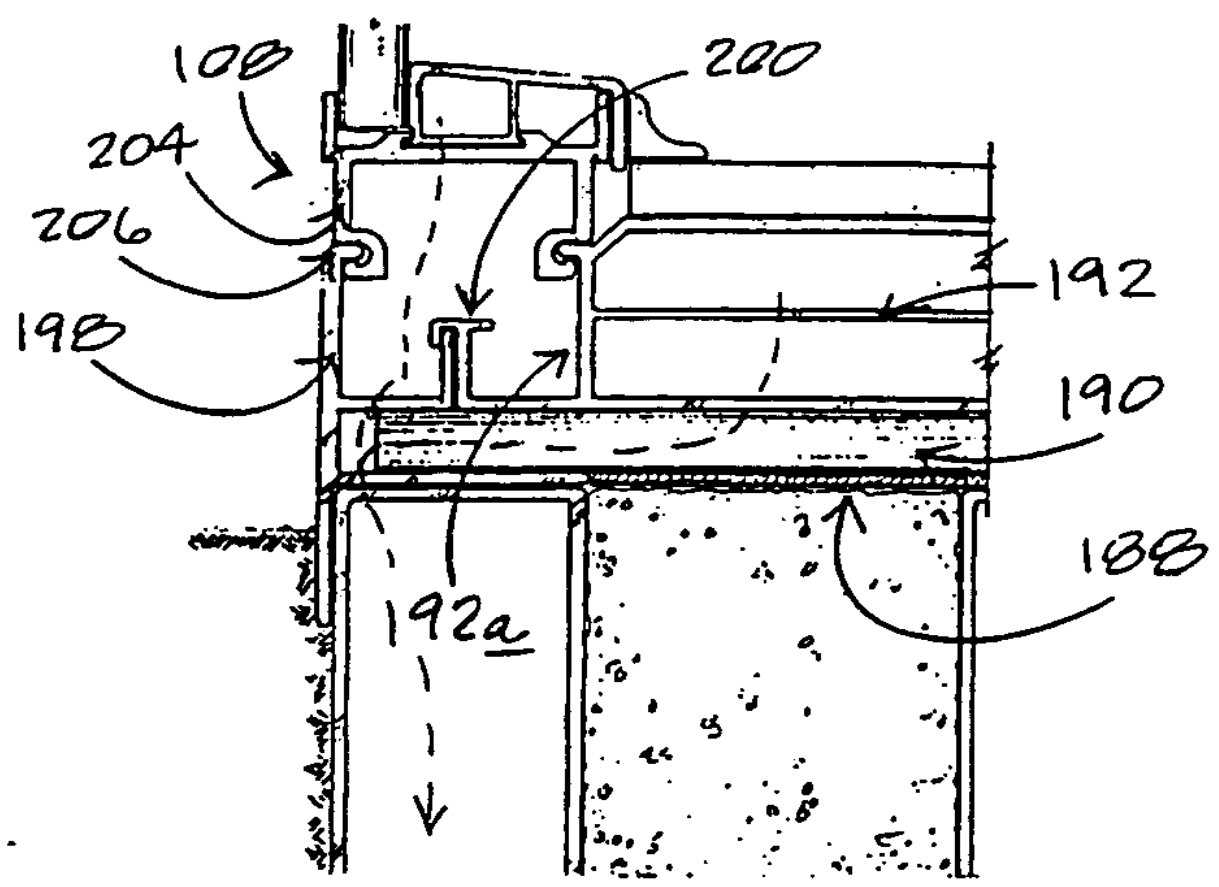

Fig. 15

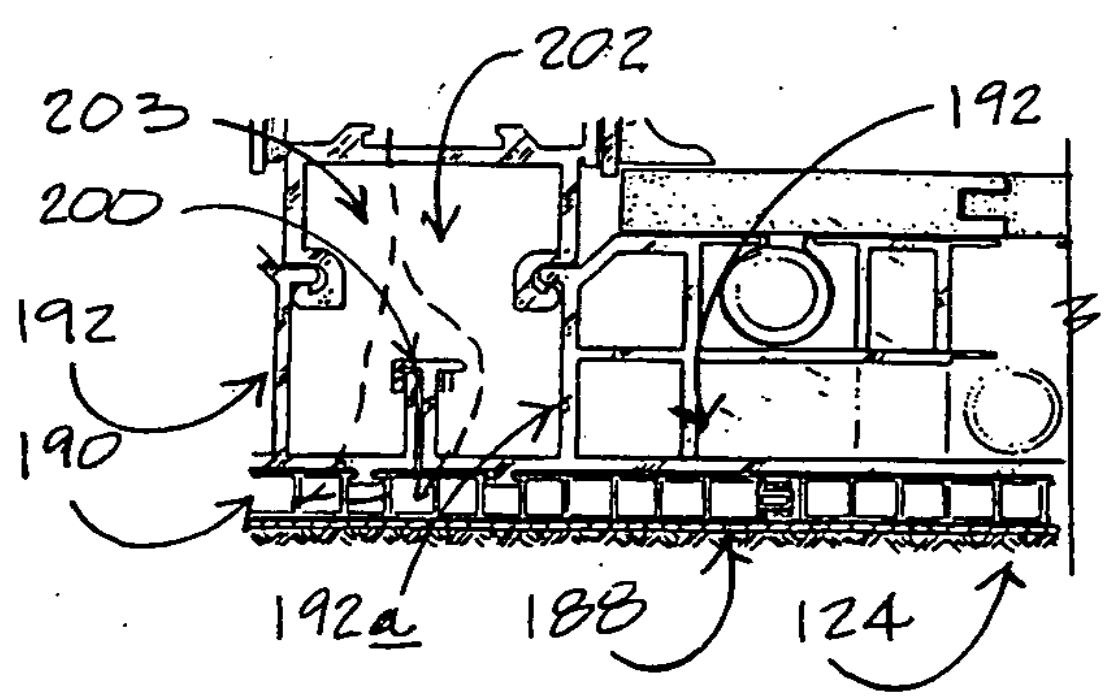

Fig. 16

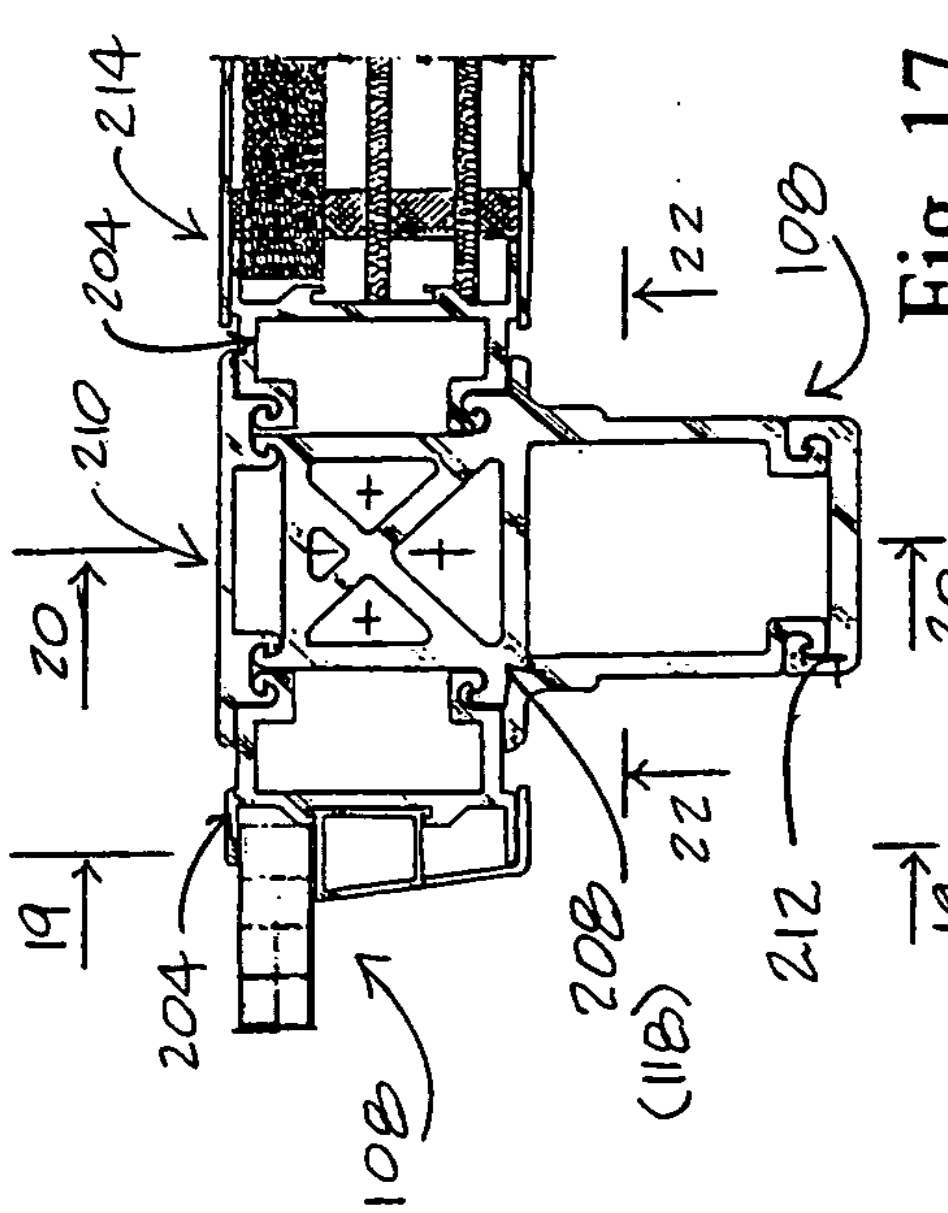

Fig. 17



Fig. 18

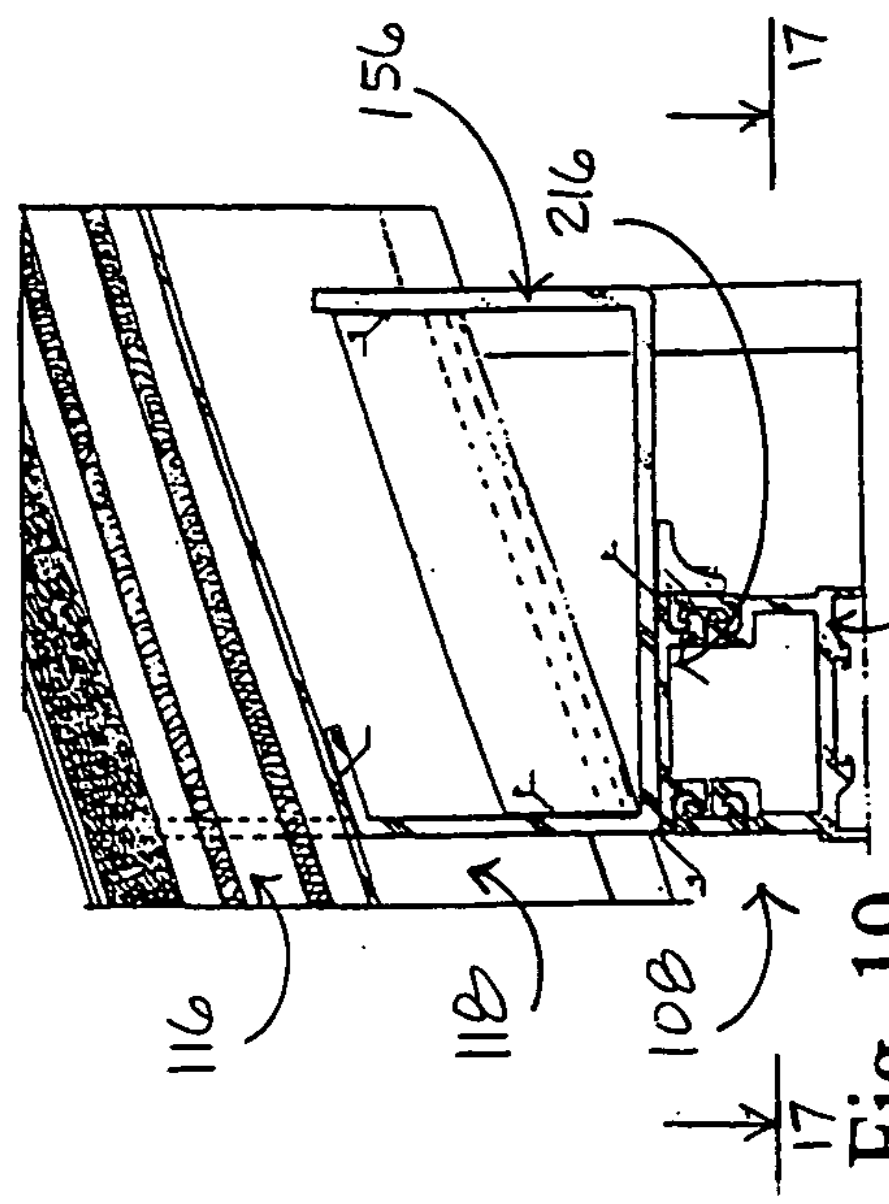

Fig. 19

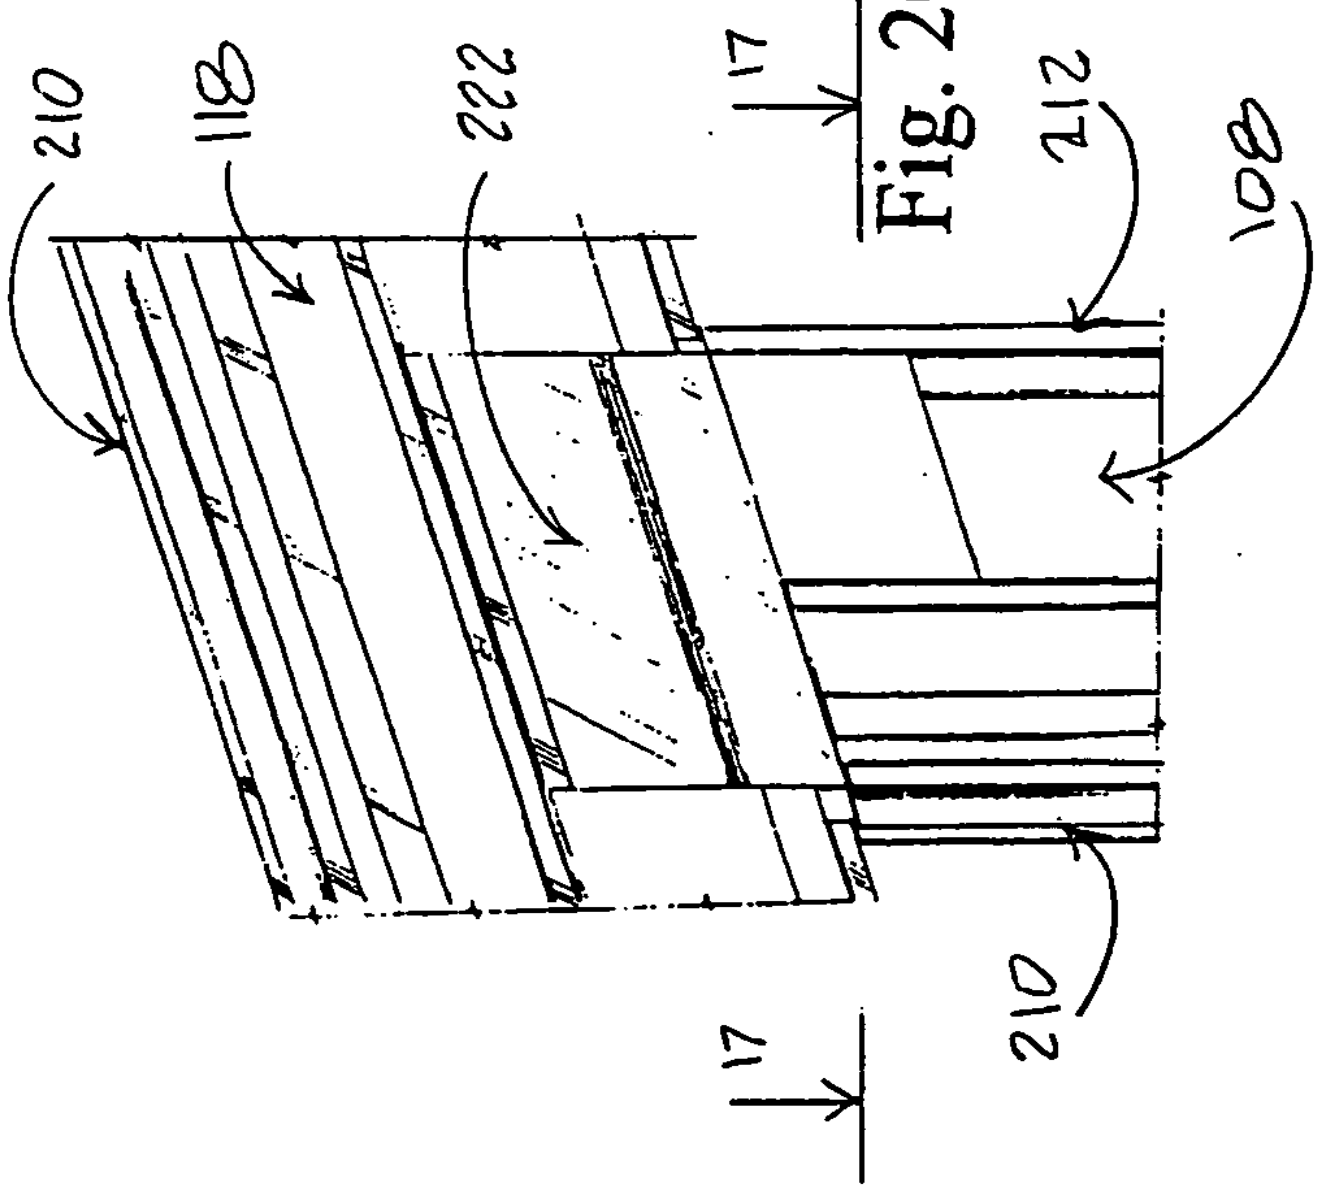

Fig. 20

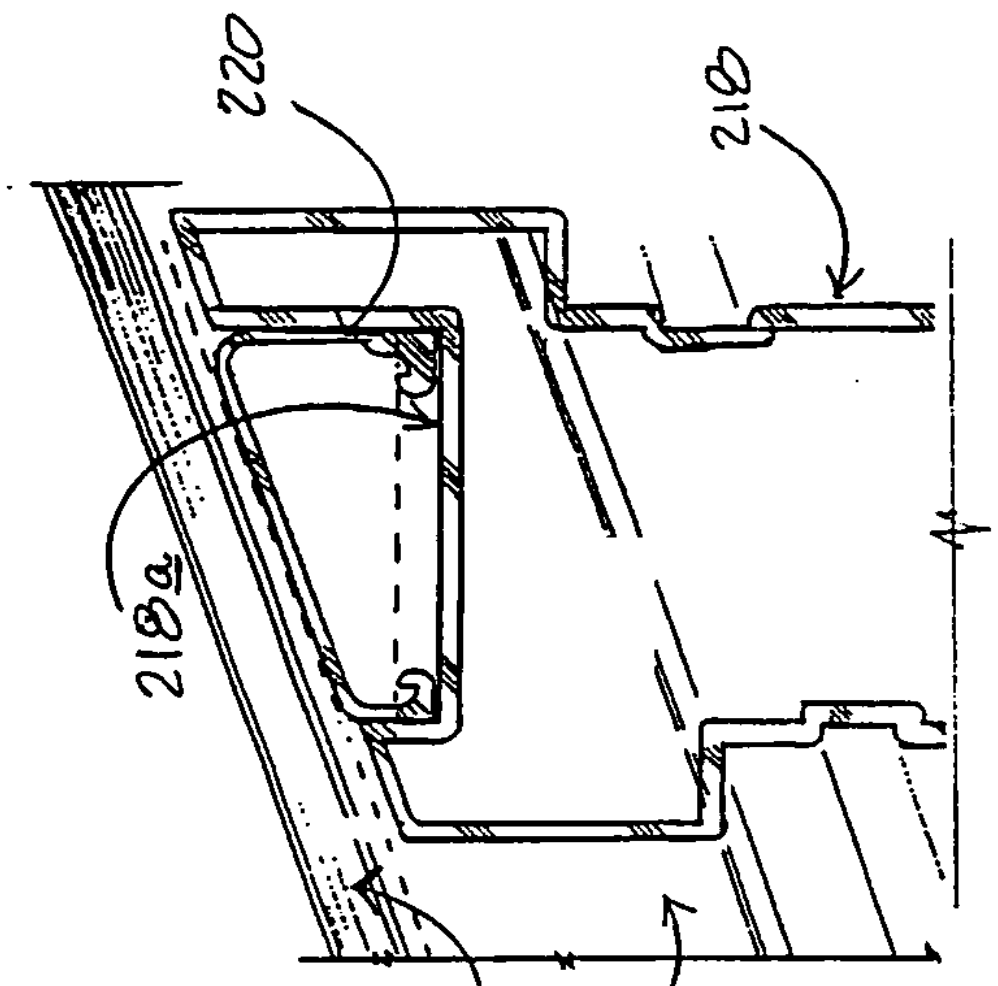

Fig. 21

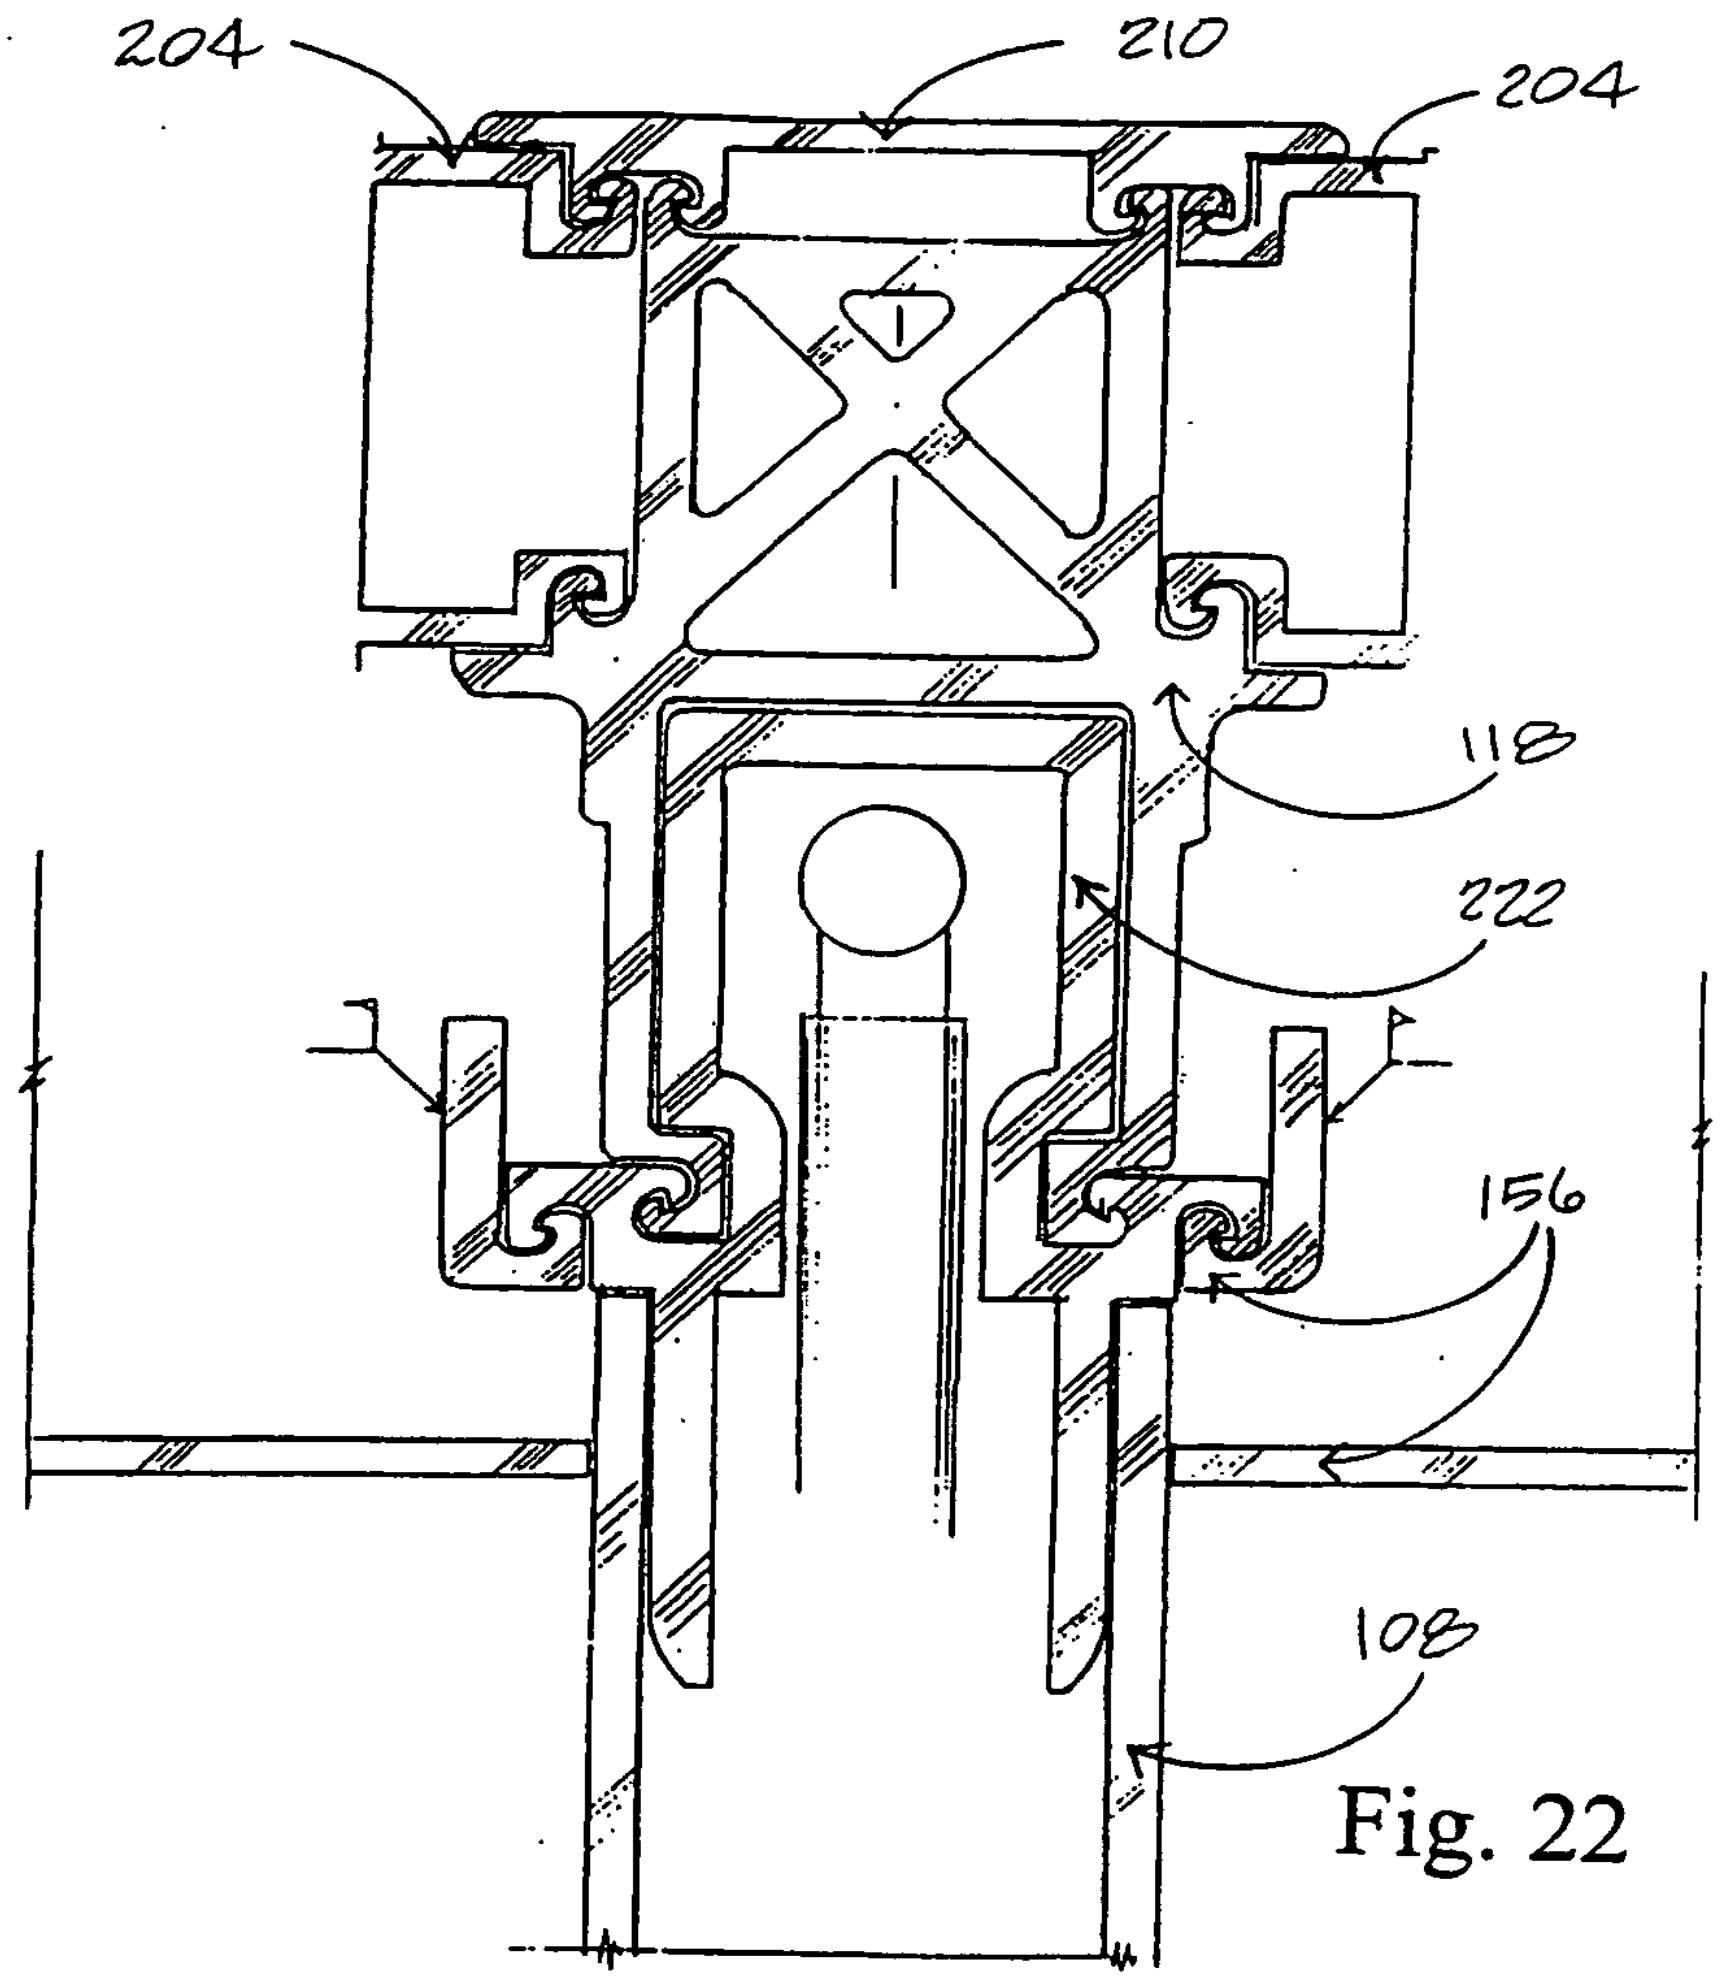

Fig. 22

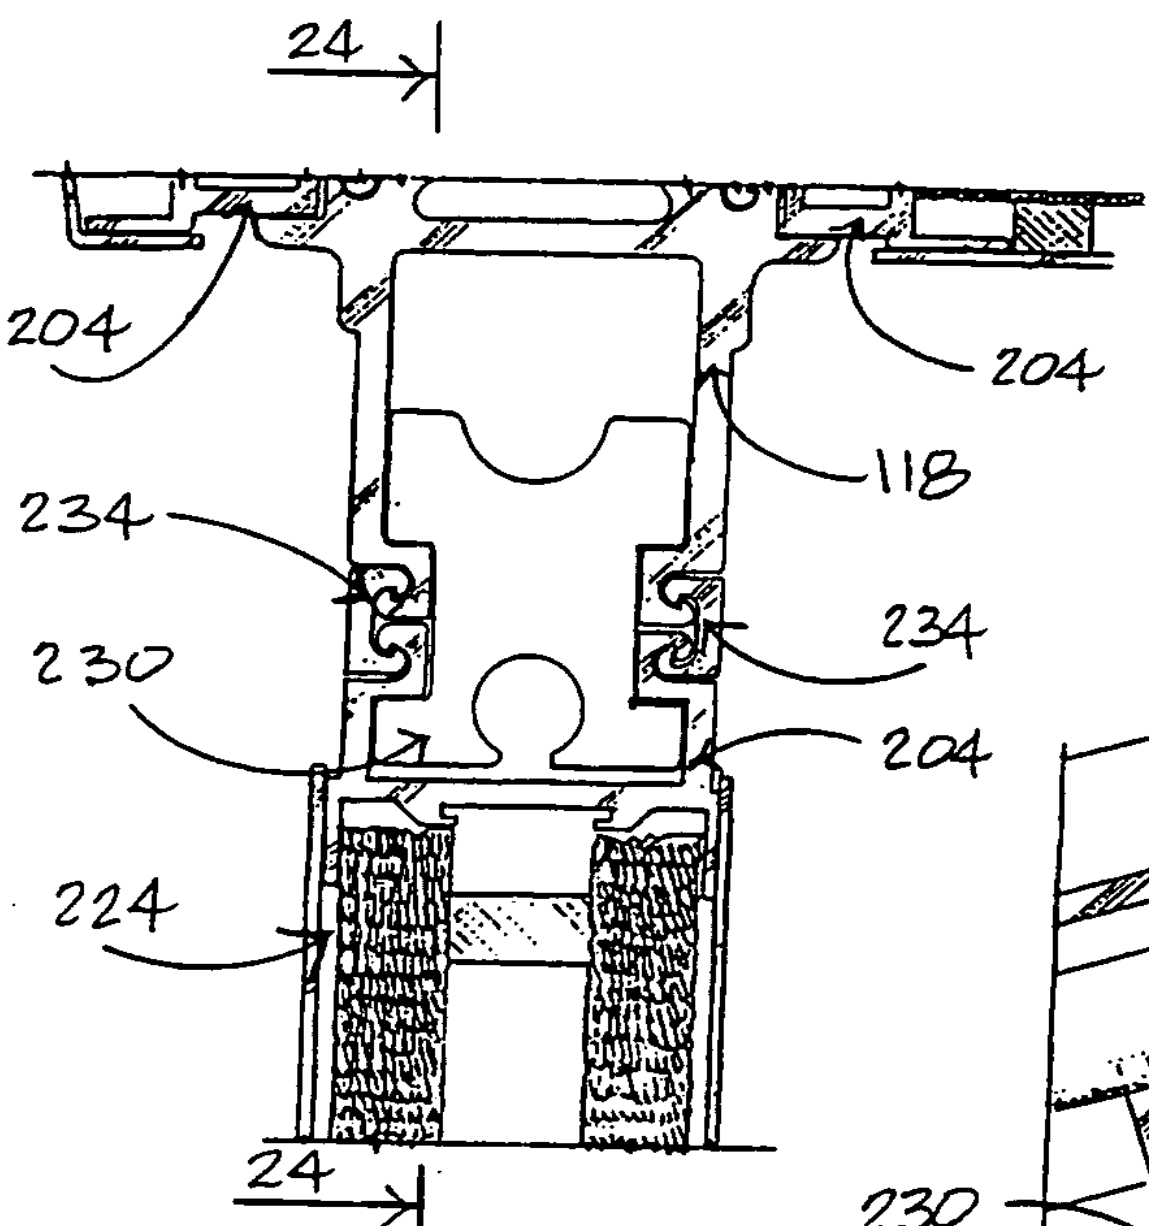

Fig. 23

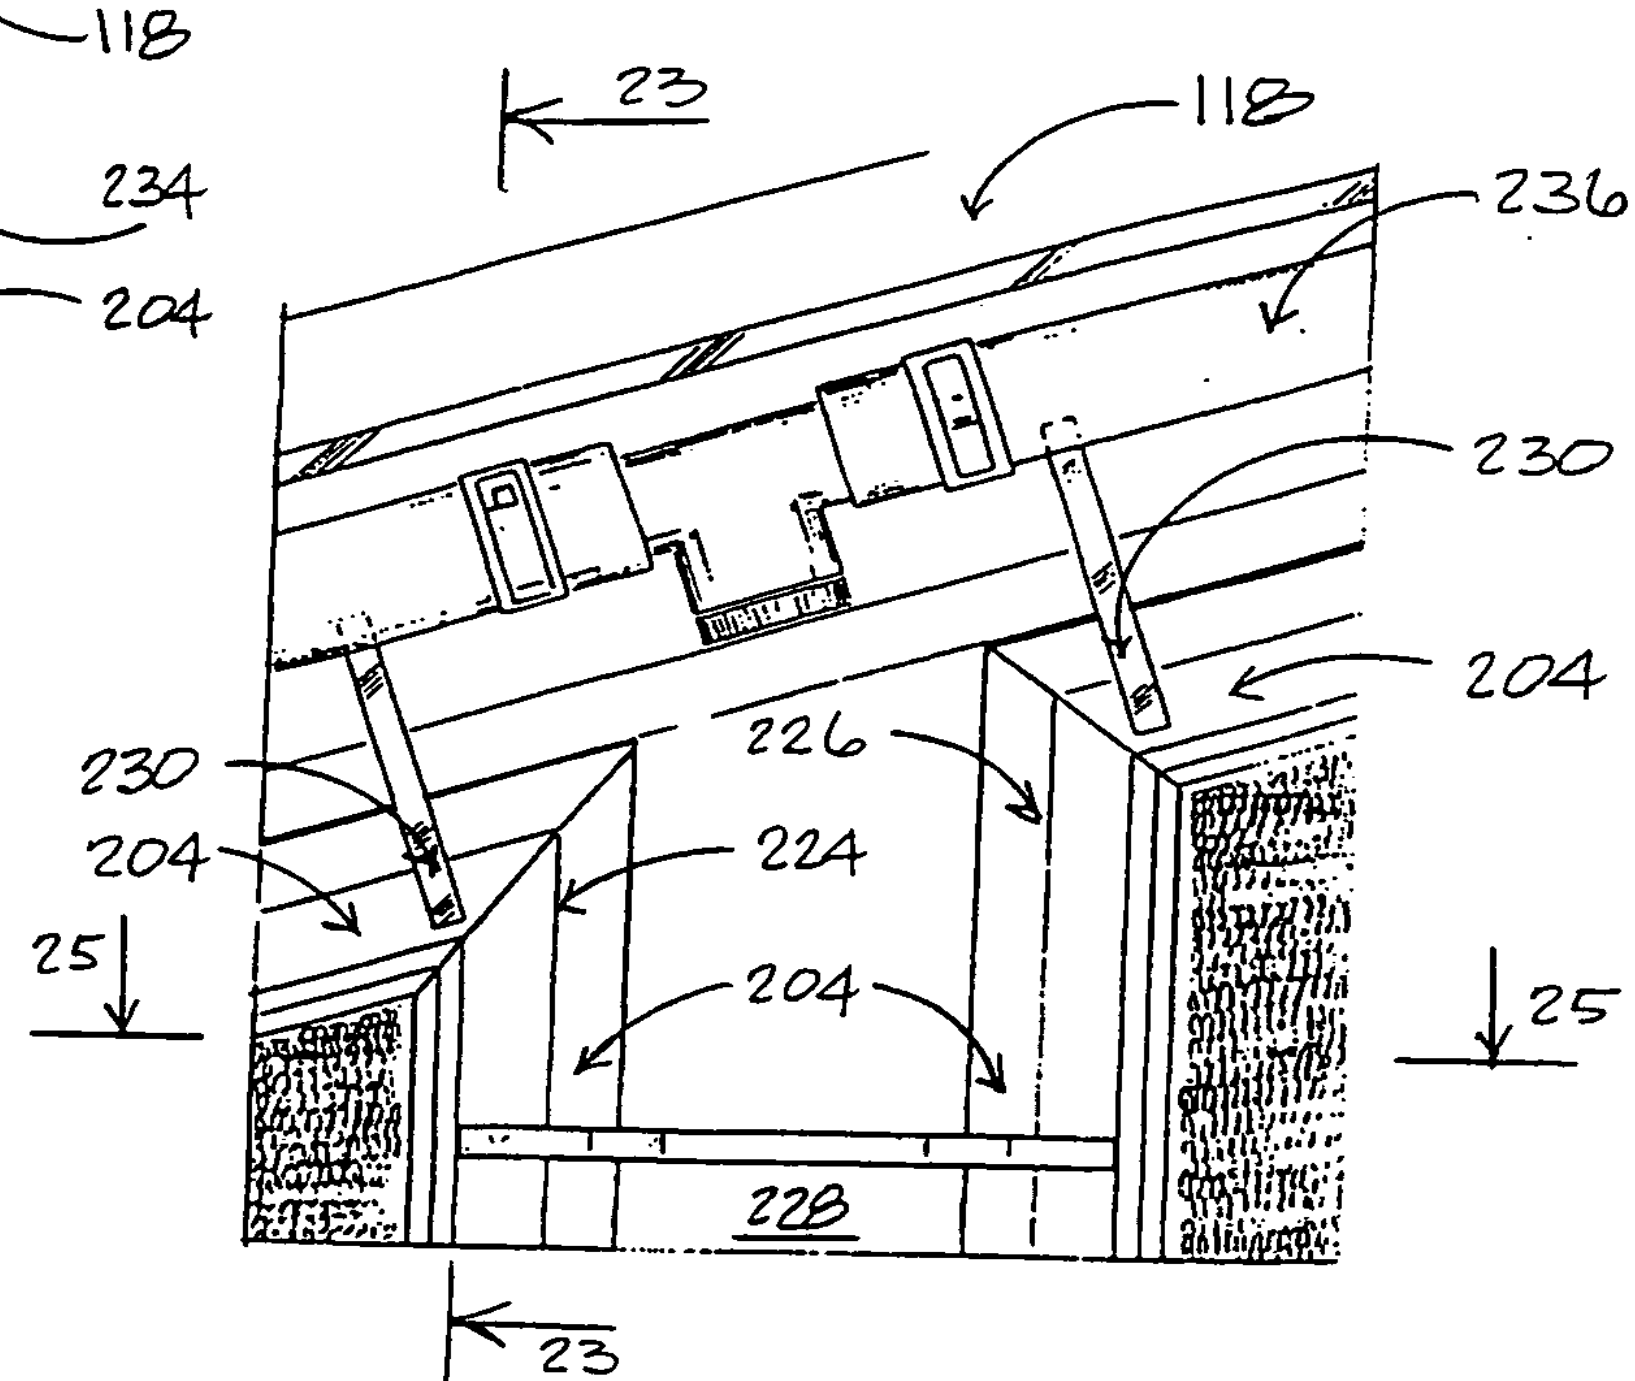

Fig. 24



Fig. 26a

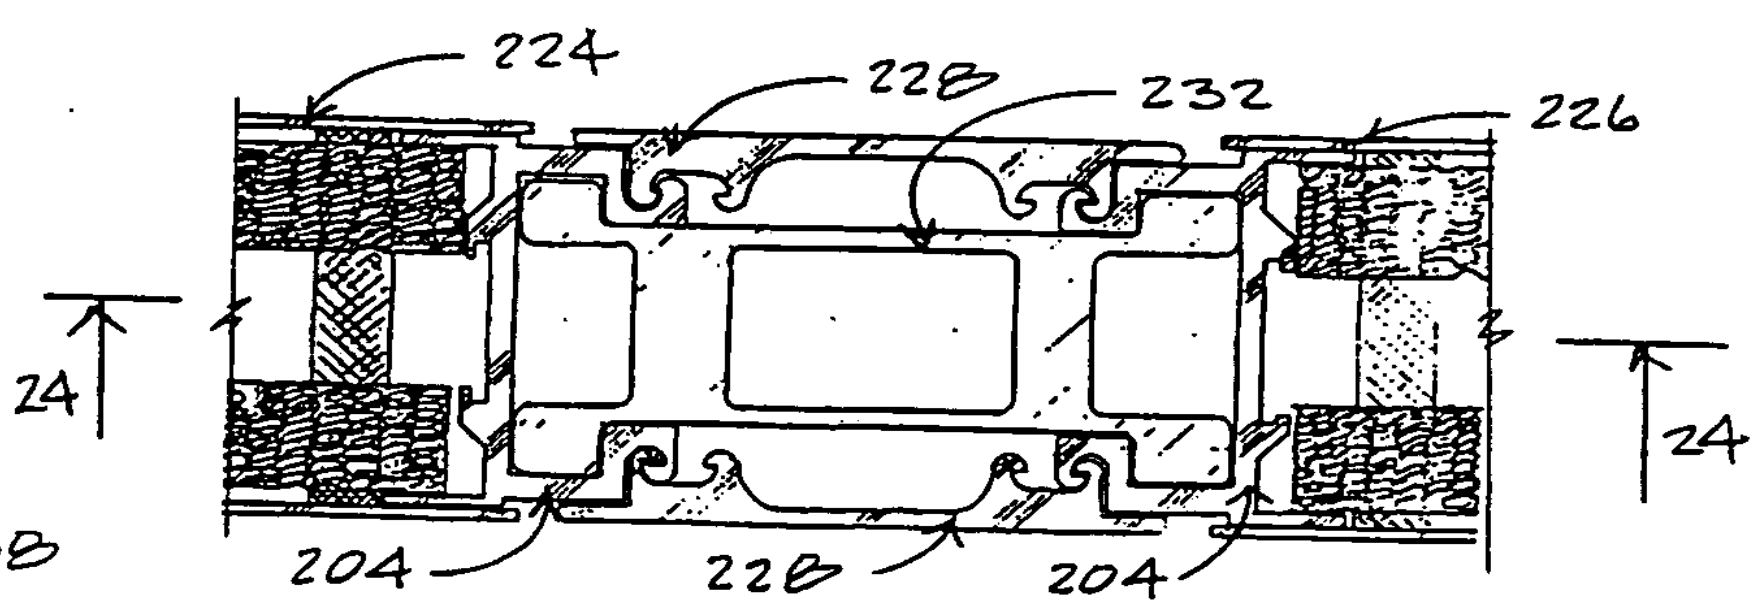

Fig. 25



Fig. 26b

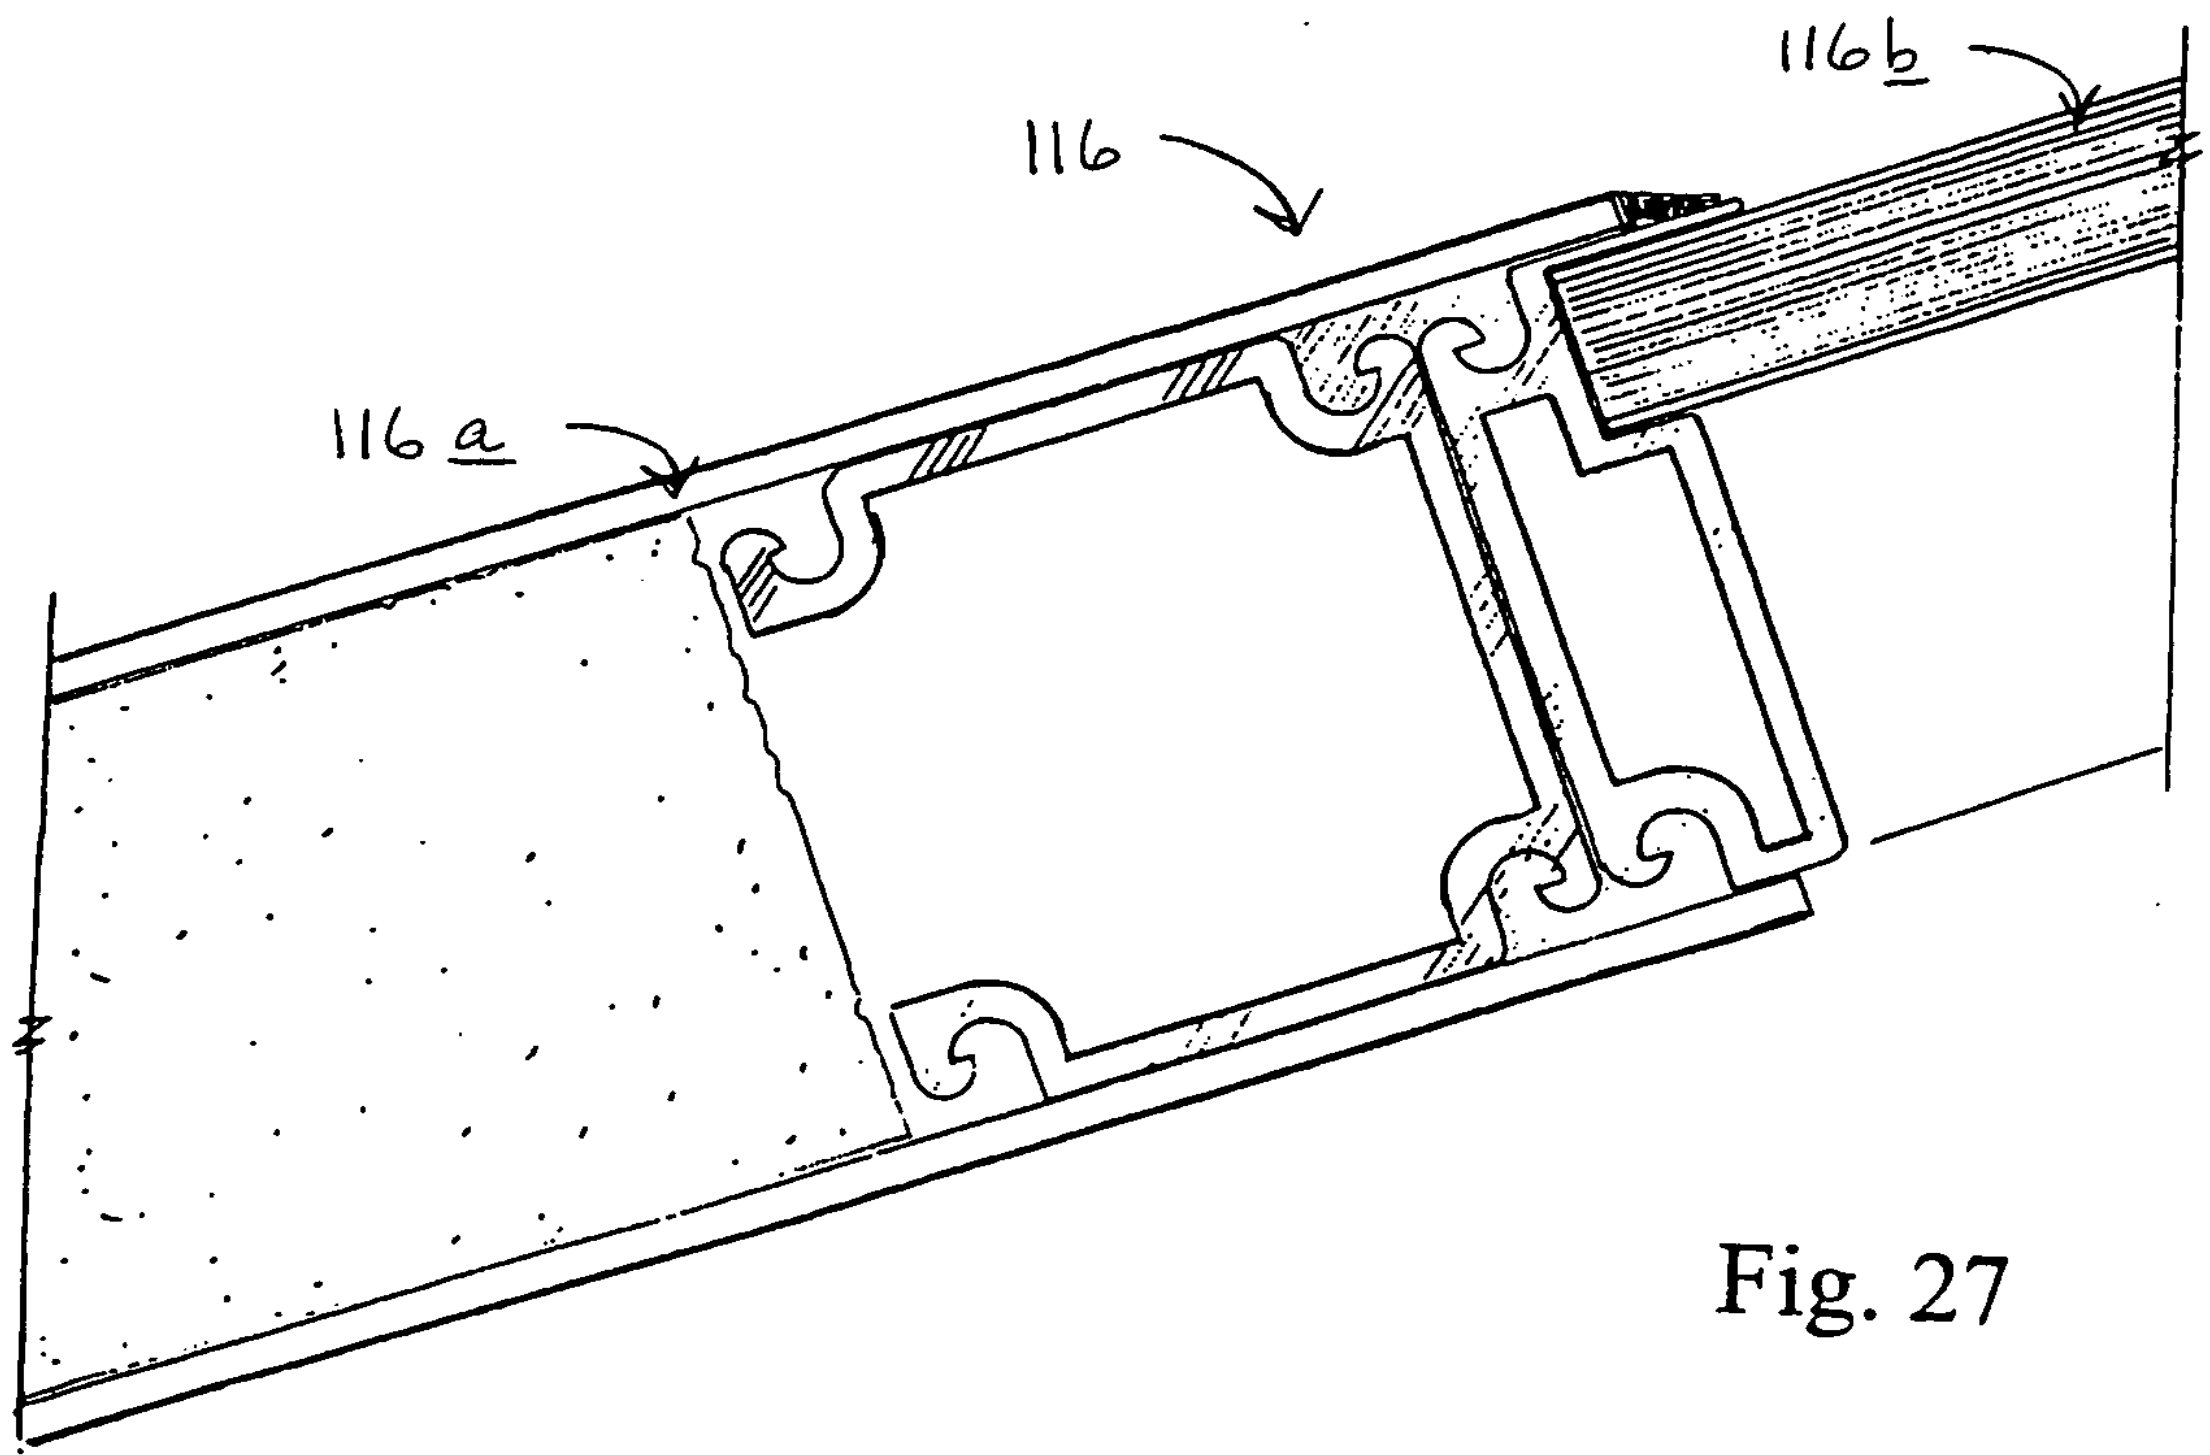

Fig. 27

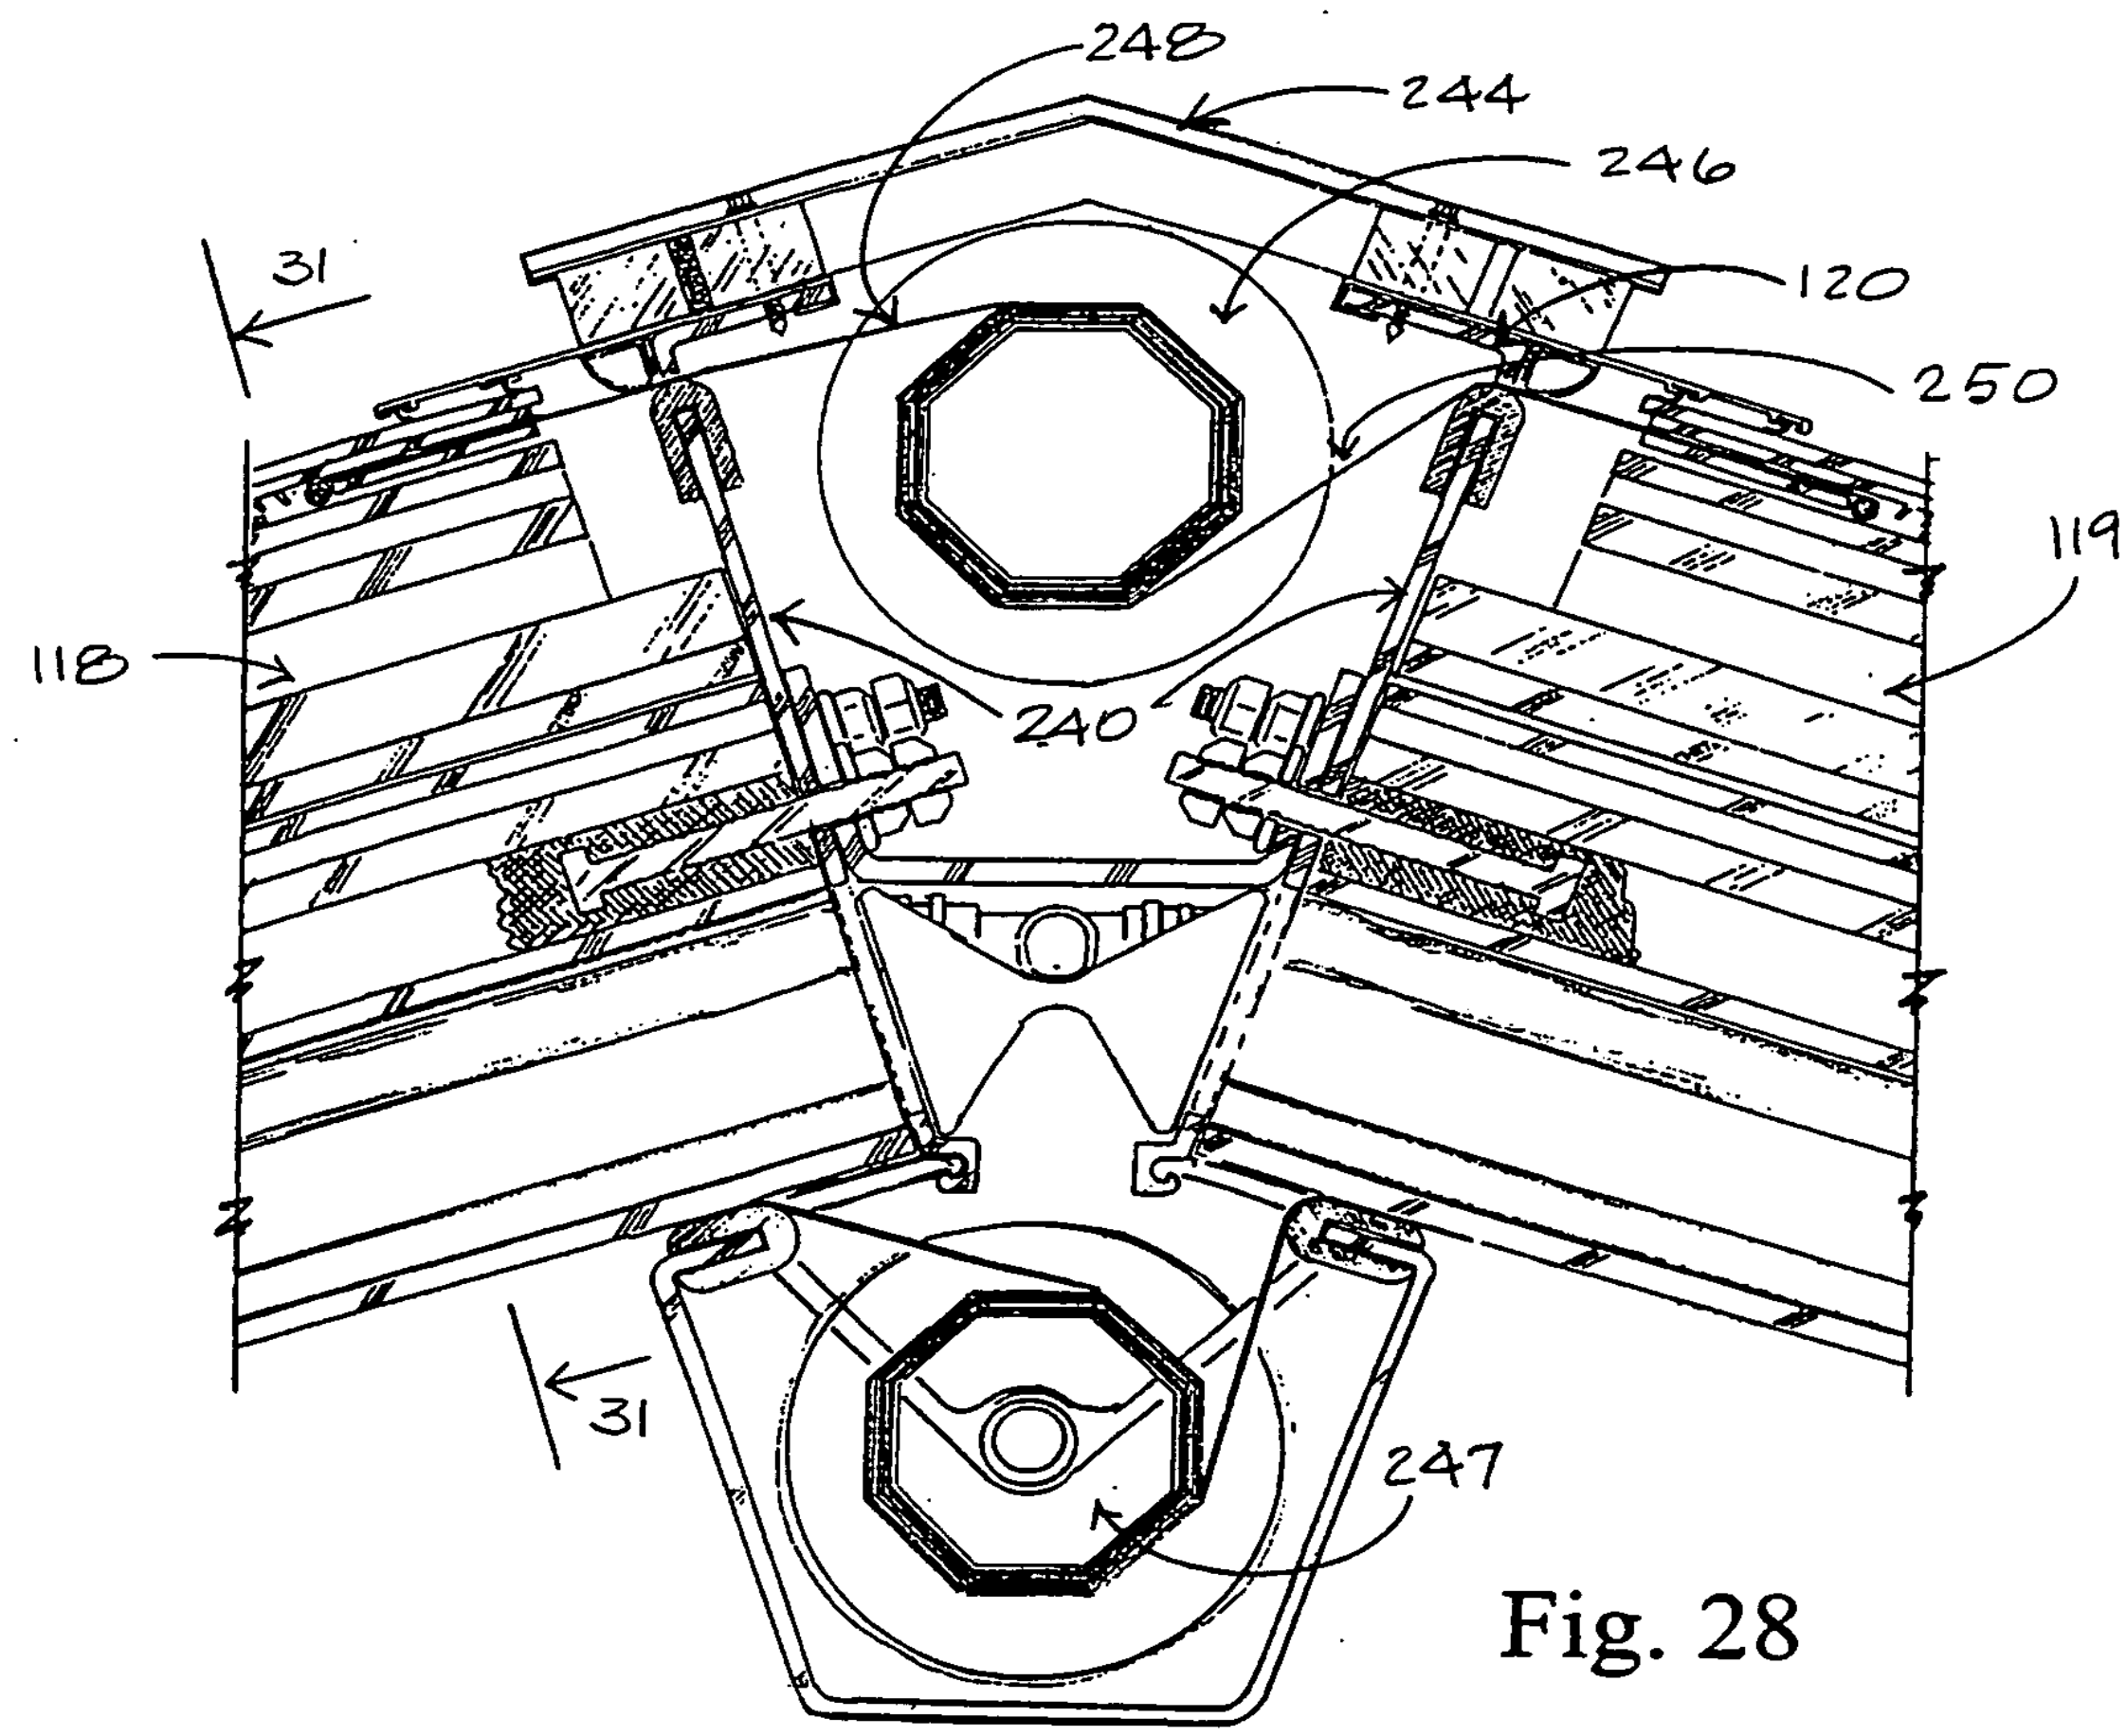

Fig. 28

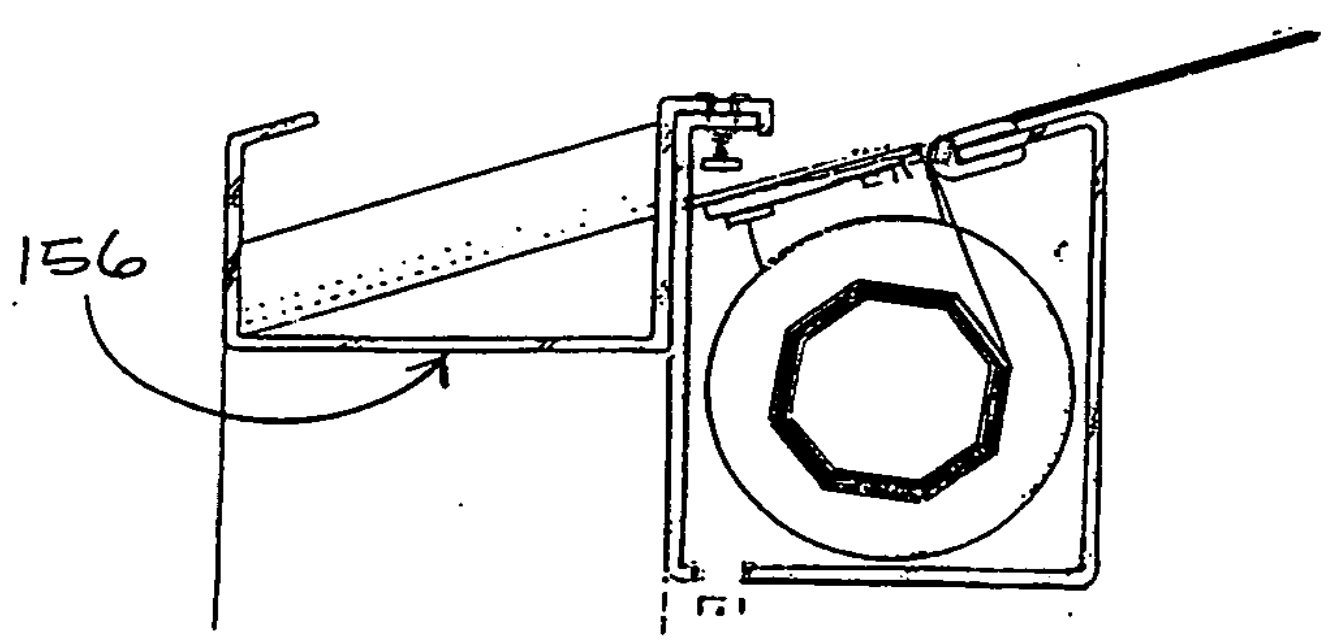

Fig. 29

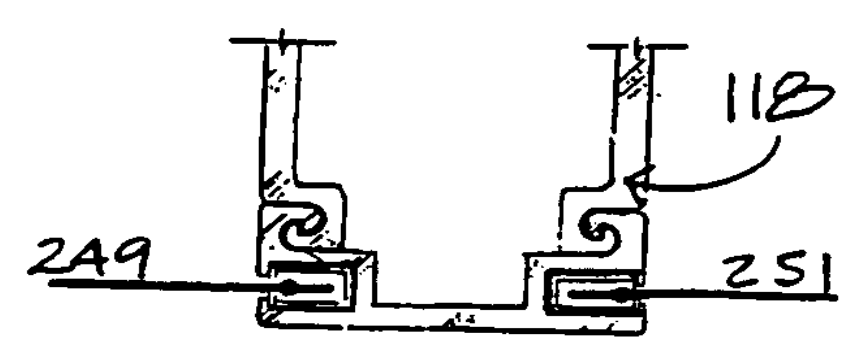

Fig. 30

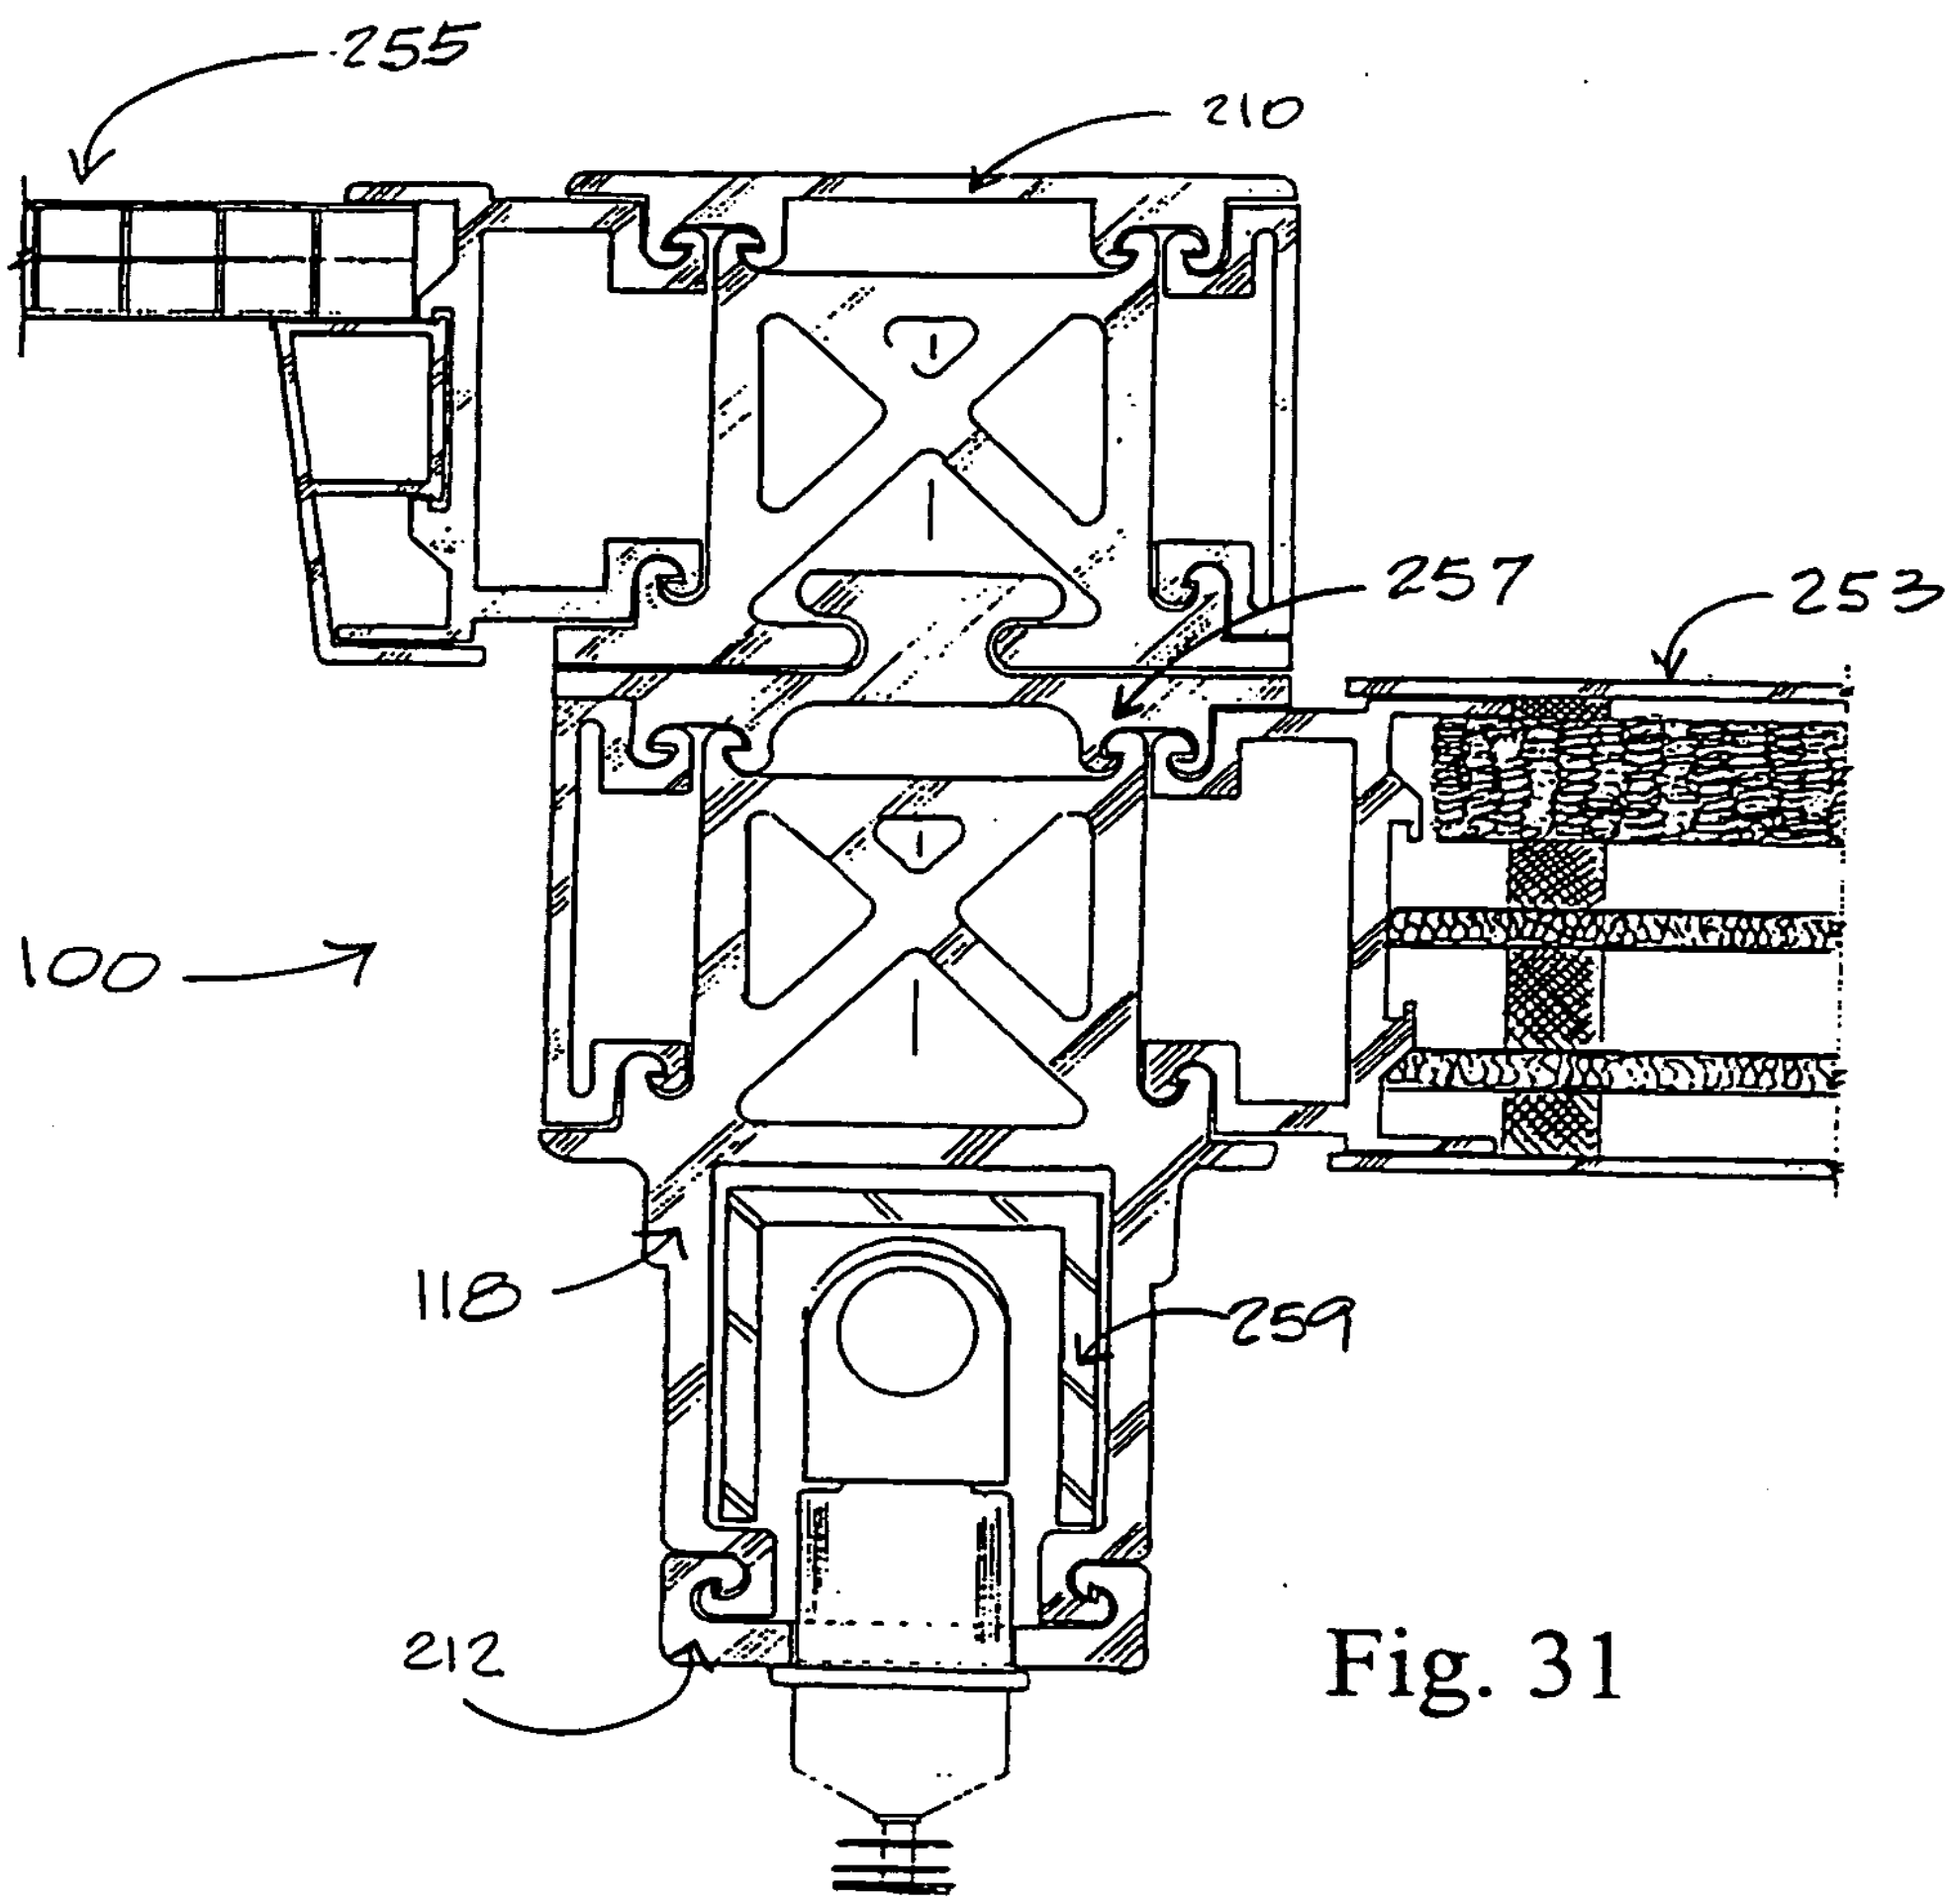

Fig. 31

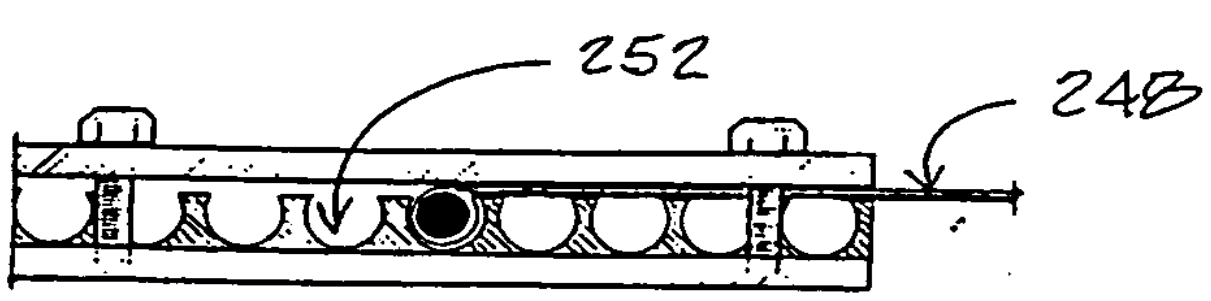

Fig. 32



Fig. 33

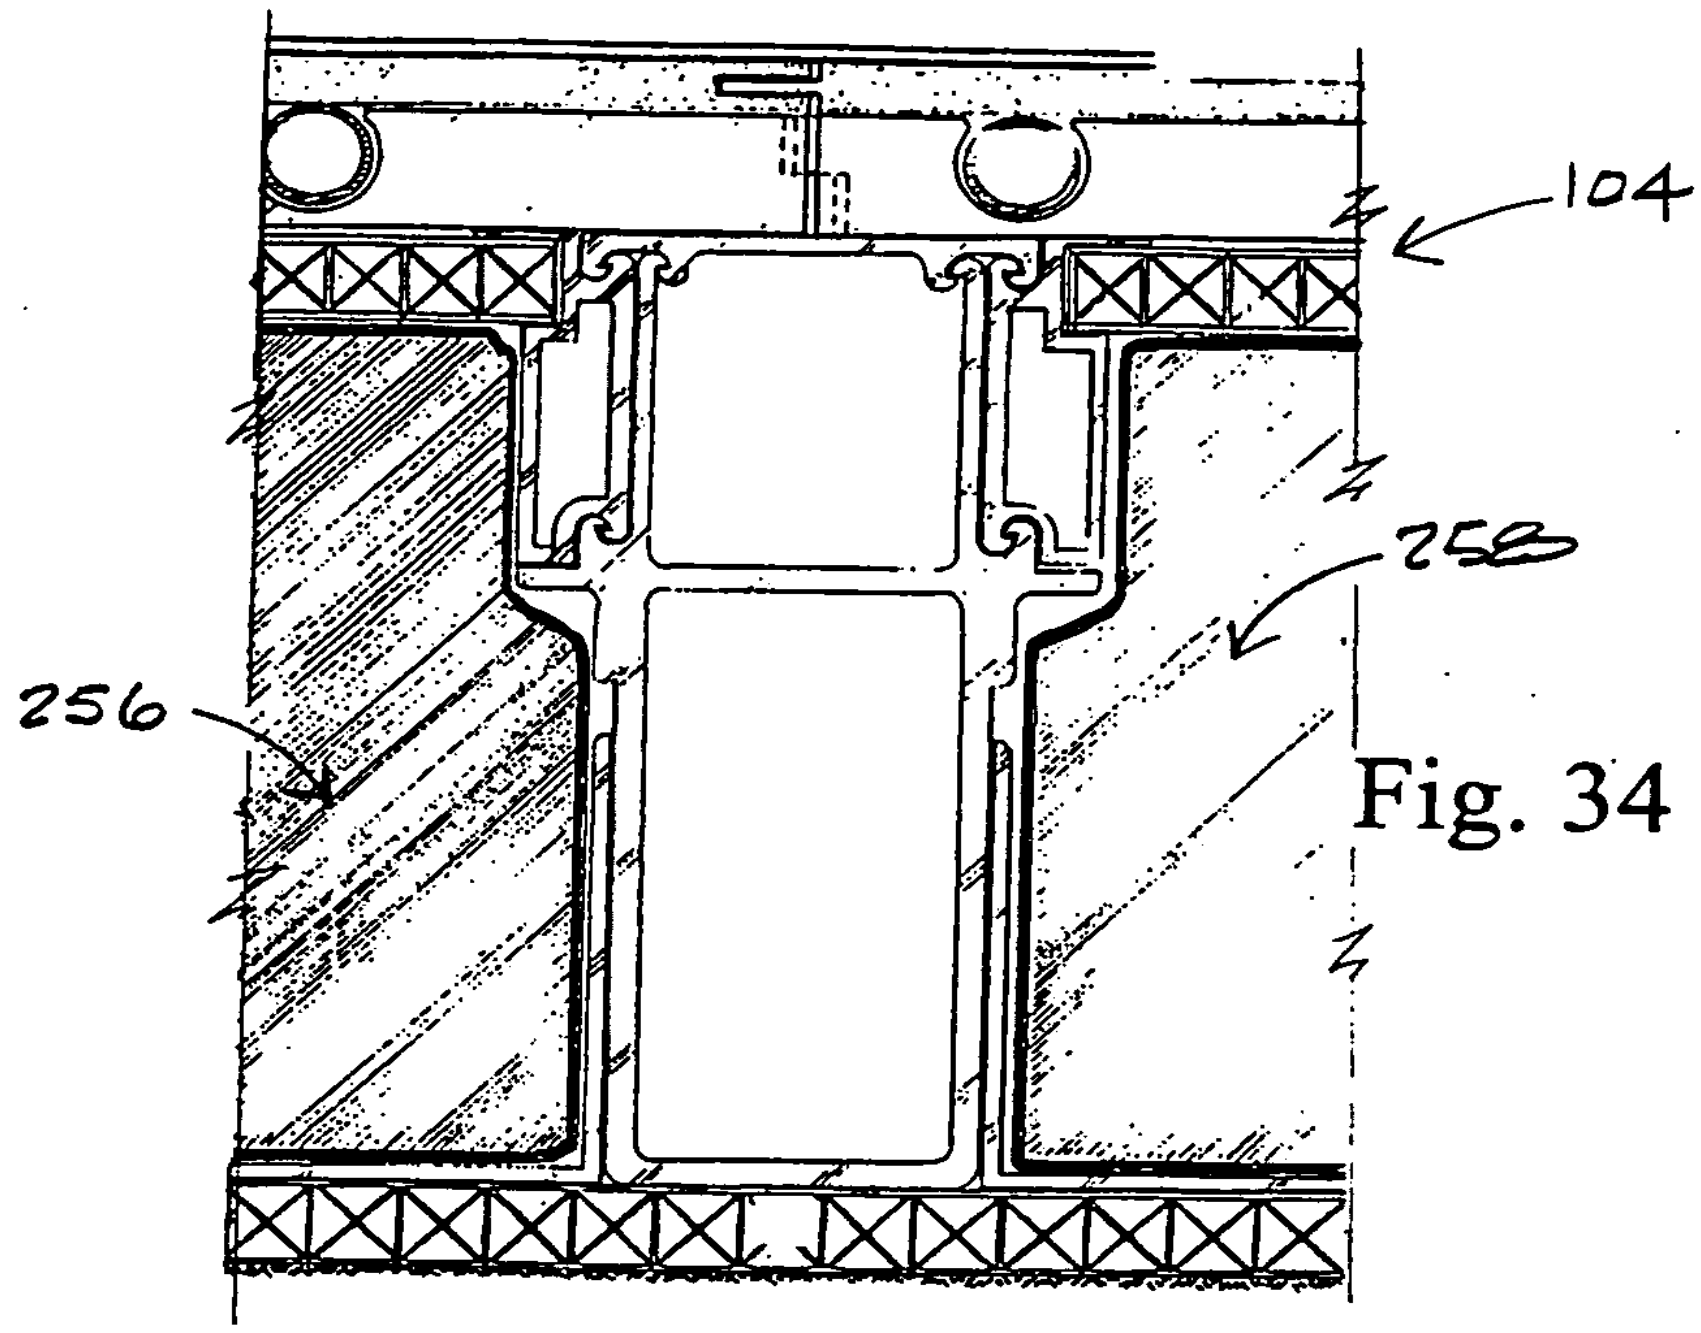

Fig. 34

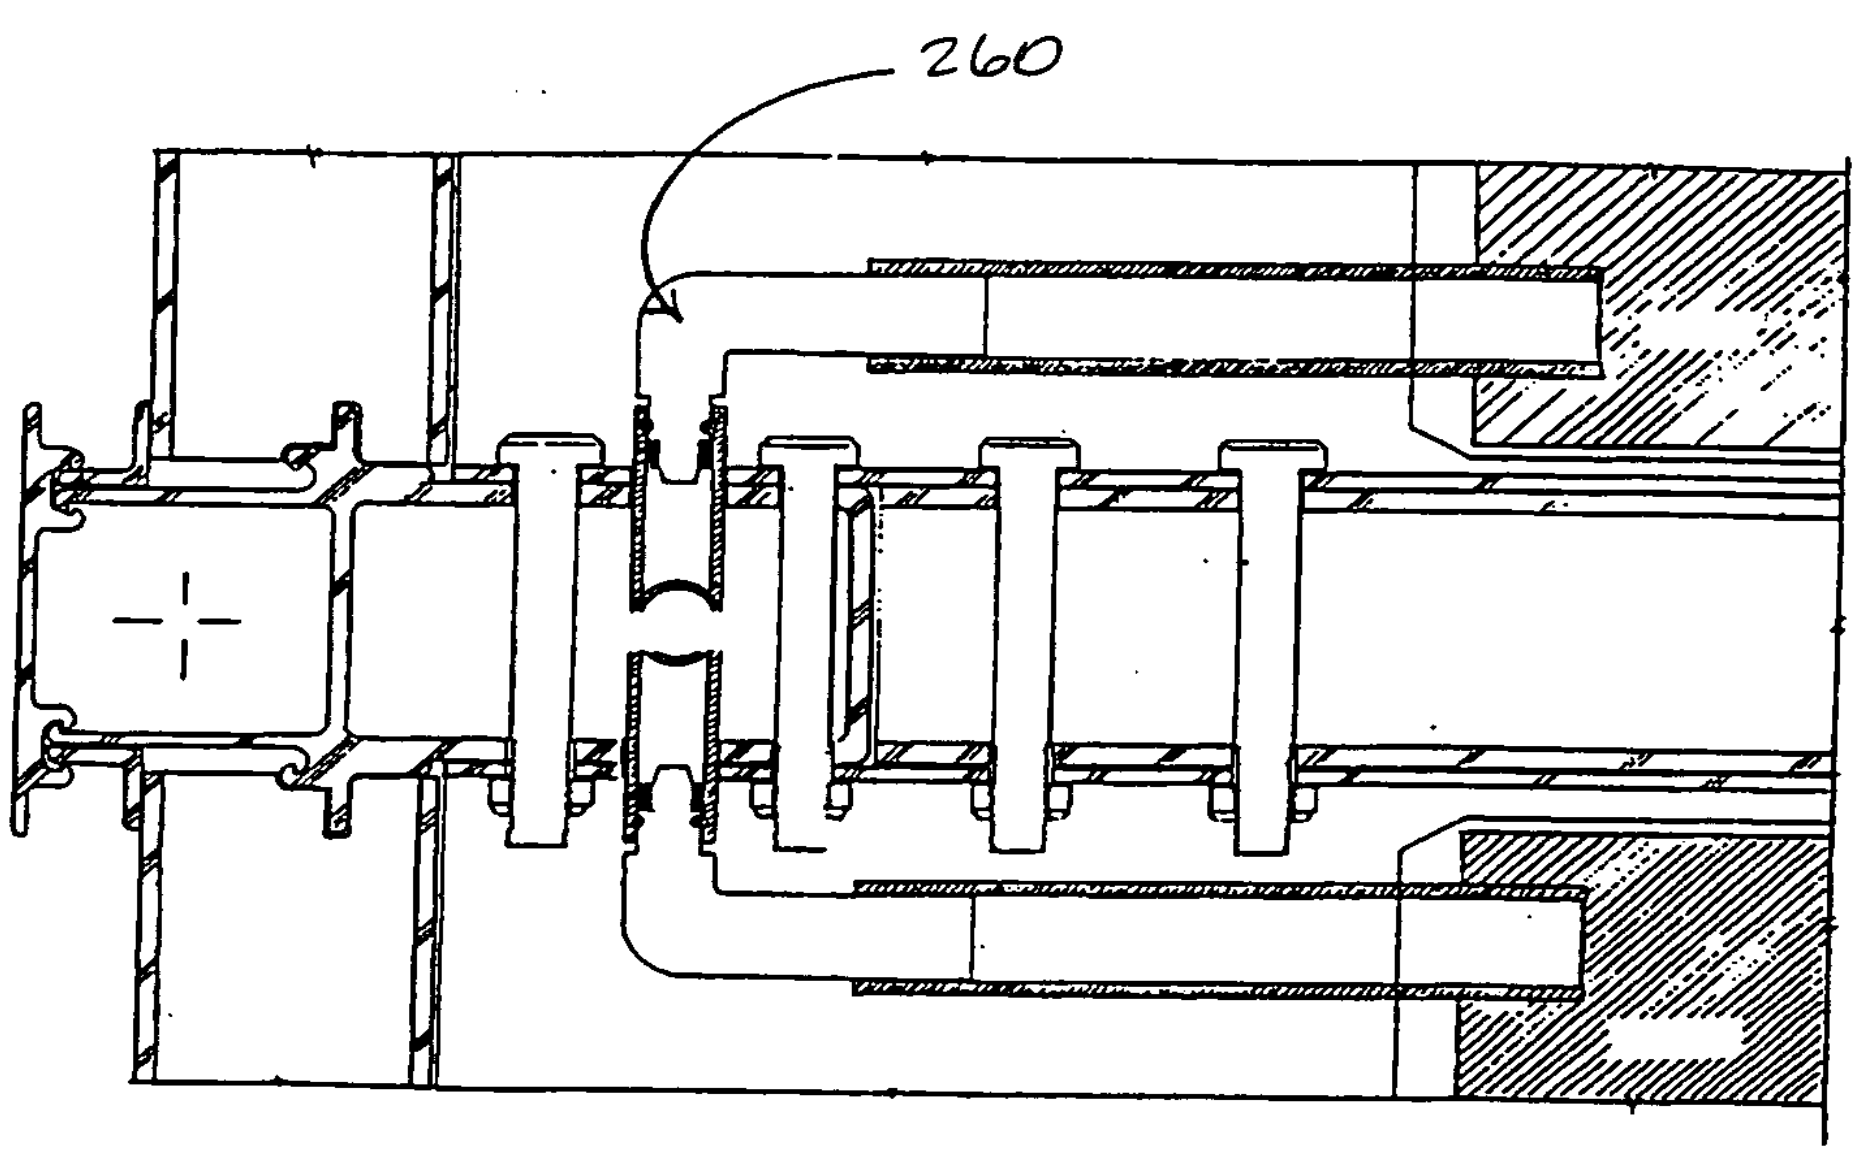

Fig. 35

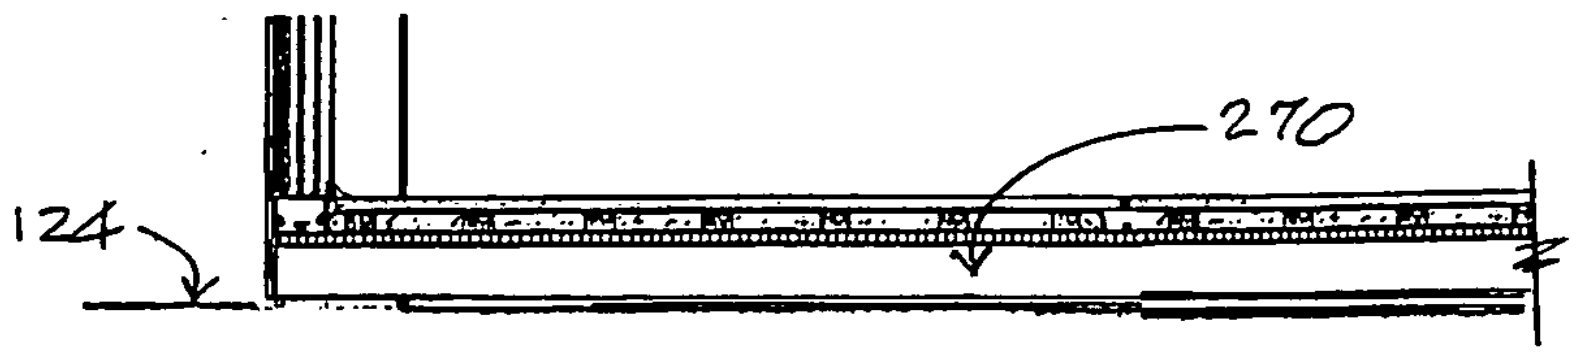

Fig. 36

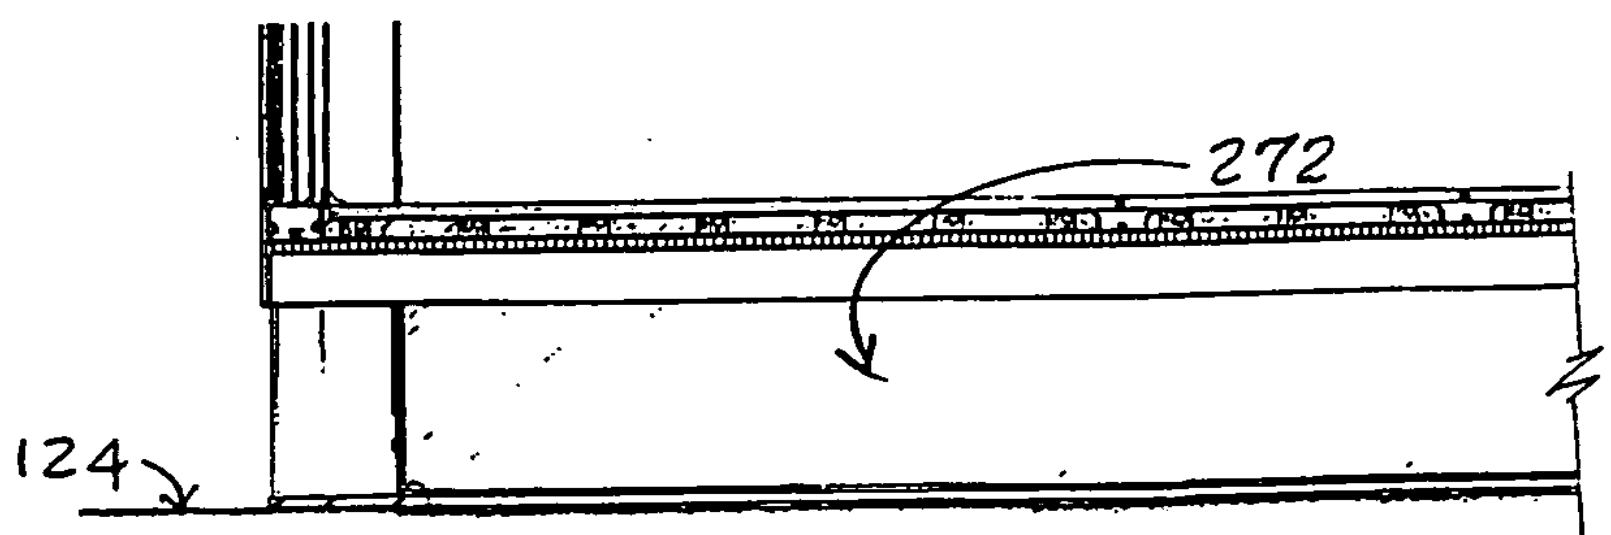

Fig. 37

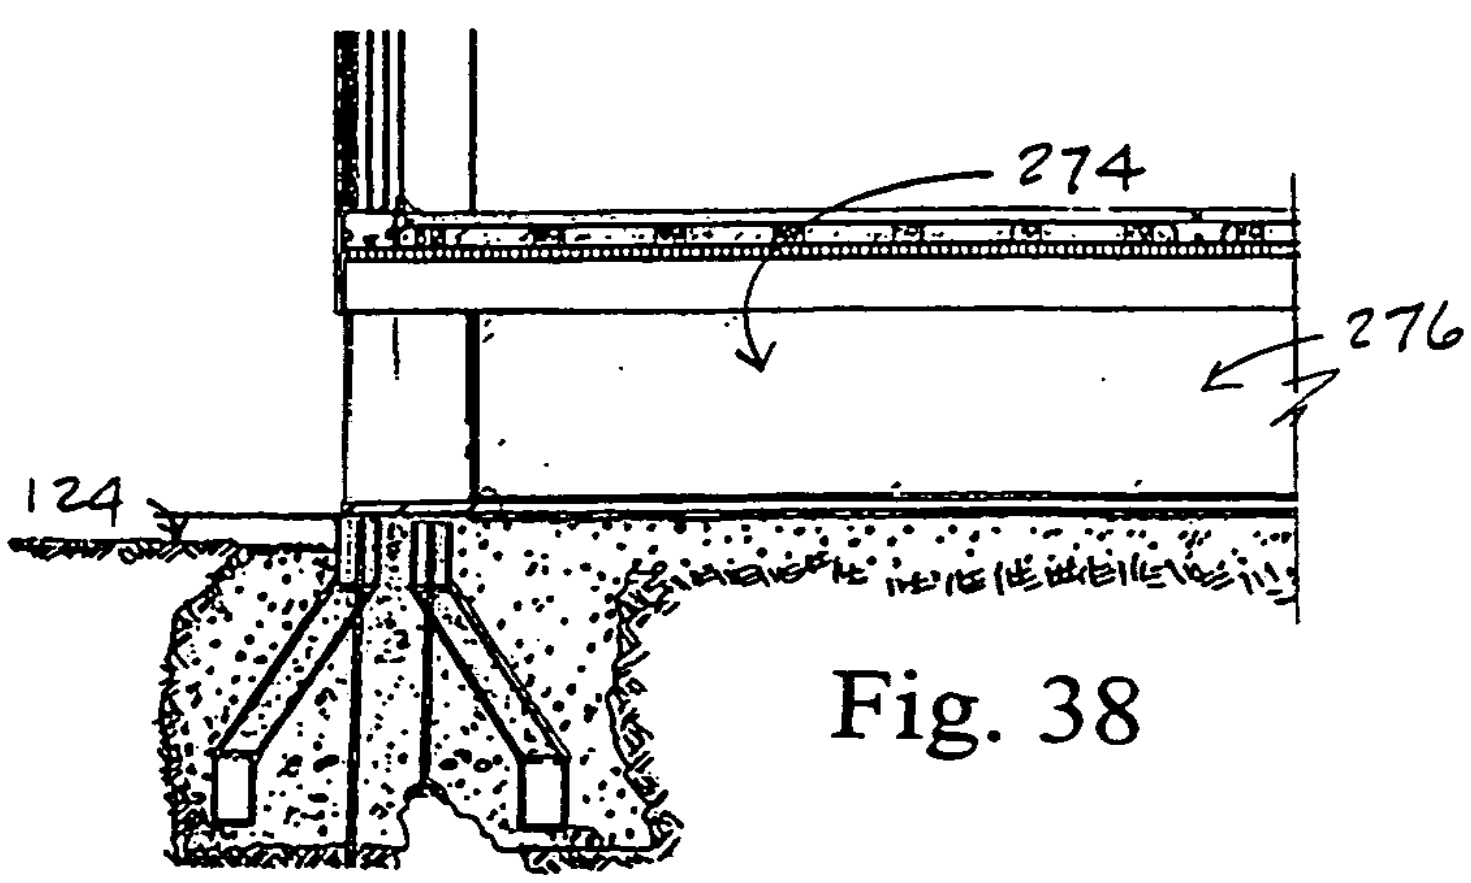

Fig. 38



Fig. 39

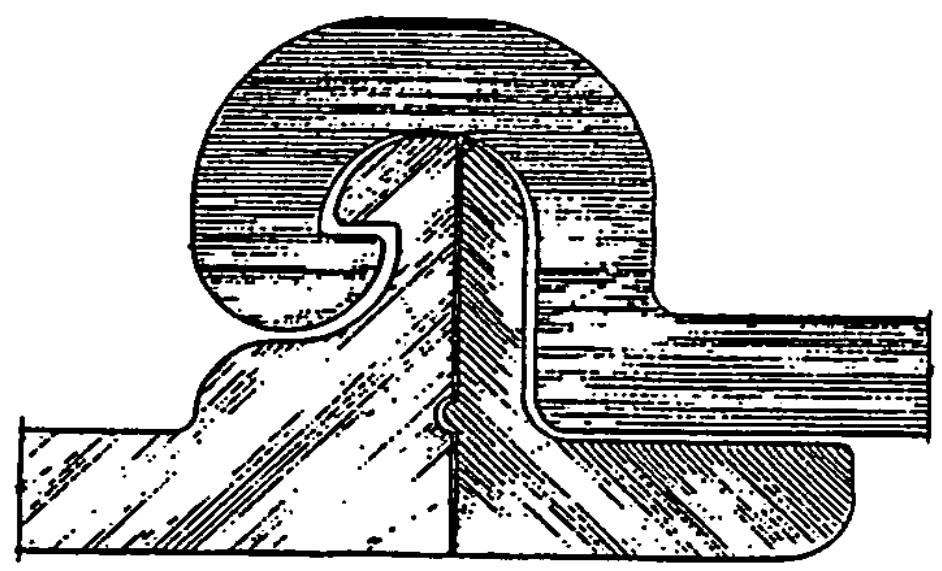

Fig. 42

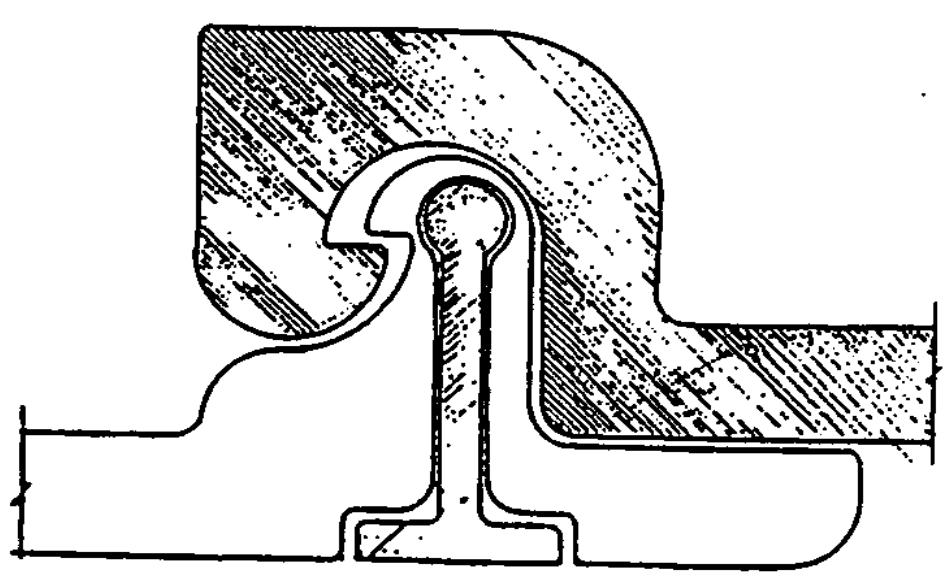

Fig. 41

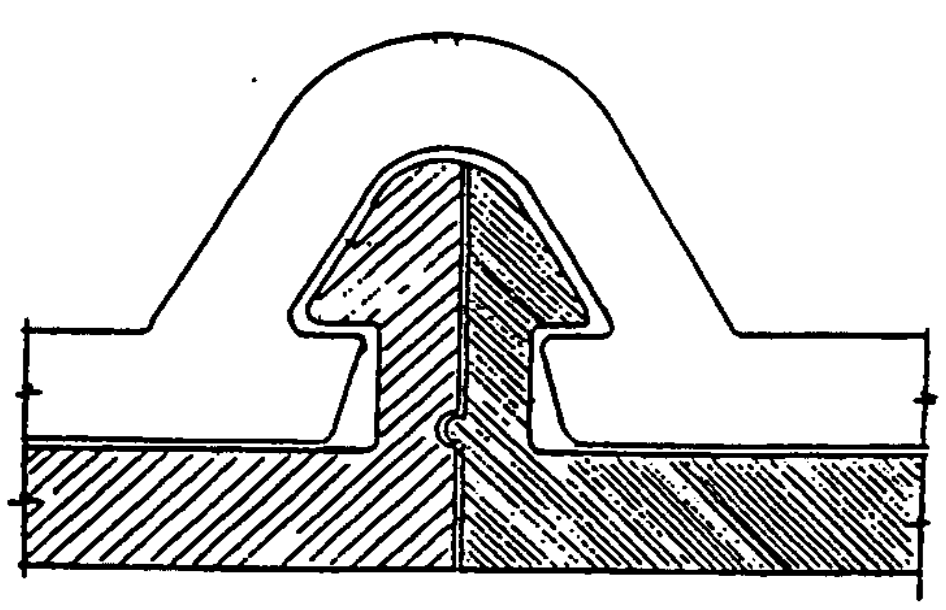

Fig. 40

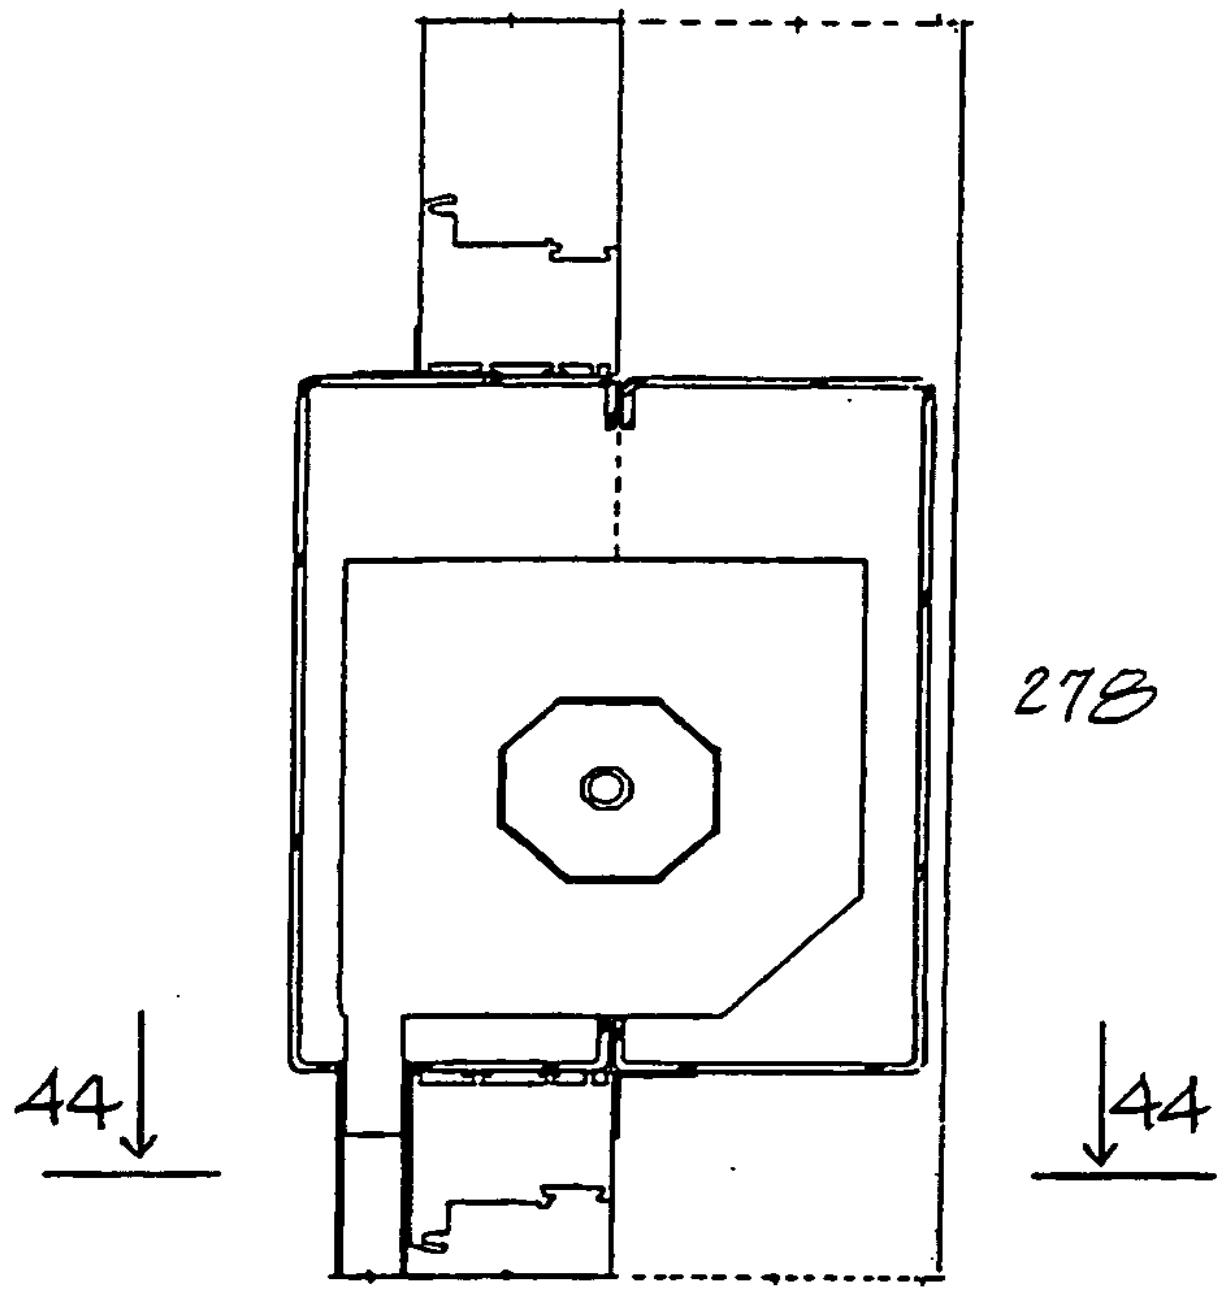

Fig. 43

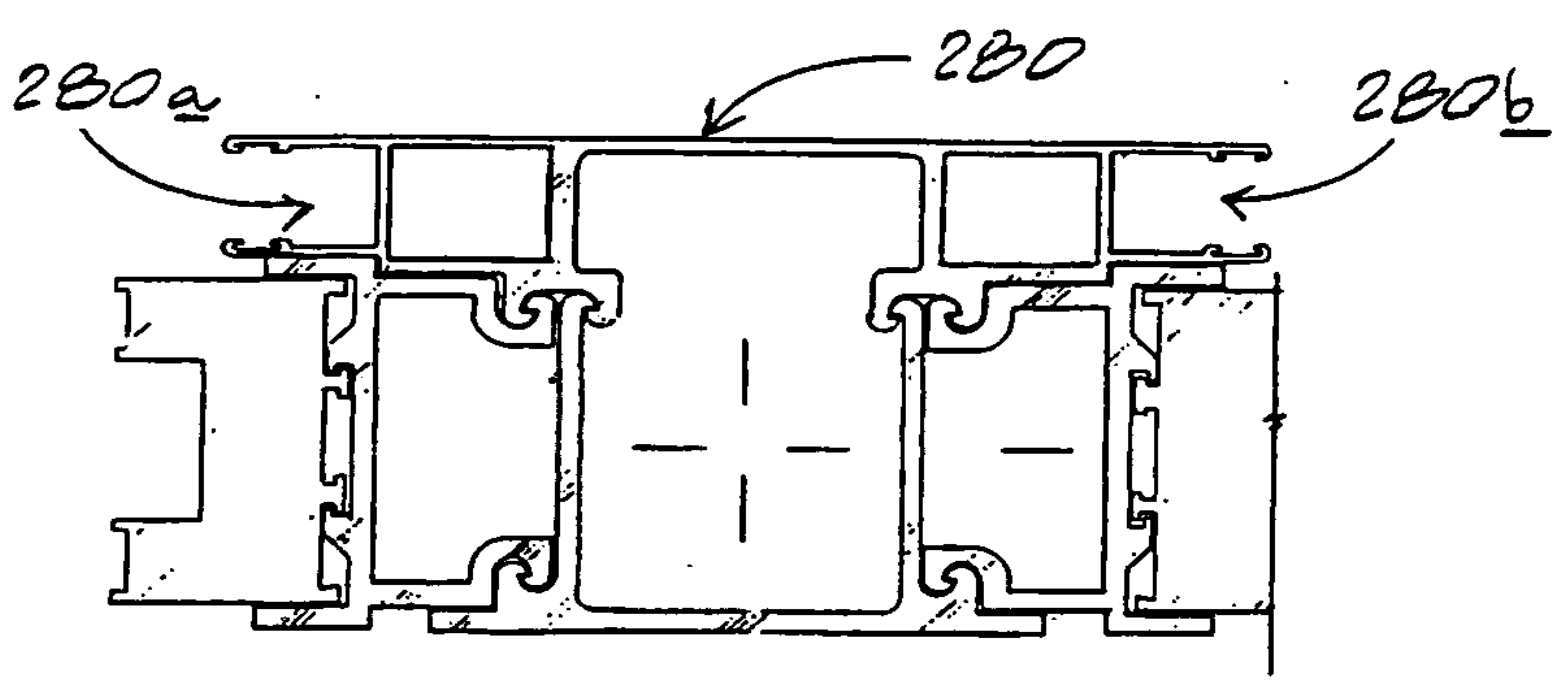

Fig. 44

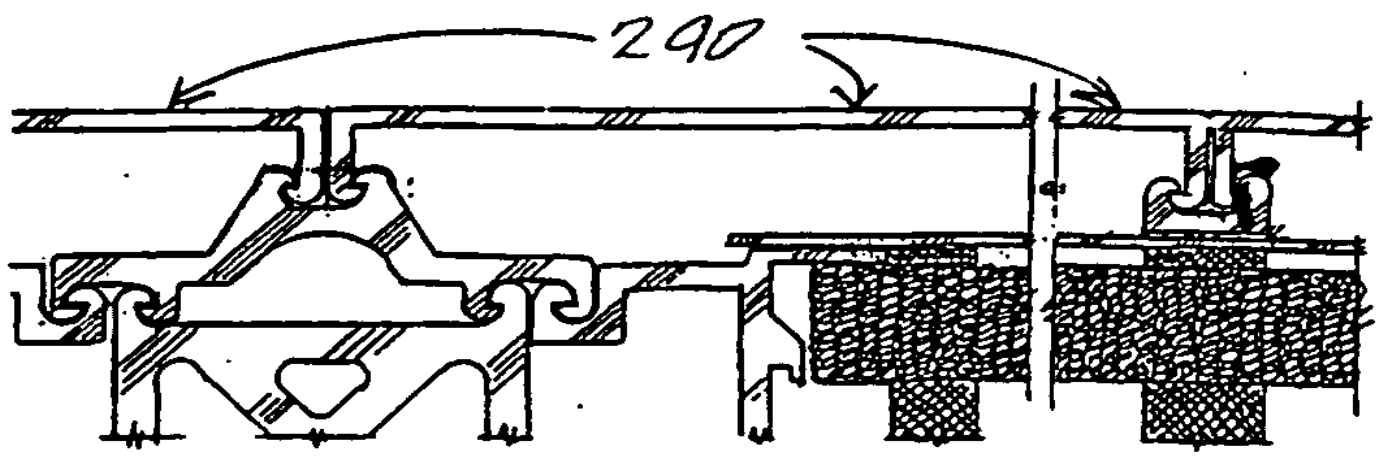

Fig. 45

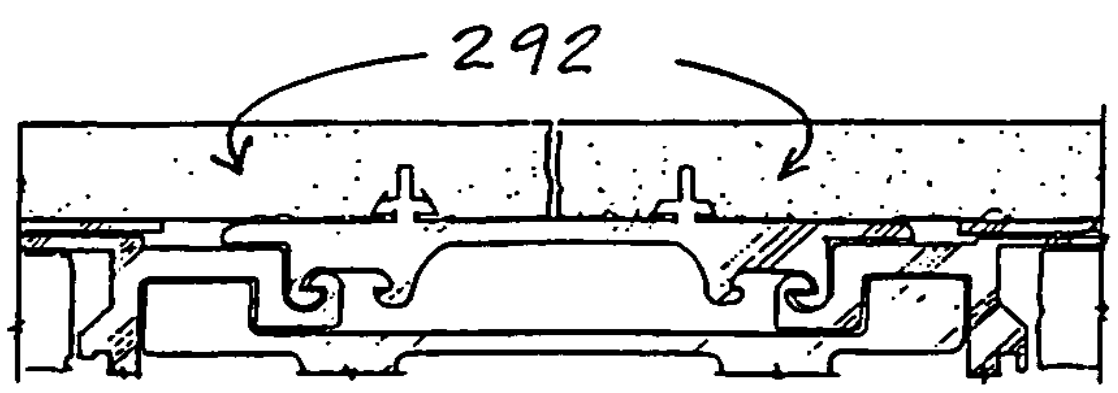

Fig. 46

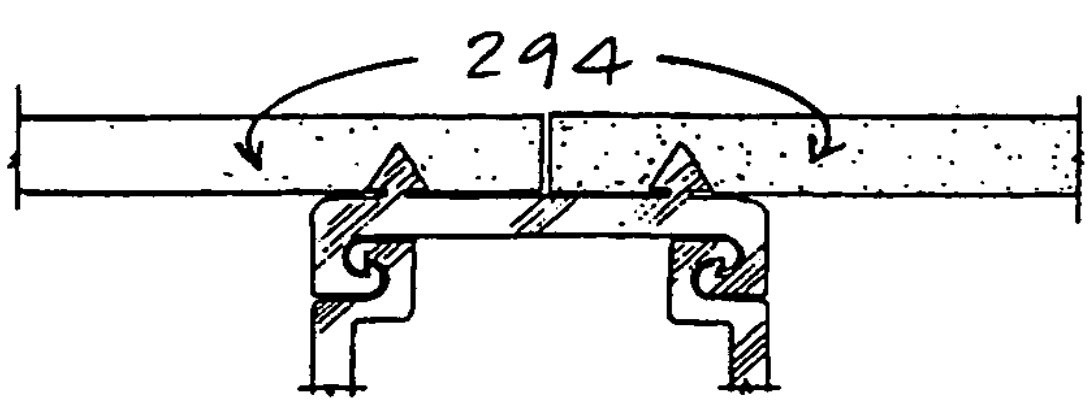

Fig. 47

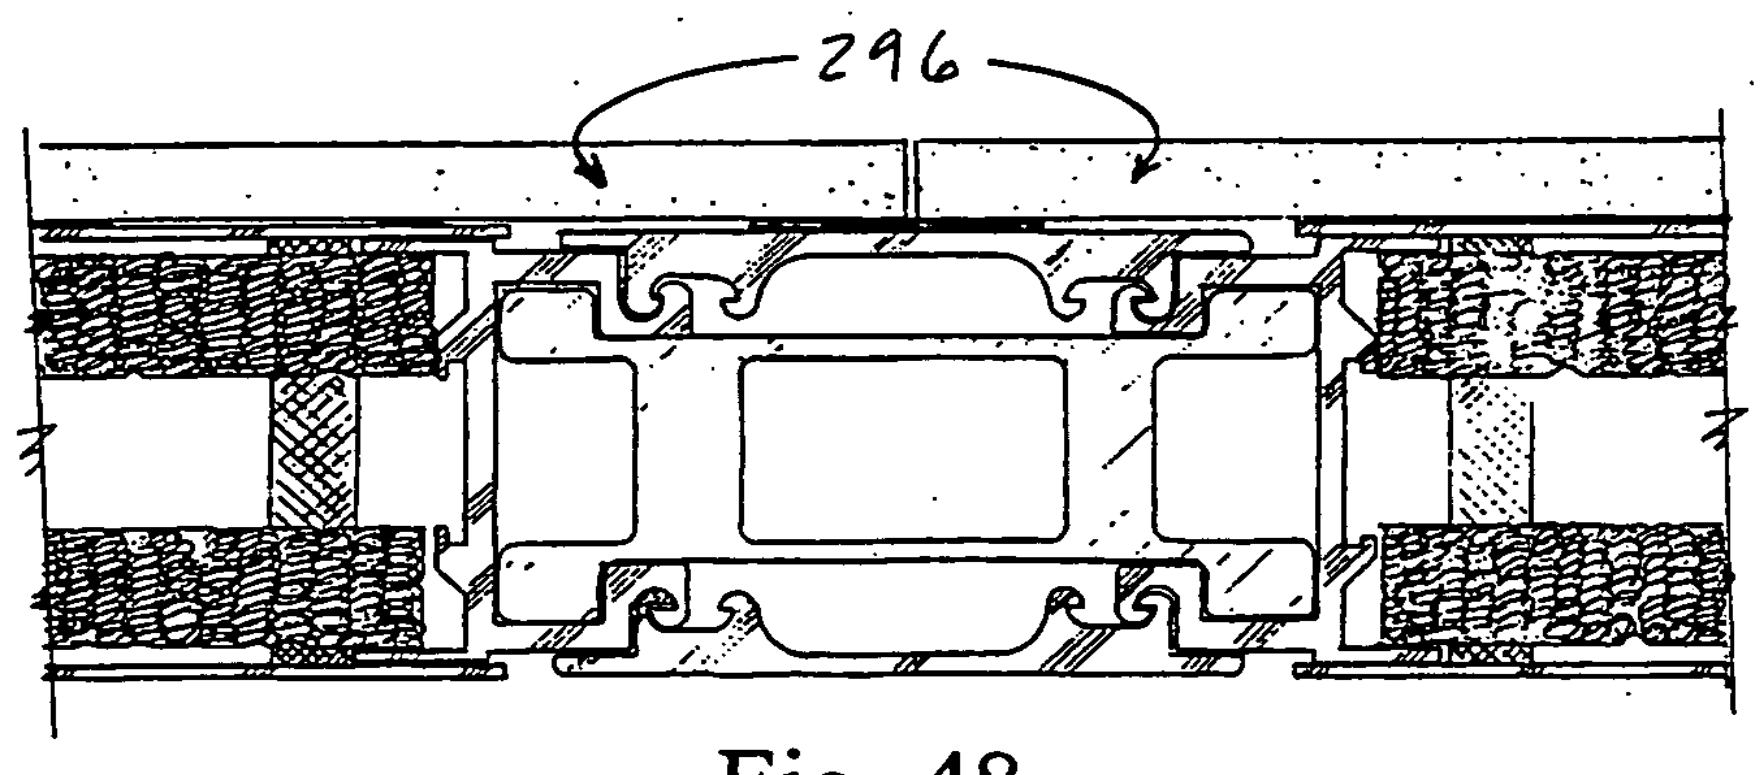

Fig. 48



Fig. 50a



Fig. 50b



Fig. 51

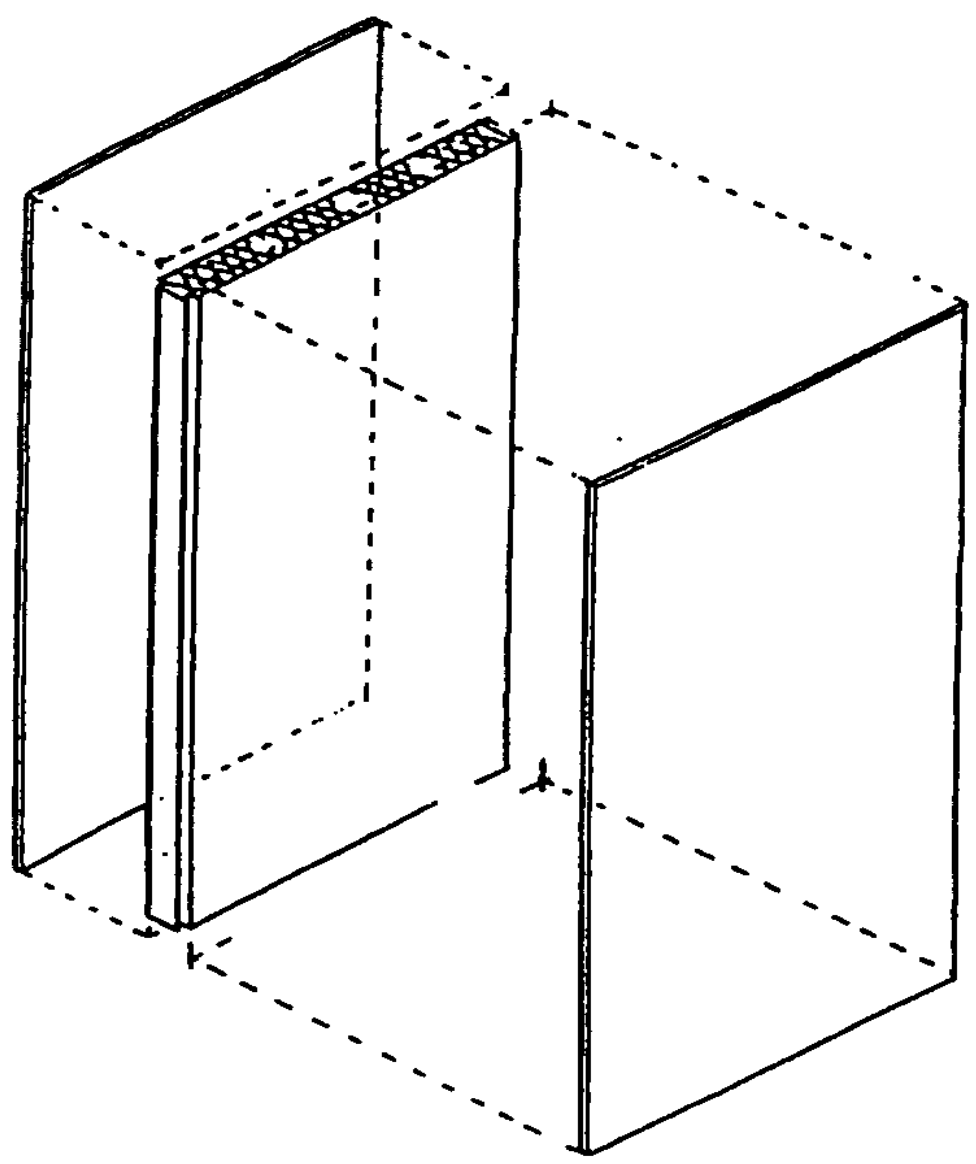

Fig. 49

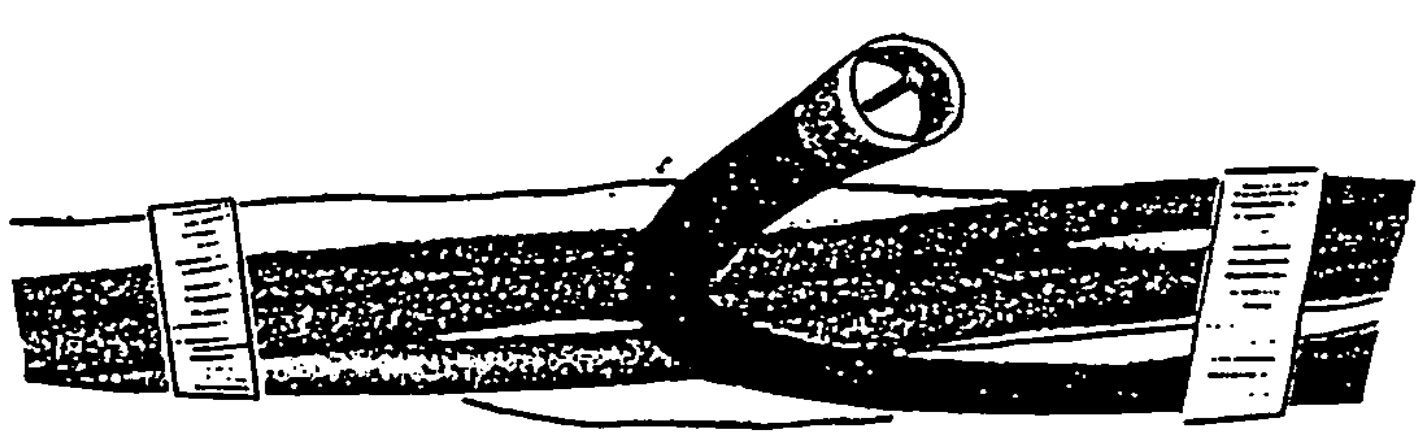

Fig. 52

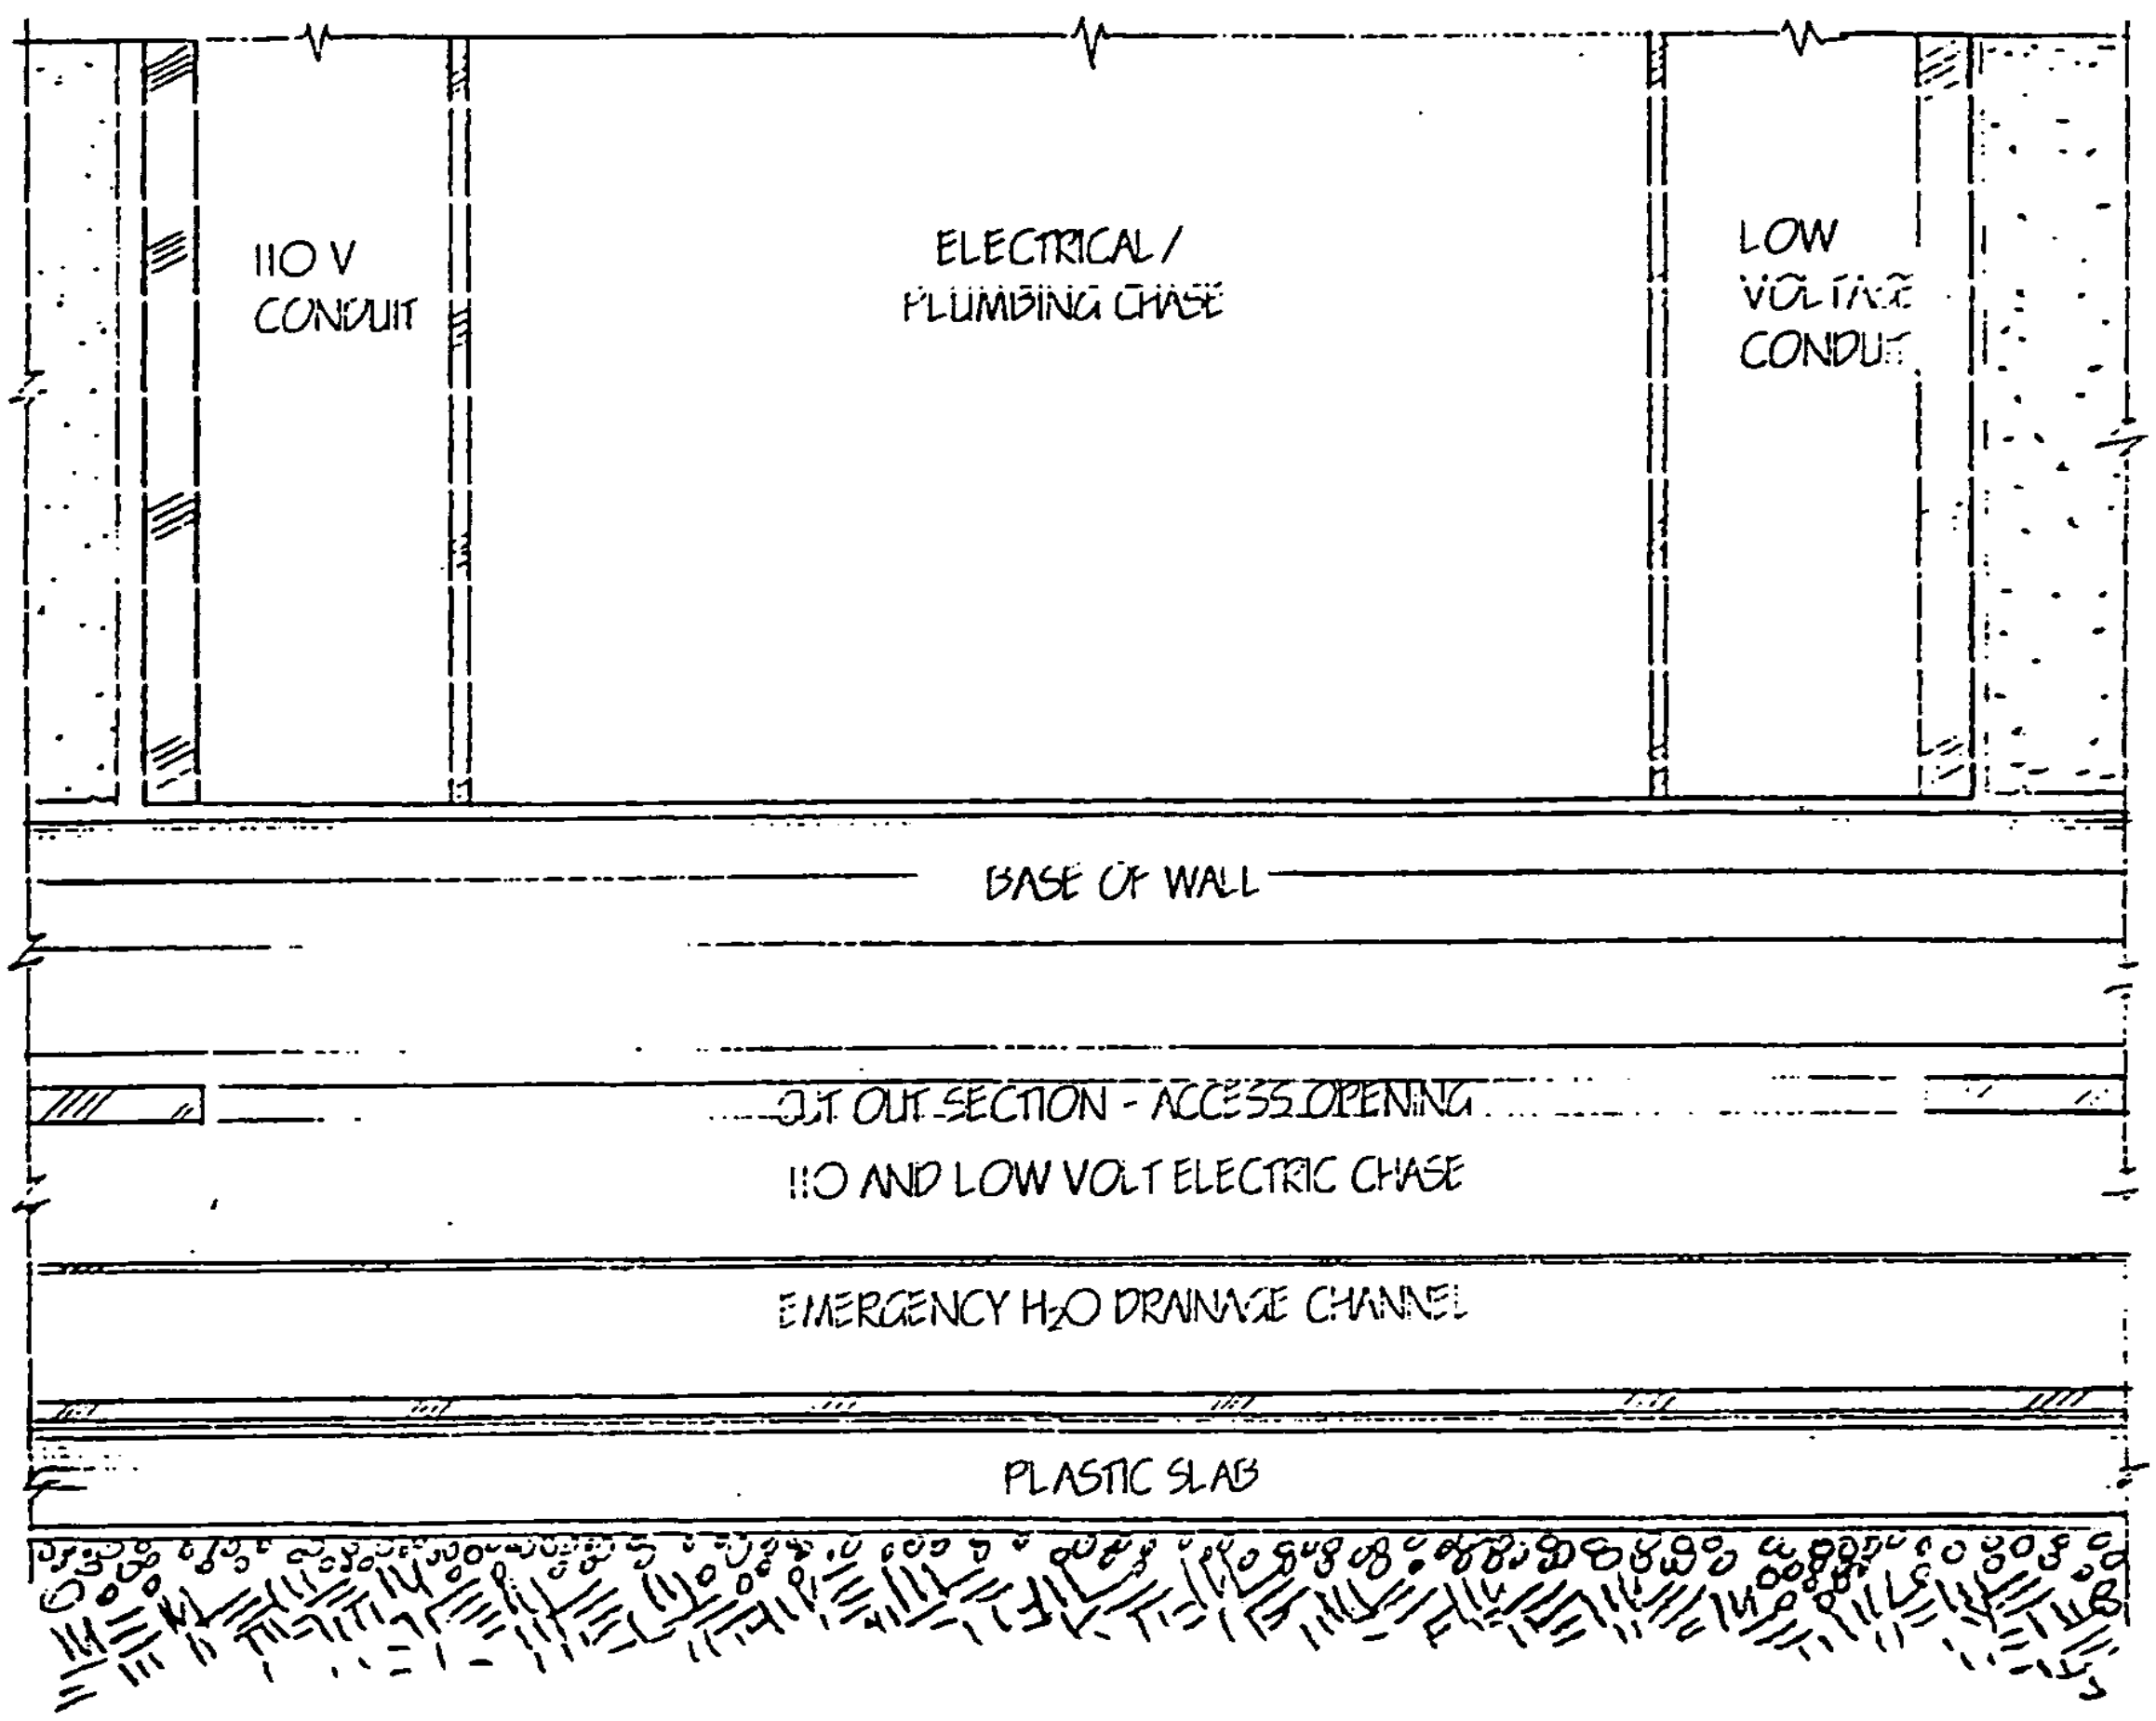

110 V CONDUIT
ELECTRICAL / PLUMBING CHASE
LOW VOLTAGE CONDUIT
BASE OF WALL
CUT OUT SECTION - ACCESS OPENING
110 AND LOW VOLT ELECTRIC CHASE
EMERGENCY H2O DRAINAGE CHANNEL
PLASTIC SLAB

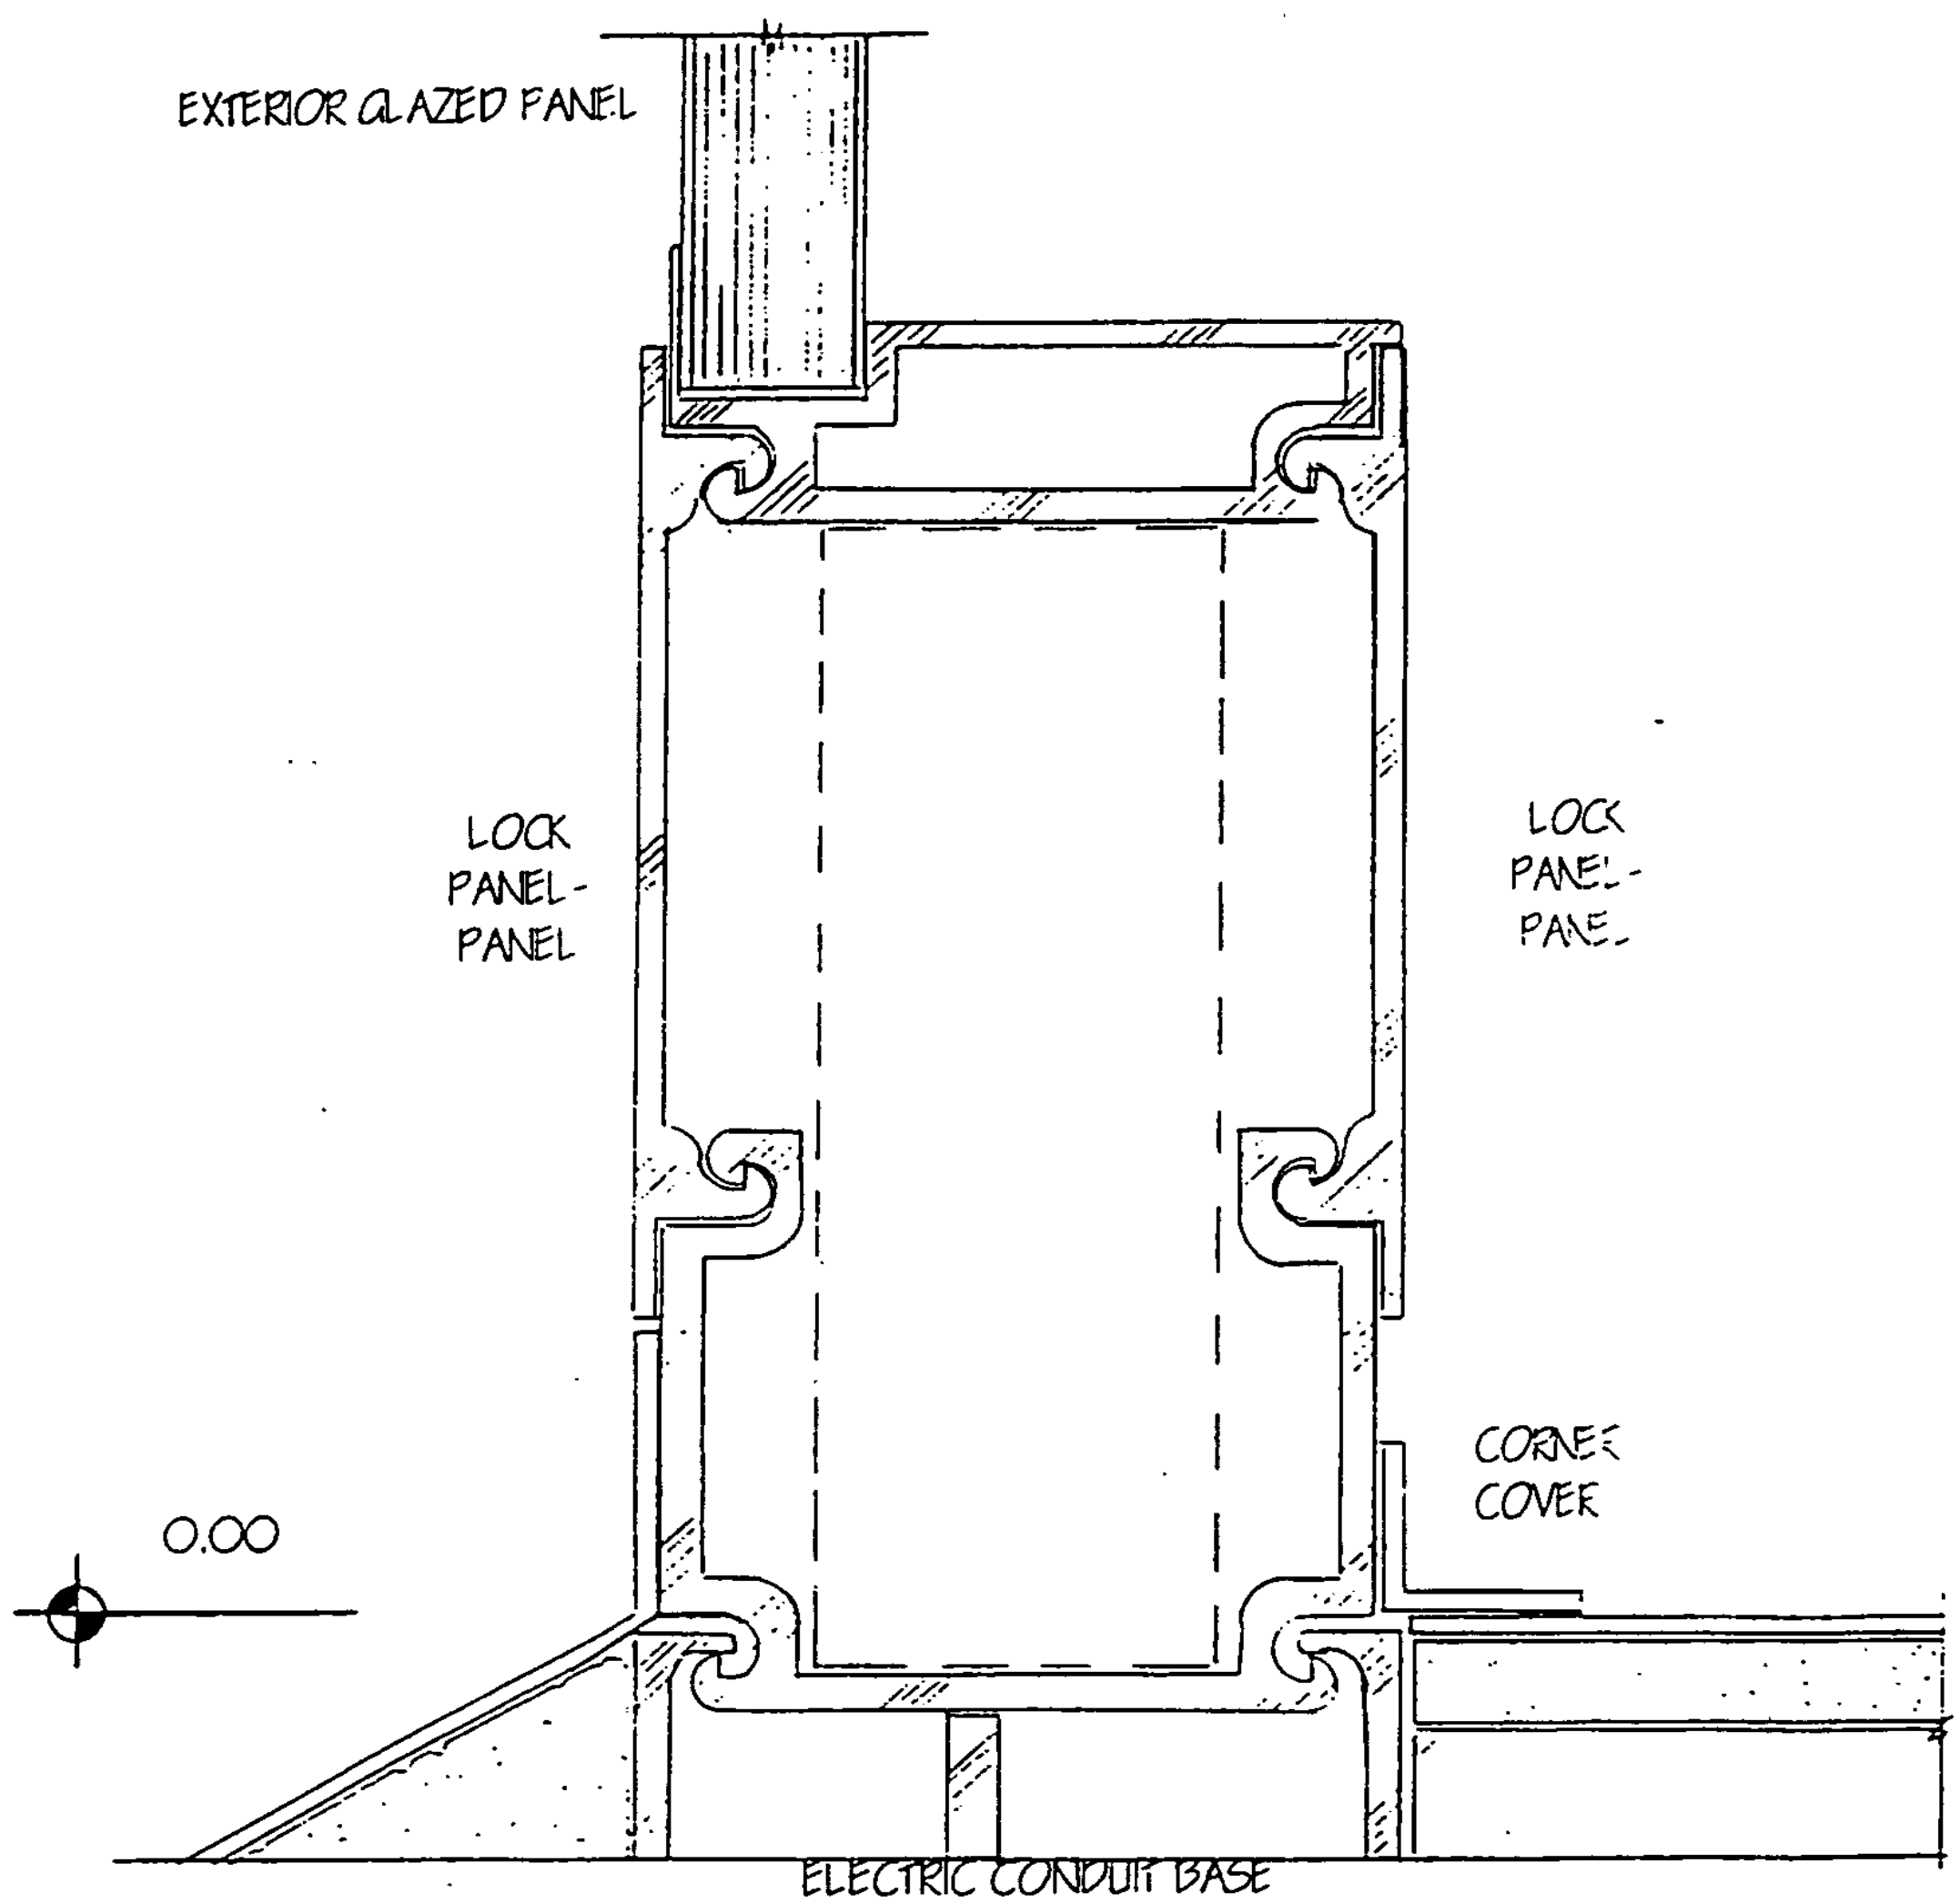
EXTERIOR GLAZED PANEL
LOCK PANEL-PANEL
LOCK PANEL-PANEL
CORNER COVER
0.00
ELECTRIC CONDUIT BASE

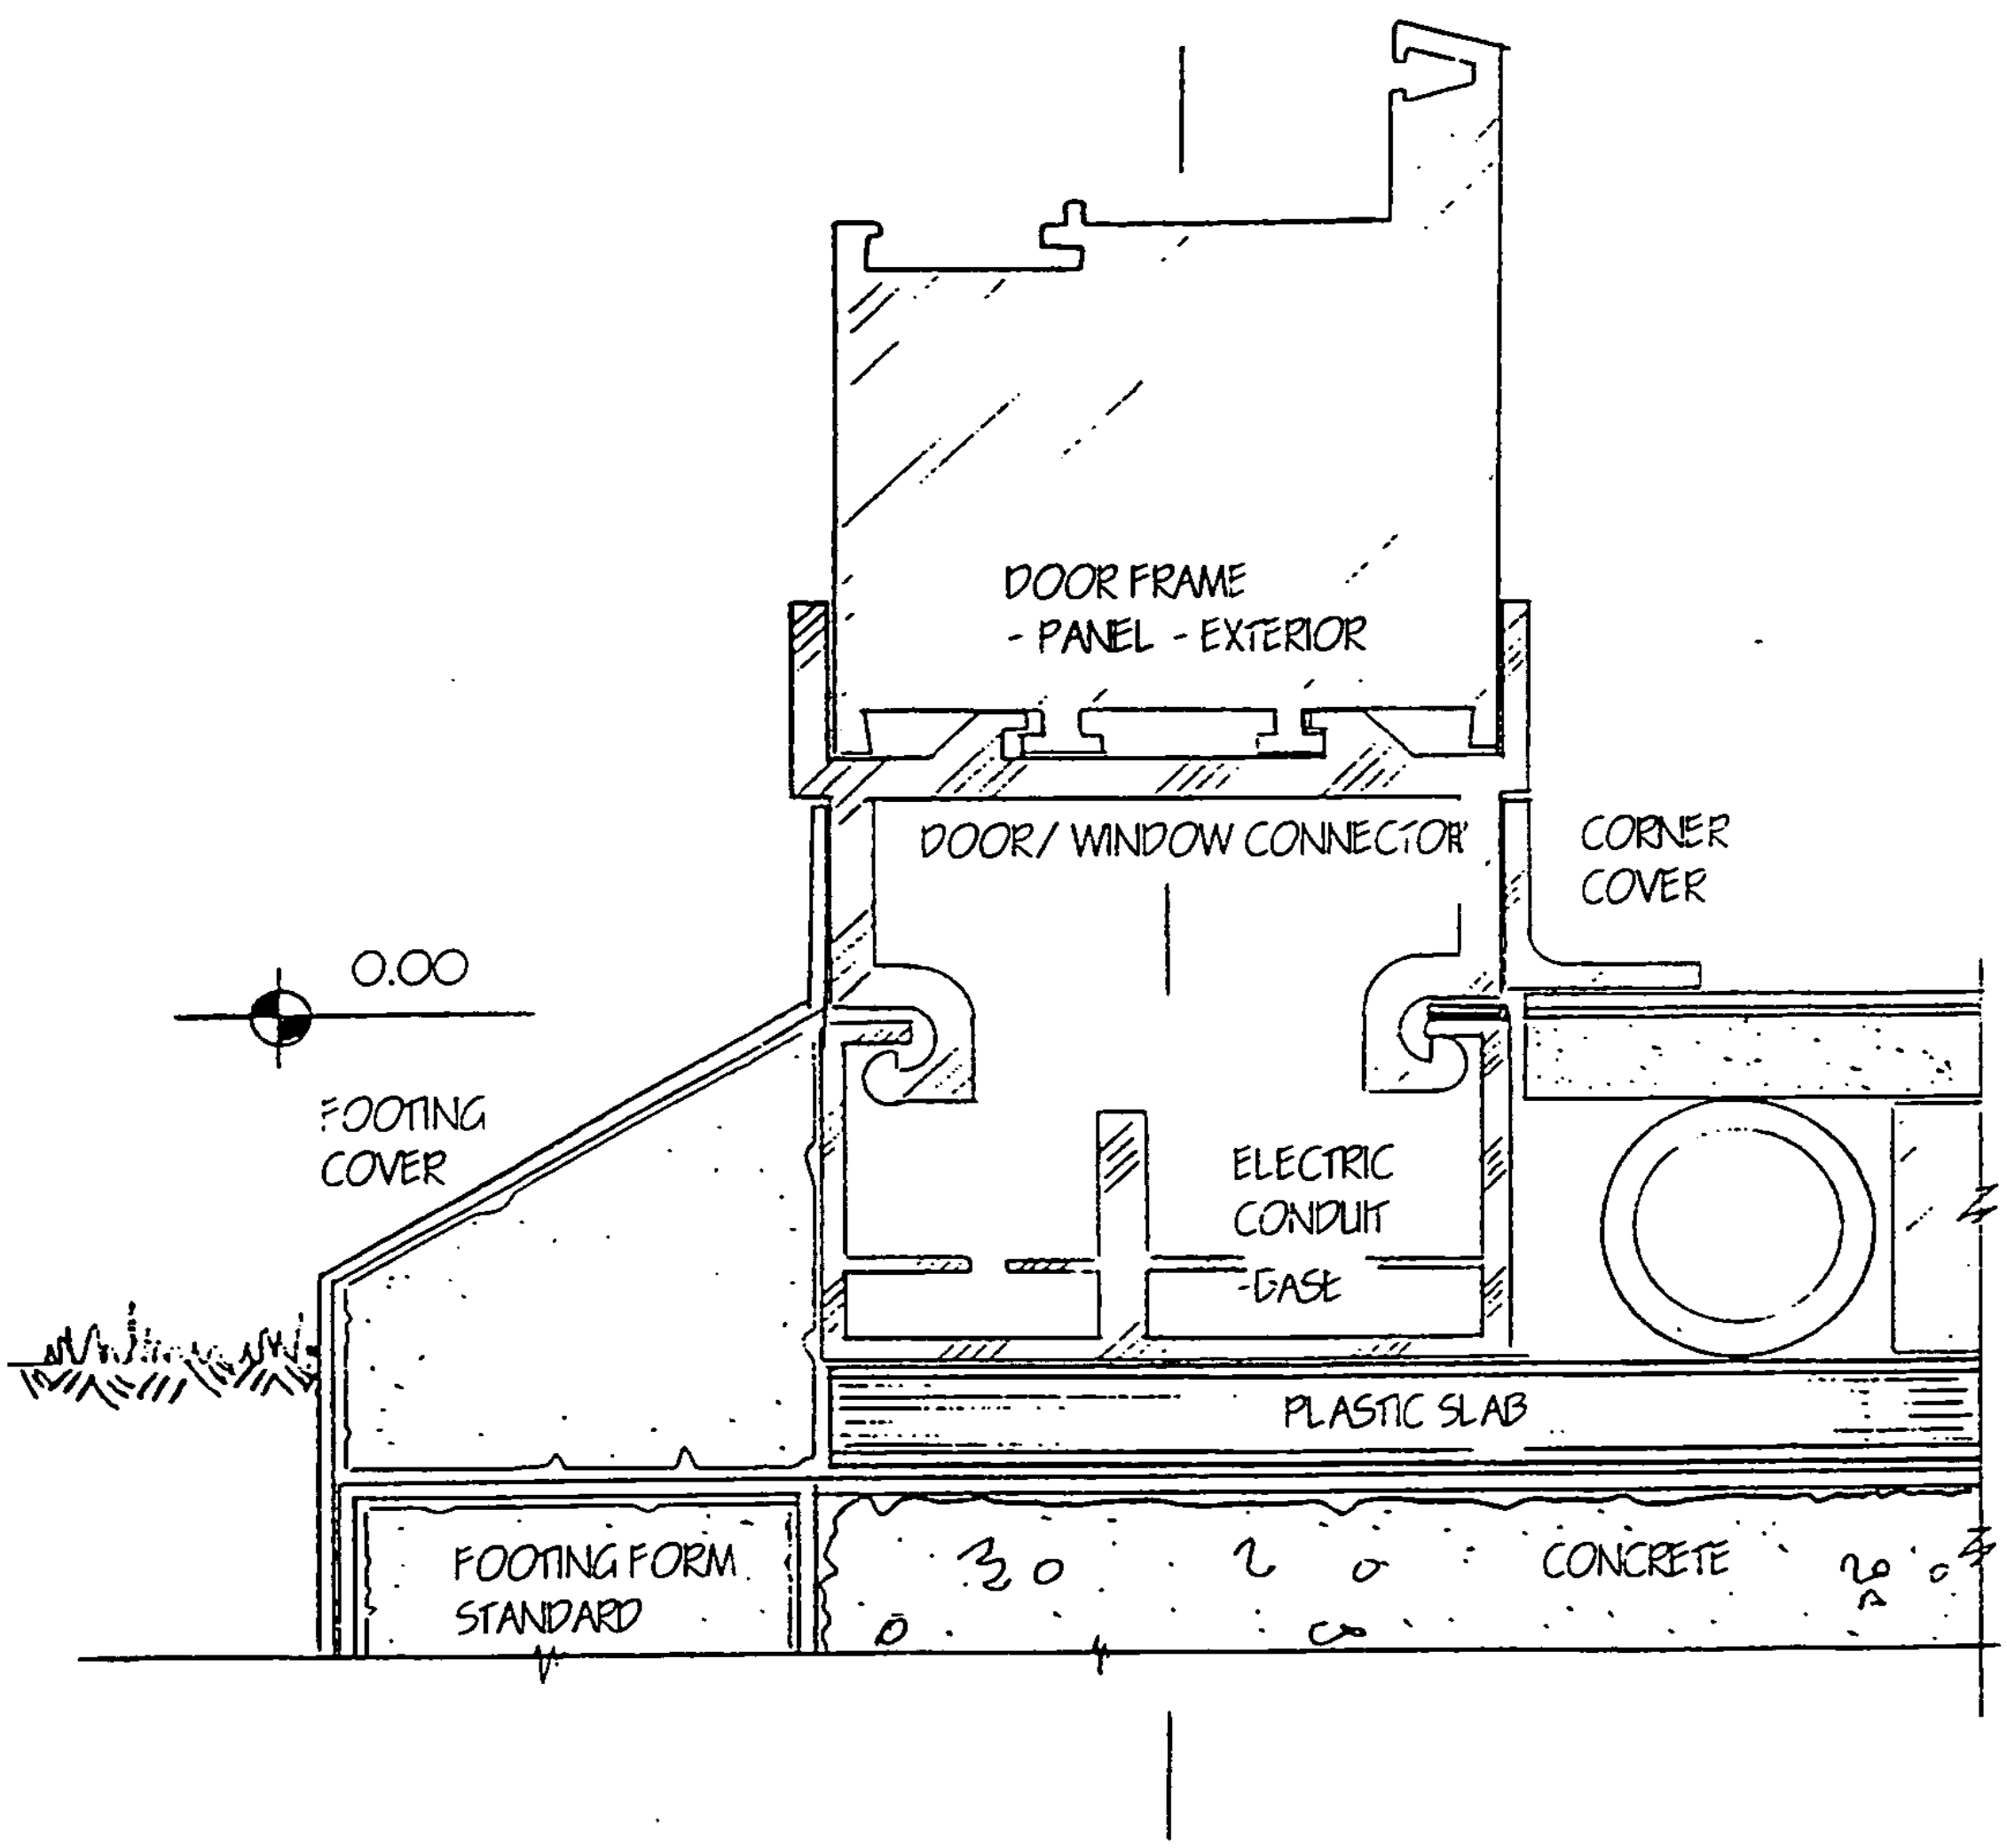
DOOR FRAME
- PANEL - EXTERIOR
DOOR/ WINDOW CONNECTOR
CORNER
COVER
0.00
FOOTING
COVER
ELECTRIC
CONDUIT
-BASE
PLASTIC SLAB
FOOTING FORM
STANDARD
CONCRETE

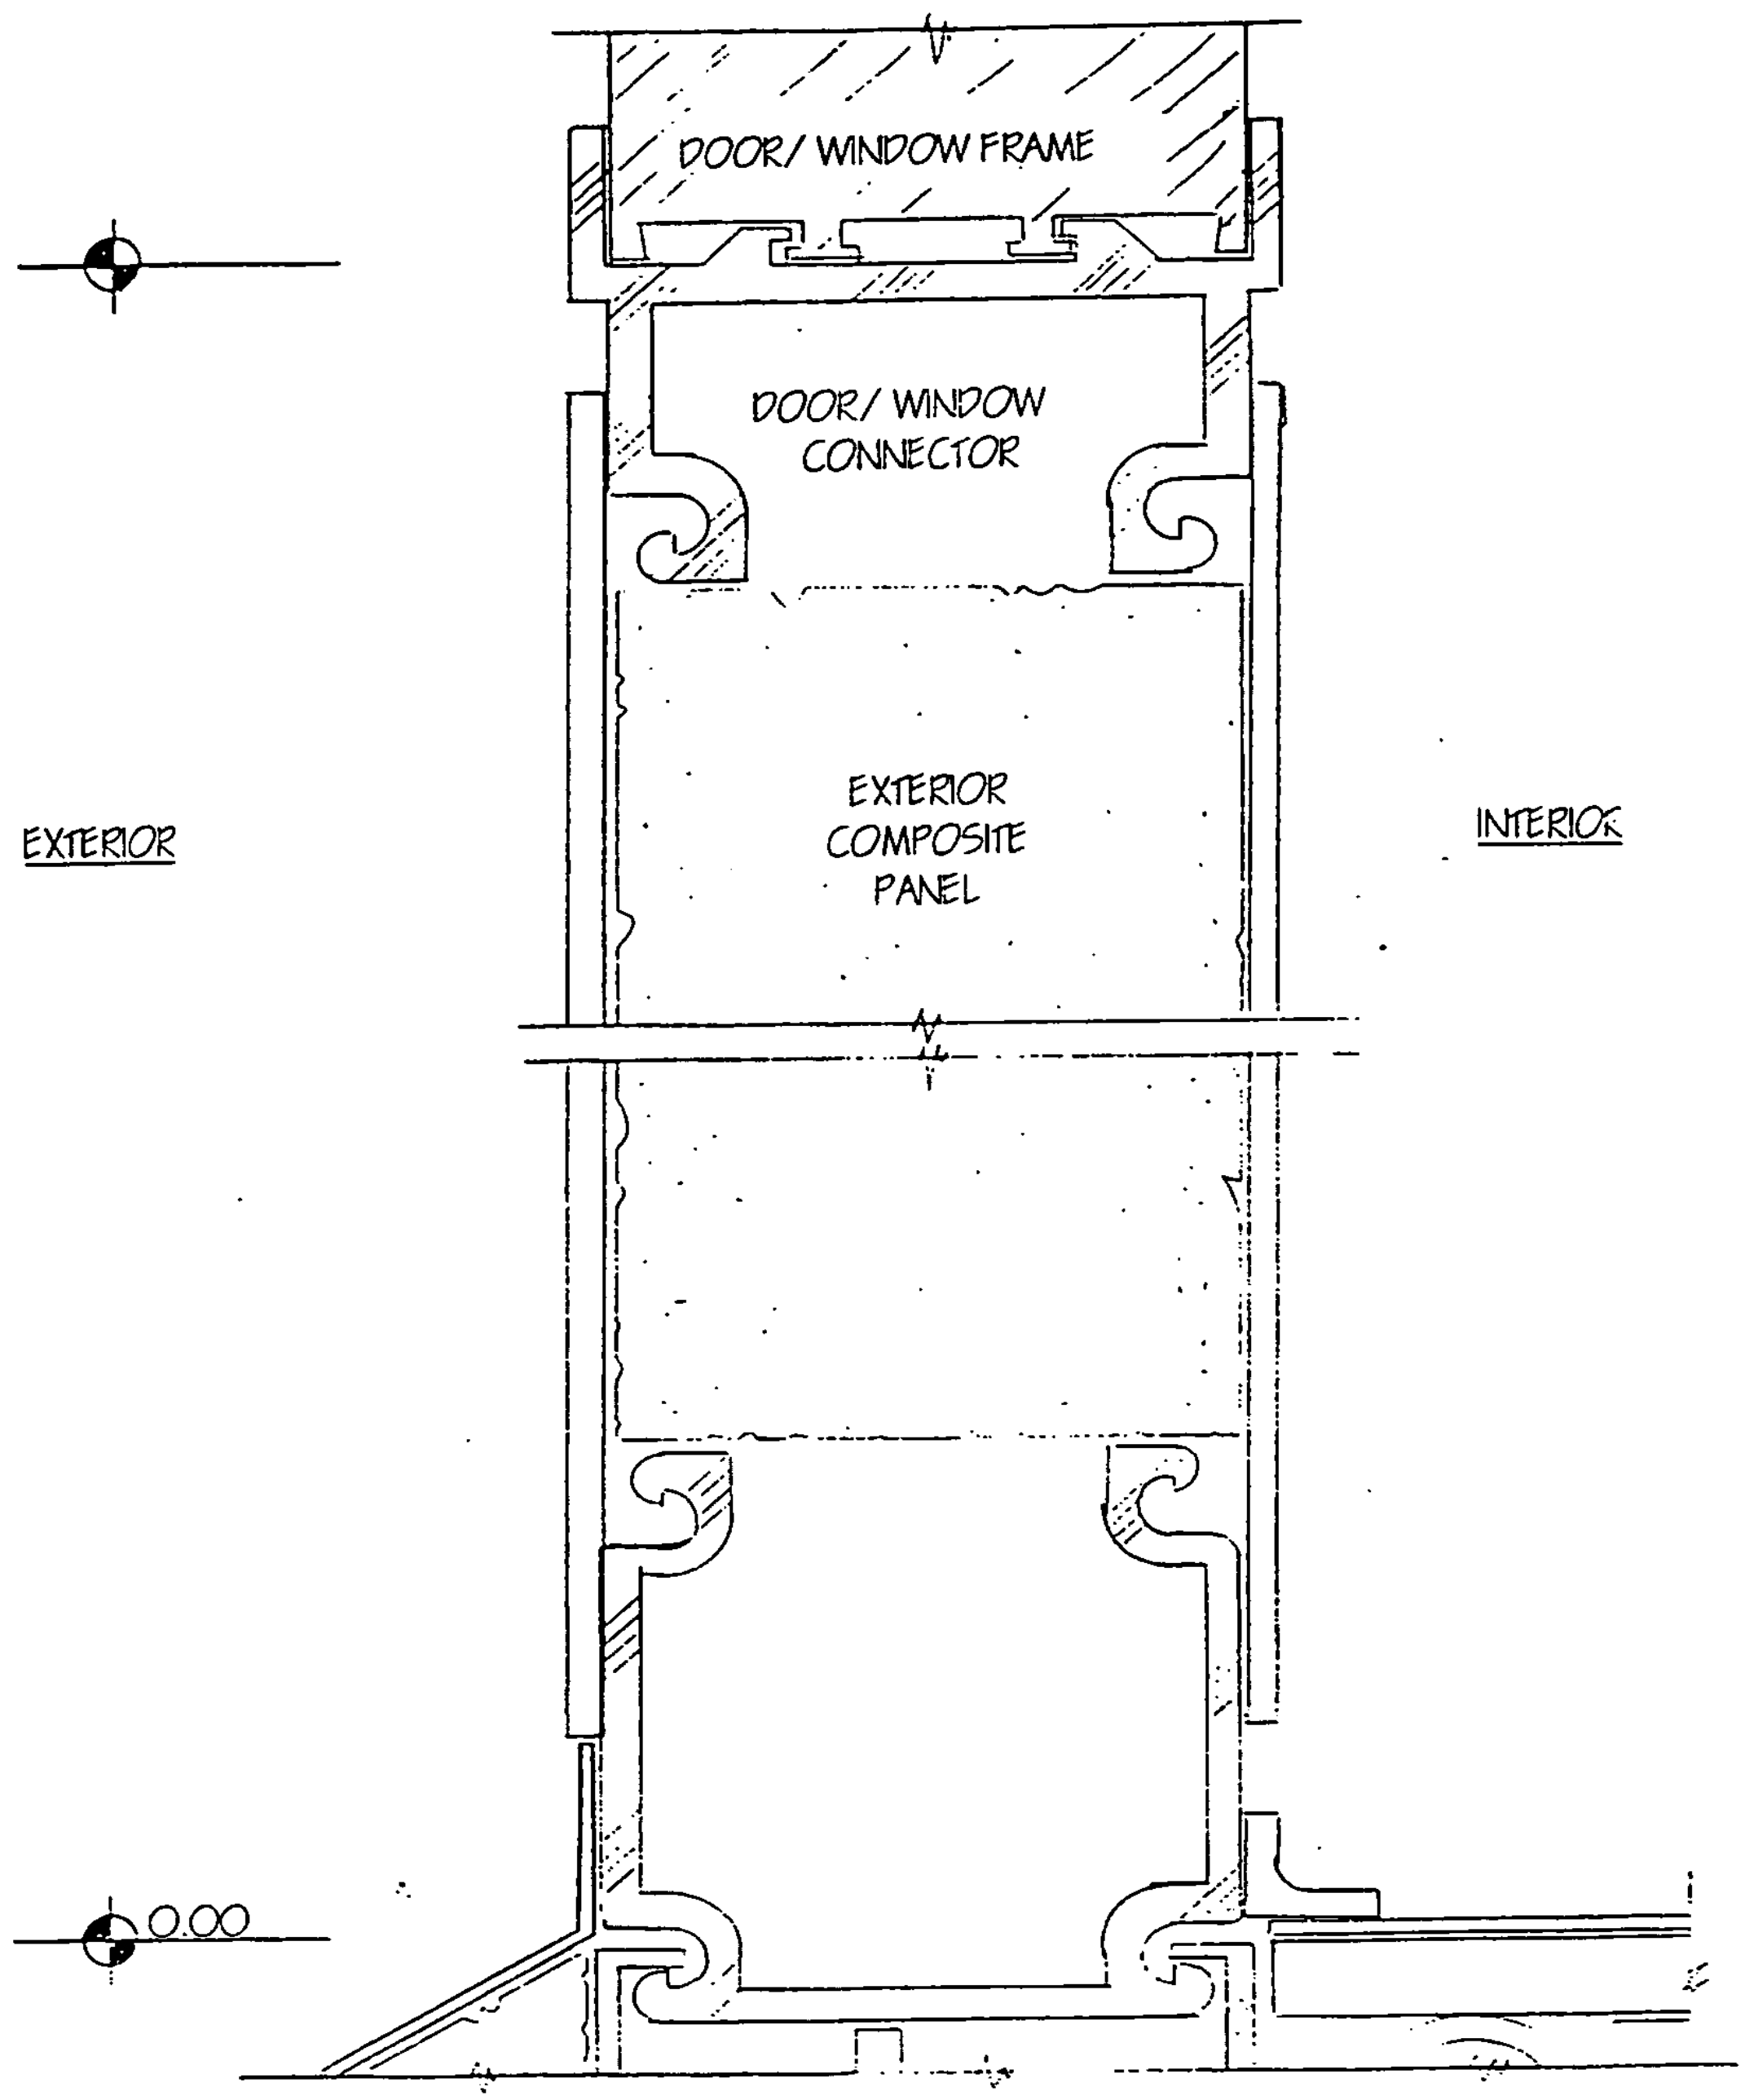
DOOR/ WINDOW FRAME
DOOR/ WINDOW CONNECTOR
EXTERIOR
EXTERIOR COMPOSITE PANEL
INTERIOR
0.00

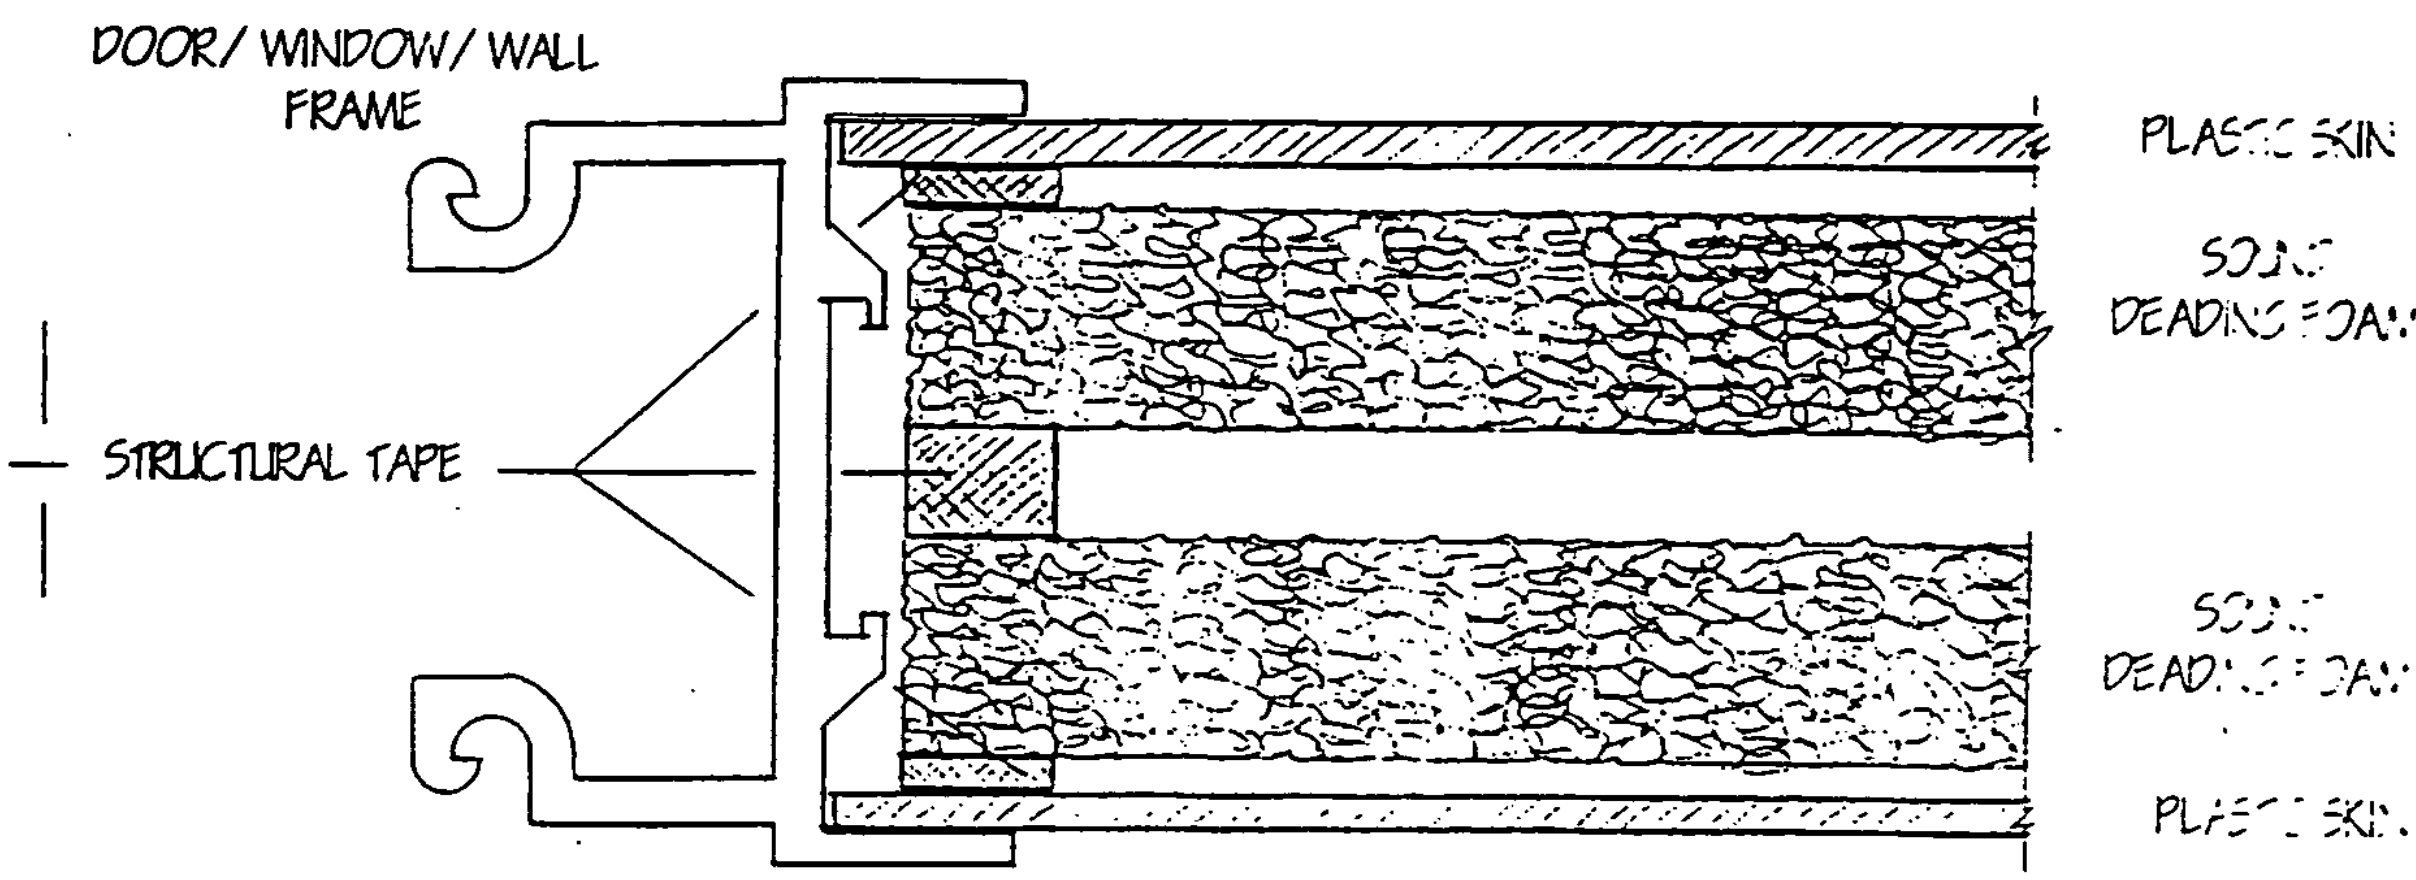
DOOR/ WINDOW/ WALL
FRAME
STRUCTURAL TAPE

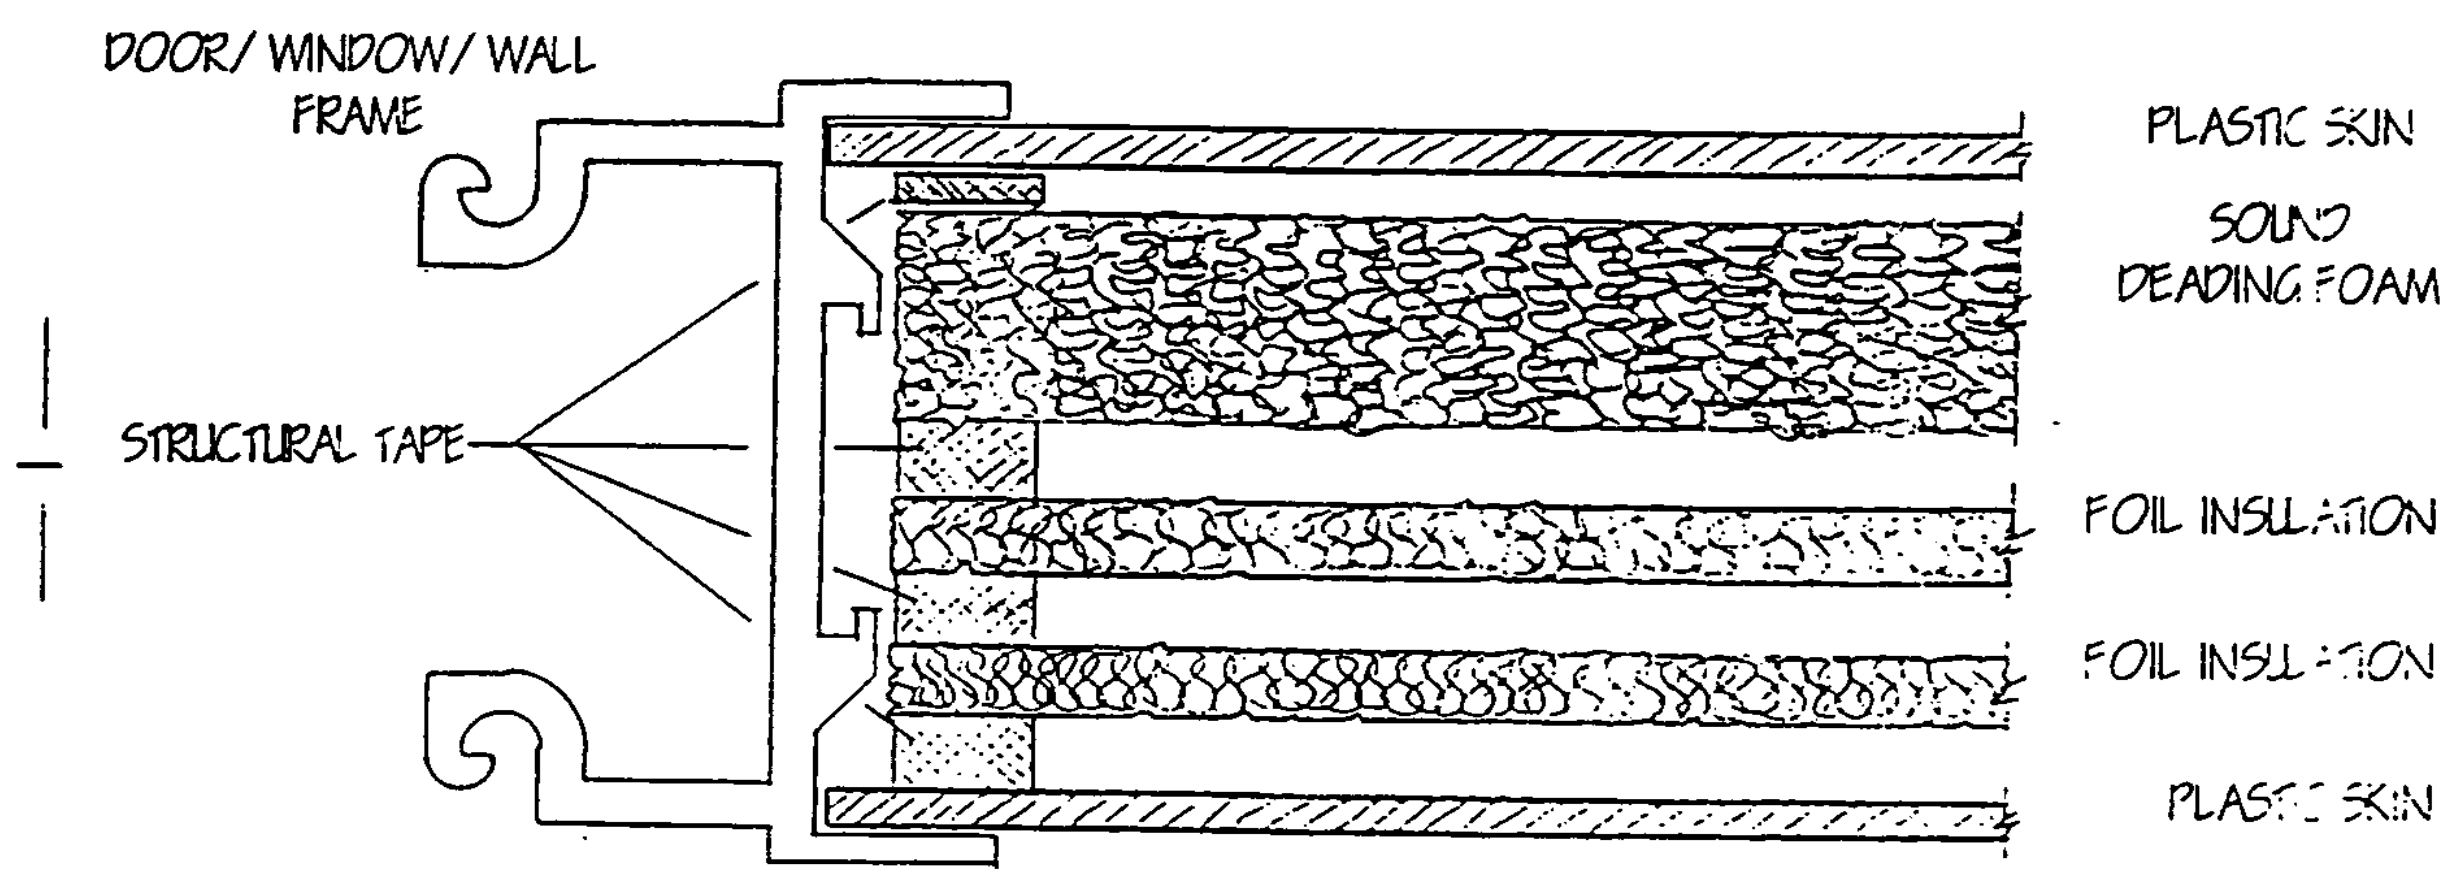
DOOR/ WINDOW/ WALL FRAME
STRUCTURAL TAPE
PLASTIC SKIN
SOUND DEADING FOAM
FOIL INSULATION
FOIL INSULATION
PLASTIC SKIN

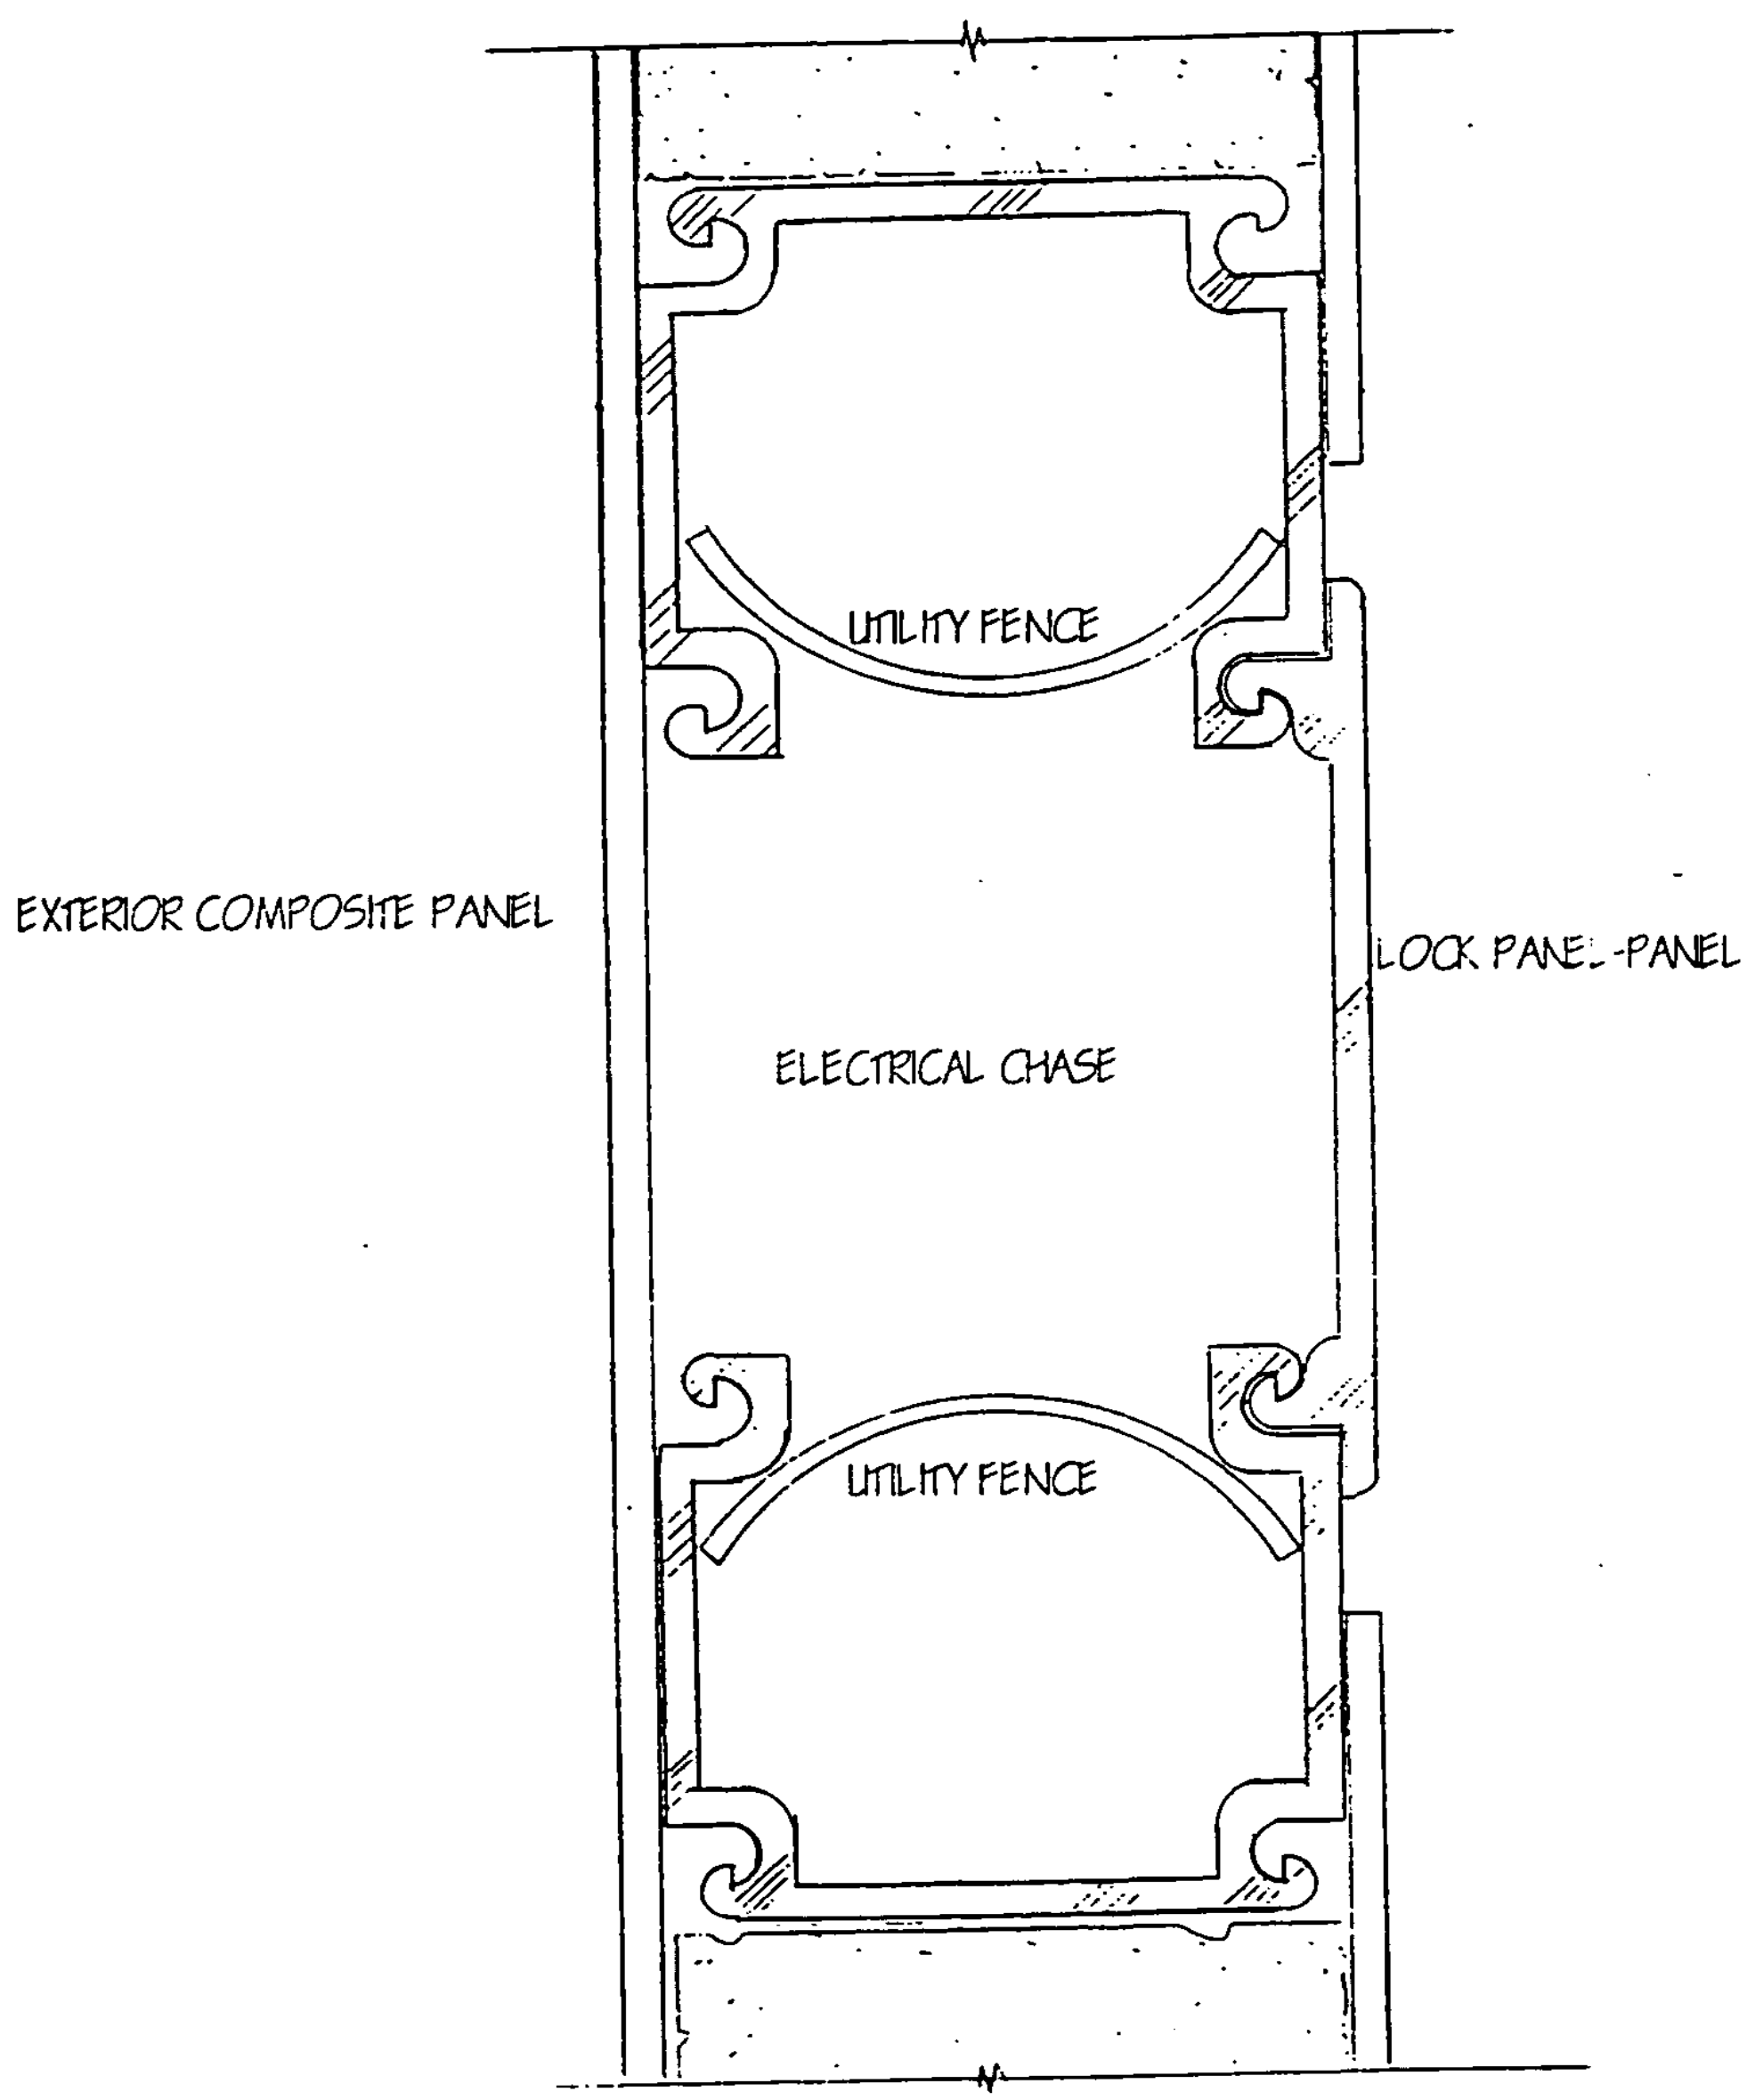
UTILITY FENCE
EXTERIOR COMPOSITE PANEL
LOCK PANEL-PANEL
ELECTRICAL CHASE
UTILITY FENCE

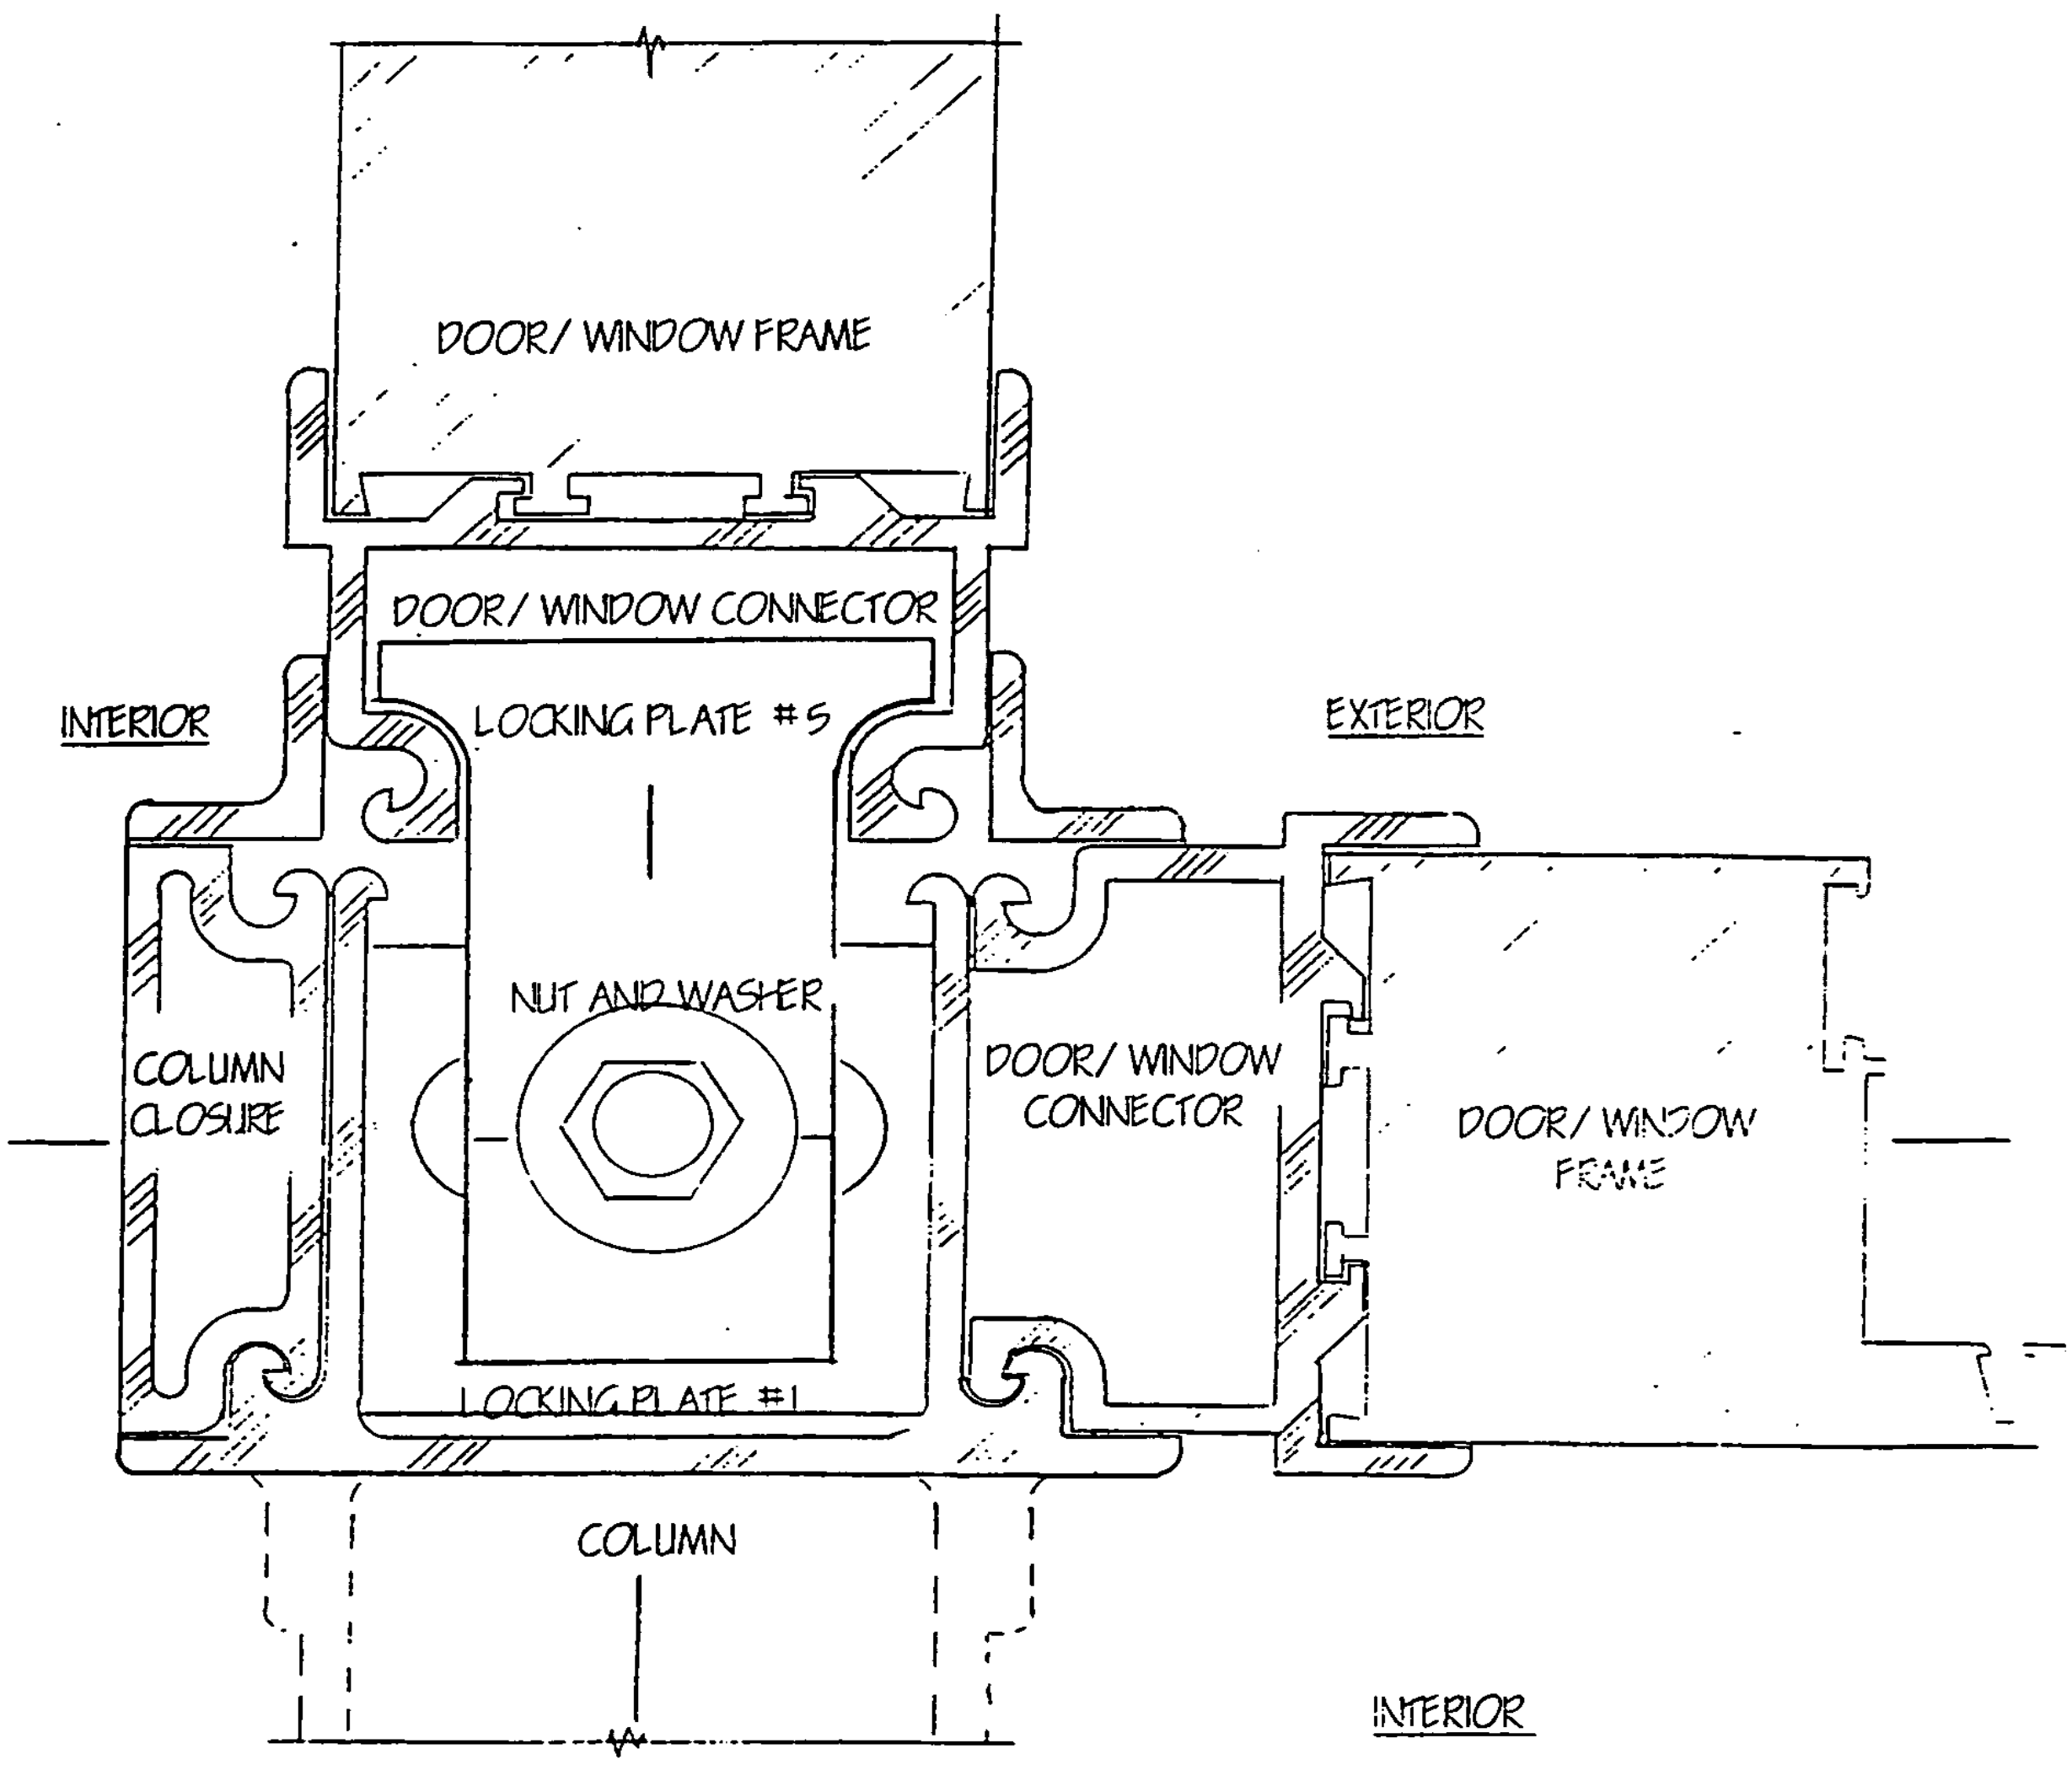
DOOR/ WINDOW FRAME
DOOR/ WINDOW CONNECTOR
INTERIOR
LOCKING PLATE #5
EXTERIOR
NUT AND WASHER
COLUMN CLOSURE
DOOR/ WINDOW CONNECTOR
DOOR/ WINDOW FRAME
LOCKING PLATE #1
COLUMN
INTERIOR

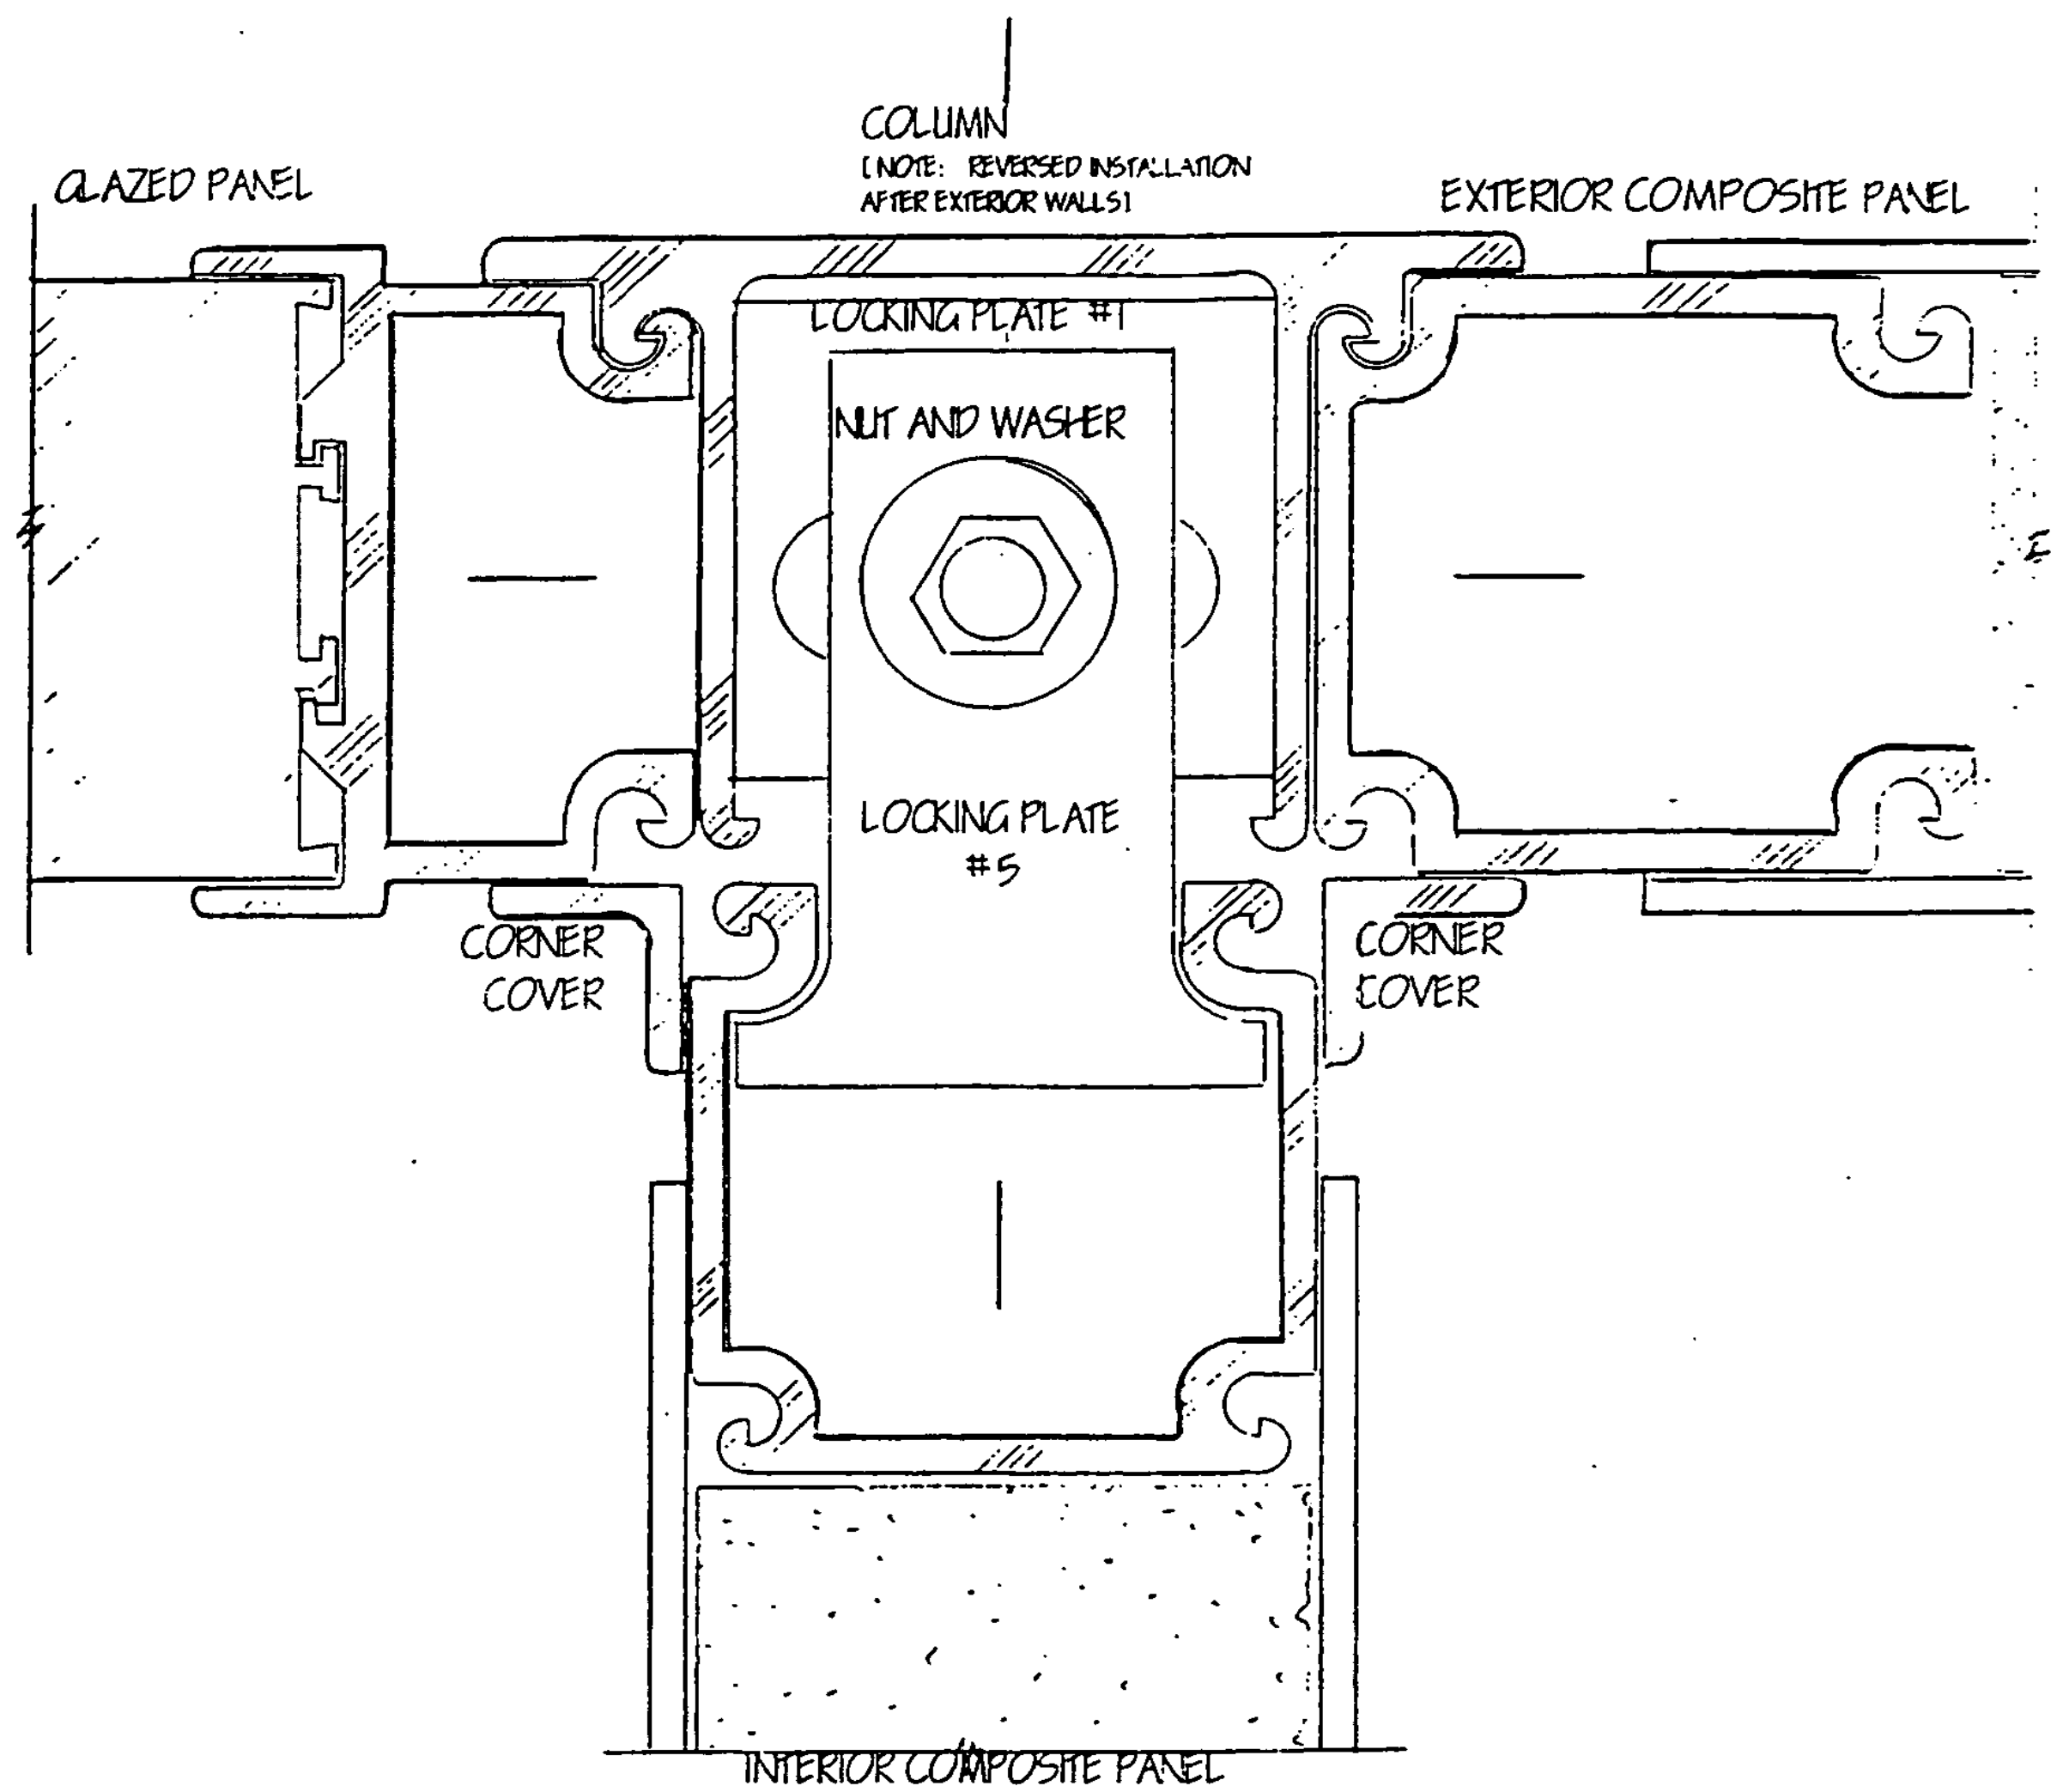
COLUMN
[NOTE: REVERSED INSTALLATION AFTER EXTERIOR WALLS]
GLAZED PANEL
EXTERIOR COMPOSITE PANEL
LOCKING PLATE #1
NUT AND WASHER
LOCKING PLATE #5
CORNER COVER
CORNER COVER
INTERIOR COMPOSITE PANEL

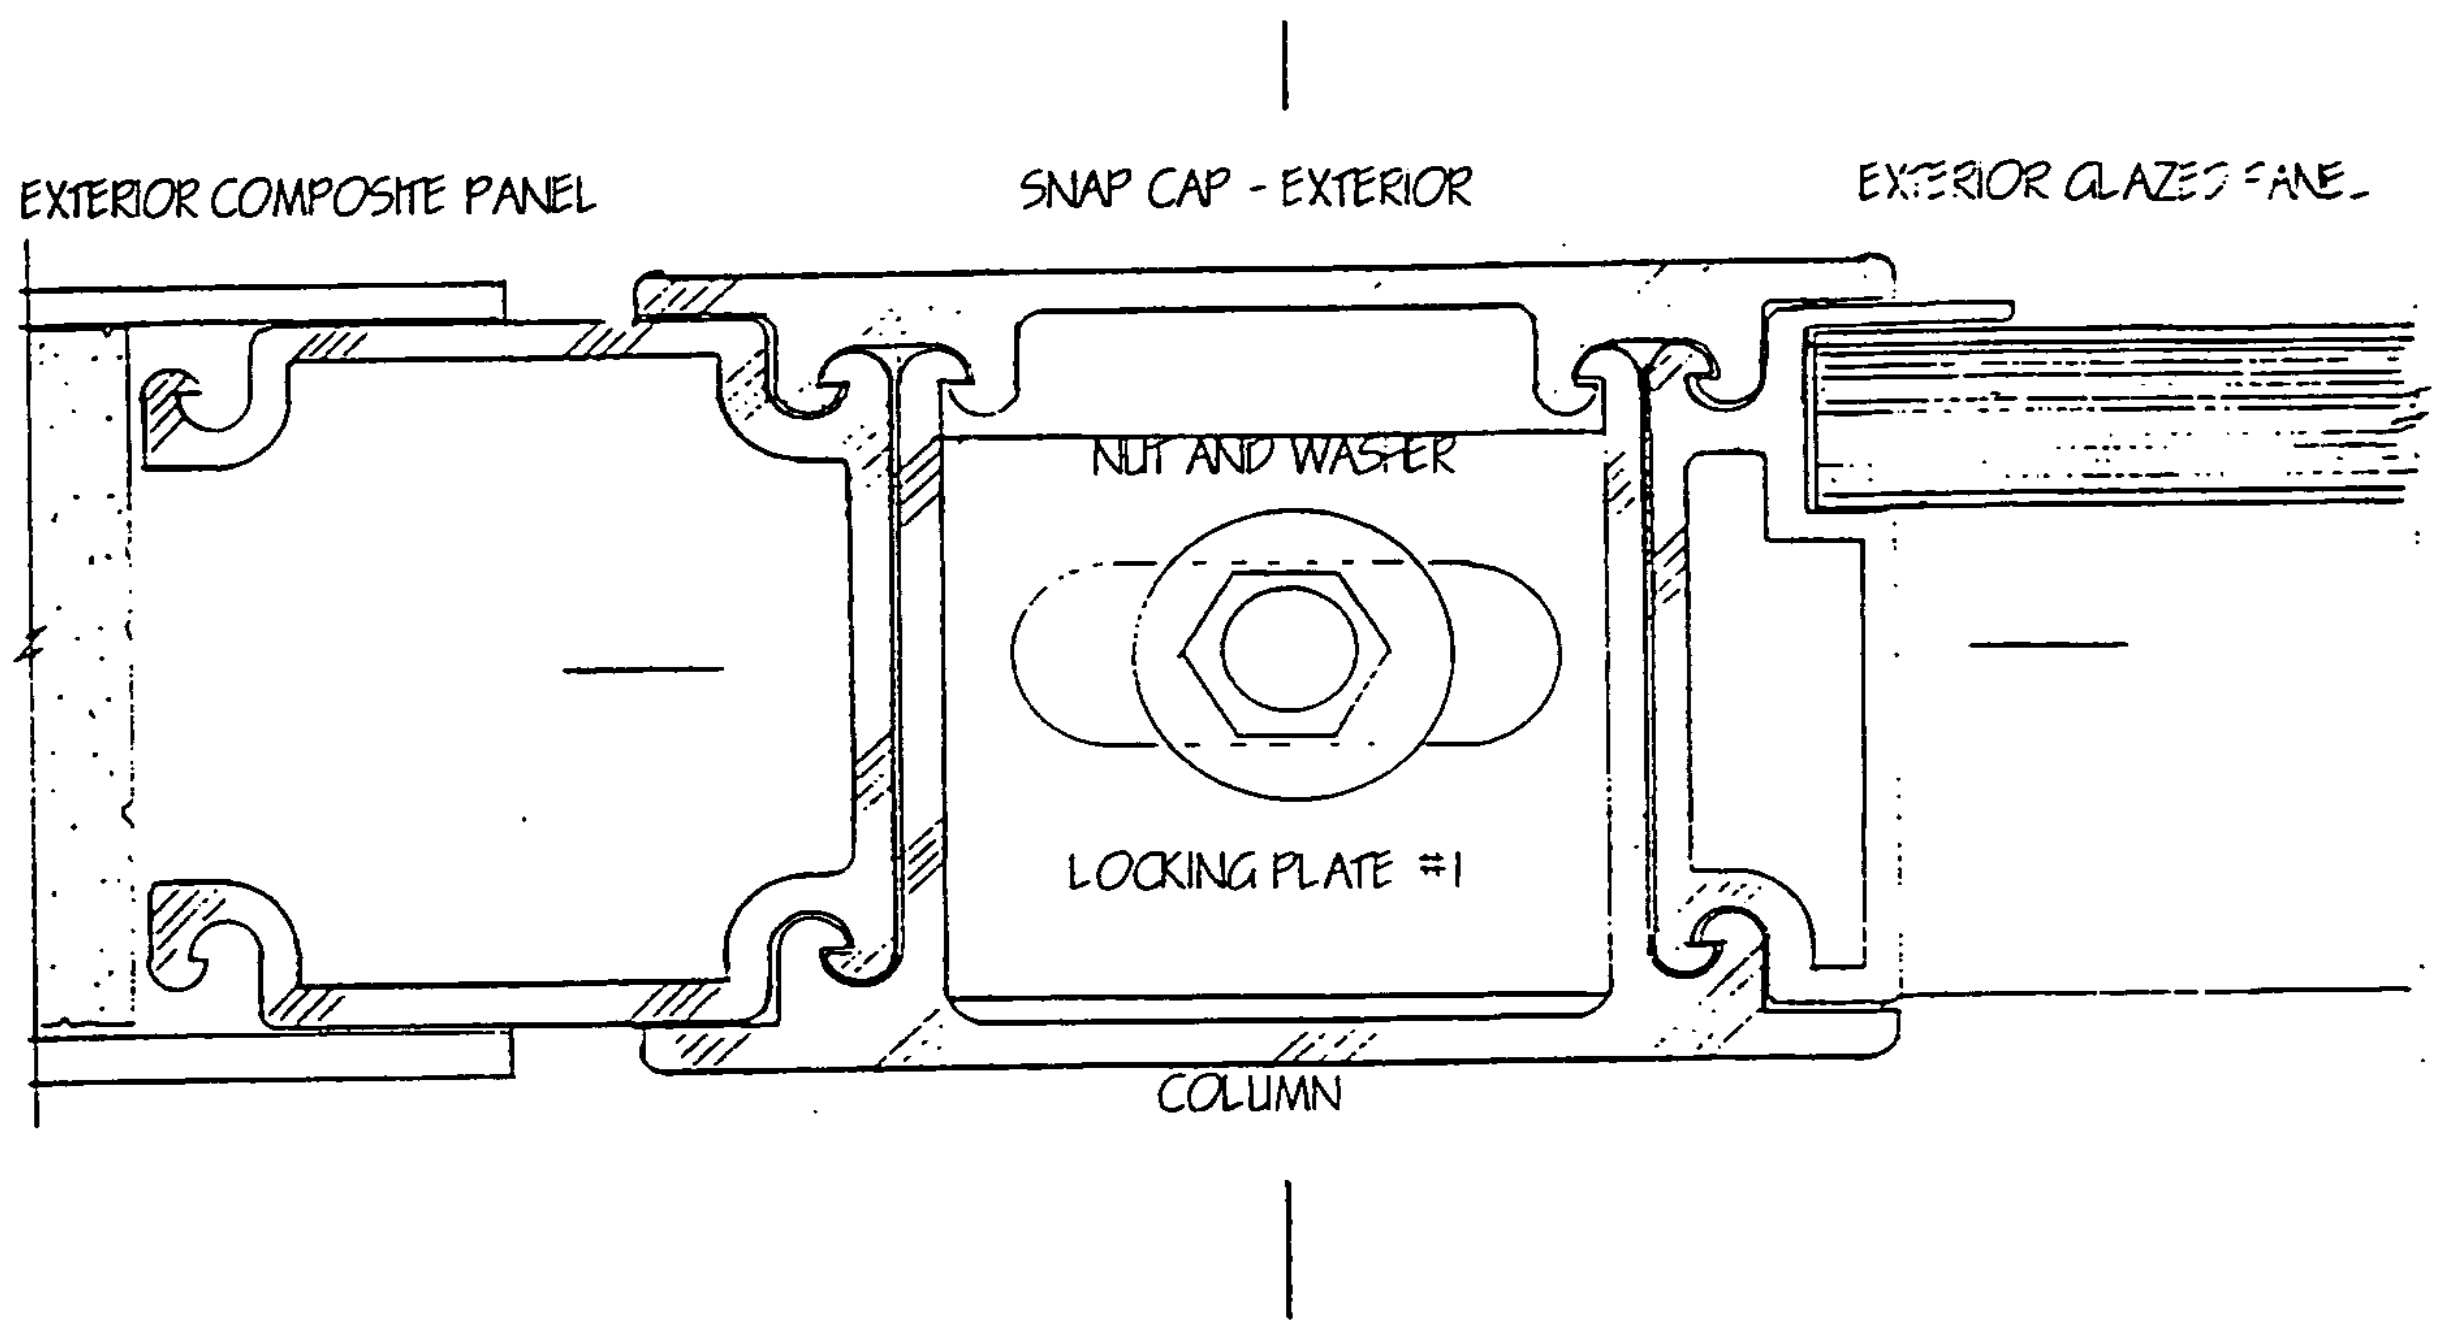
EXTERIOR COMPOSITE PANEL
SNAP CAP - EXTERIOR
NUT AND WASHER
LOCKING PLATE #1
COLUMN

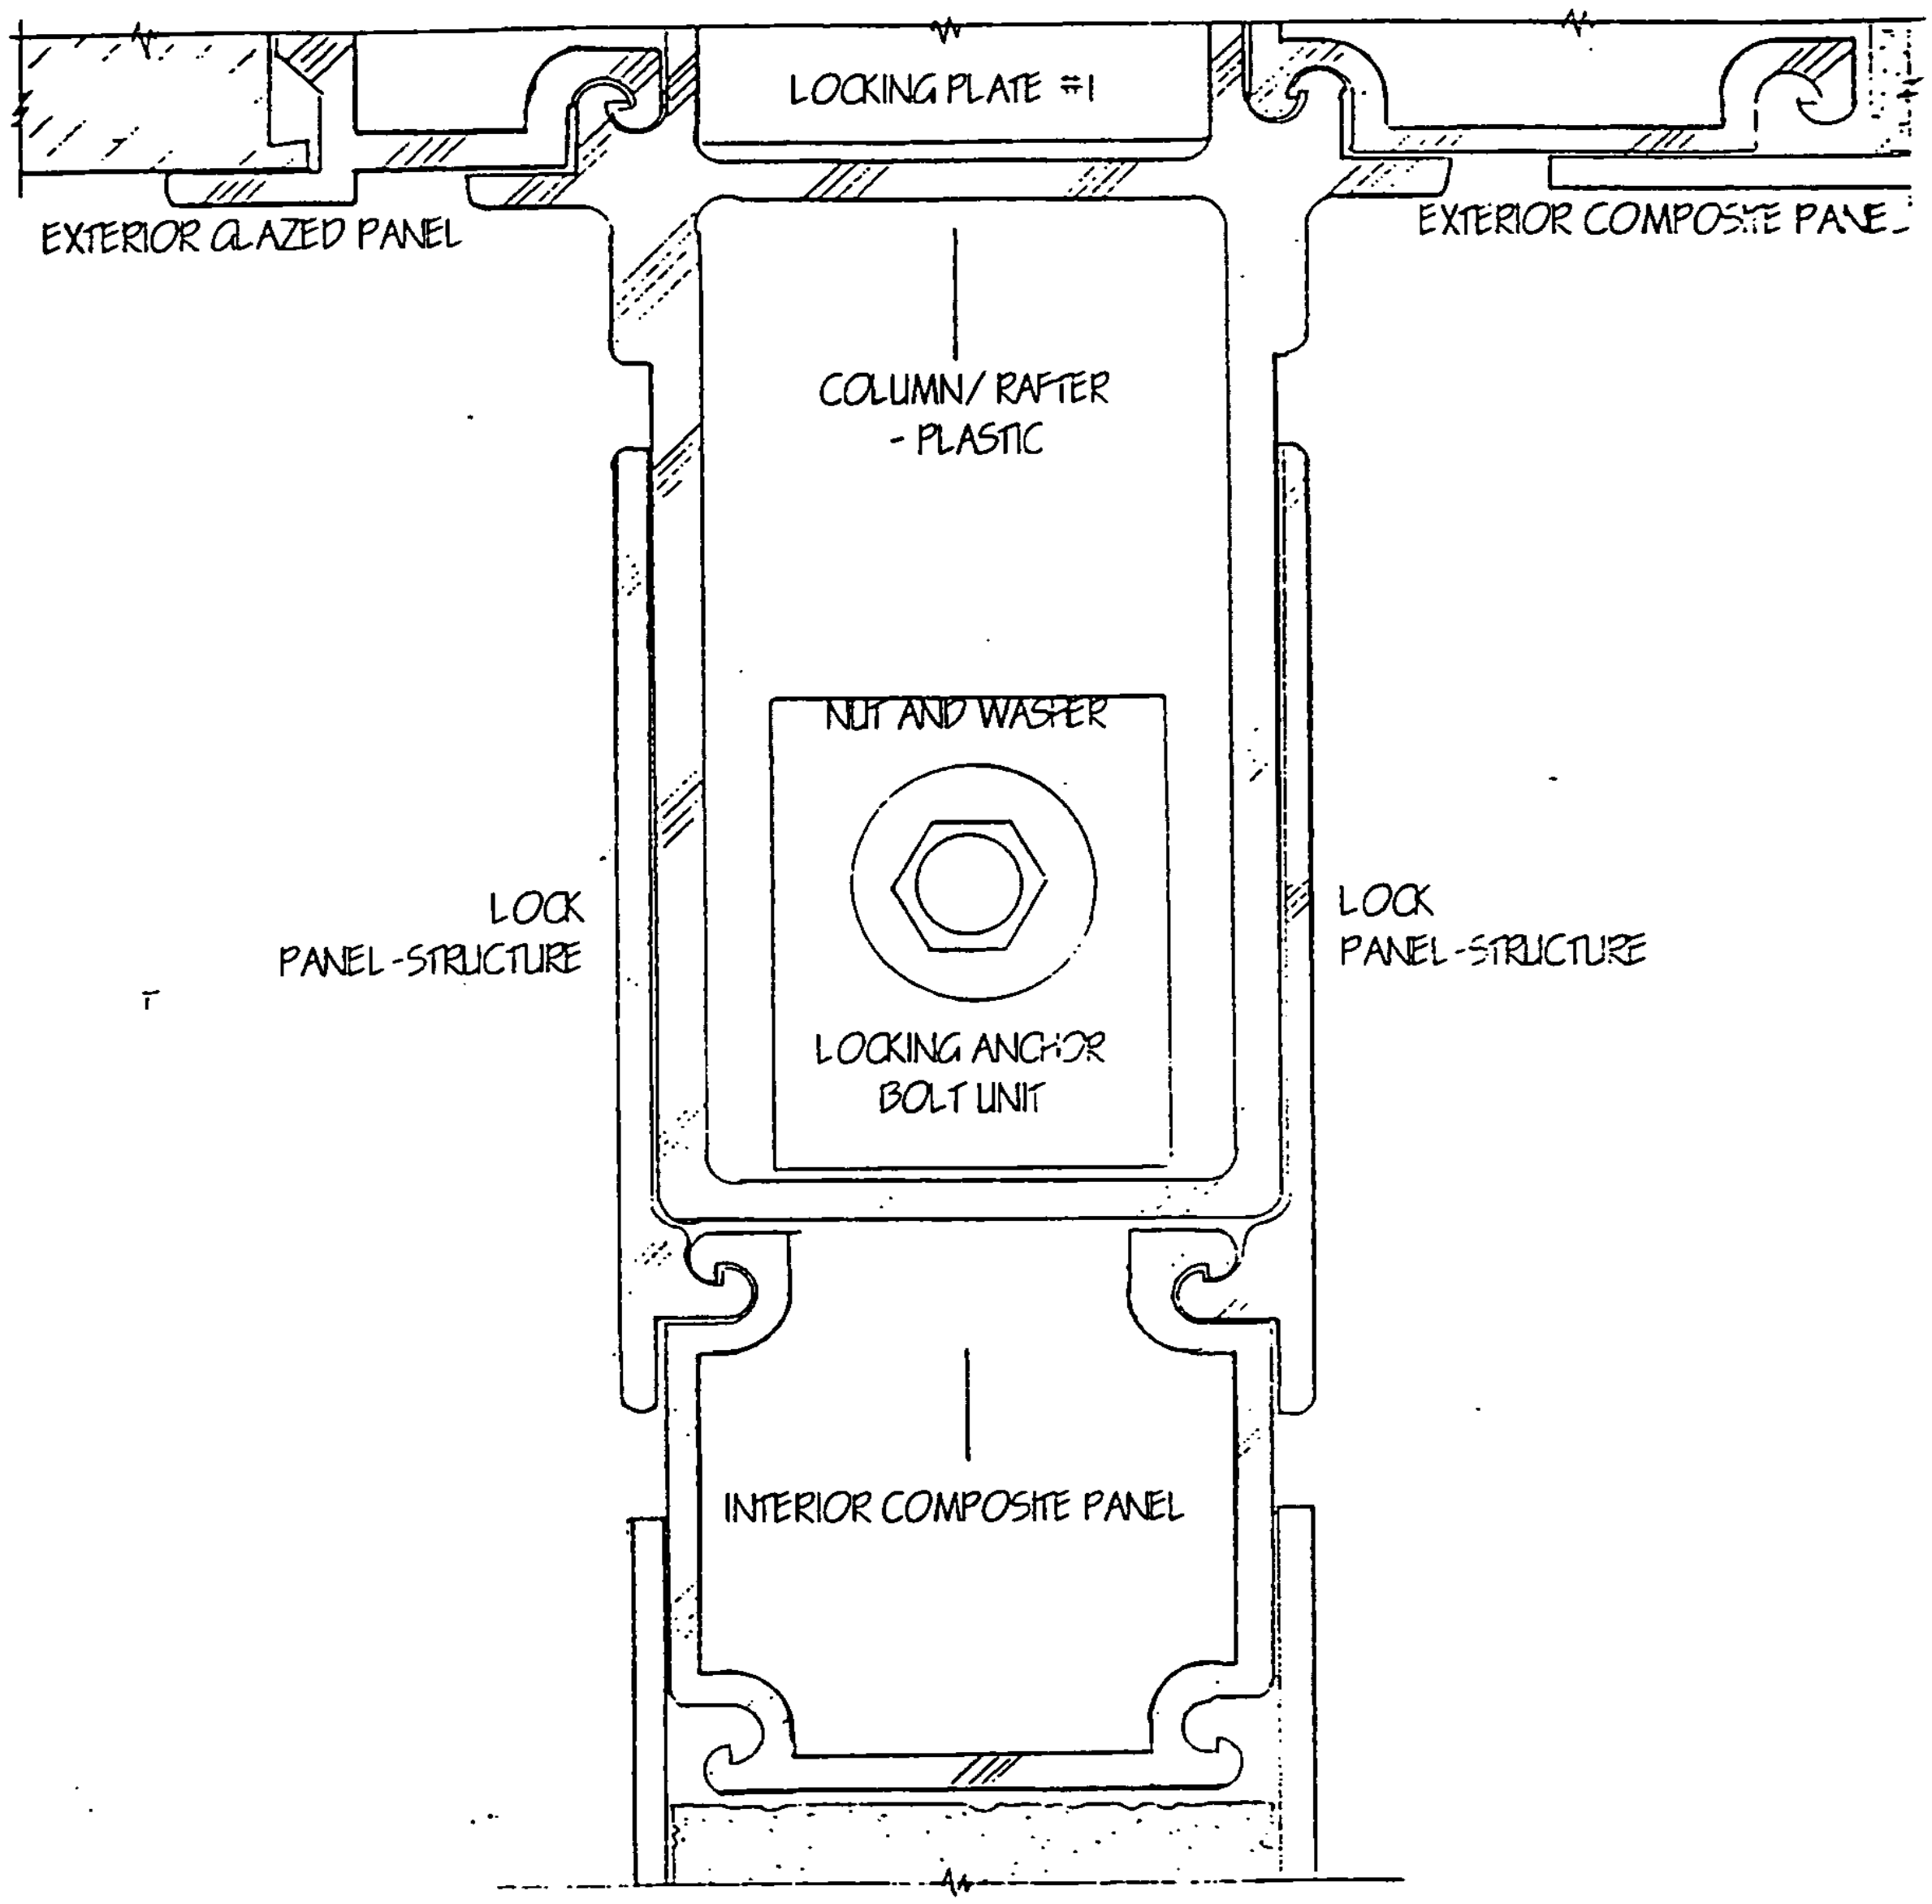
LOCKING PLATE #1
EXTERIOR GLAZED PANEL
EXTERIOR COMPOSITE PANEL
COLUMN/ RAFTER
- PLASTIC
NUT AND WASHER
LOCK
PANEL - STRUCTURE
LOCK
PANEL - STRUCTURE
LOCKING ANCHOR
BOLT UNIT
INTERIOR COMPOSITE PANEL

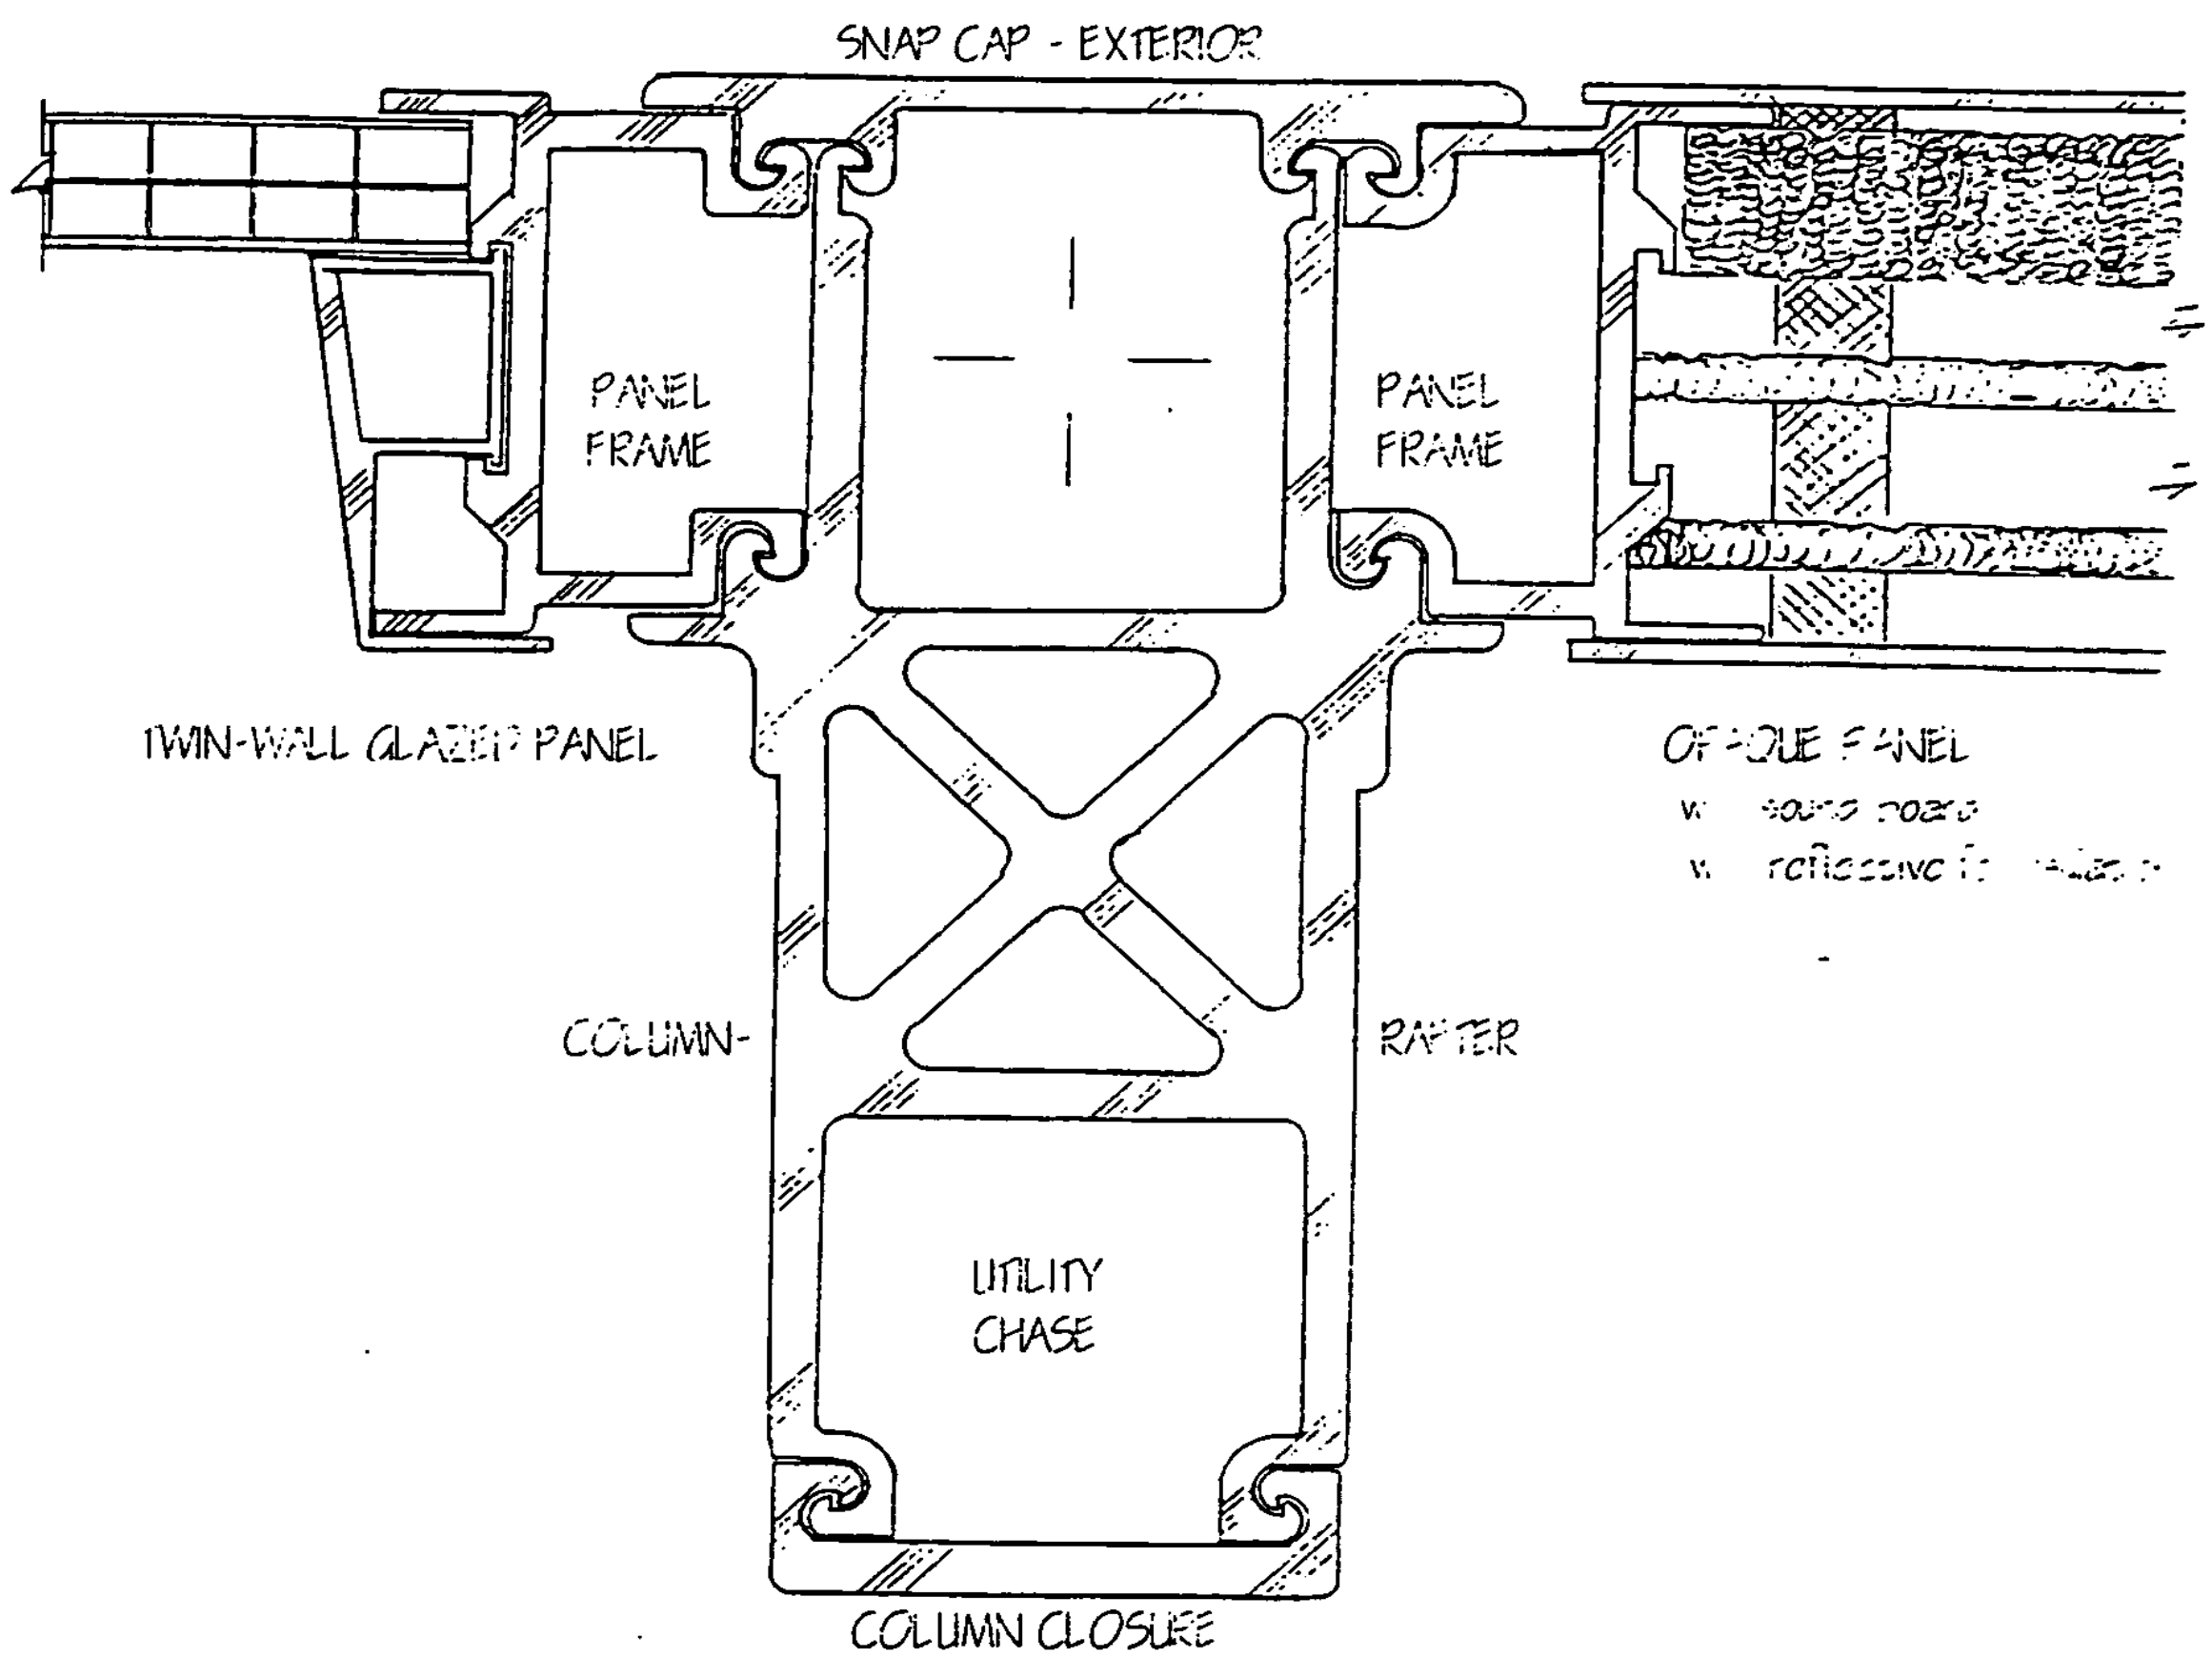
SNAP CAP - EXTERIOR
PANEL FRAME
PANEL FRAME
COLUMN-
UTILITY CHASE
COLUMN CLOSURE

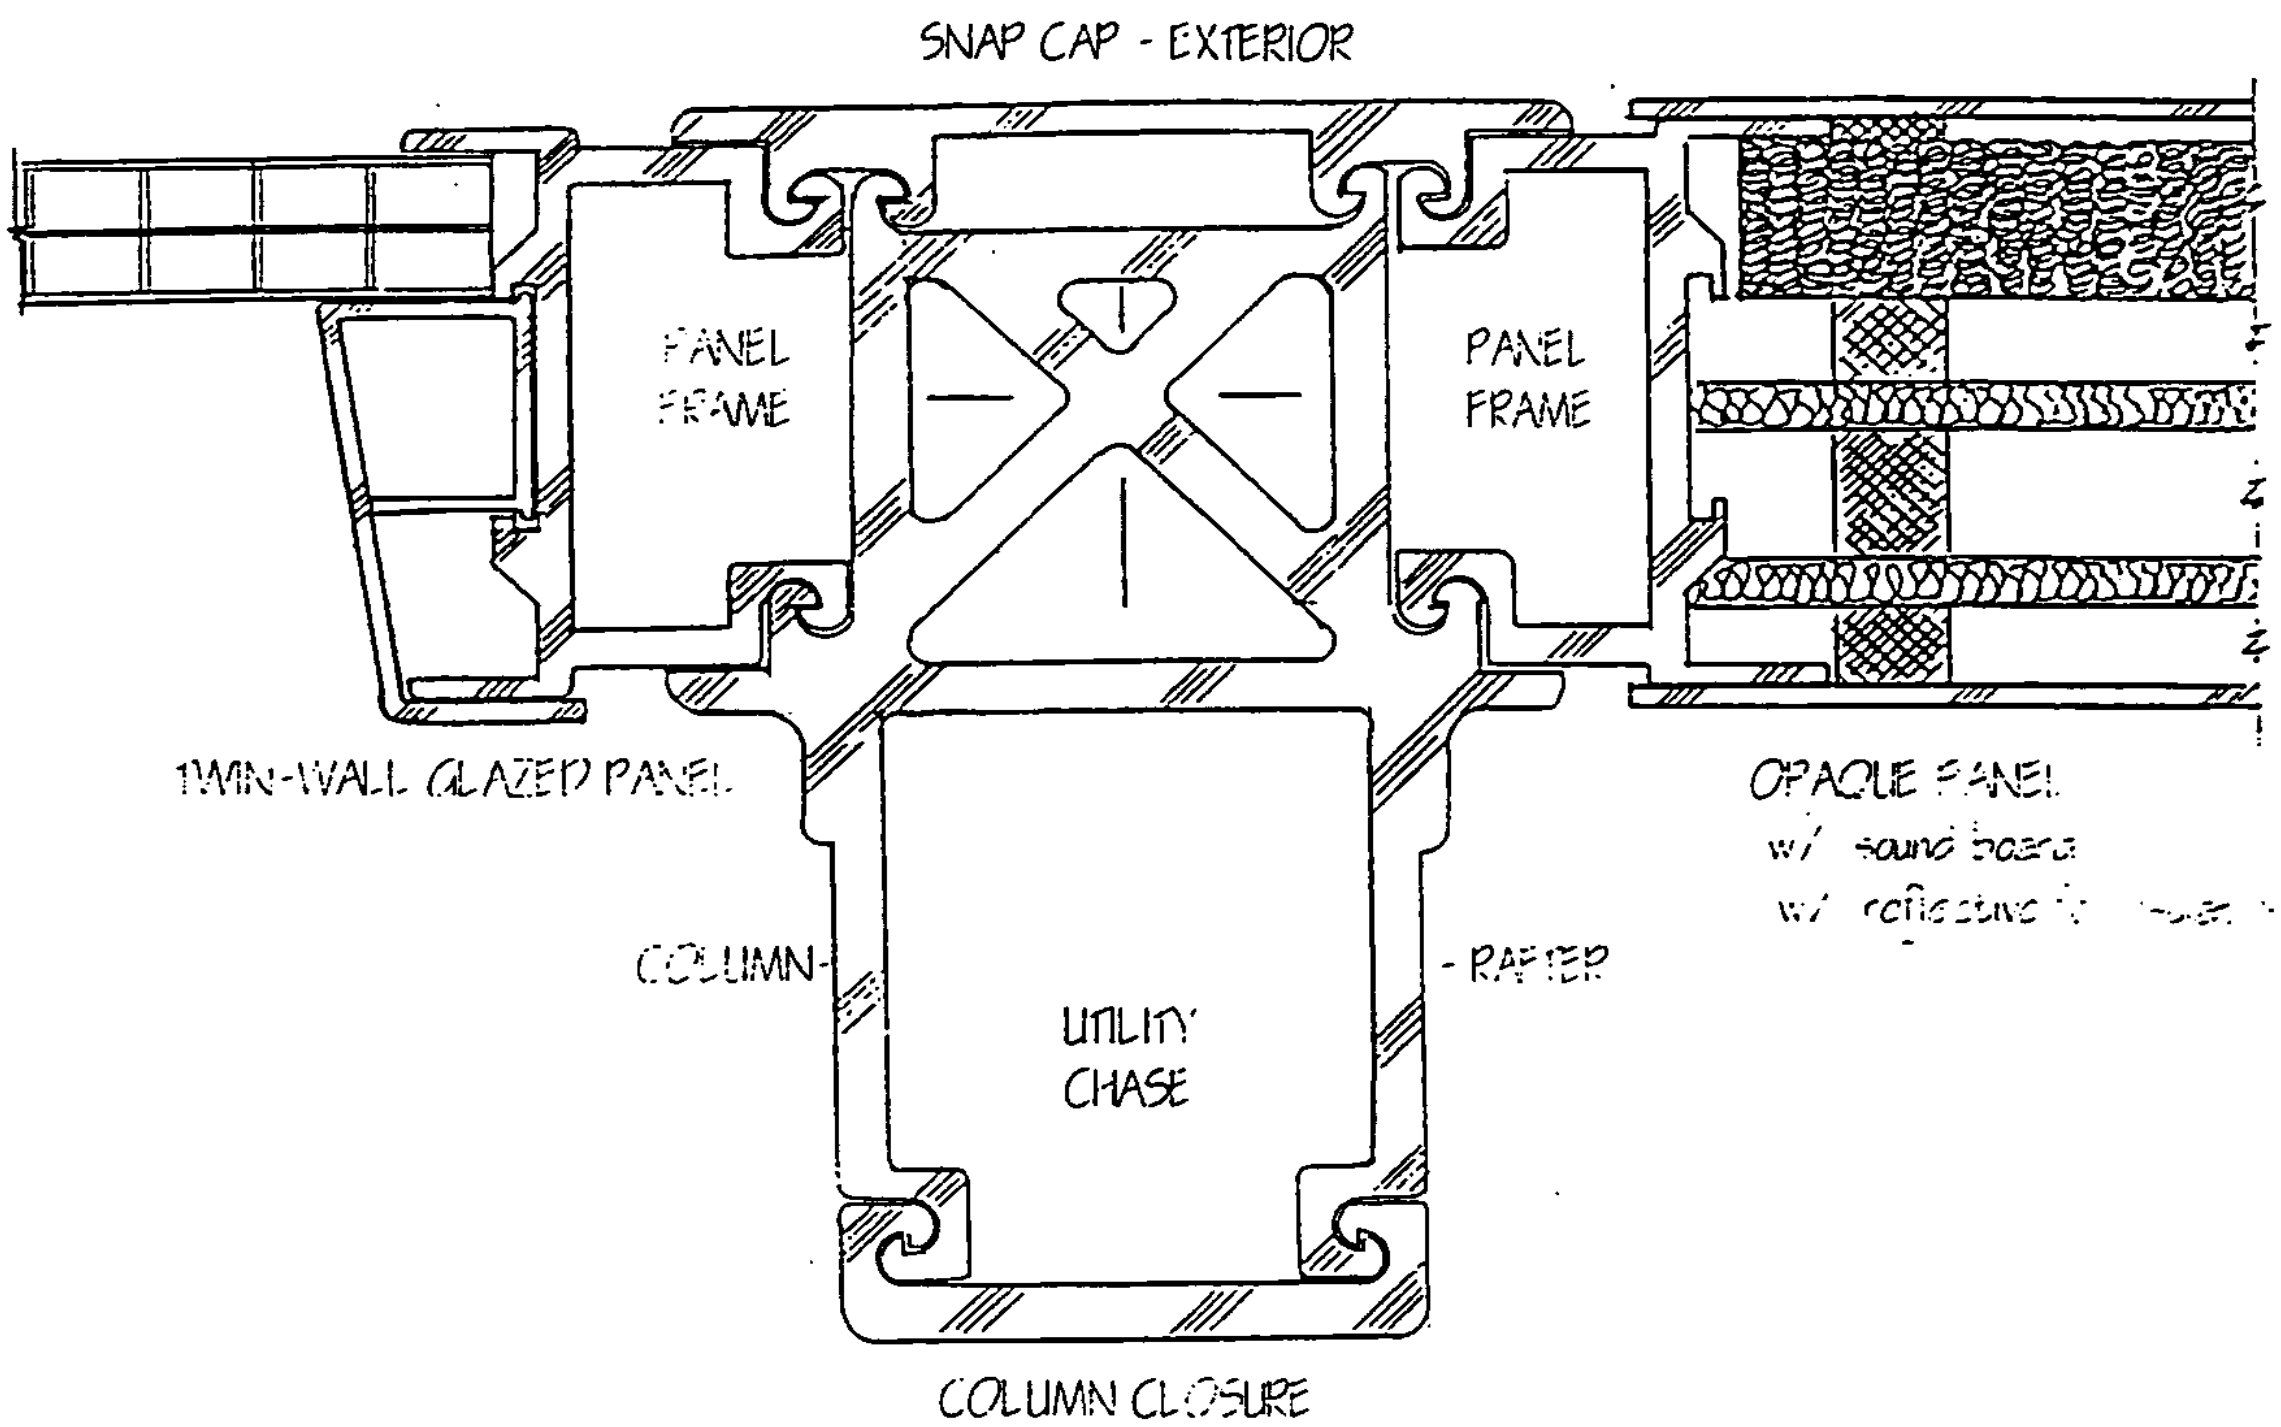
SNAP CAP - EXTERIOR
PANEL FRAME
PANEL FRAME
TWIN-WALL GLAZED PANEL
OPAQUE PANEL
w/ sound board
COLUMN
RAFTER
UTILITY CHASE
COLUMN CLOSURE

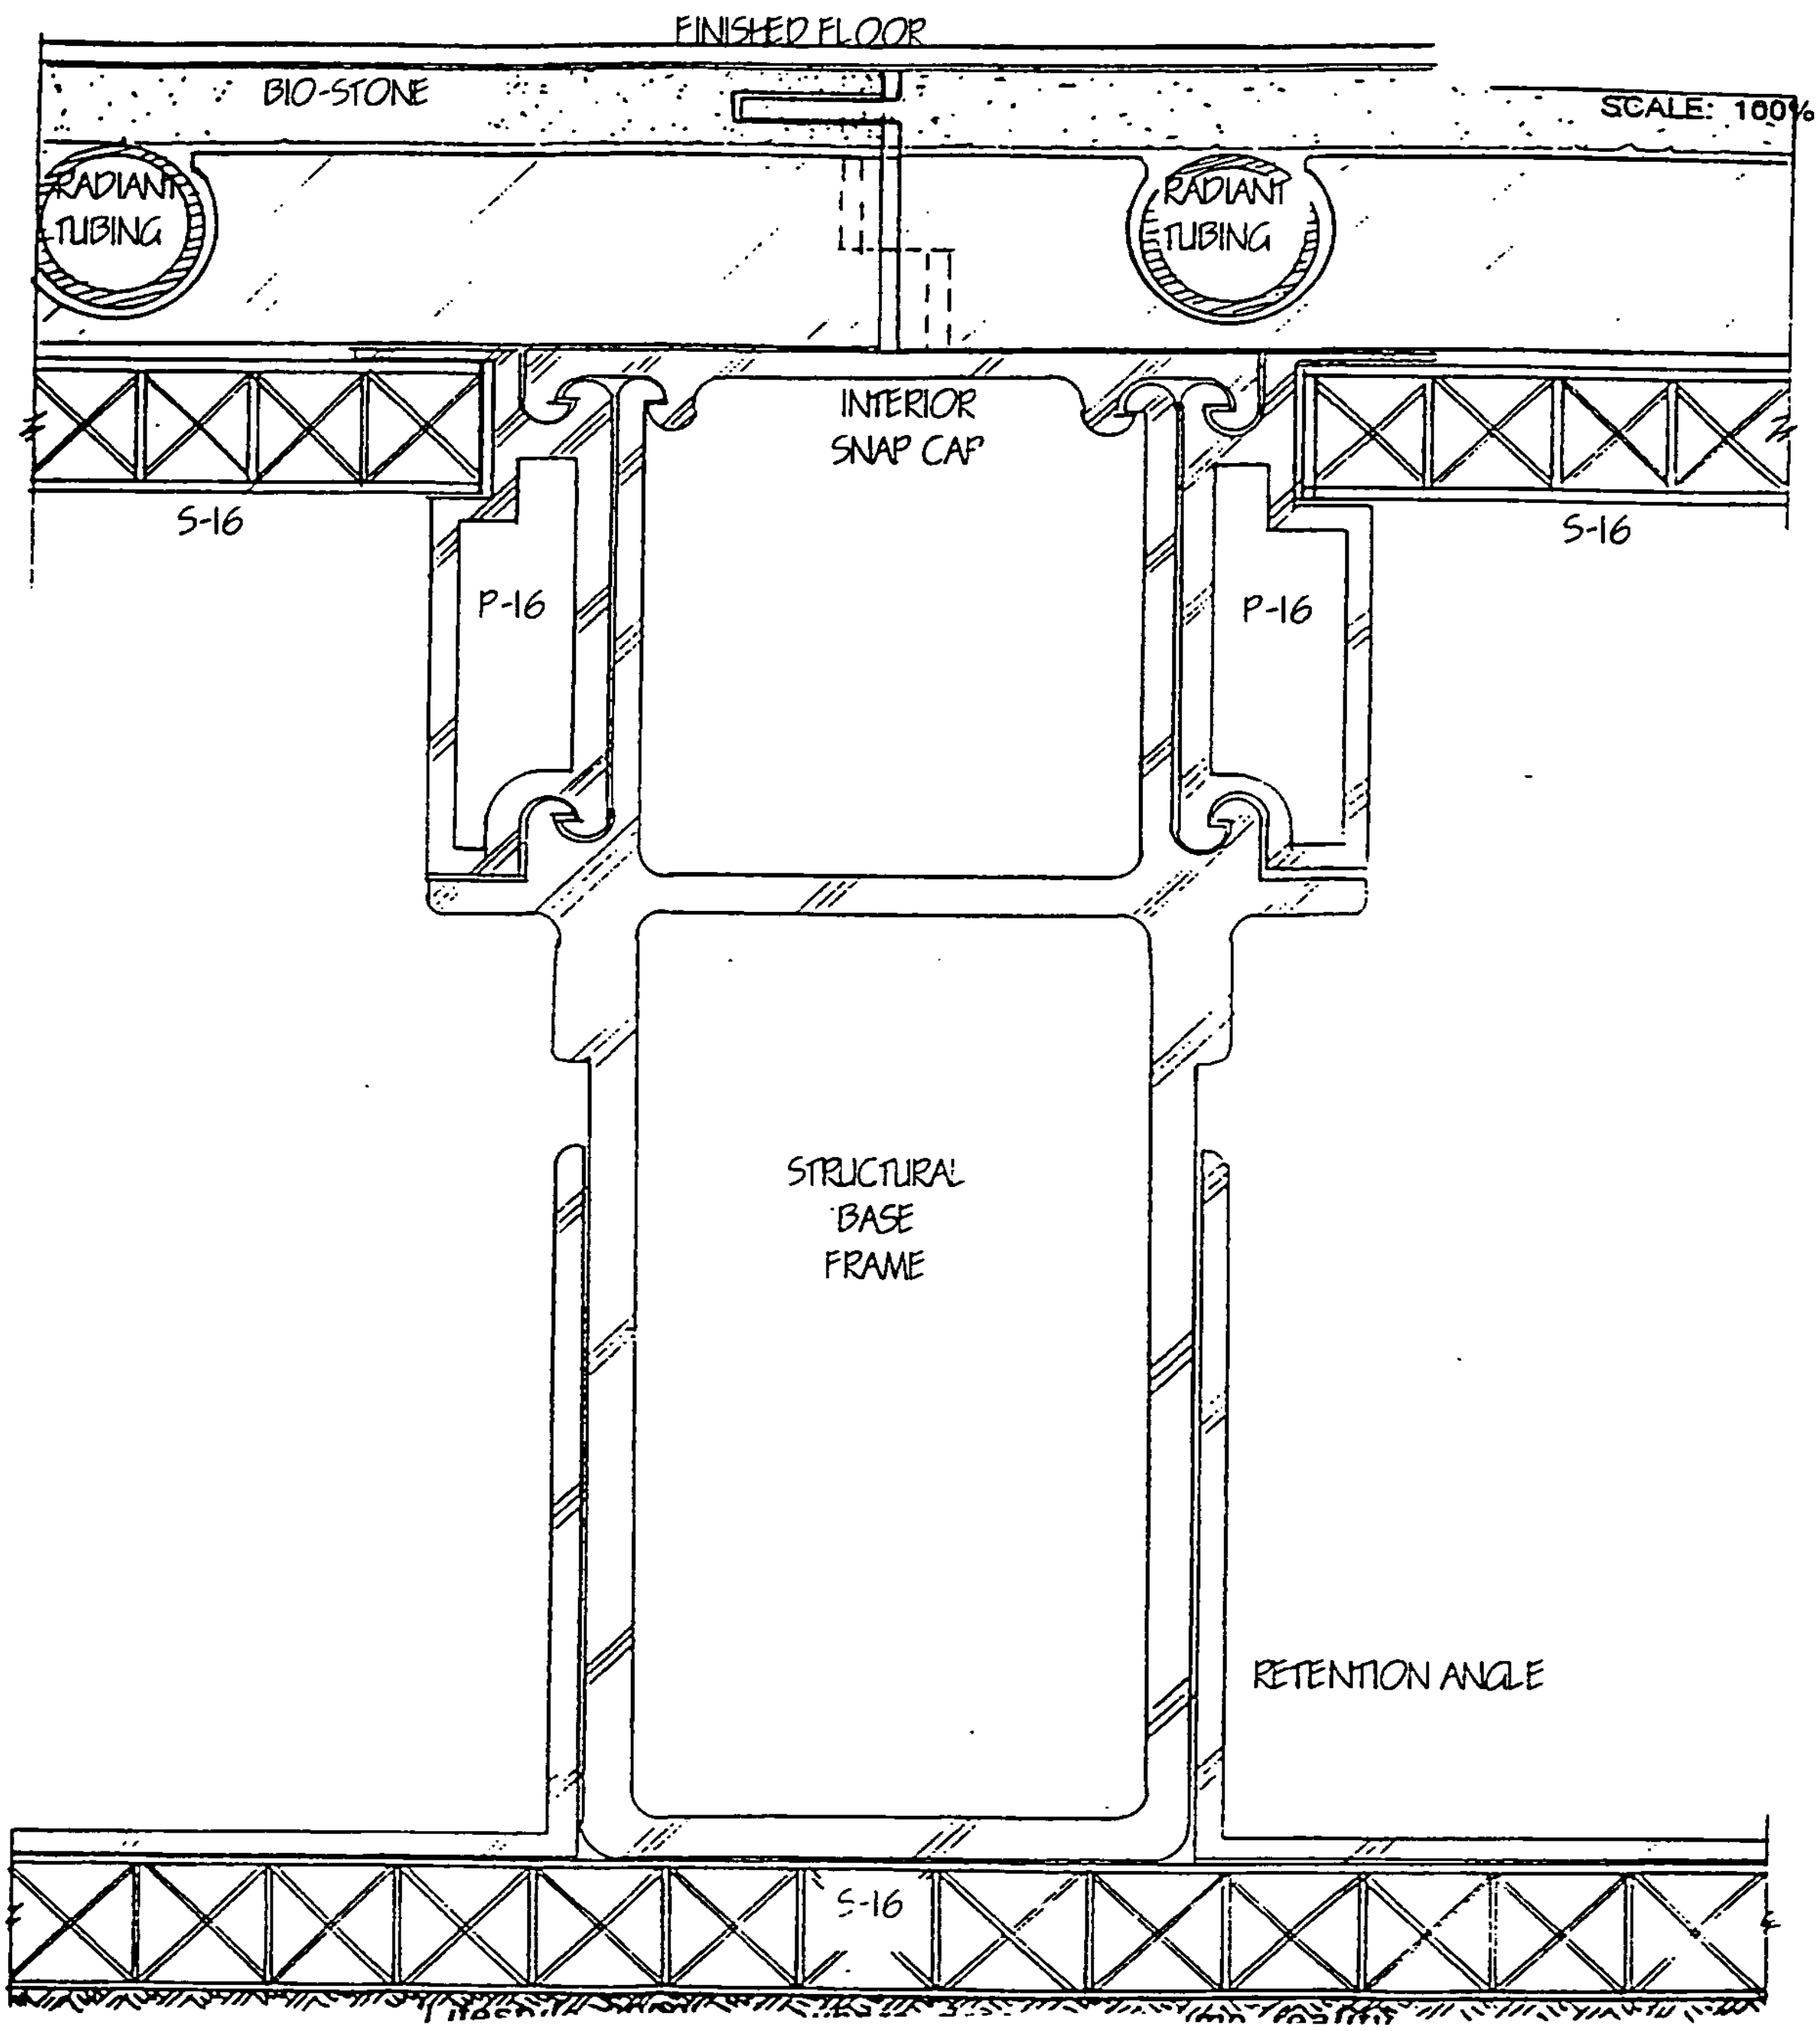
FINISHED FLOOR
BIO-STONE
SCALE: 100%
RADIANT TUBING
RADIANT TUBING
INTERIOR SNAP CAP
S-16
S-16
P-16
P-16
STRUCTURAL BASE FRAME
RETENTION ANGLE
S-16

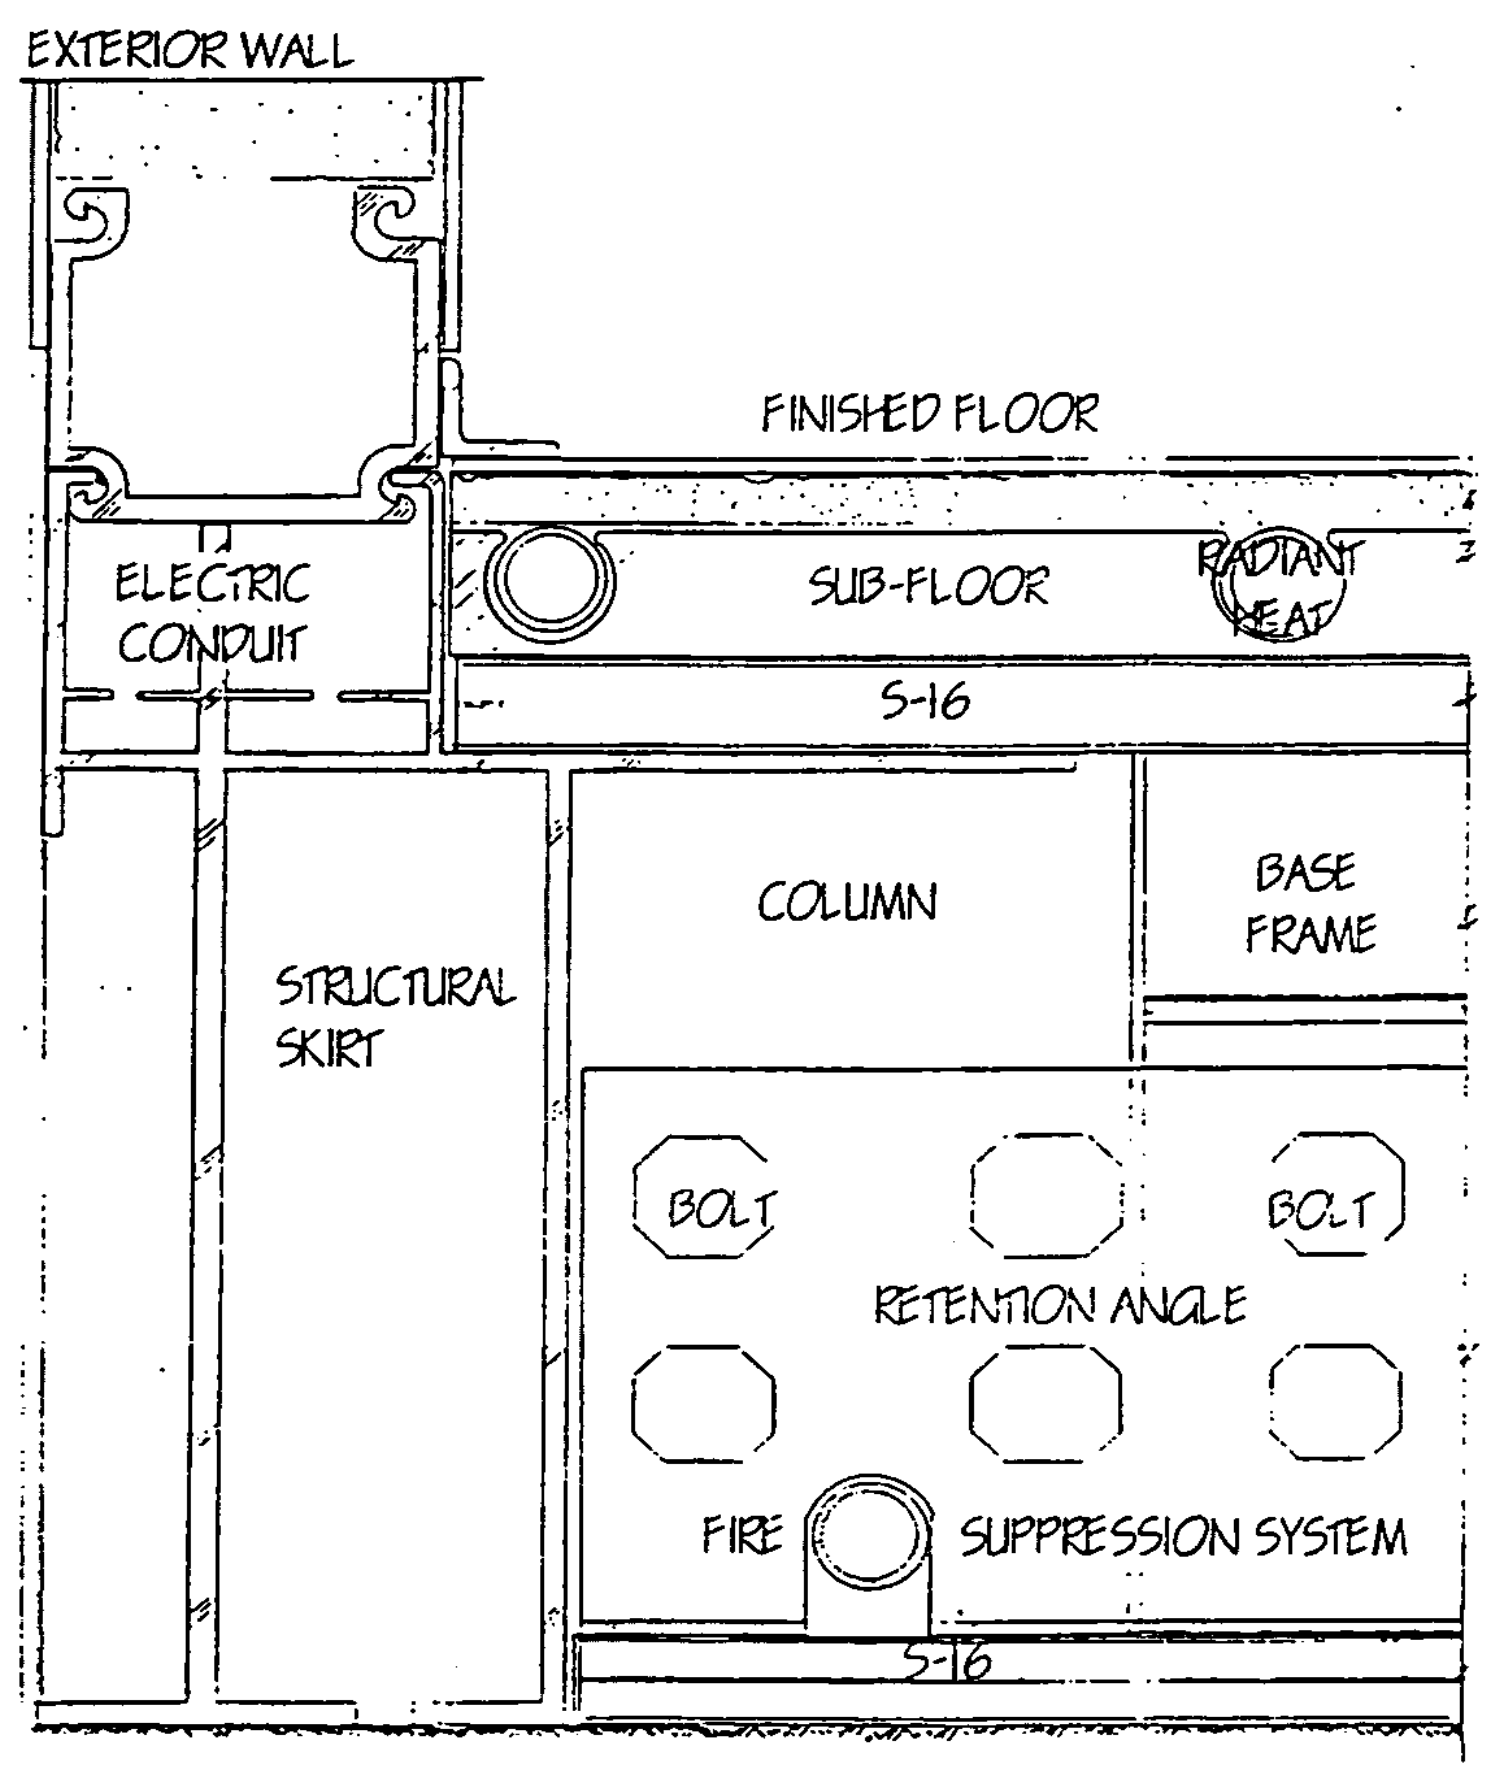
EXTERIOR WALL
FINISHED FLOOR
ELECTRIC CONDUIT
SUB-FLOOR
RADIANT HEAT
S-16
COLUMN
BASE FRAME
STRUCTURAL SKIRT
BOLT
BOLT
RETENTION ANGLE
FIRE
SUPPRESSION SYSTEM
S-16

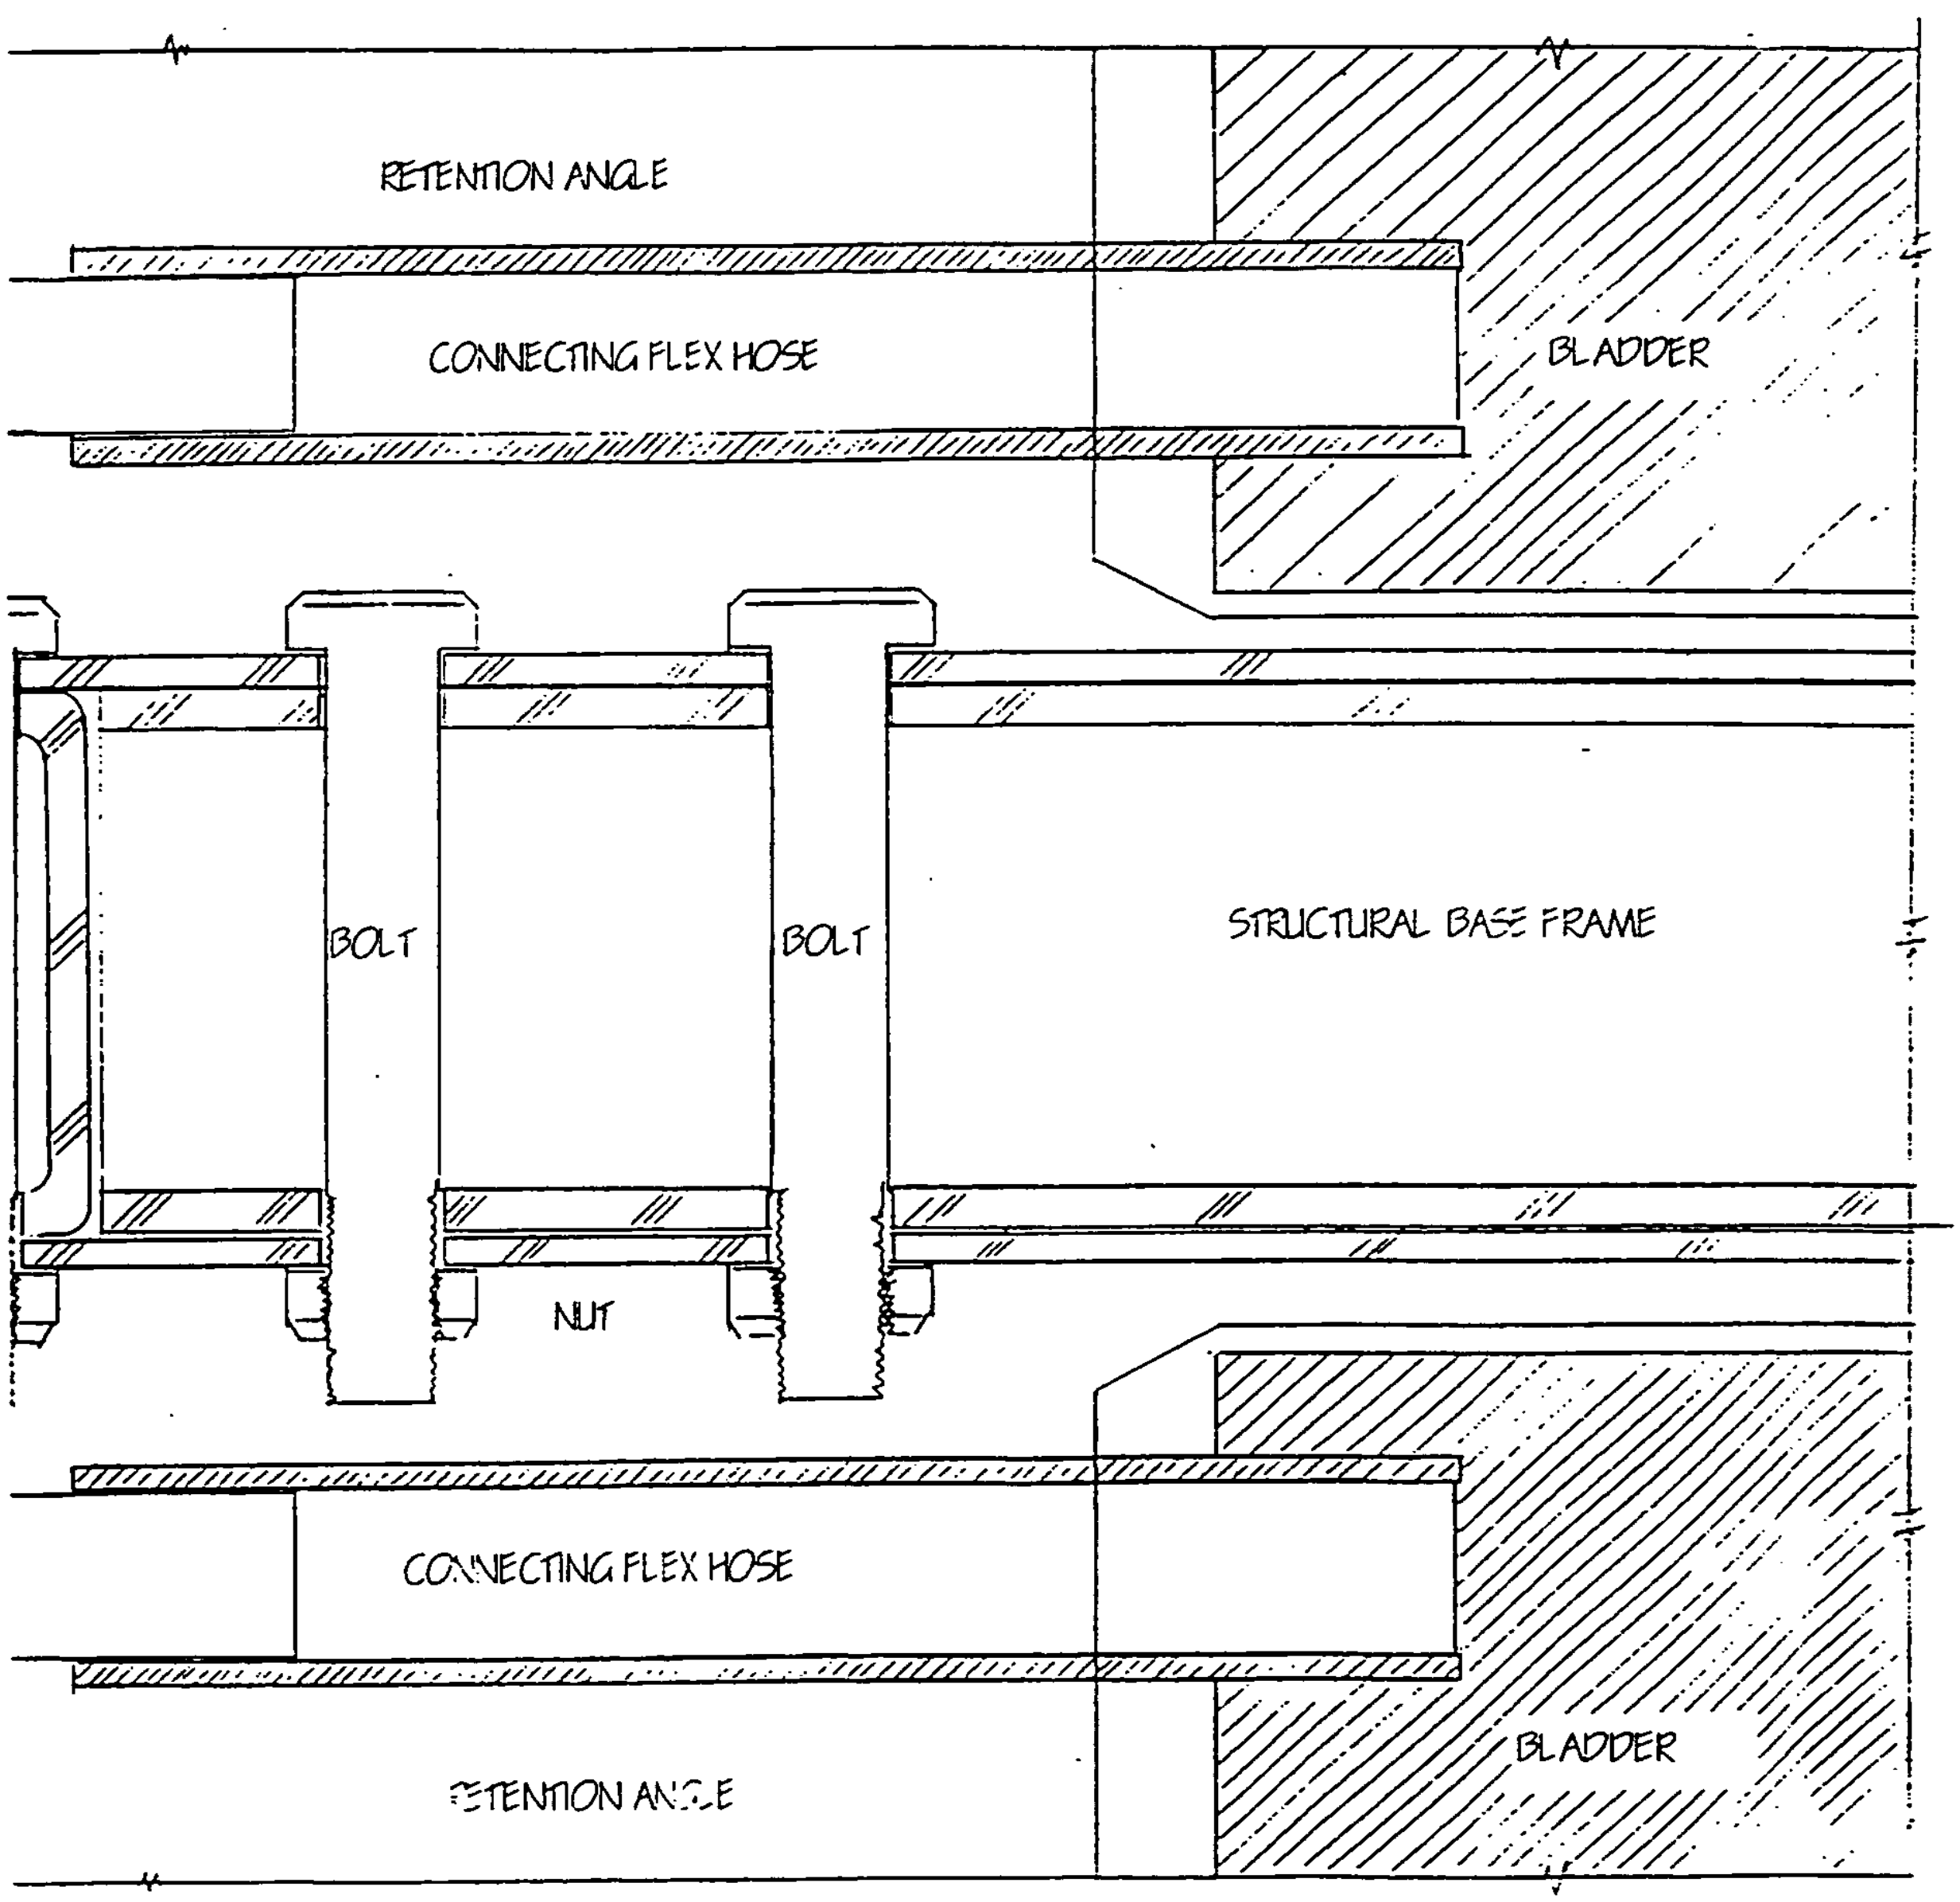
RETENTION ANGLE
CONNECTING FLEX HOSE
BLADDER
BOLT
BOLT
STRUCTURAL BASE FRAME
NUT
CONNECTING FLEX HOSE
BLADDER
RETENTION ANGLE

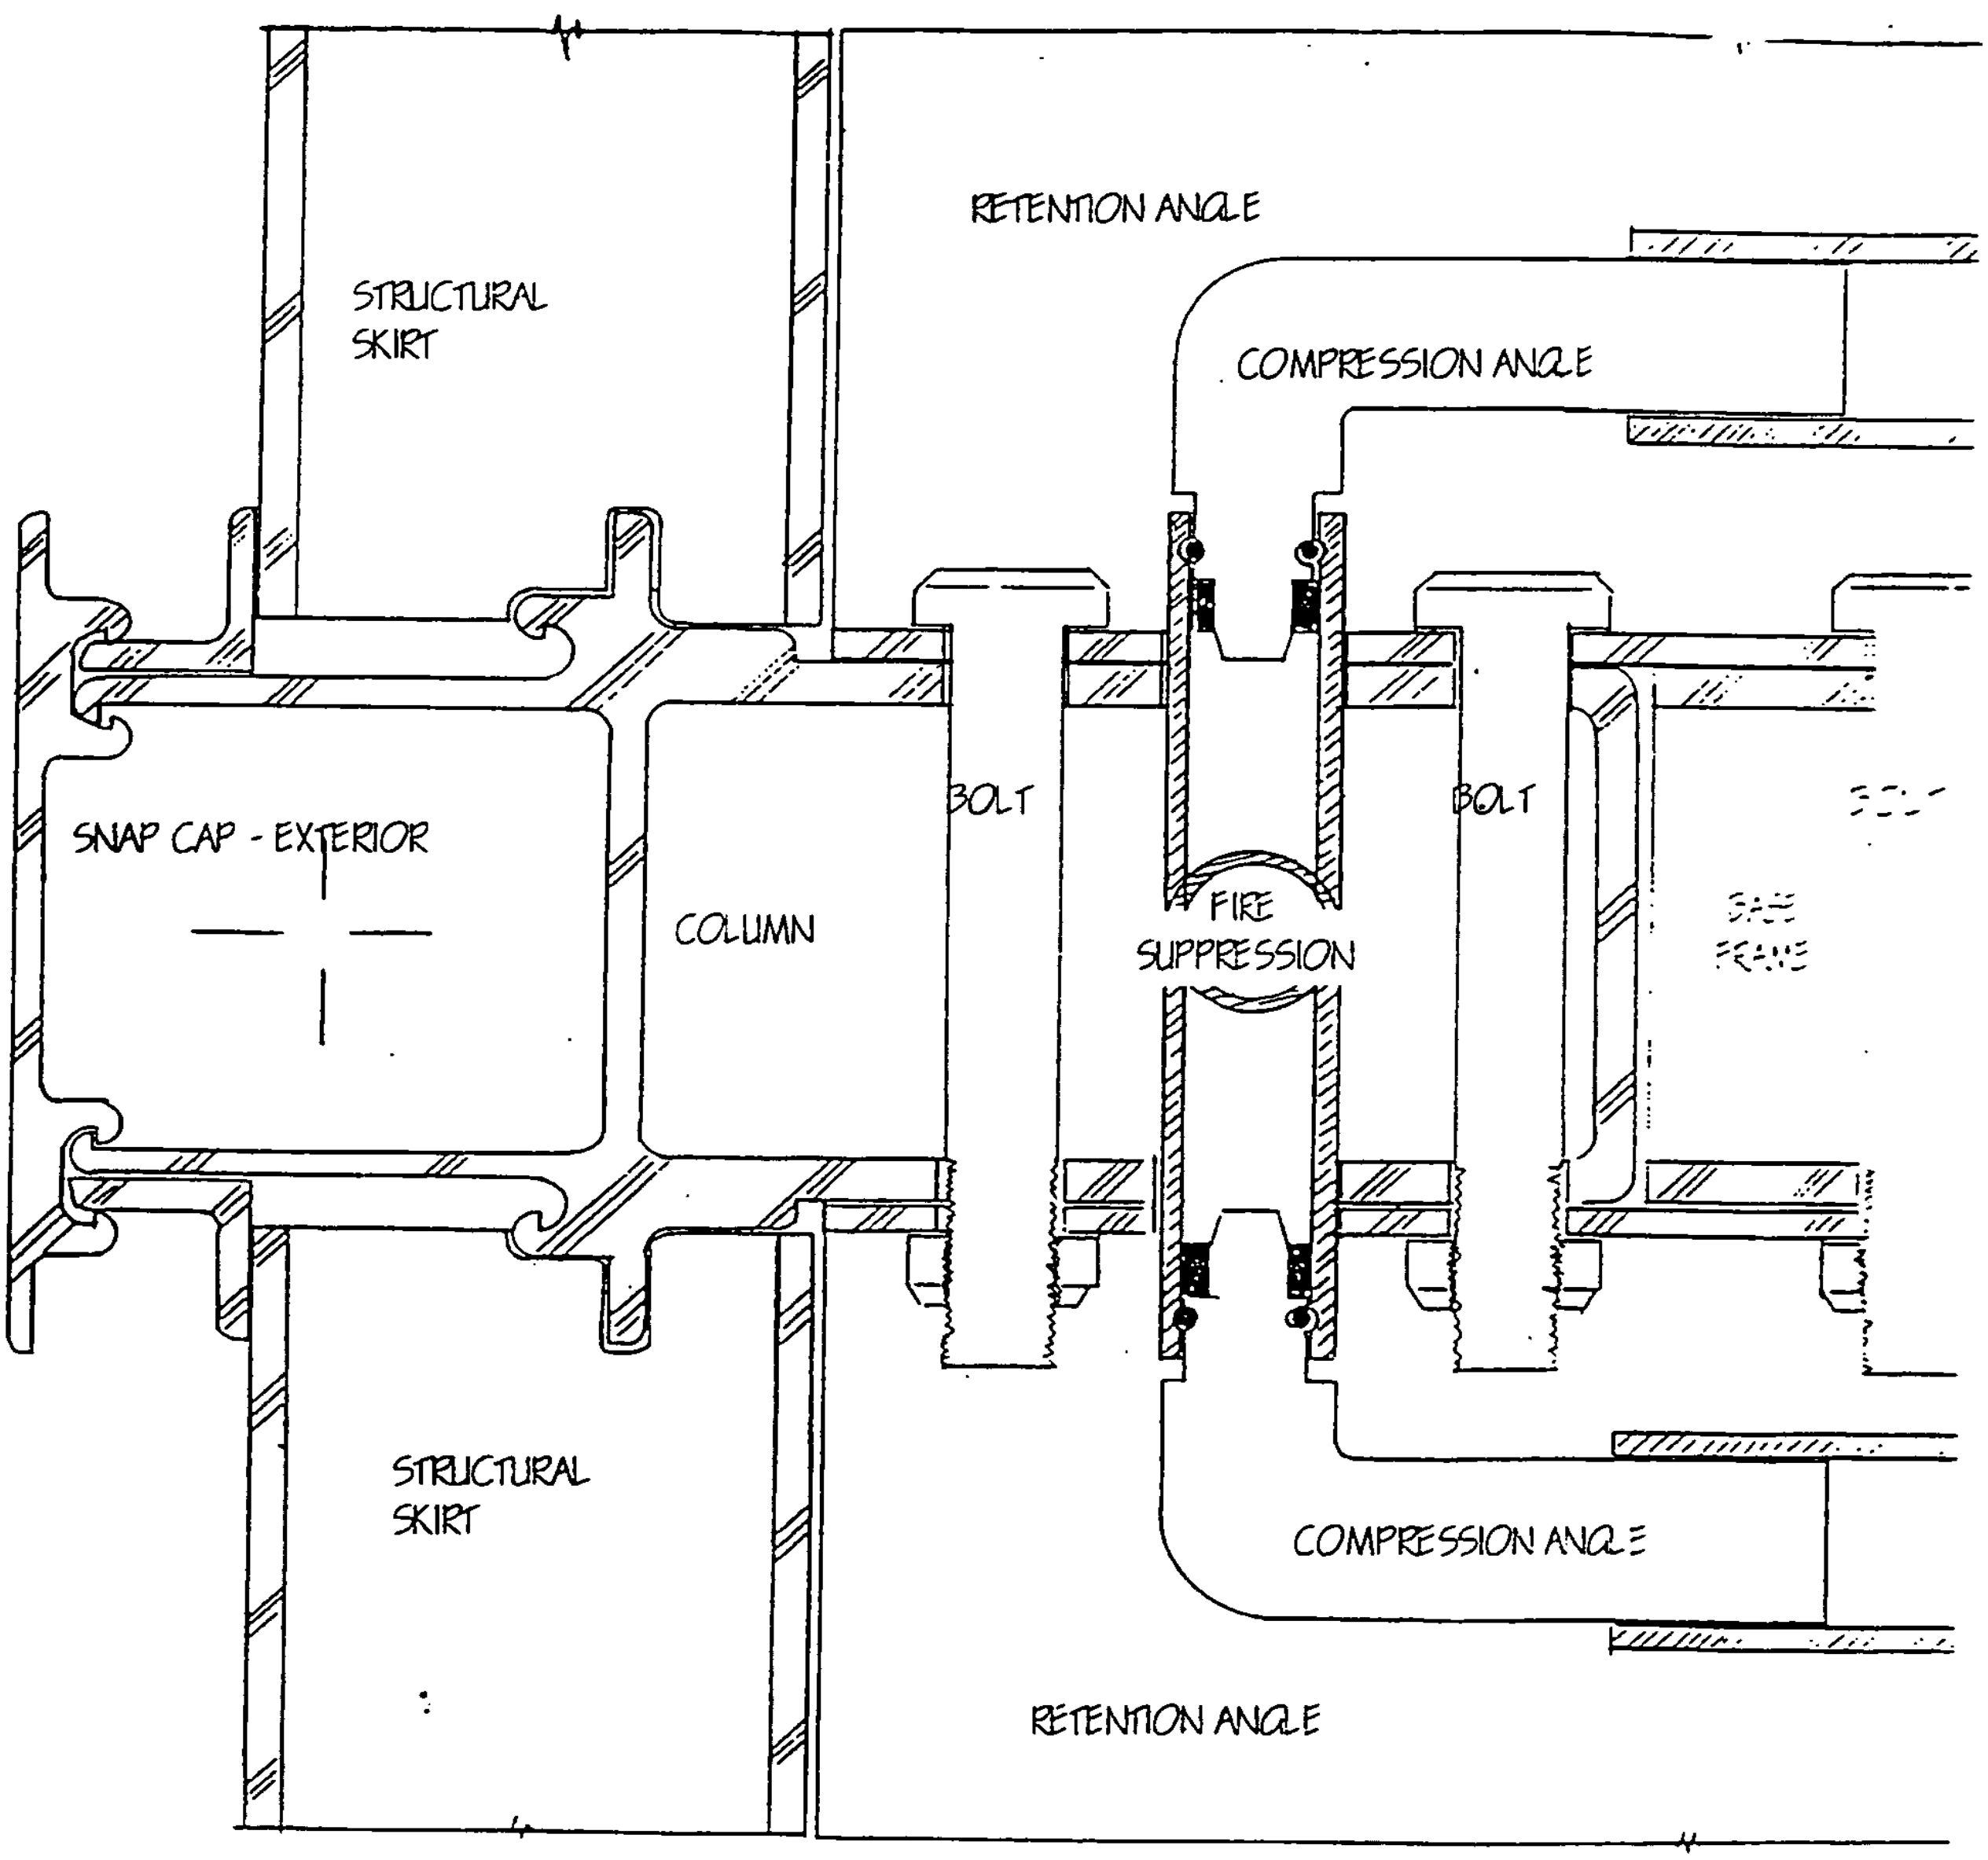
RETENTION ANGLE
STRUCTURAL SKIRT
COMPRESSION ANGLE
BOLT
BOLT
SNAP CAP - EXTERIOR
COLUMN
FIRE SUPPRESSION
STRUCTURAL SKIRT
COMPRESSION ANGLE
RETENTION ANGLE

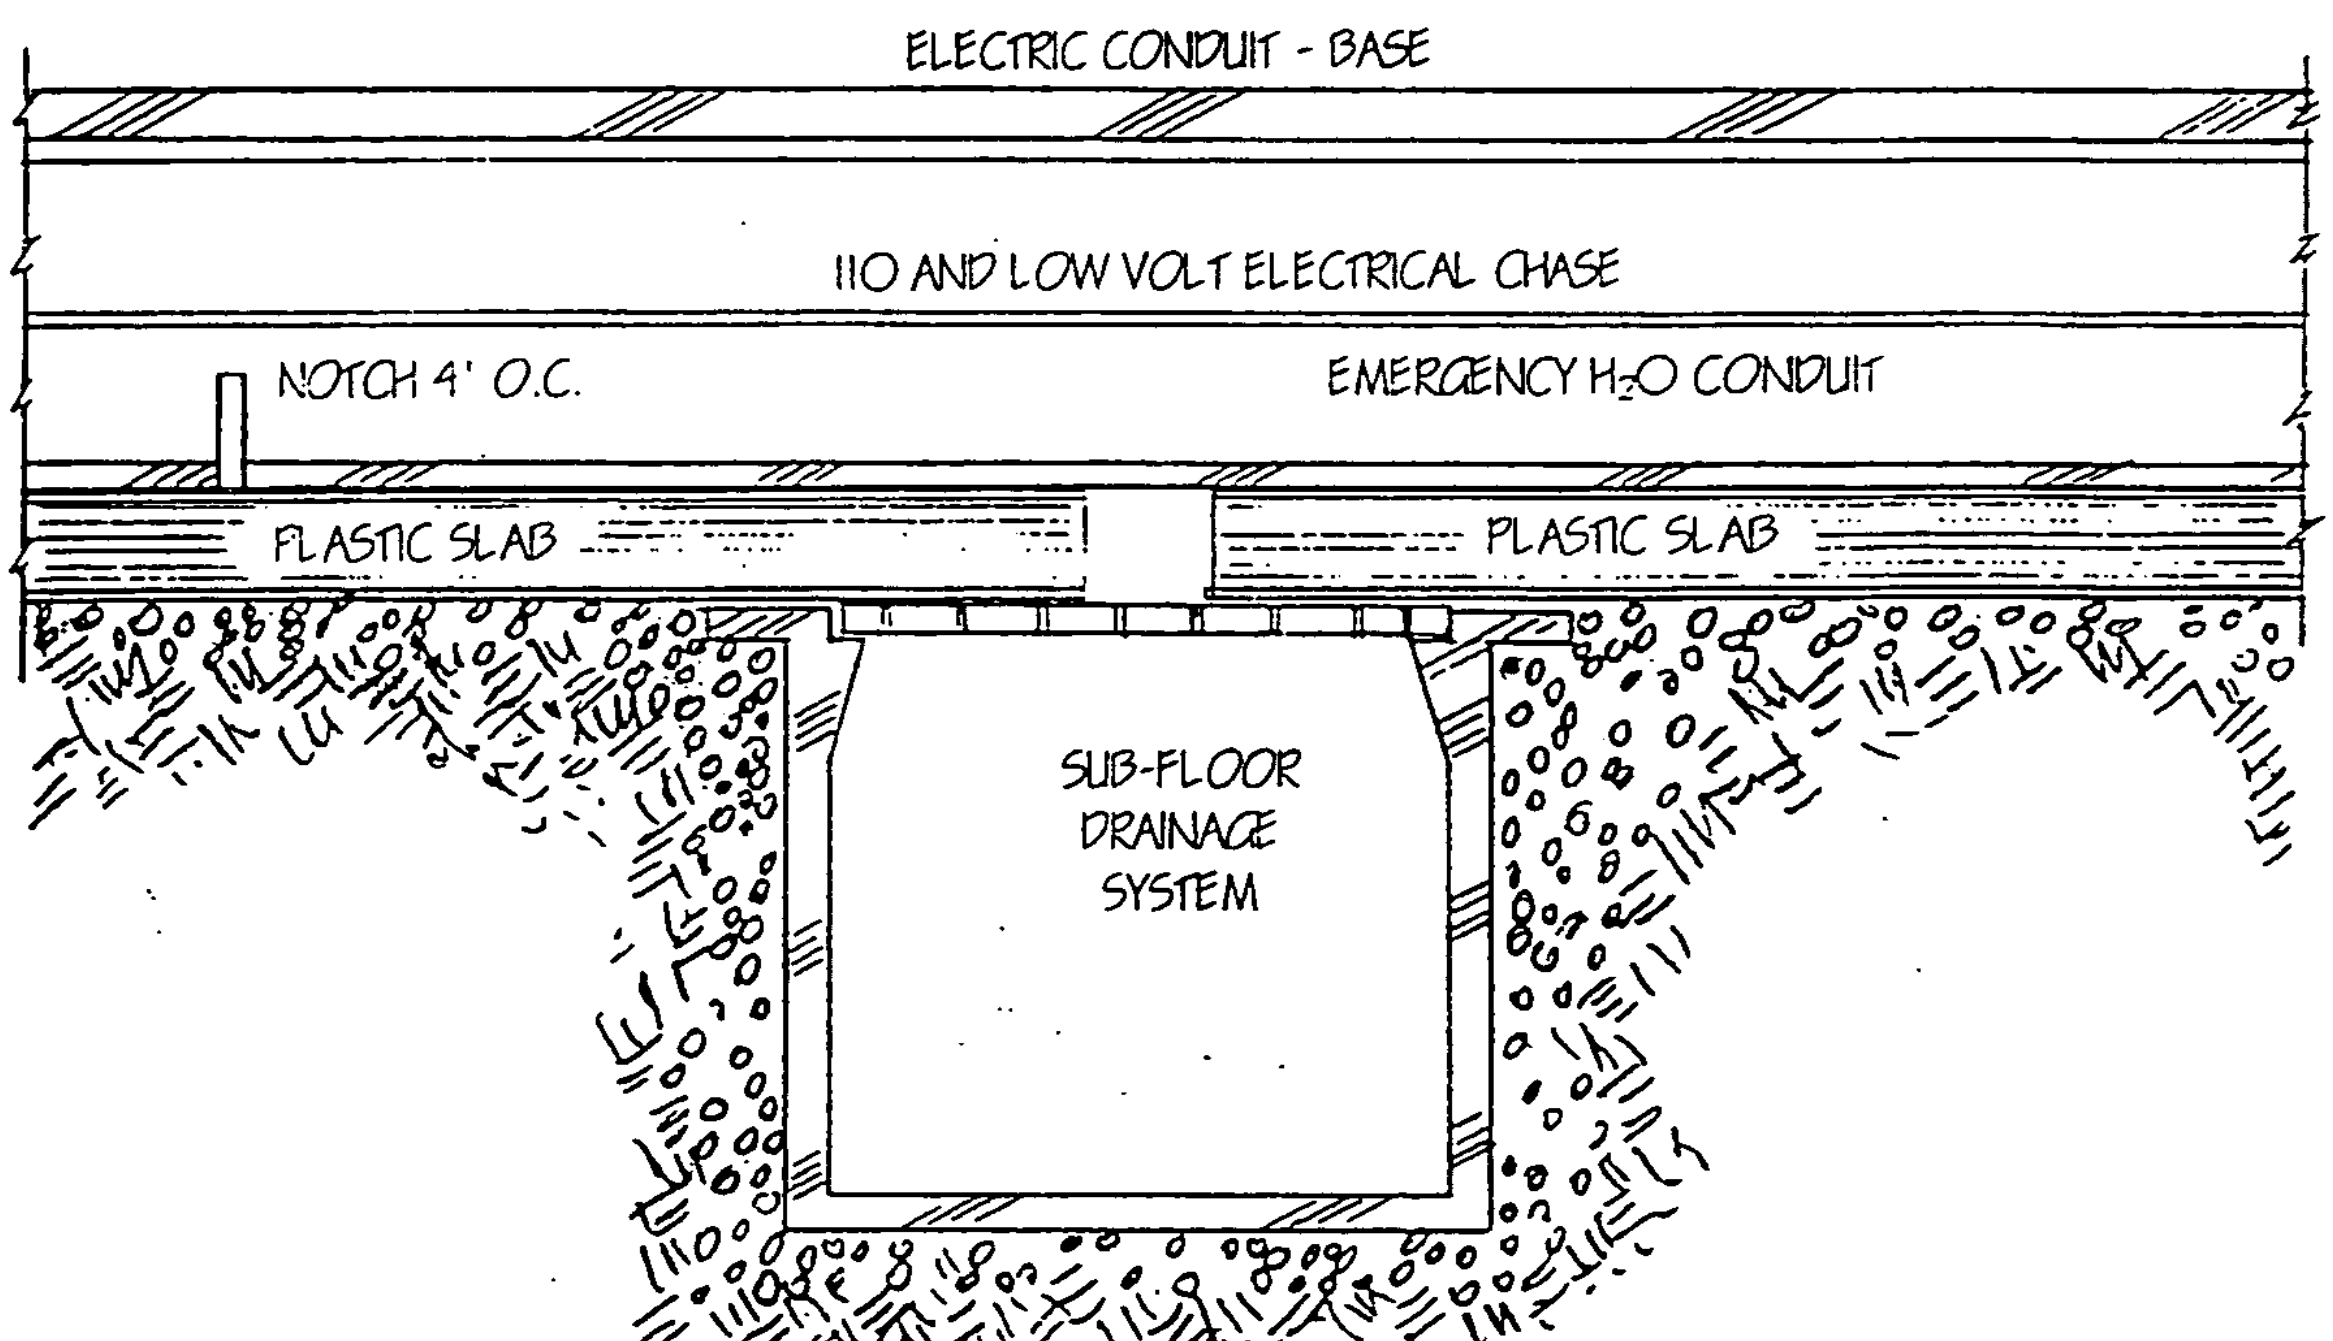
ELECTRIC CONDUIT - BASE
110 AND LOW VOLT ELECTRICAL CHASE
NOTCH 4' O.C.
EMERGENCY H2O CONDUIT
PLASTIC SLAB
PLASTIC SLAB
SUB-FLOOR
DRAINAGE
SYSTEM

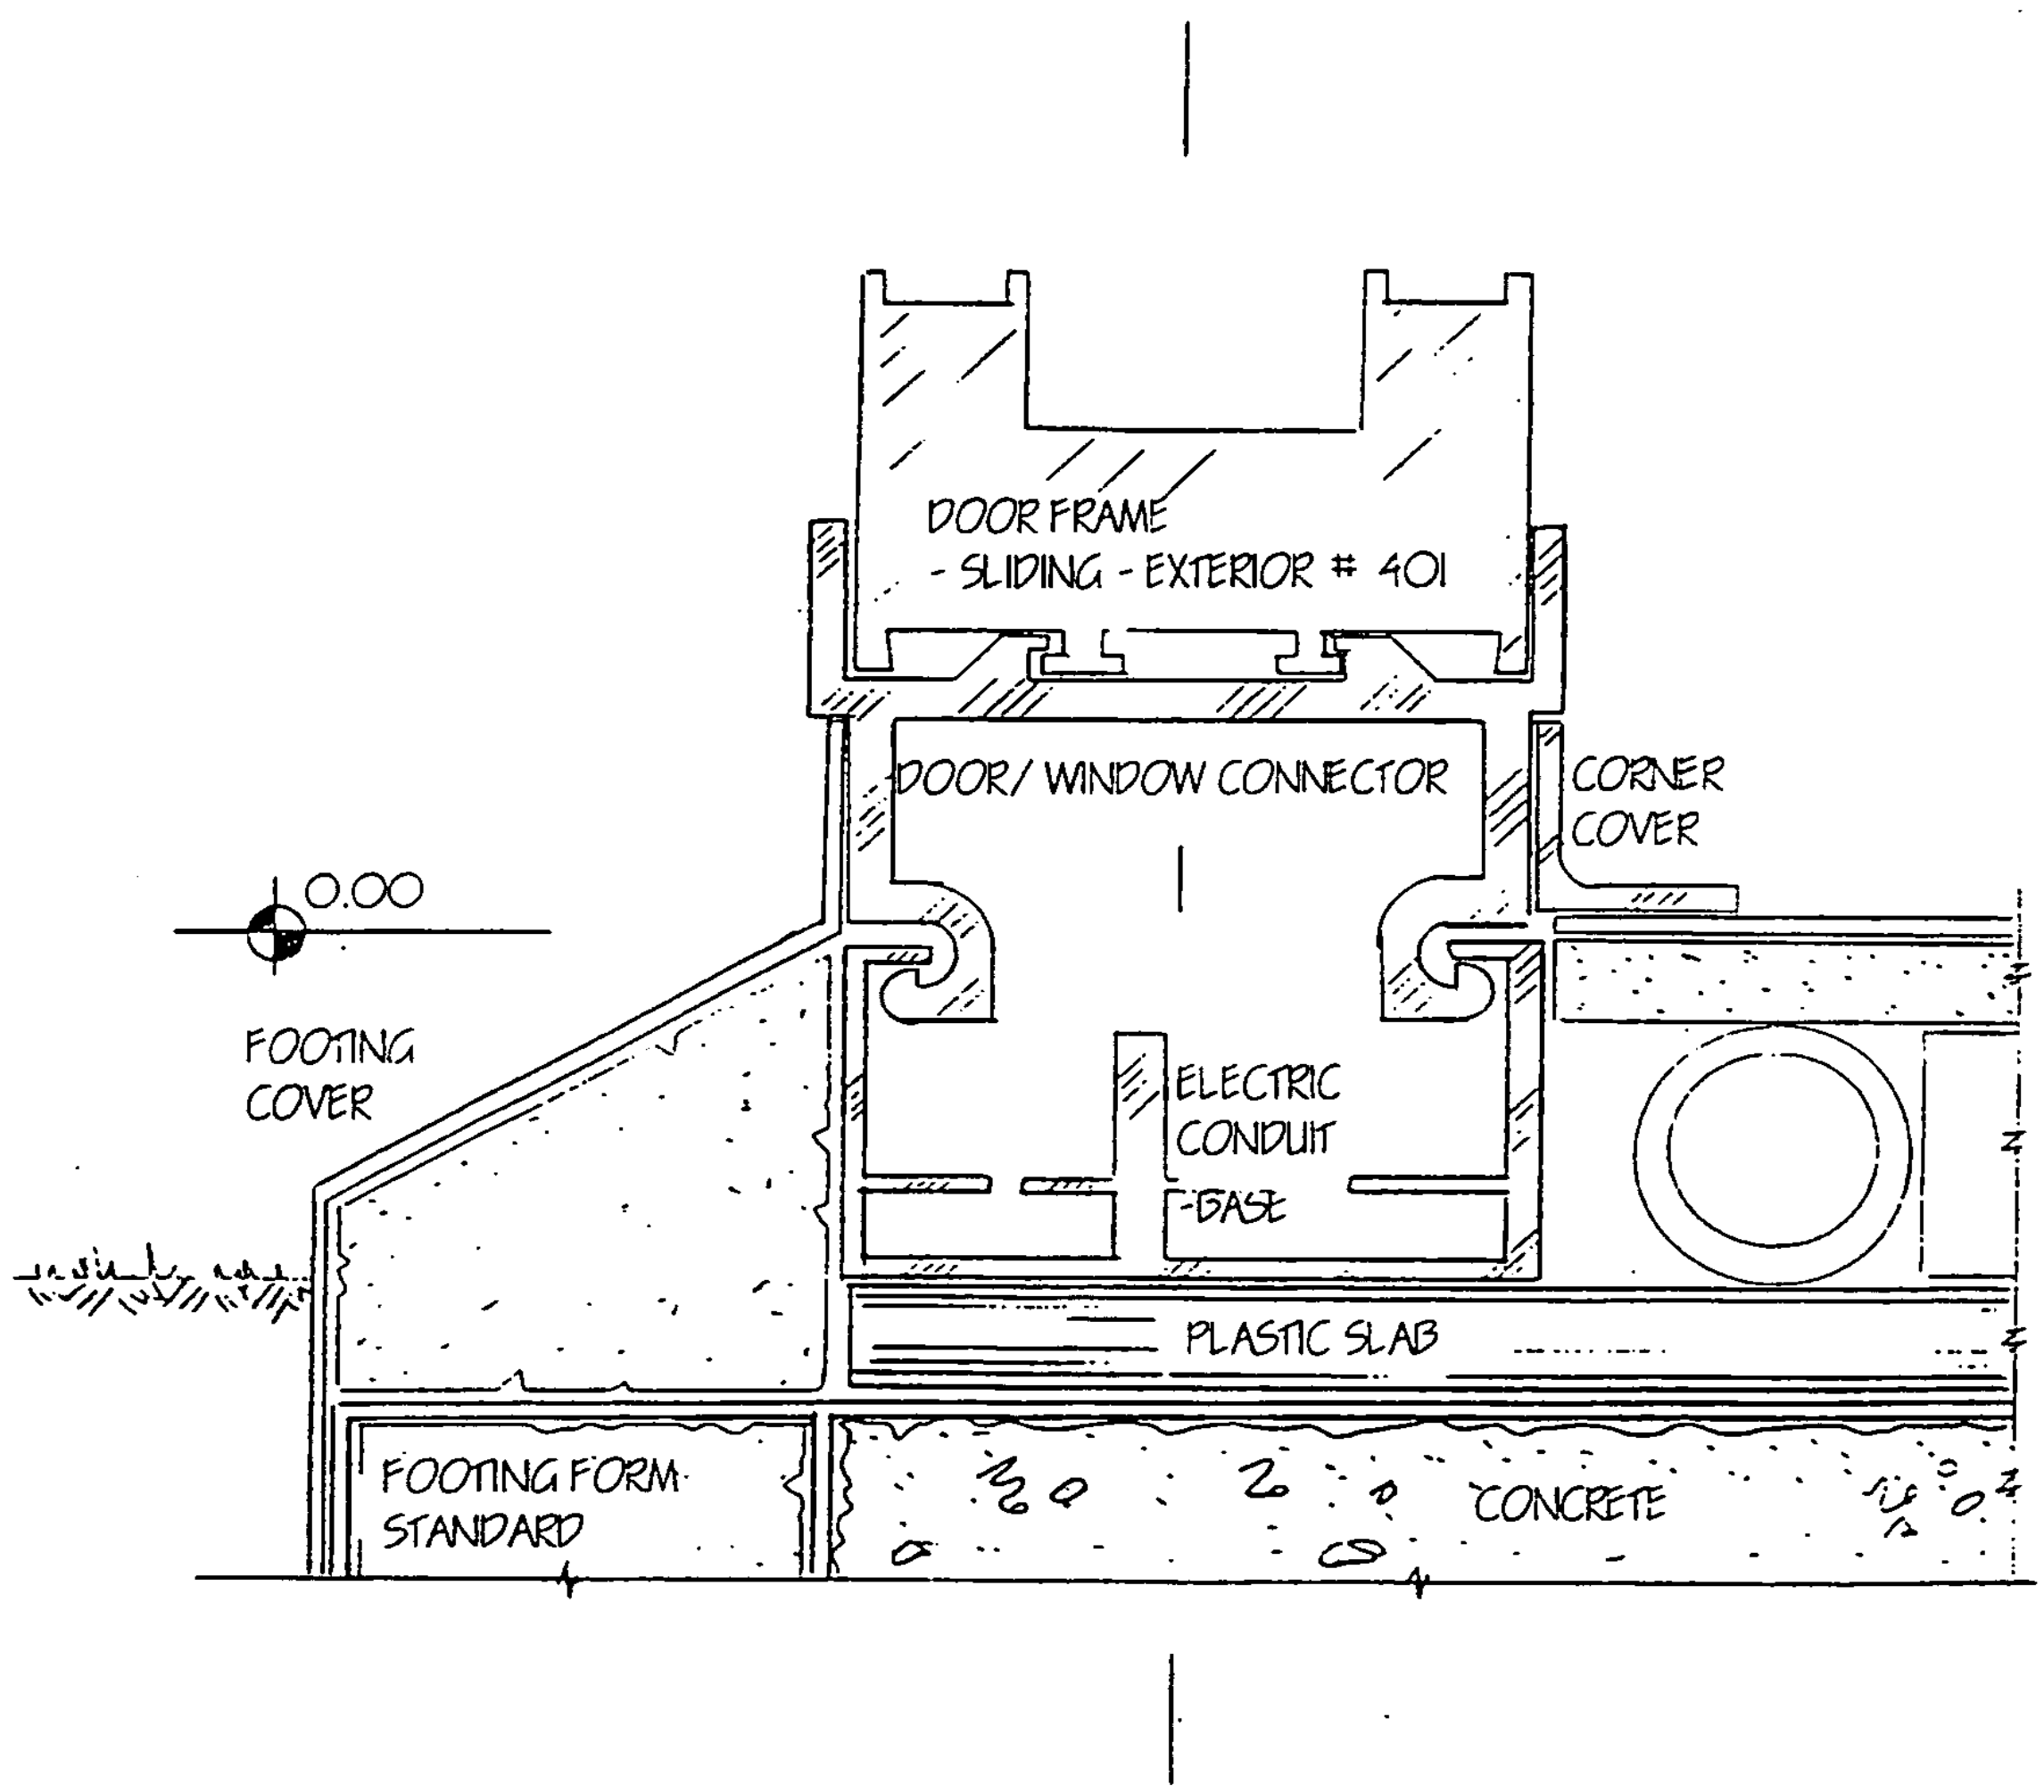
DOOR FRAME
- SLIDING - EXTERIOR # 401
DOOR/ WINDOW CONNECTOR
CORNER
COVER
0.00
FOOTING
COVER
ELECTRIC
CONDUIT
-BASE
PLASTIC SLAB
FOOTING FORM
STANDARD
CONCRETE

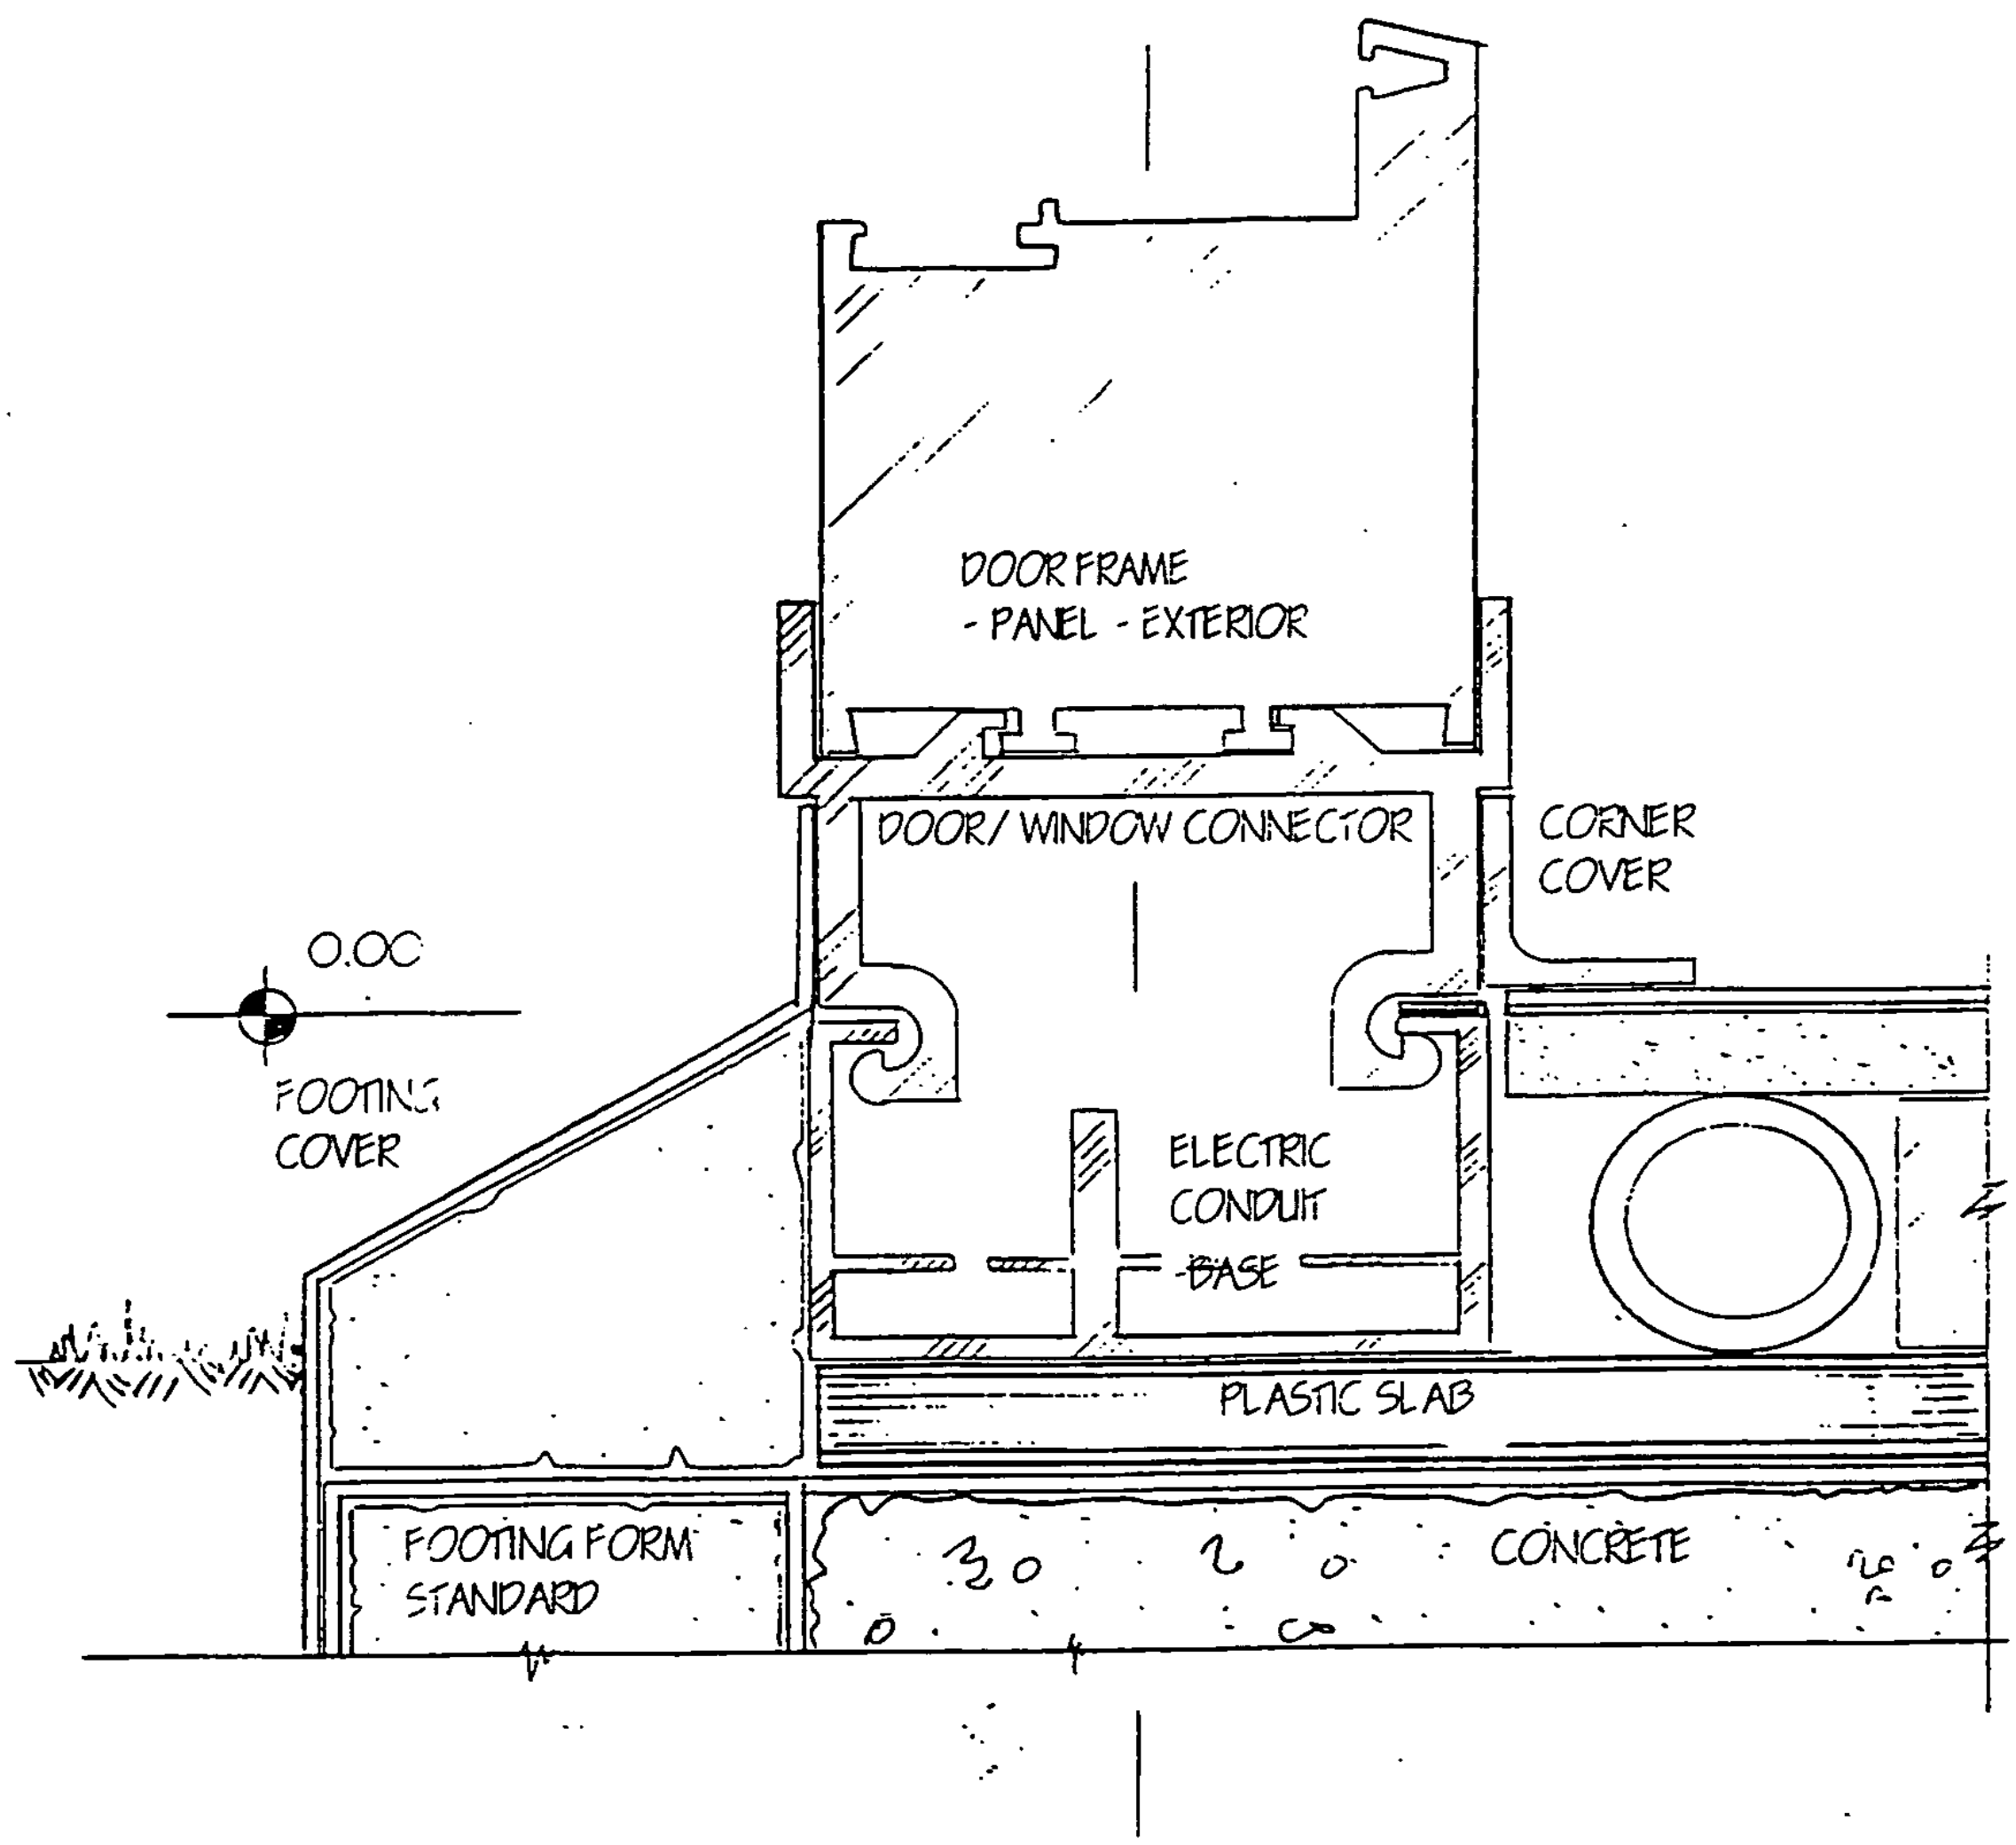
DOOR FRAME
- PANEL - EXTERIOR
DOOR/ WINDOW CONNECTOR
CORNER
COVER
O.OC
FOOTING
COVER
ELECTRIC
CONDUIT
BASE
PLASTIC SLAB
FOOTING FORM
STANDARD
CONCRETE

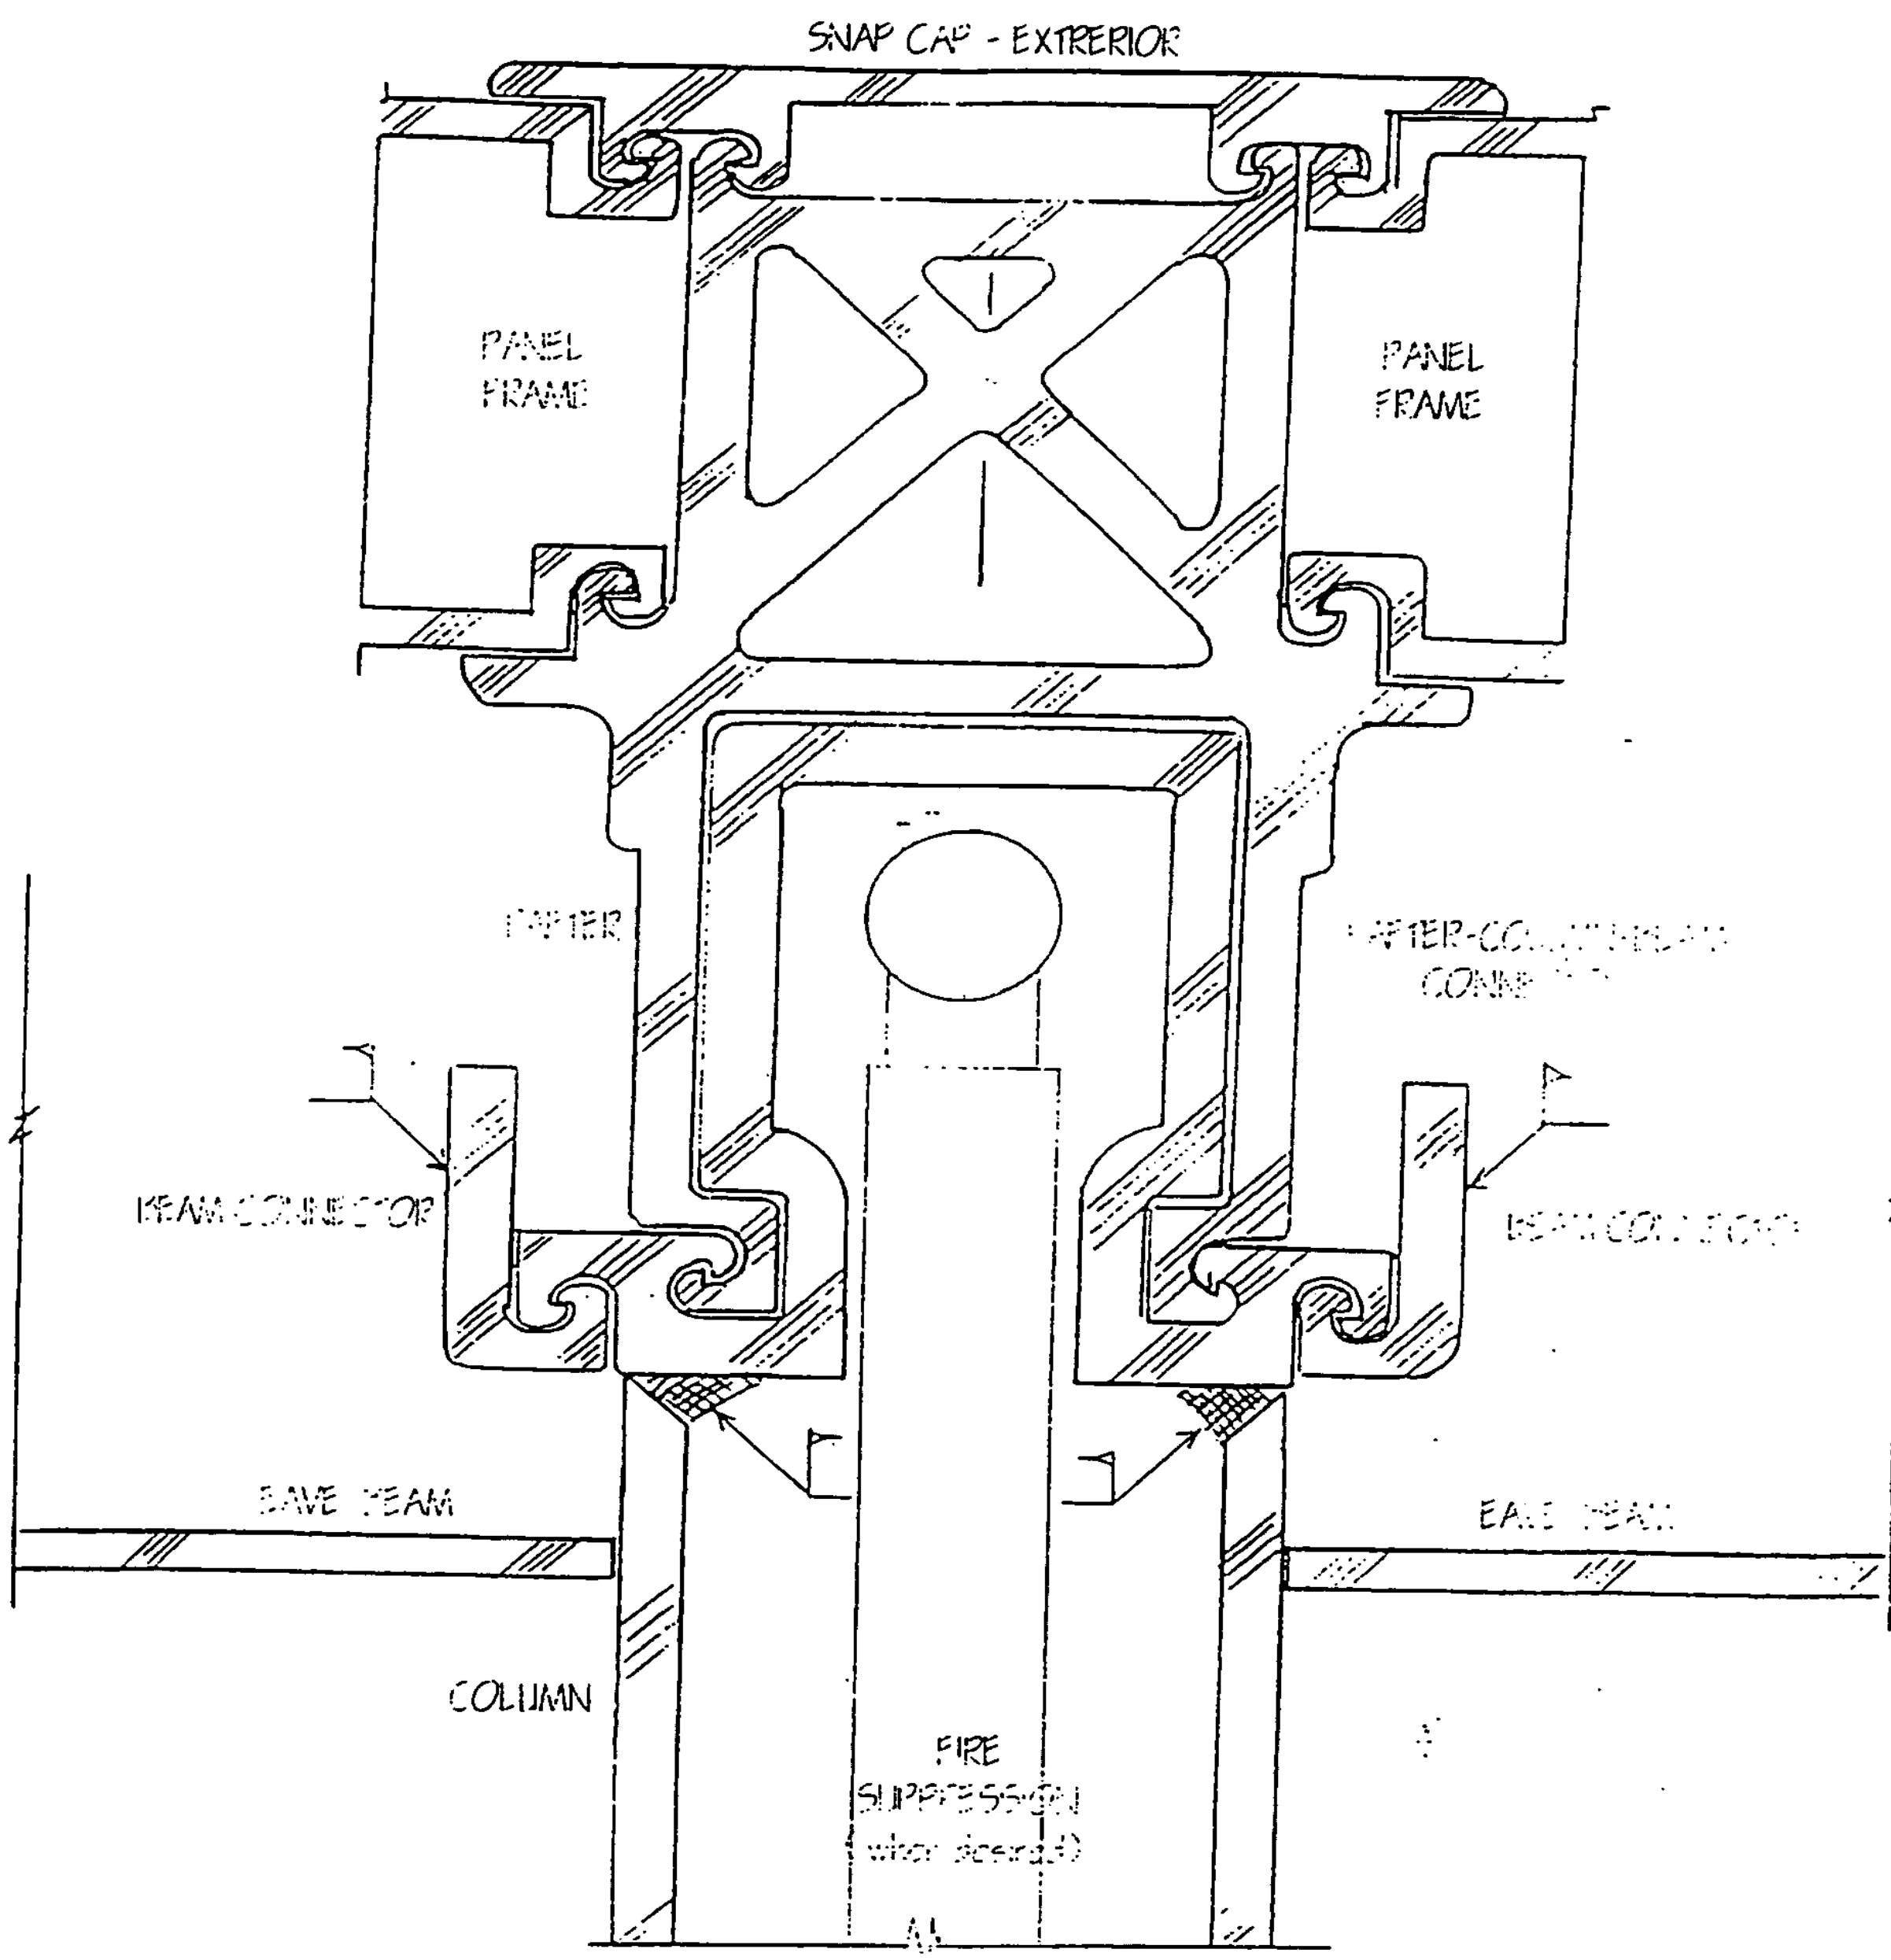
SNAP CAP - EXTERIOR
PANEL FRAME
PANEL FRAME
COLUMN
FIRE

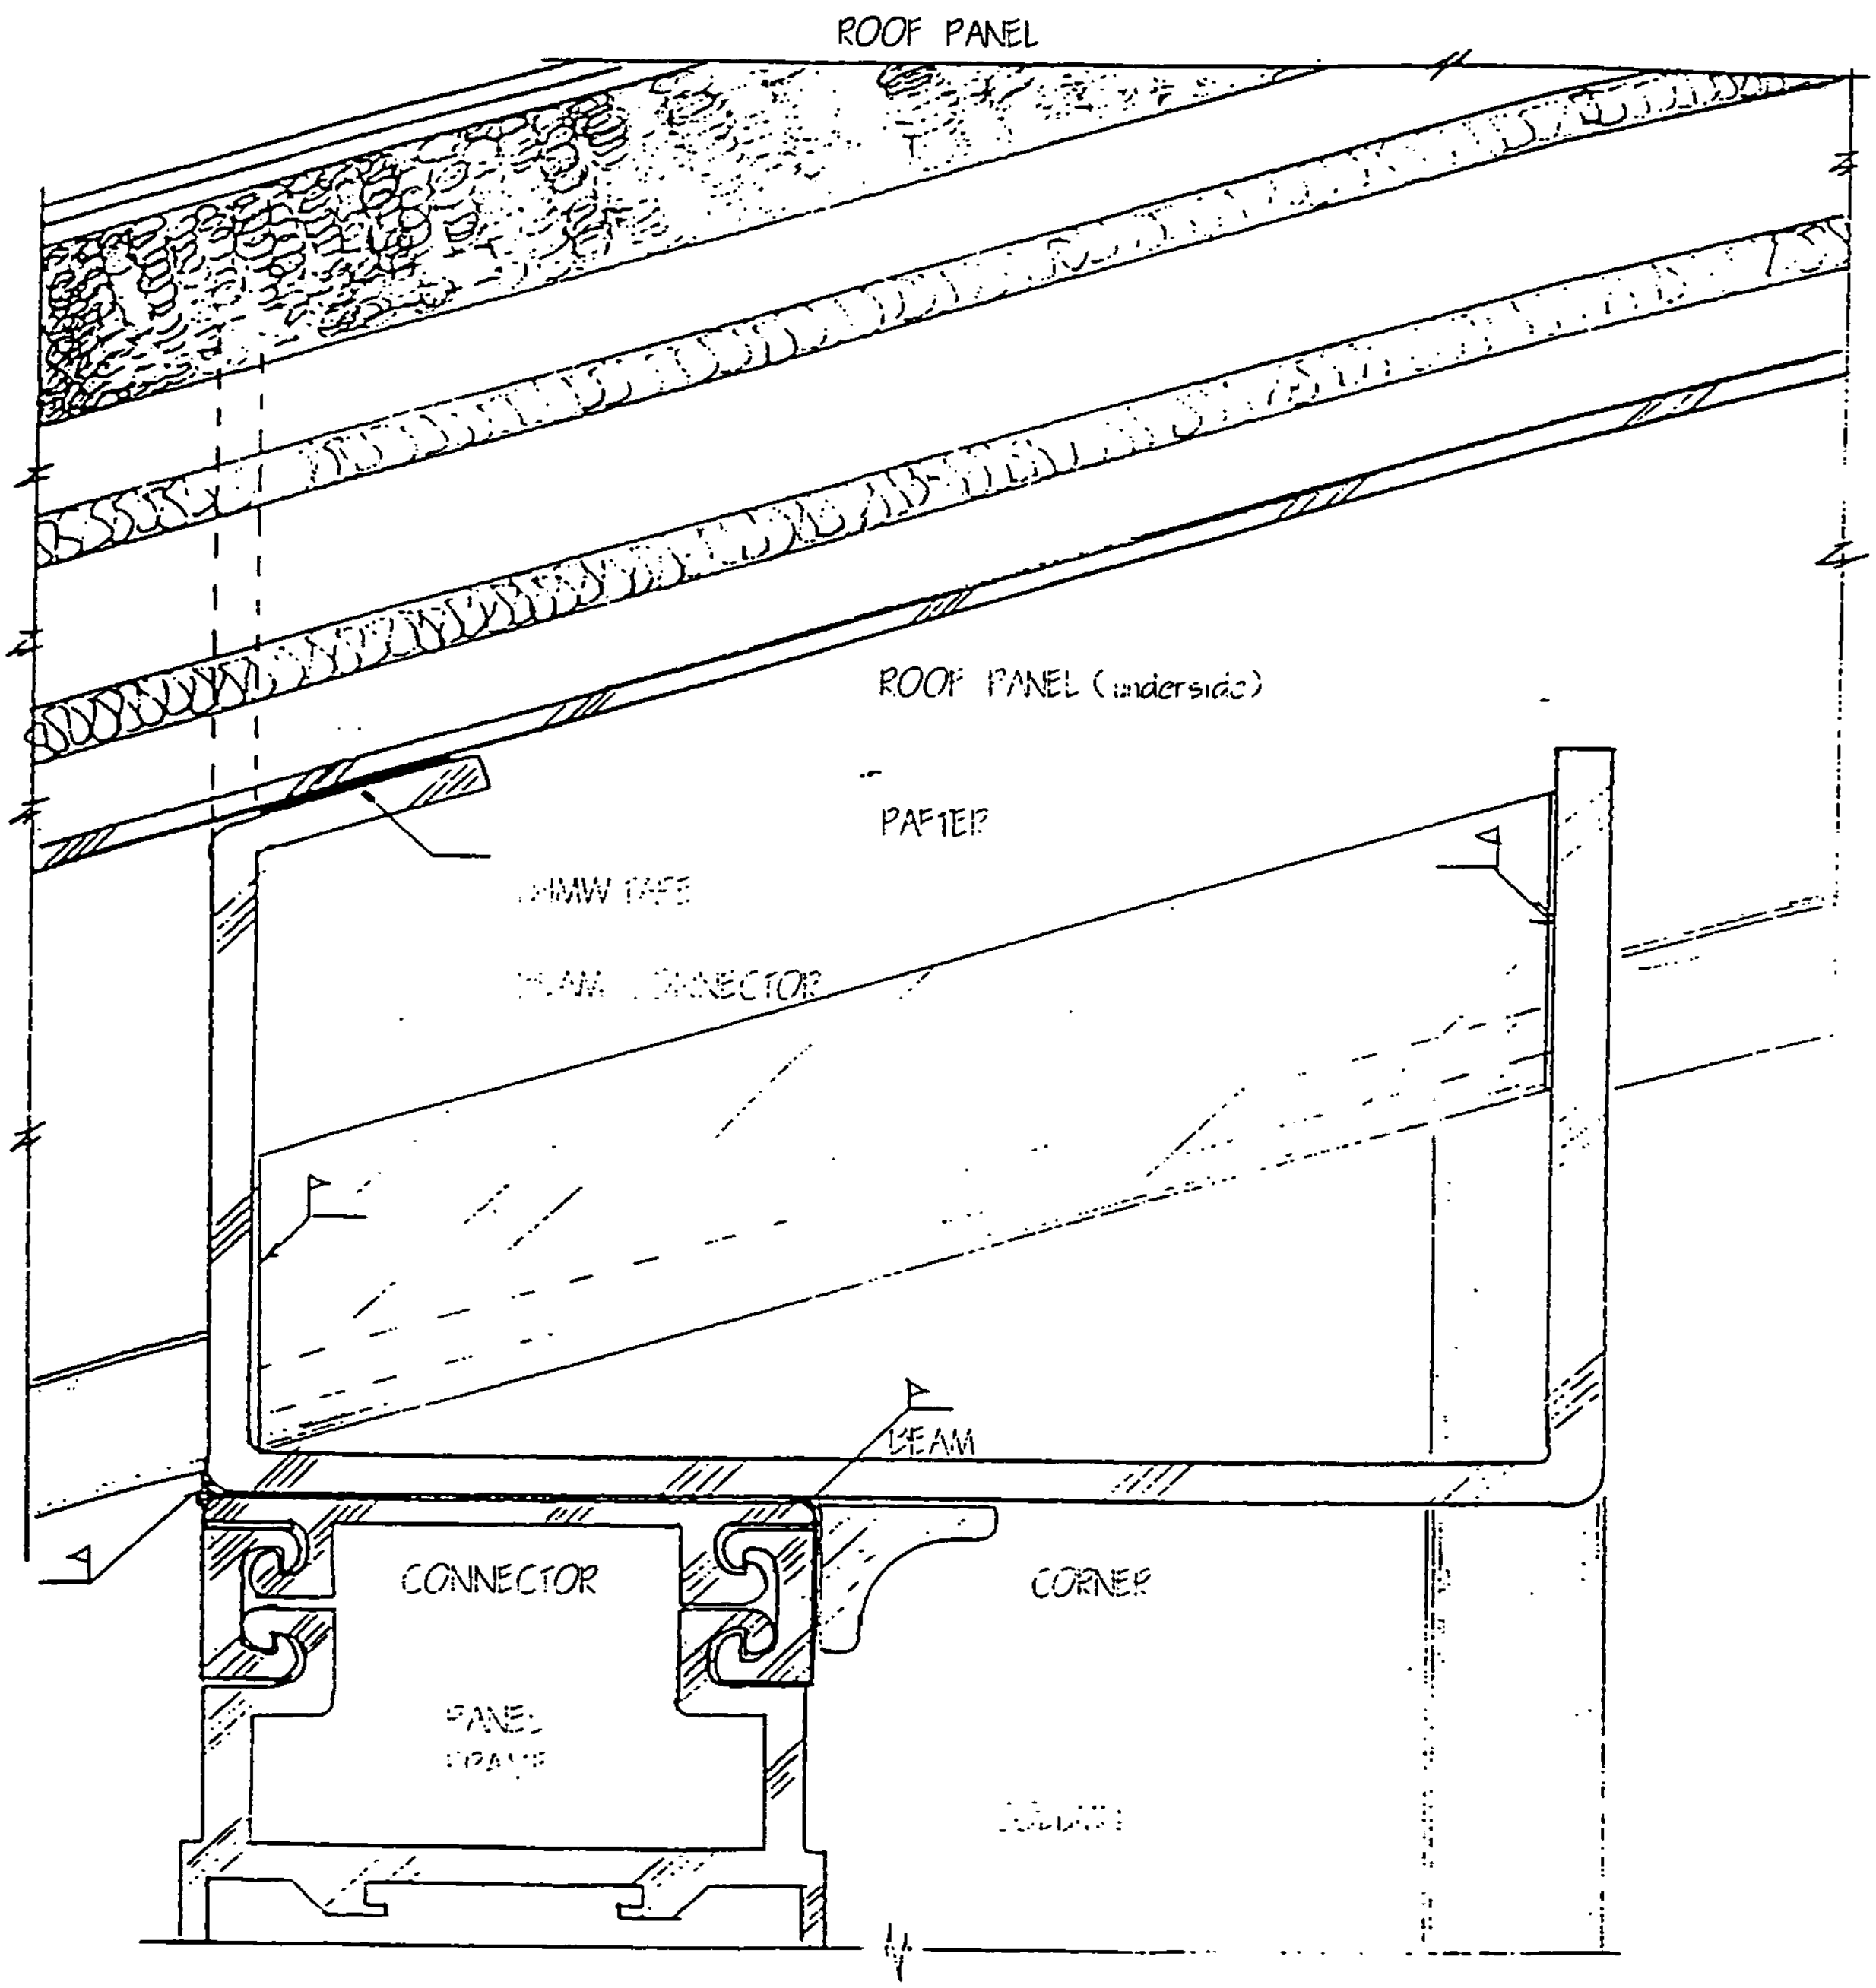
ROOF PANEL
ROOF PANEL (underside)
BEAM
CONNECTOR
CORNER

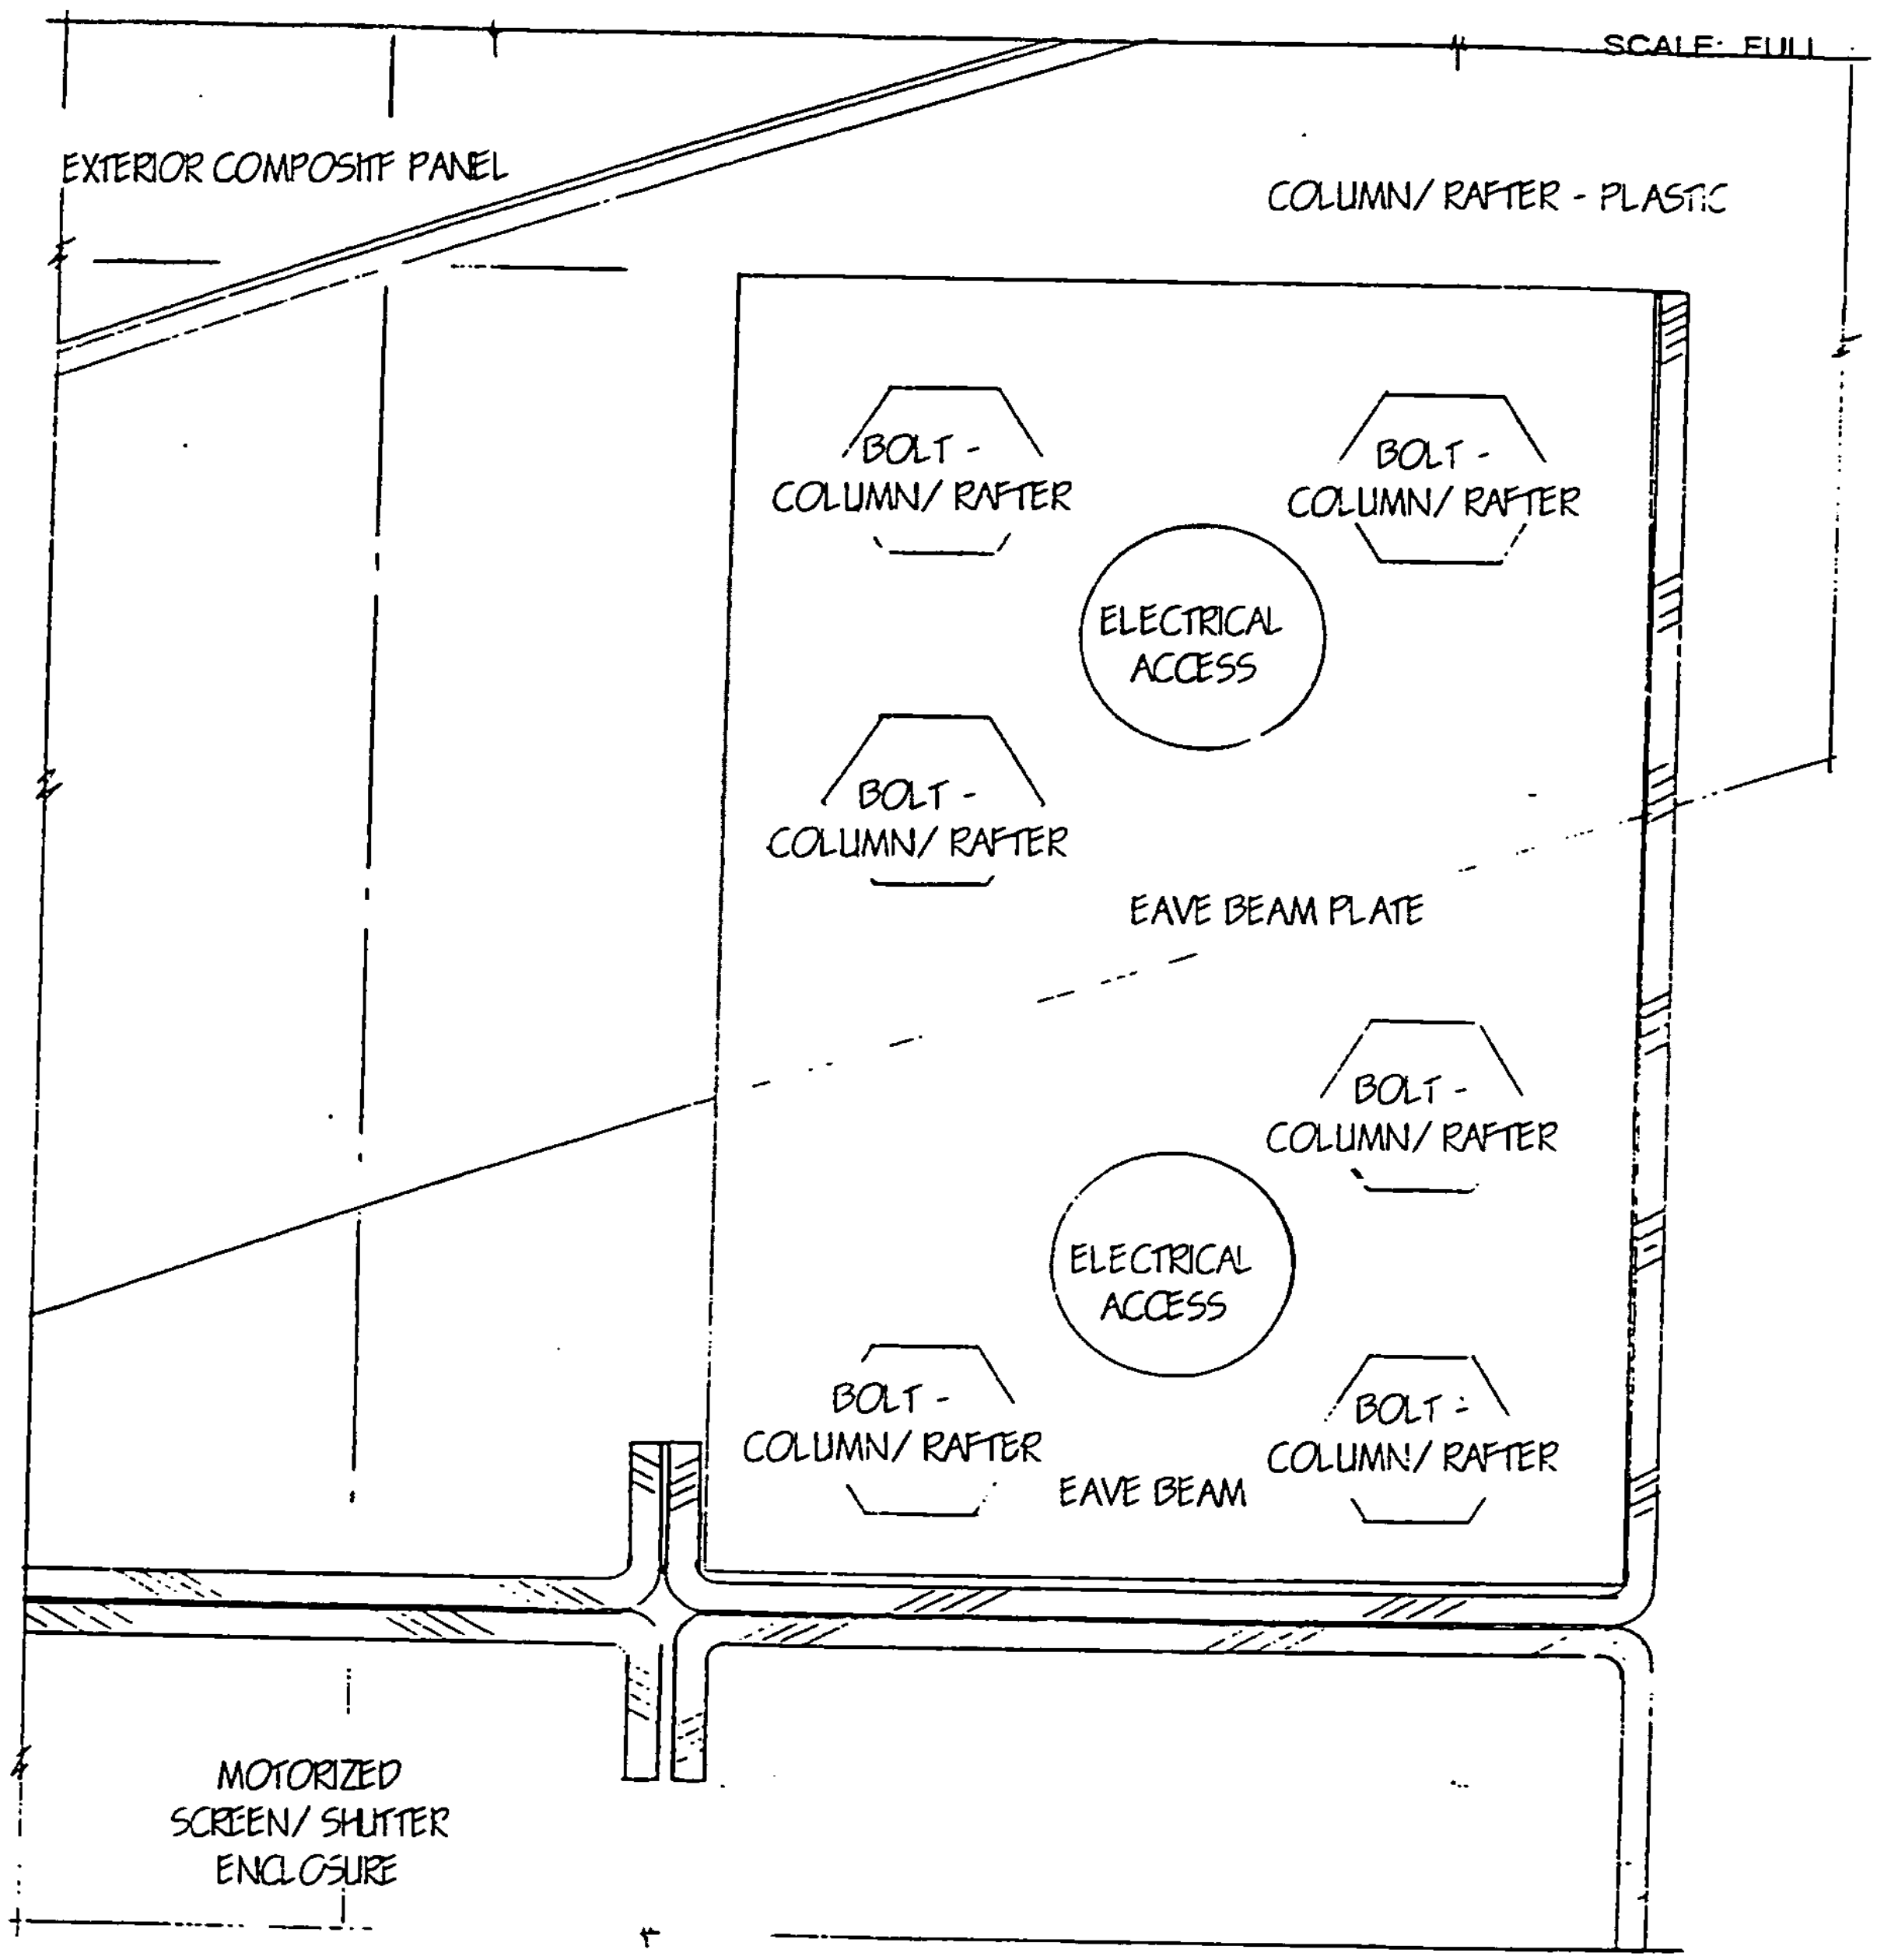
SCALE: FULL
EXTERIOR COMPOSITE PANEL
COLUMN/ RAFTER - PLASTIC
BOLT - COLUMN/ RAFTER
BOLT - COLUMN/ RAFTER
ELECTRICAL ACCESS
BOLT - COLUMN/ RAFTER
EAVE BEAM PLATE
BOLT - COLUMN/ RAFTER
ELECTRICAL ACCESS
BOLT - COLUMN/ RAFTER
EAVE BEAM
BOLT - COLUMN/ RAFTER
MOTORIZED SCREEN/ SHUTTER ENCLOSURE

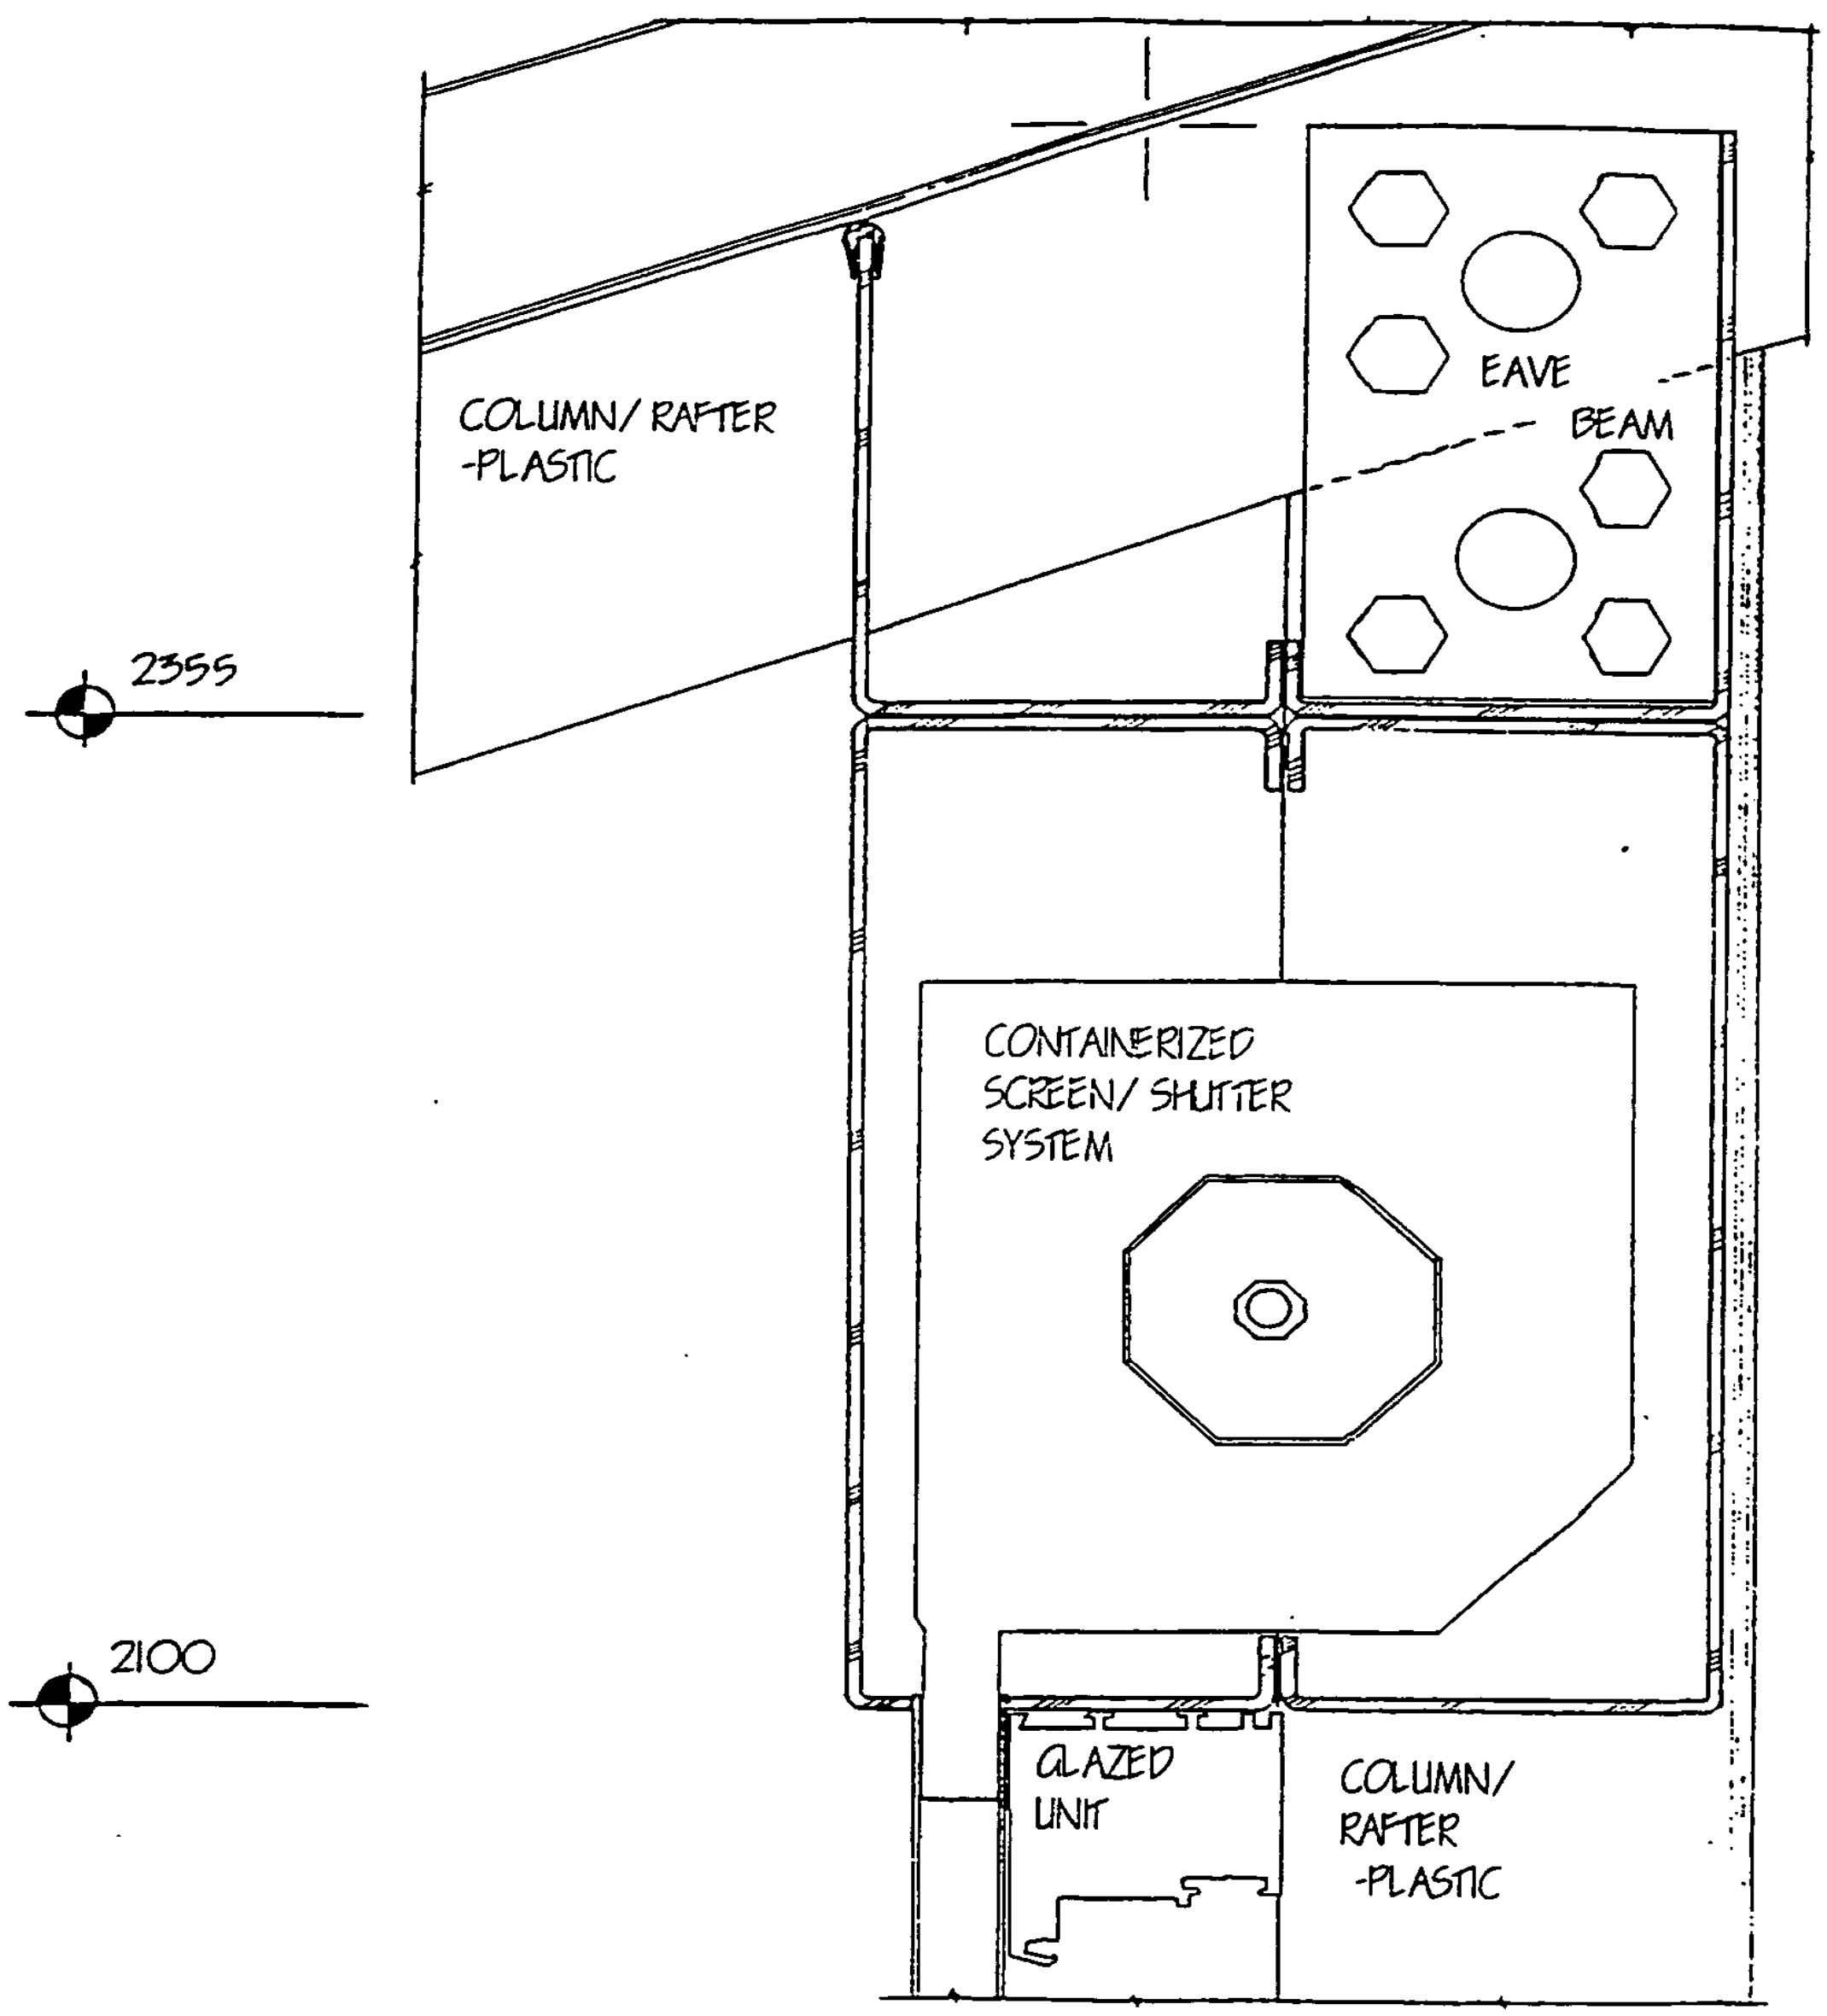
COLUMN/ RAFTER
-PLASTIC
EAVE
BEAM
2355
CONTAINERIZED
SCREEN/ SHUTTER
SYSTEM
2100
GLAZED
UNIT
COLUMN/
RAFTER
-PLASTIC

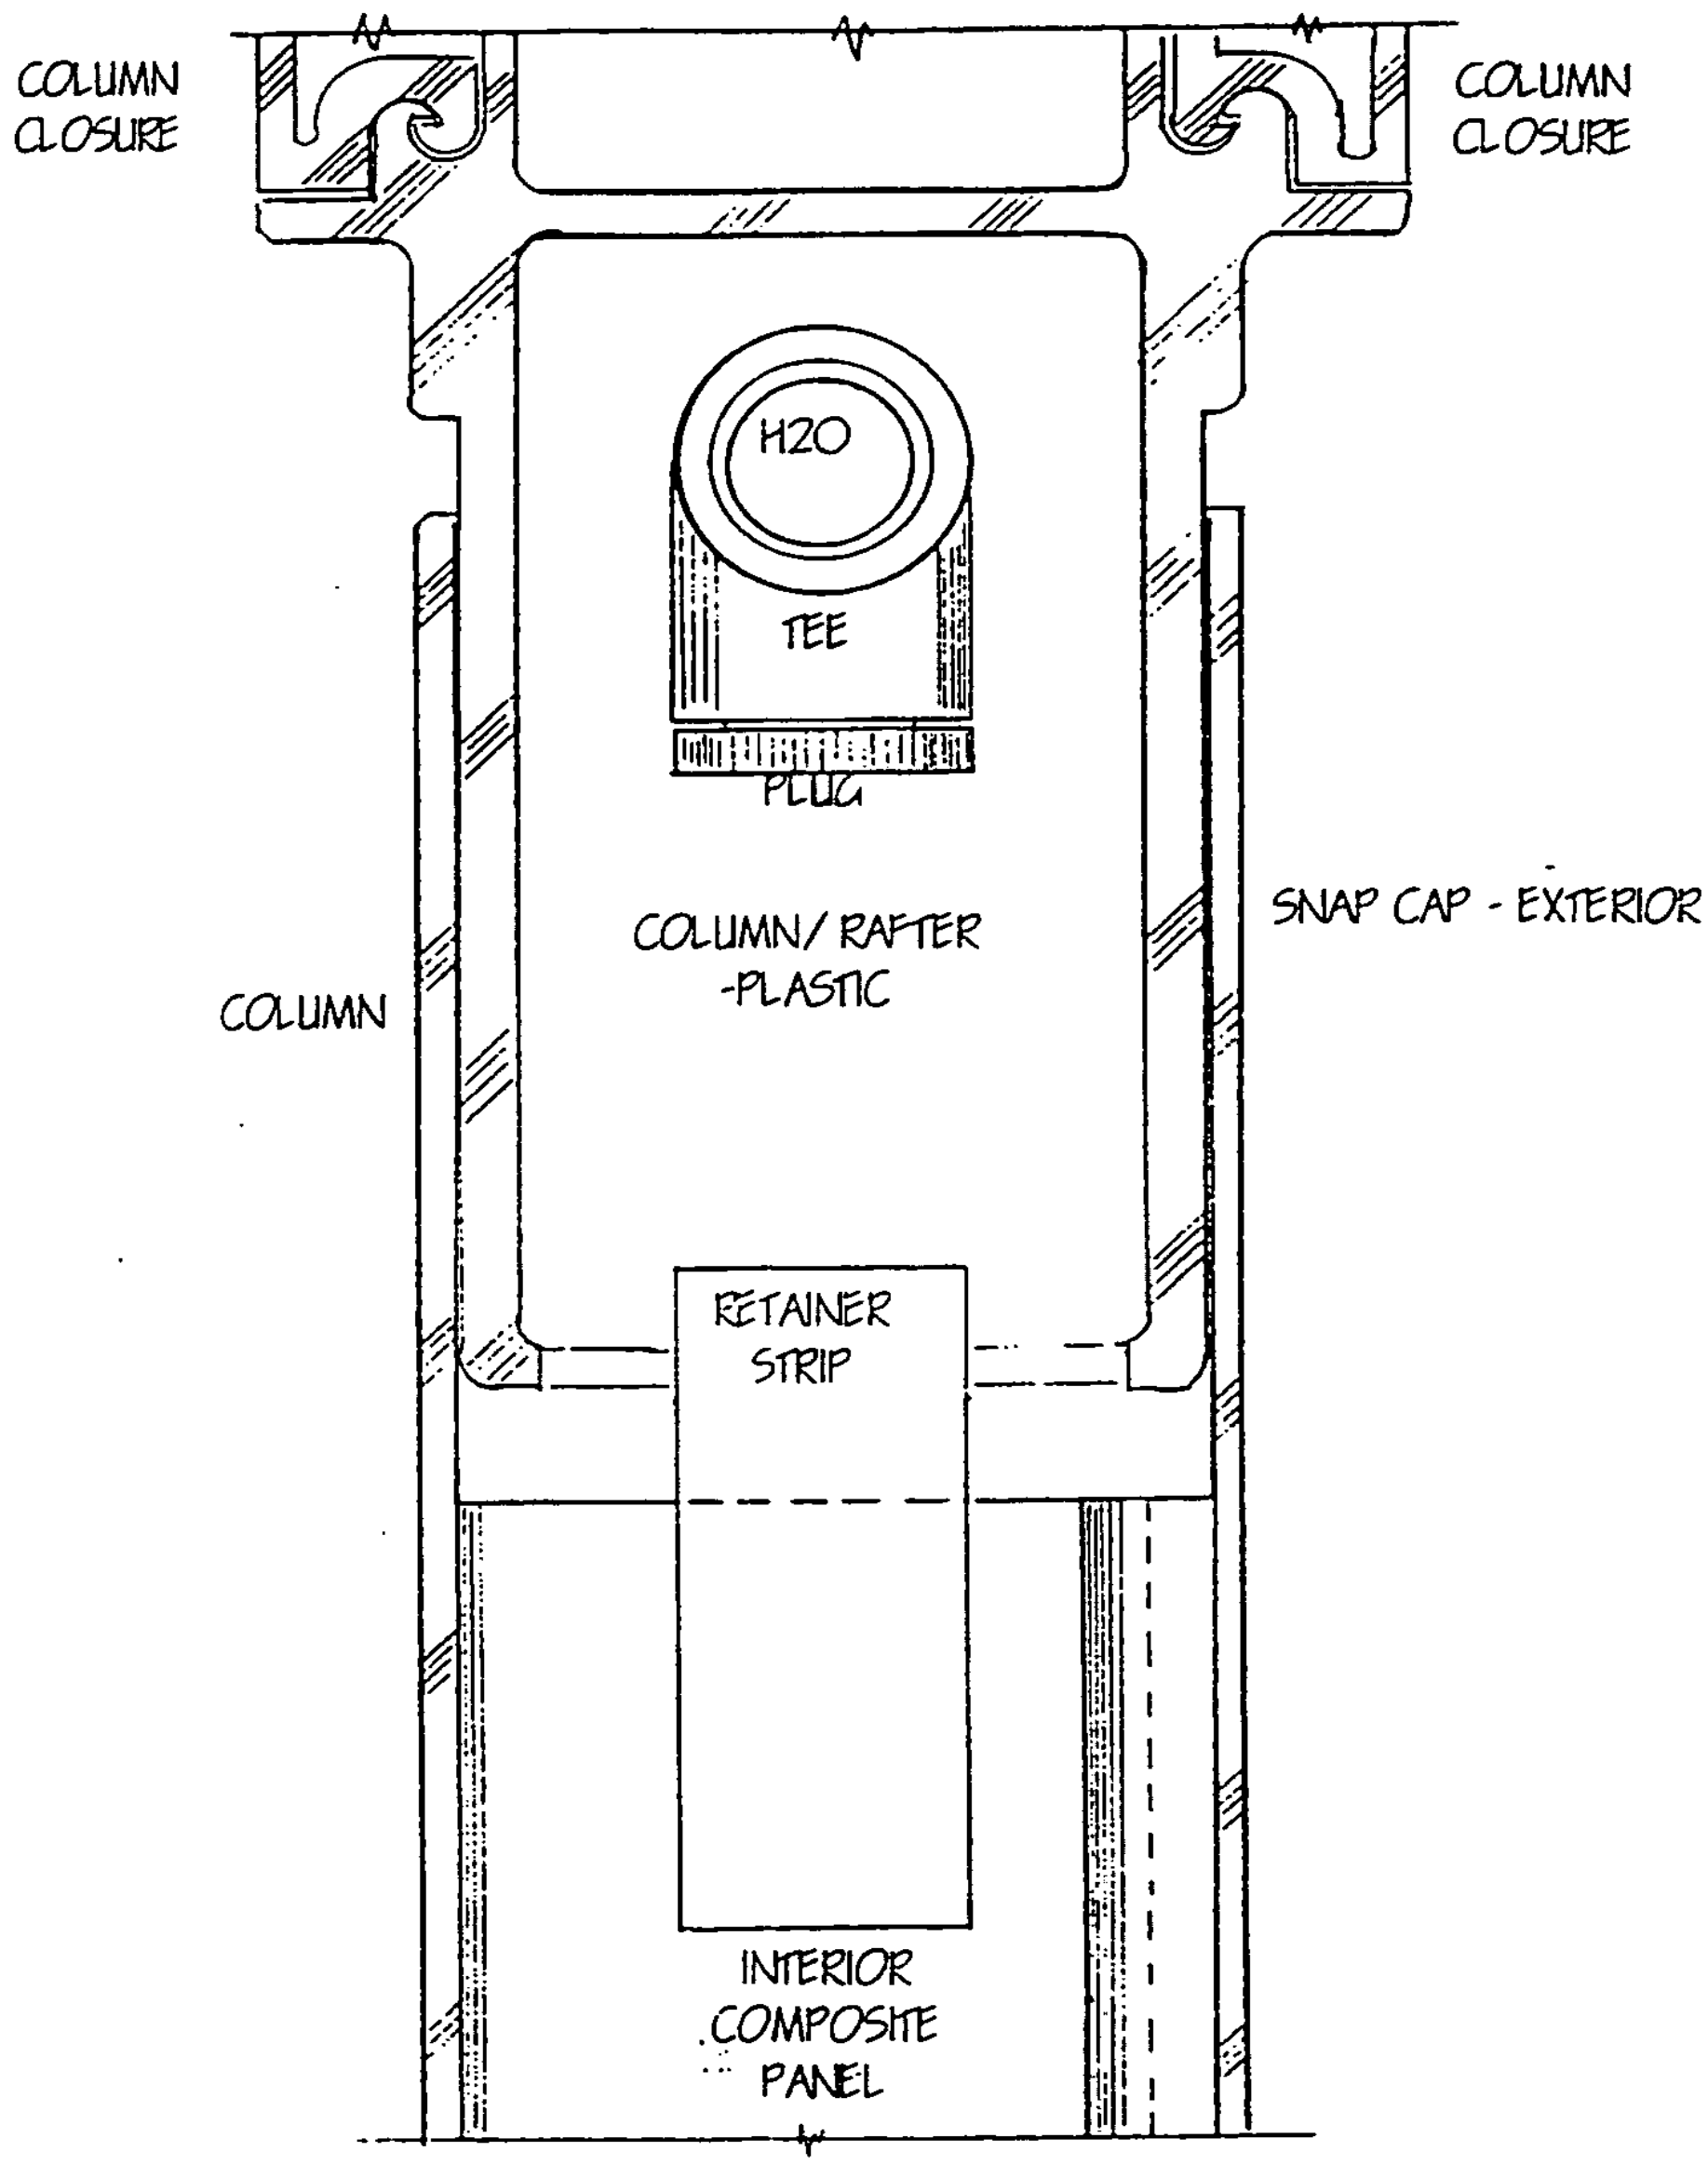
COLUMN
CLOSURE
COLUMN
CLOSURE
H2O
TEE
PLUG
COLUMN/ RAFTER
-PLASTIC
SNAP CAP - EXTERIOR
COLUMN
RETAINER
STRIP
INTERIOR
COMPOSITE
PANEL

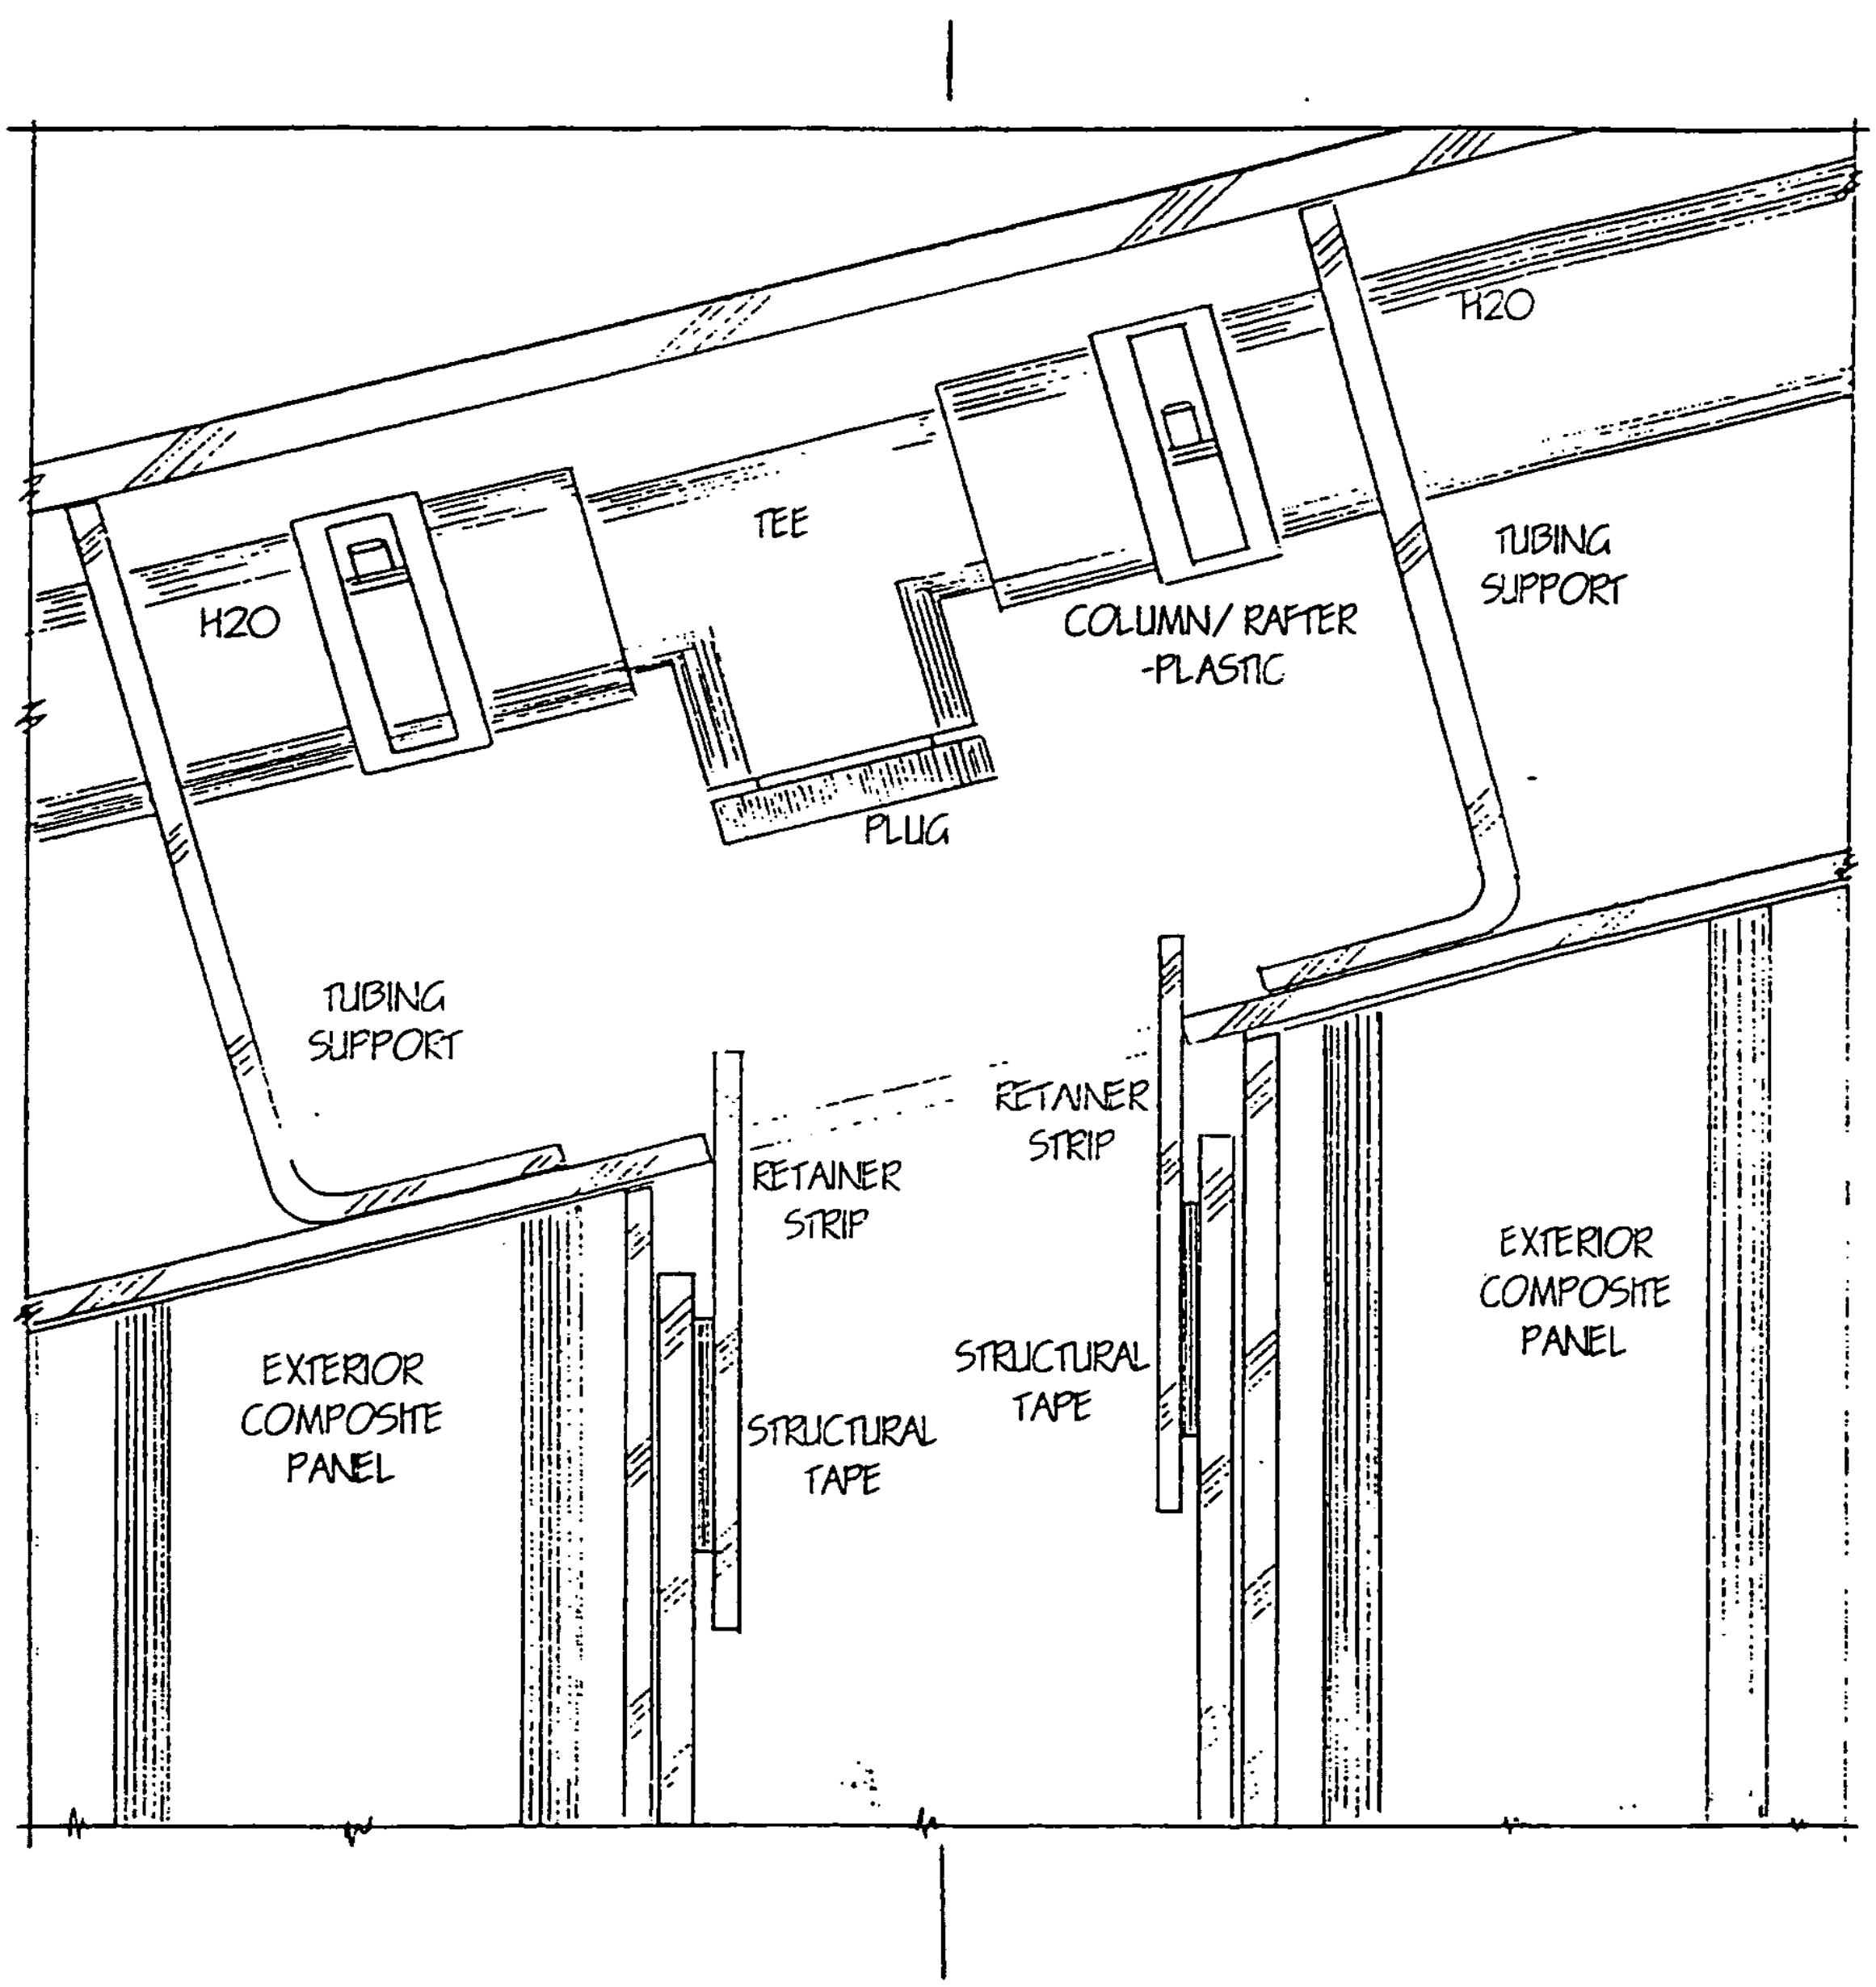
H2O
TEE
H2O
COLUMN/ RAFTER -PLASTIC
TUBING SUPPORT
PLUG
TUBING SUPPORT
RETAINER STRIP
RETAINER STRIP
EXTERIOR COMPOSITE PANEL
EXTERIOR COMPOSITE PANEL
STRUCTURAL TAPE
STRUCTURAL TAPE

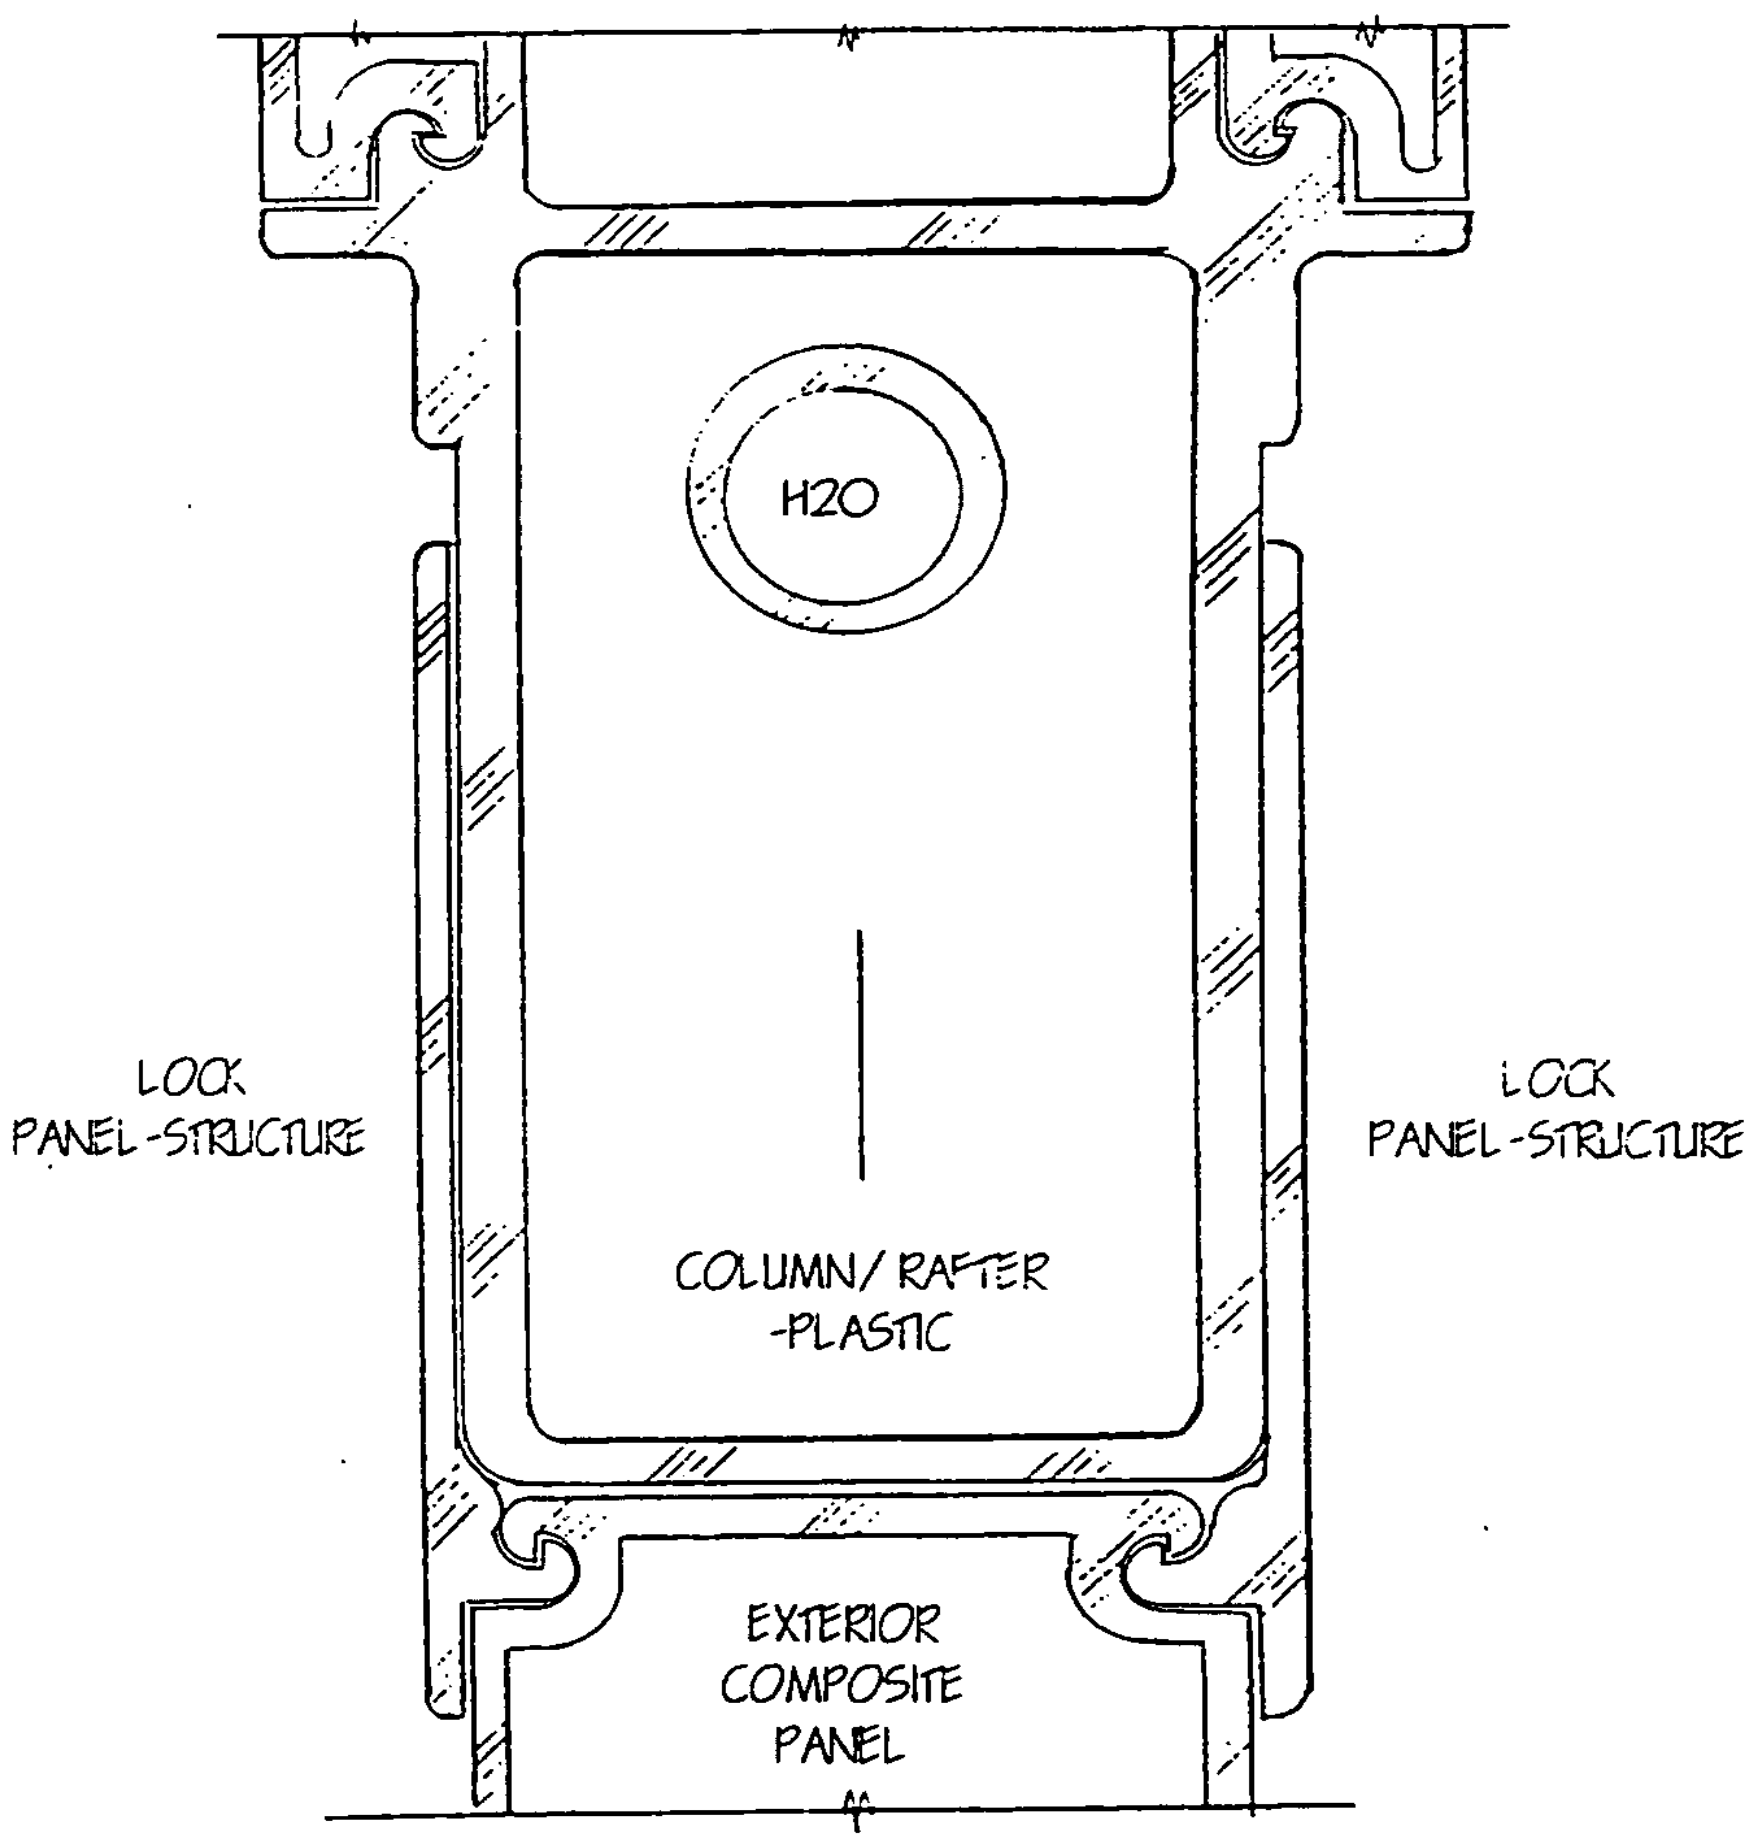
H2O
LOCK
PANEL-STRUCTURE
LOCK
PANEL-STRUCTURE
COLUMN/RAFTER
-PLASTIC
EXTERIOR
COMPOSITE
PANEL

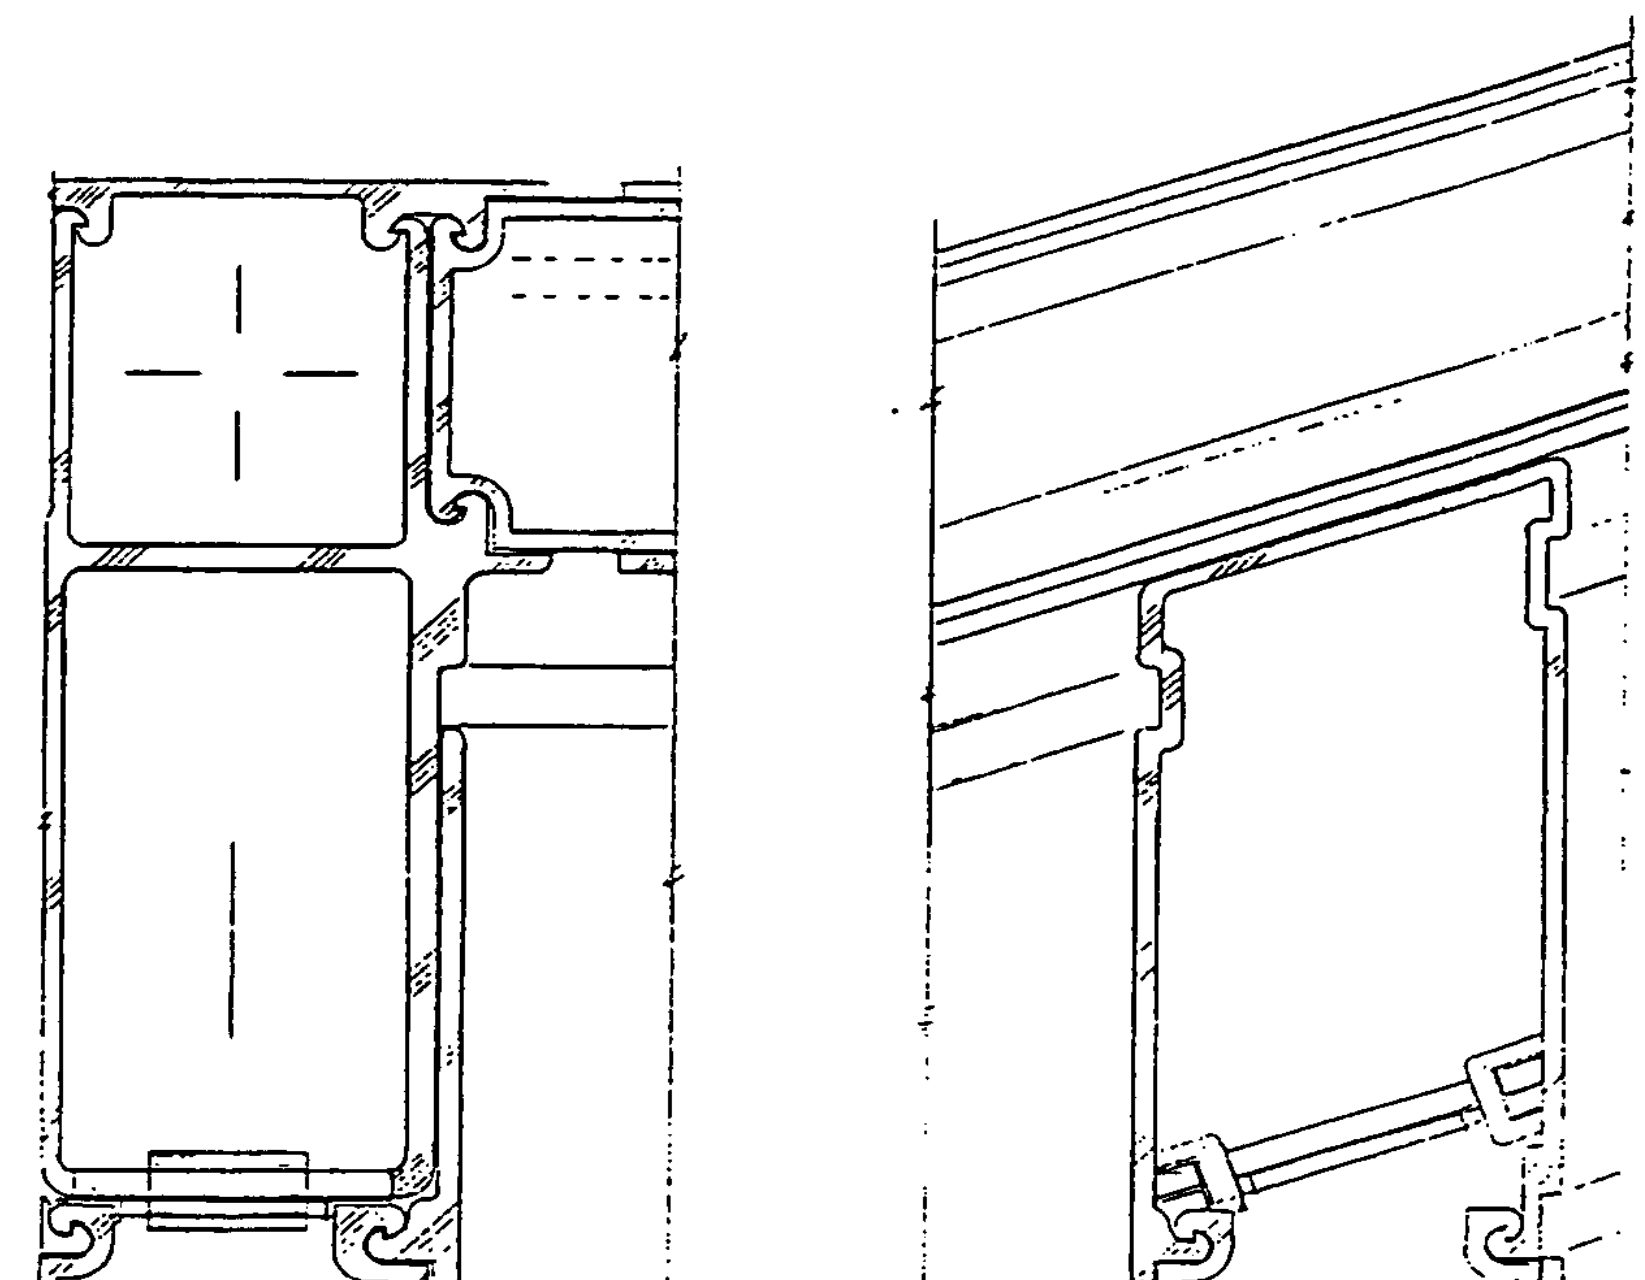

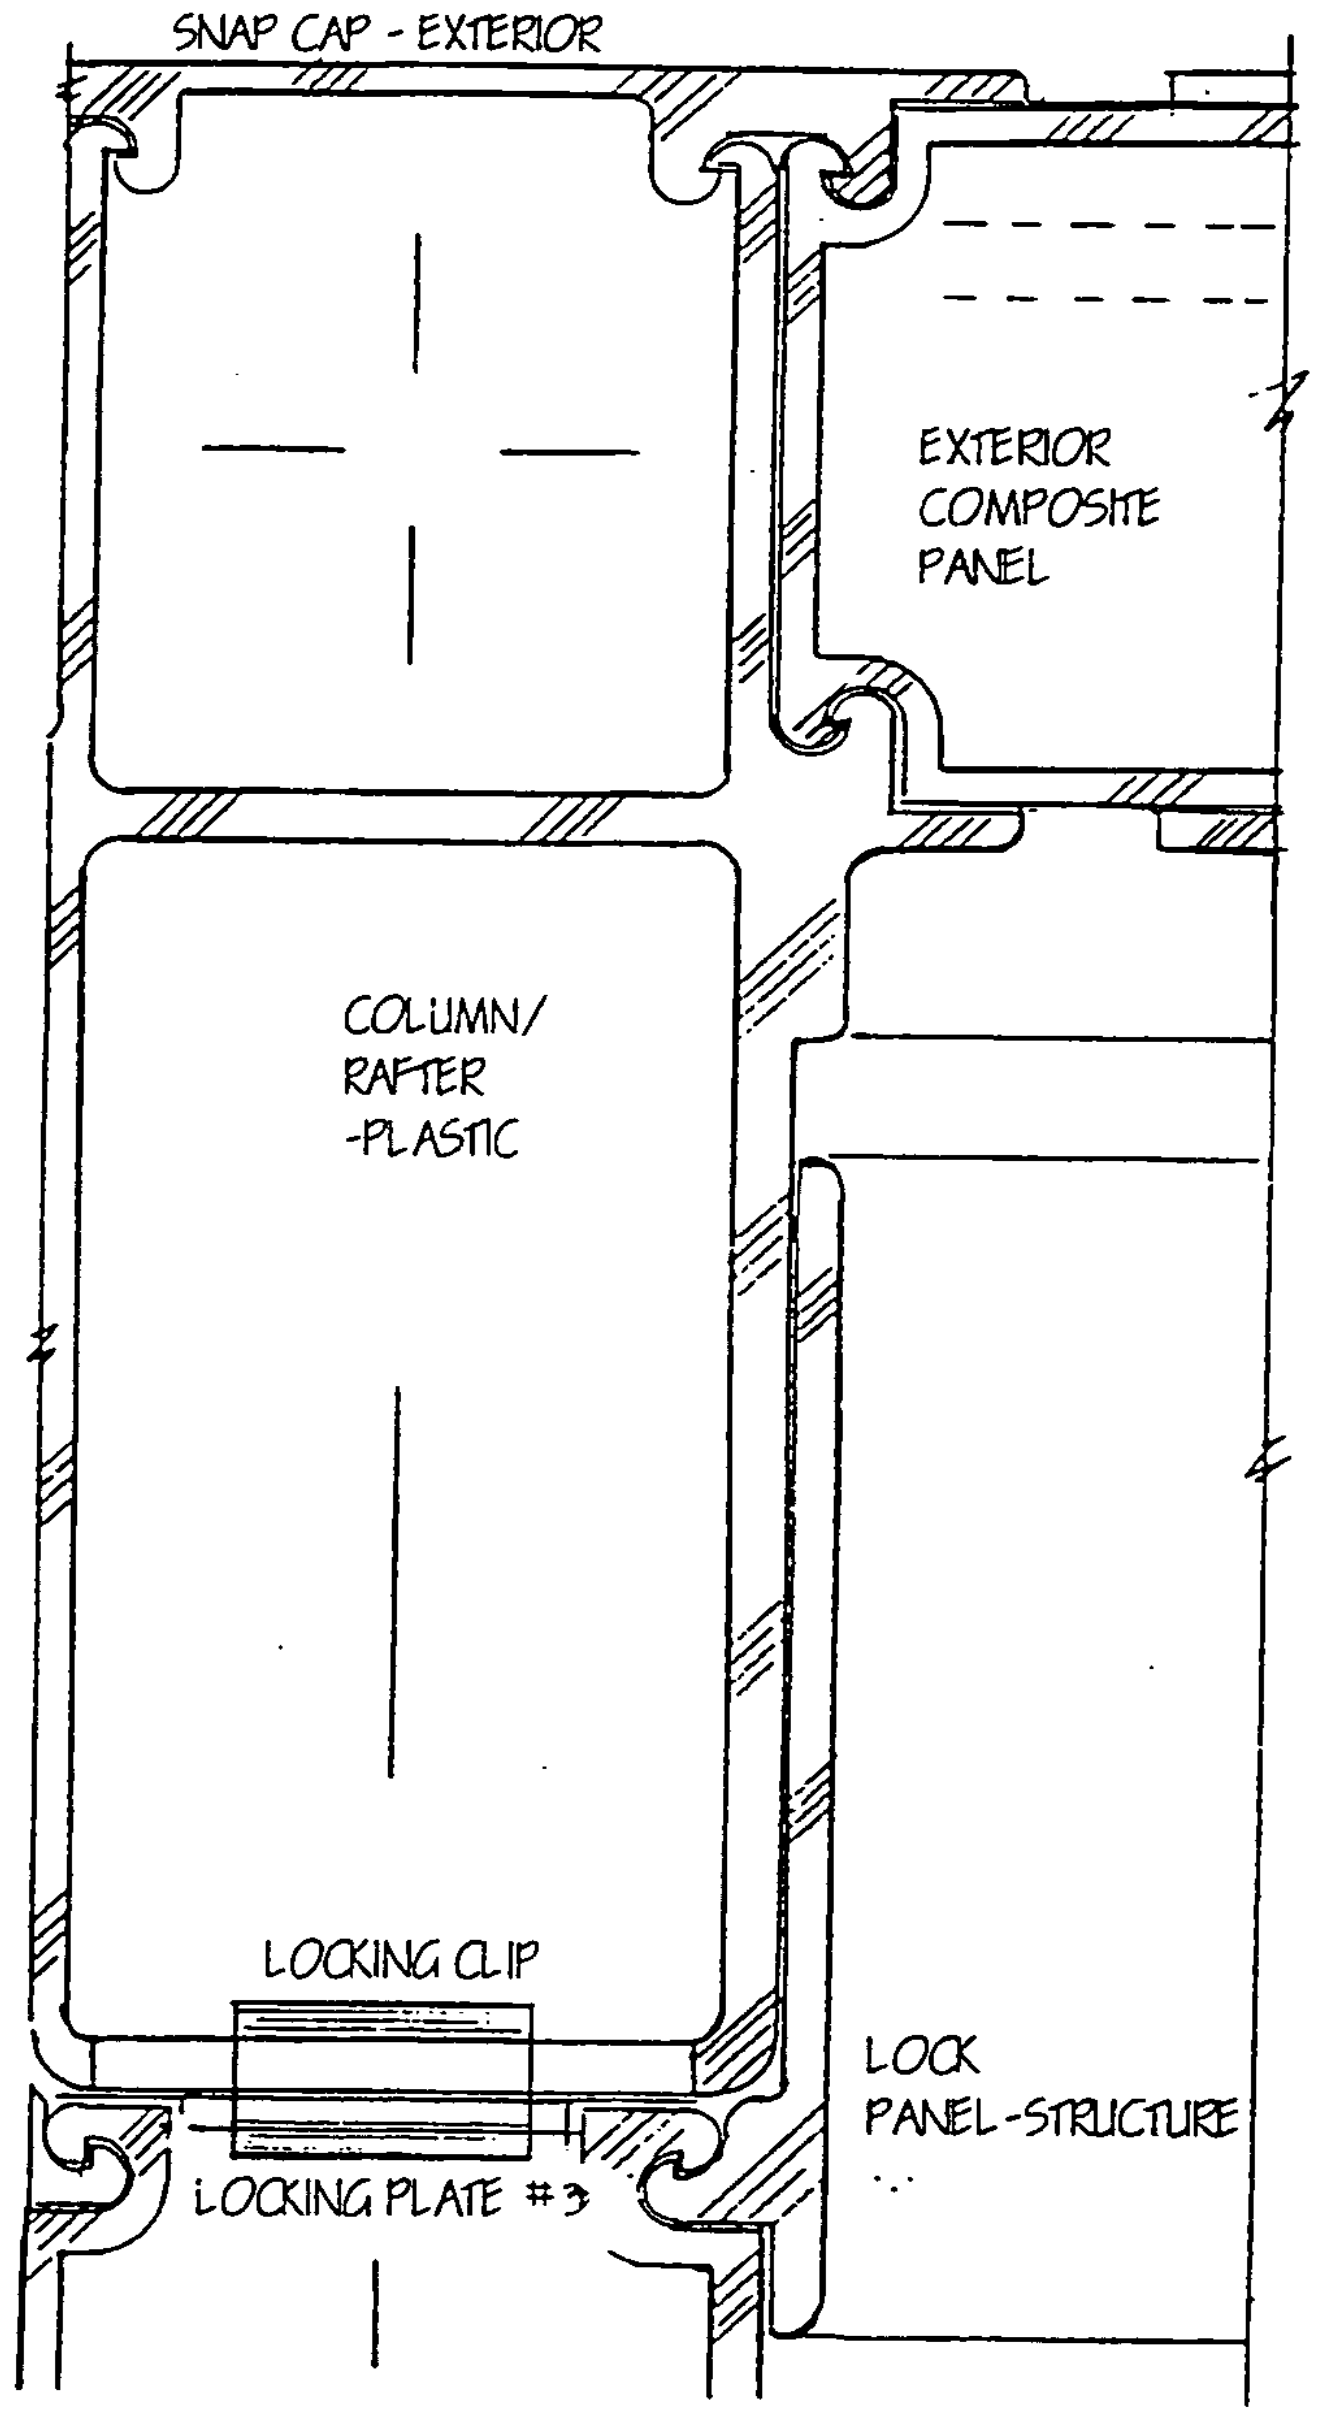
SNAP CAP - EXTERIOR
EXTERIOR COMPOSITE PANEL
COLUMN/ RAFTER -PLASTIC
LOCKING CLIP
LOCK PANEL-STRUCTURE
LOCKING PLATE #3

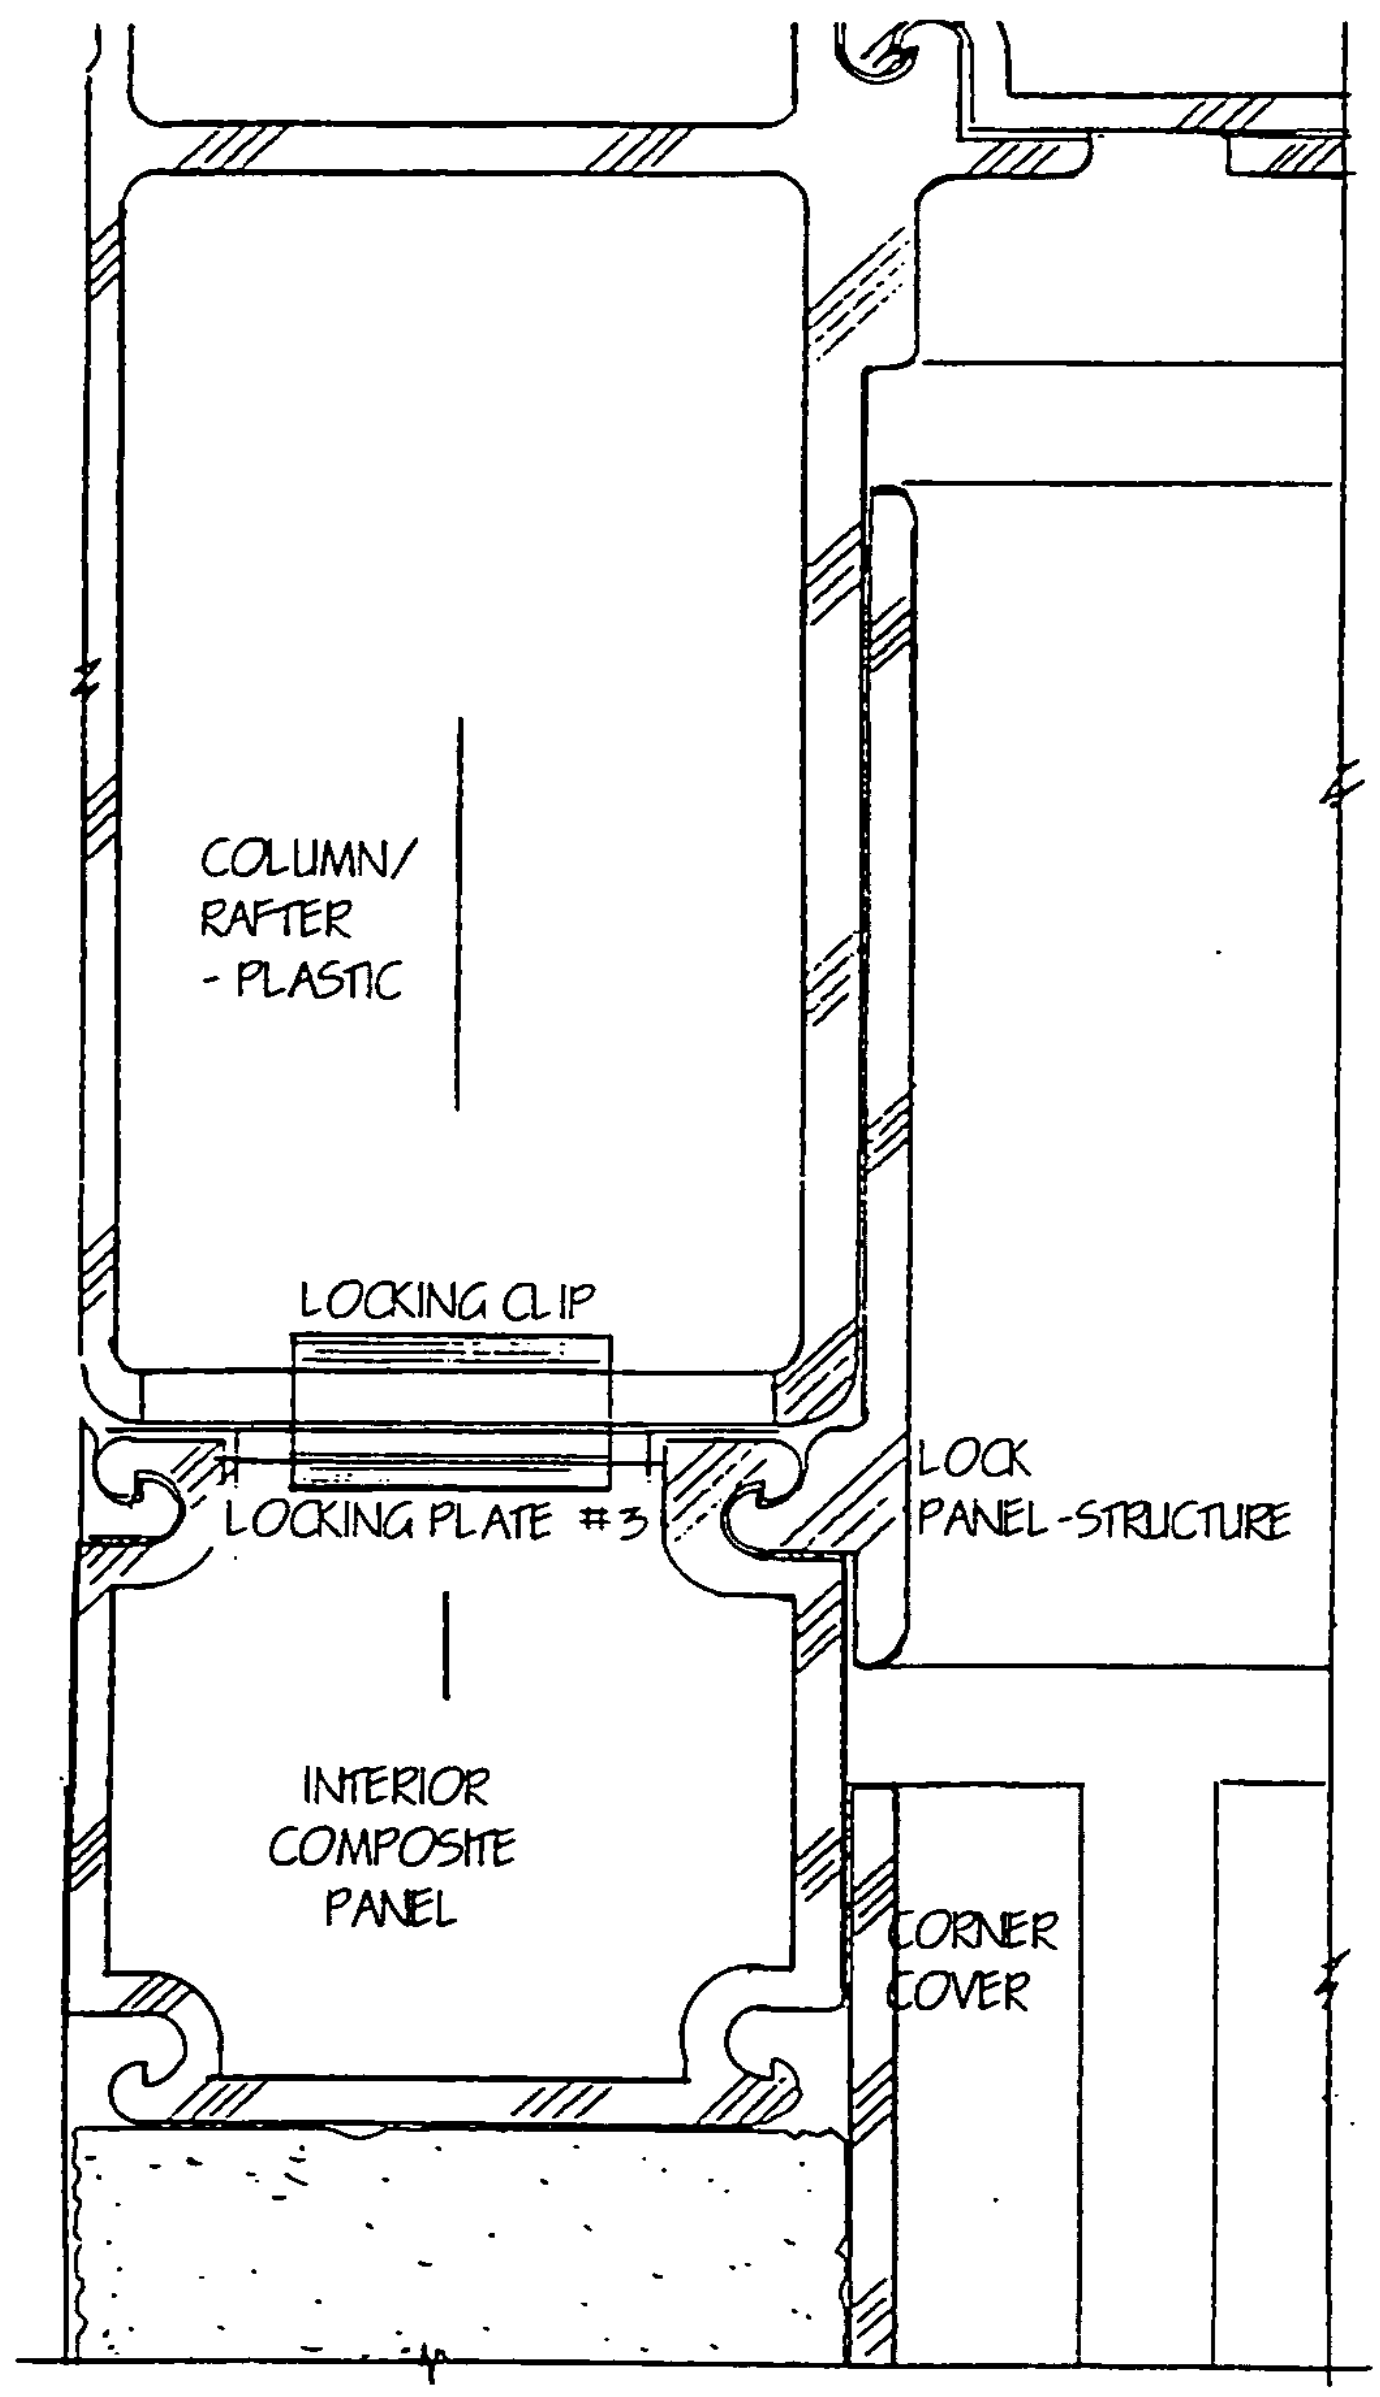
COLUMN/
RAFTER
- PLASTIC
LOCKING CLIP
LOCKING PLATE #3
LOCK
PANEL-STRUCTURE
INTERIOR
COMPOSITE
PANEL
CORNER
COVER

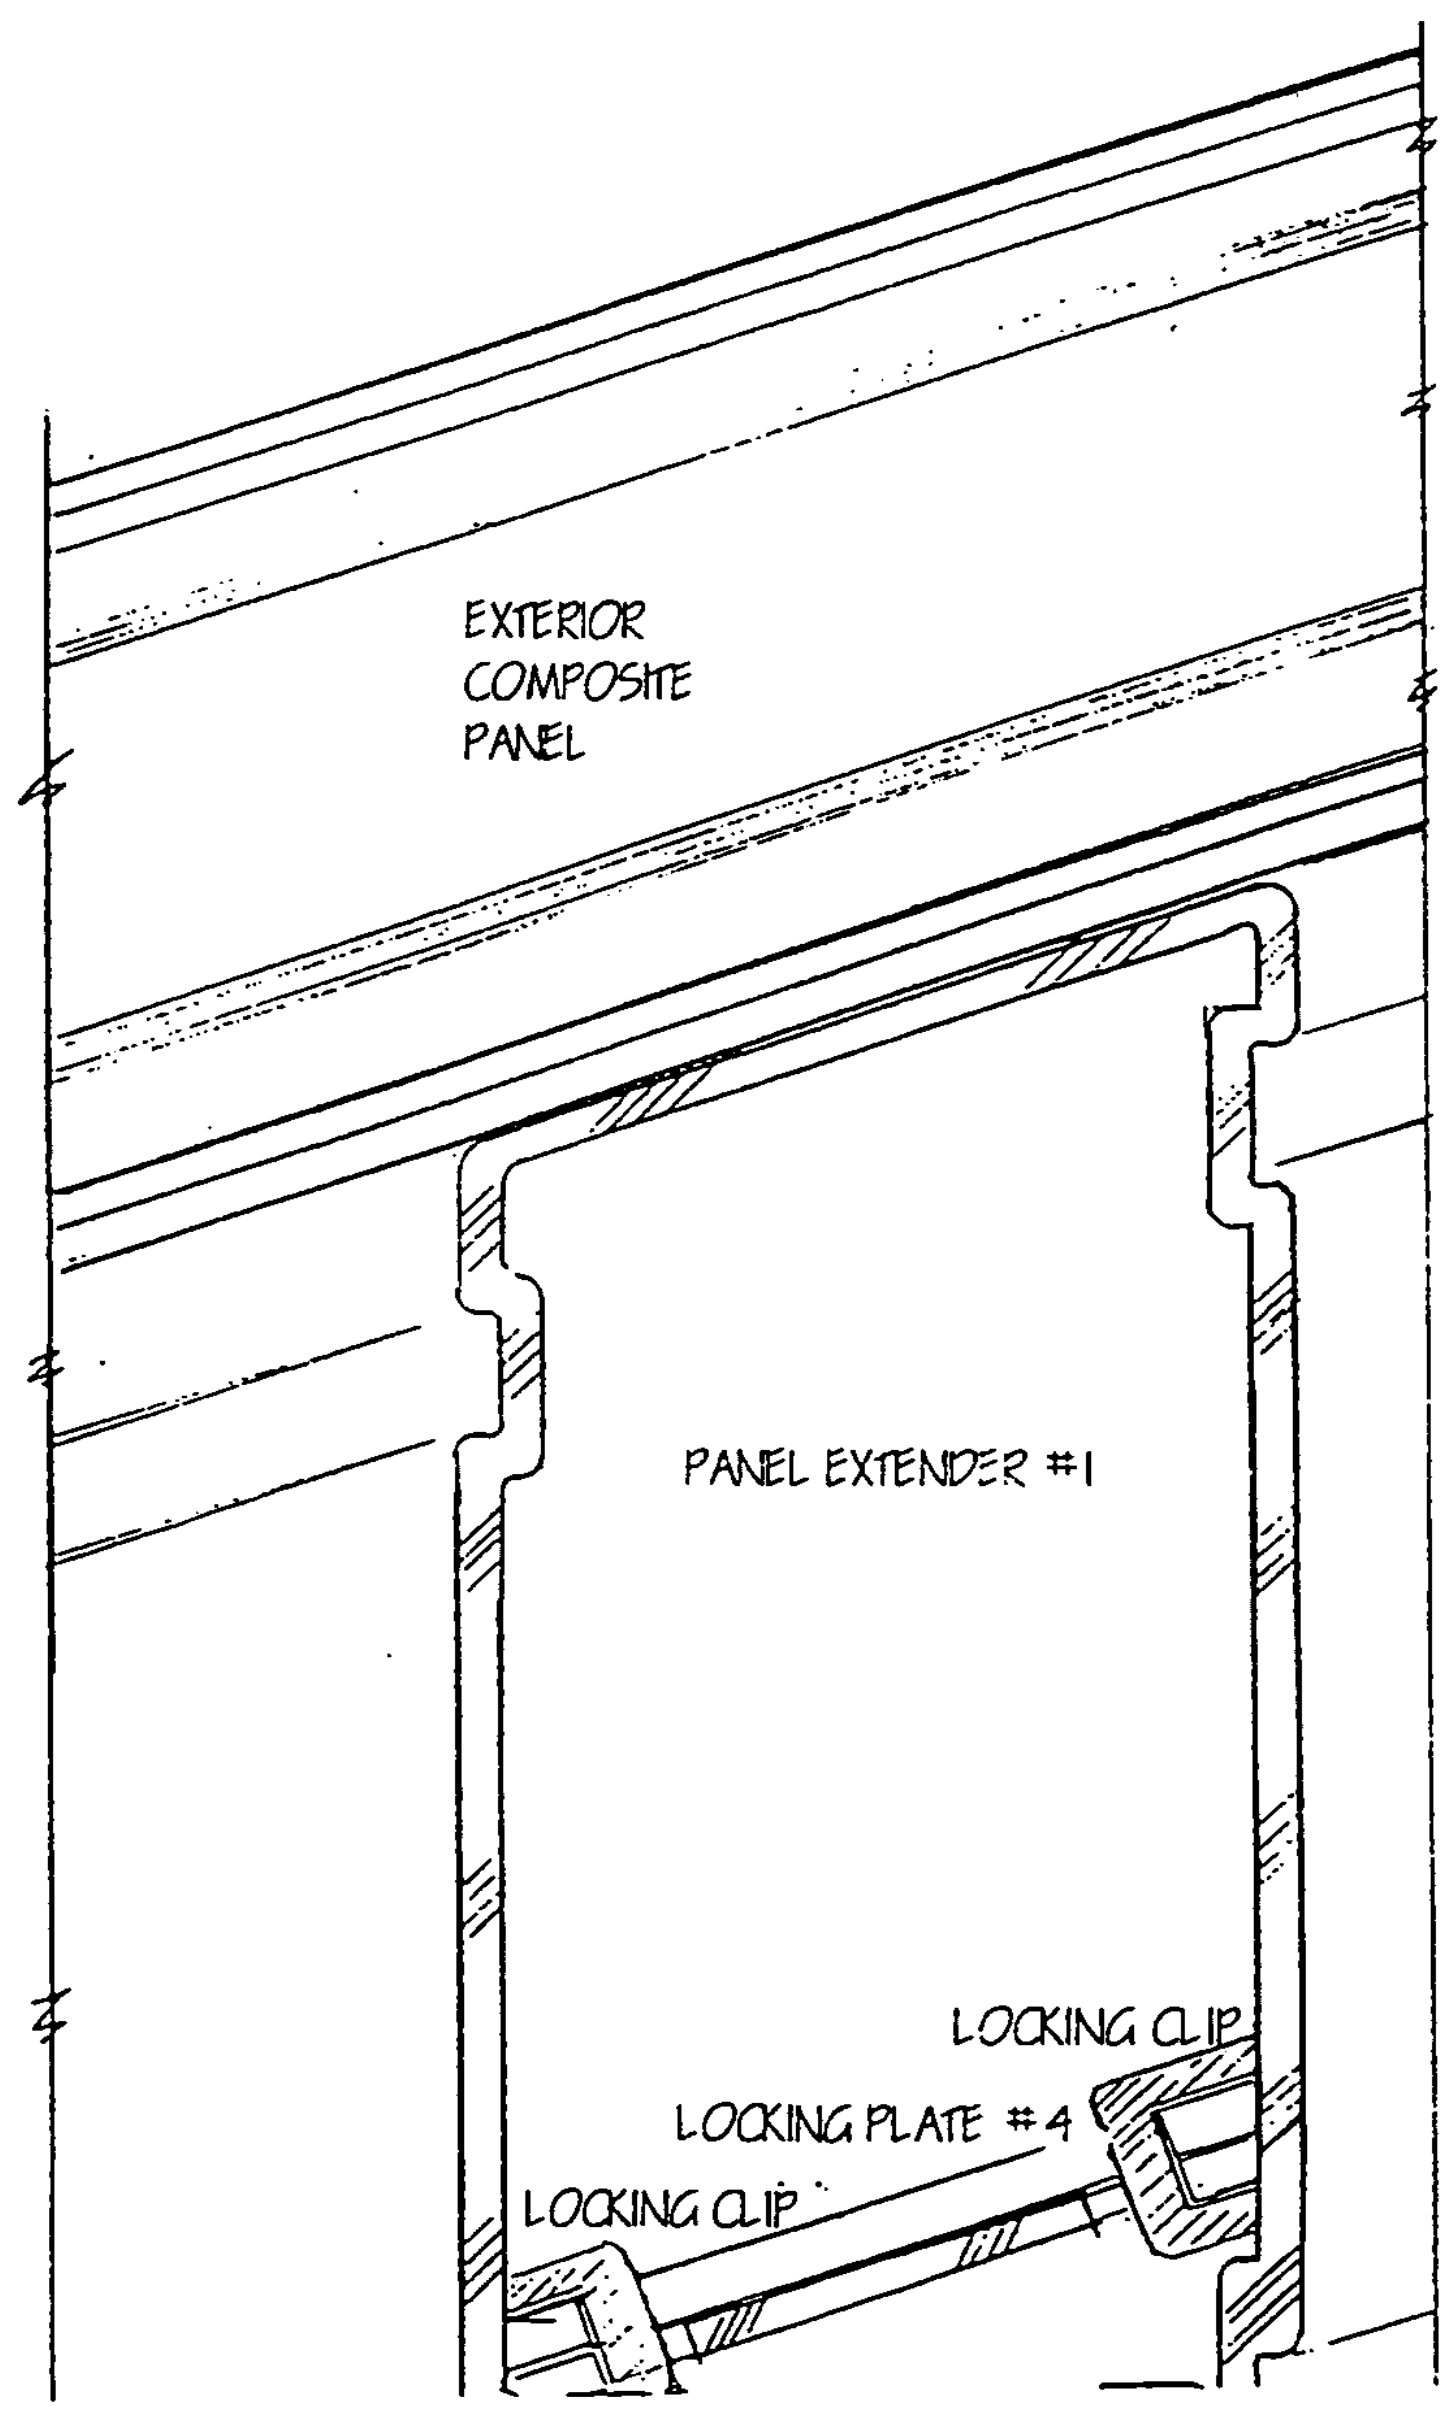
EXTERIOR
COMPOSITE
PANEL
PANEL EXTENDER #1
LOCKING CLIP
LOCKING PLATE #4
LOCKING CLIP

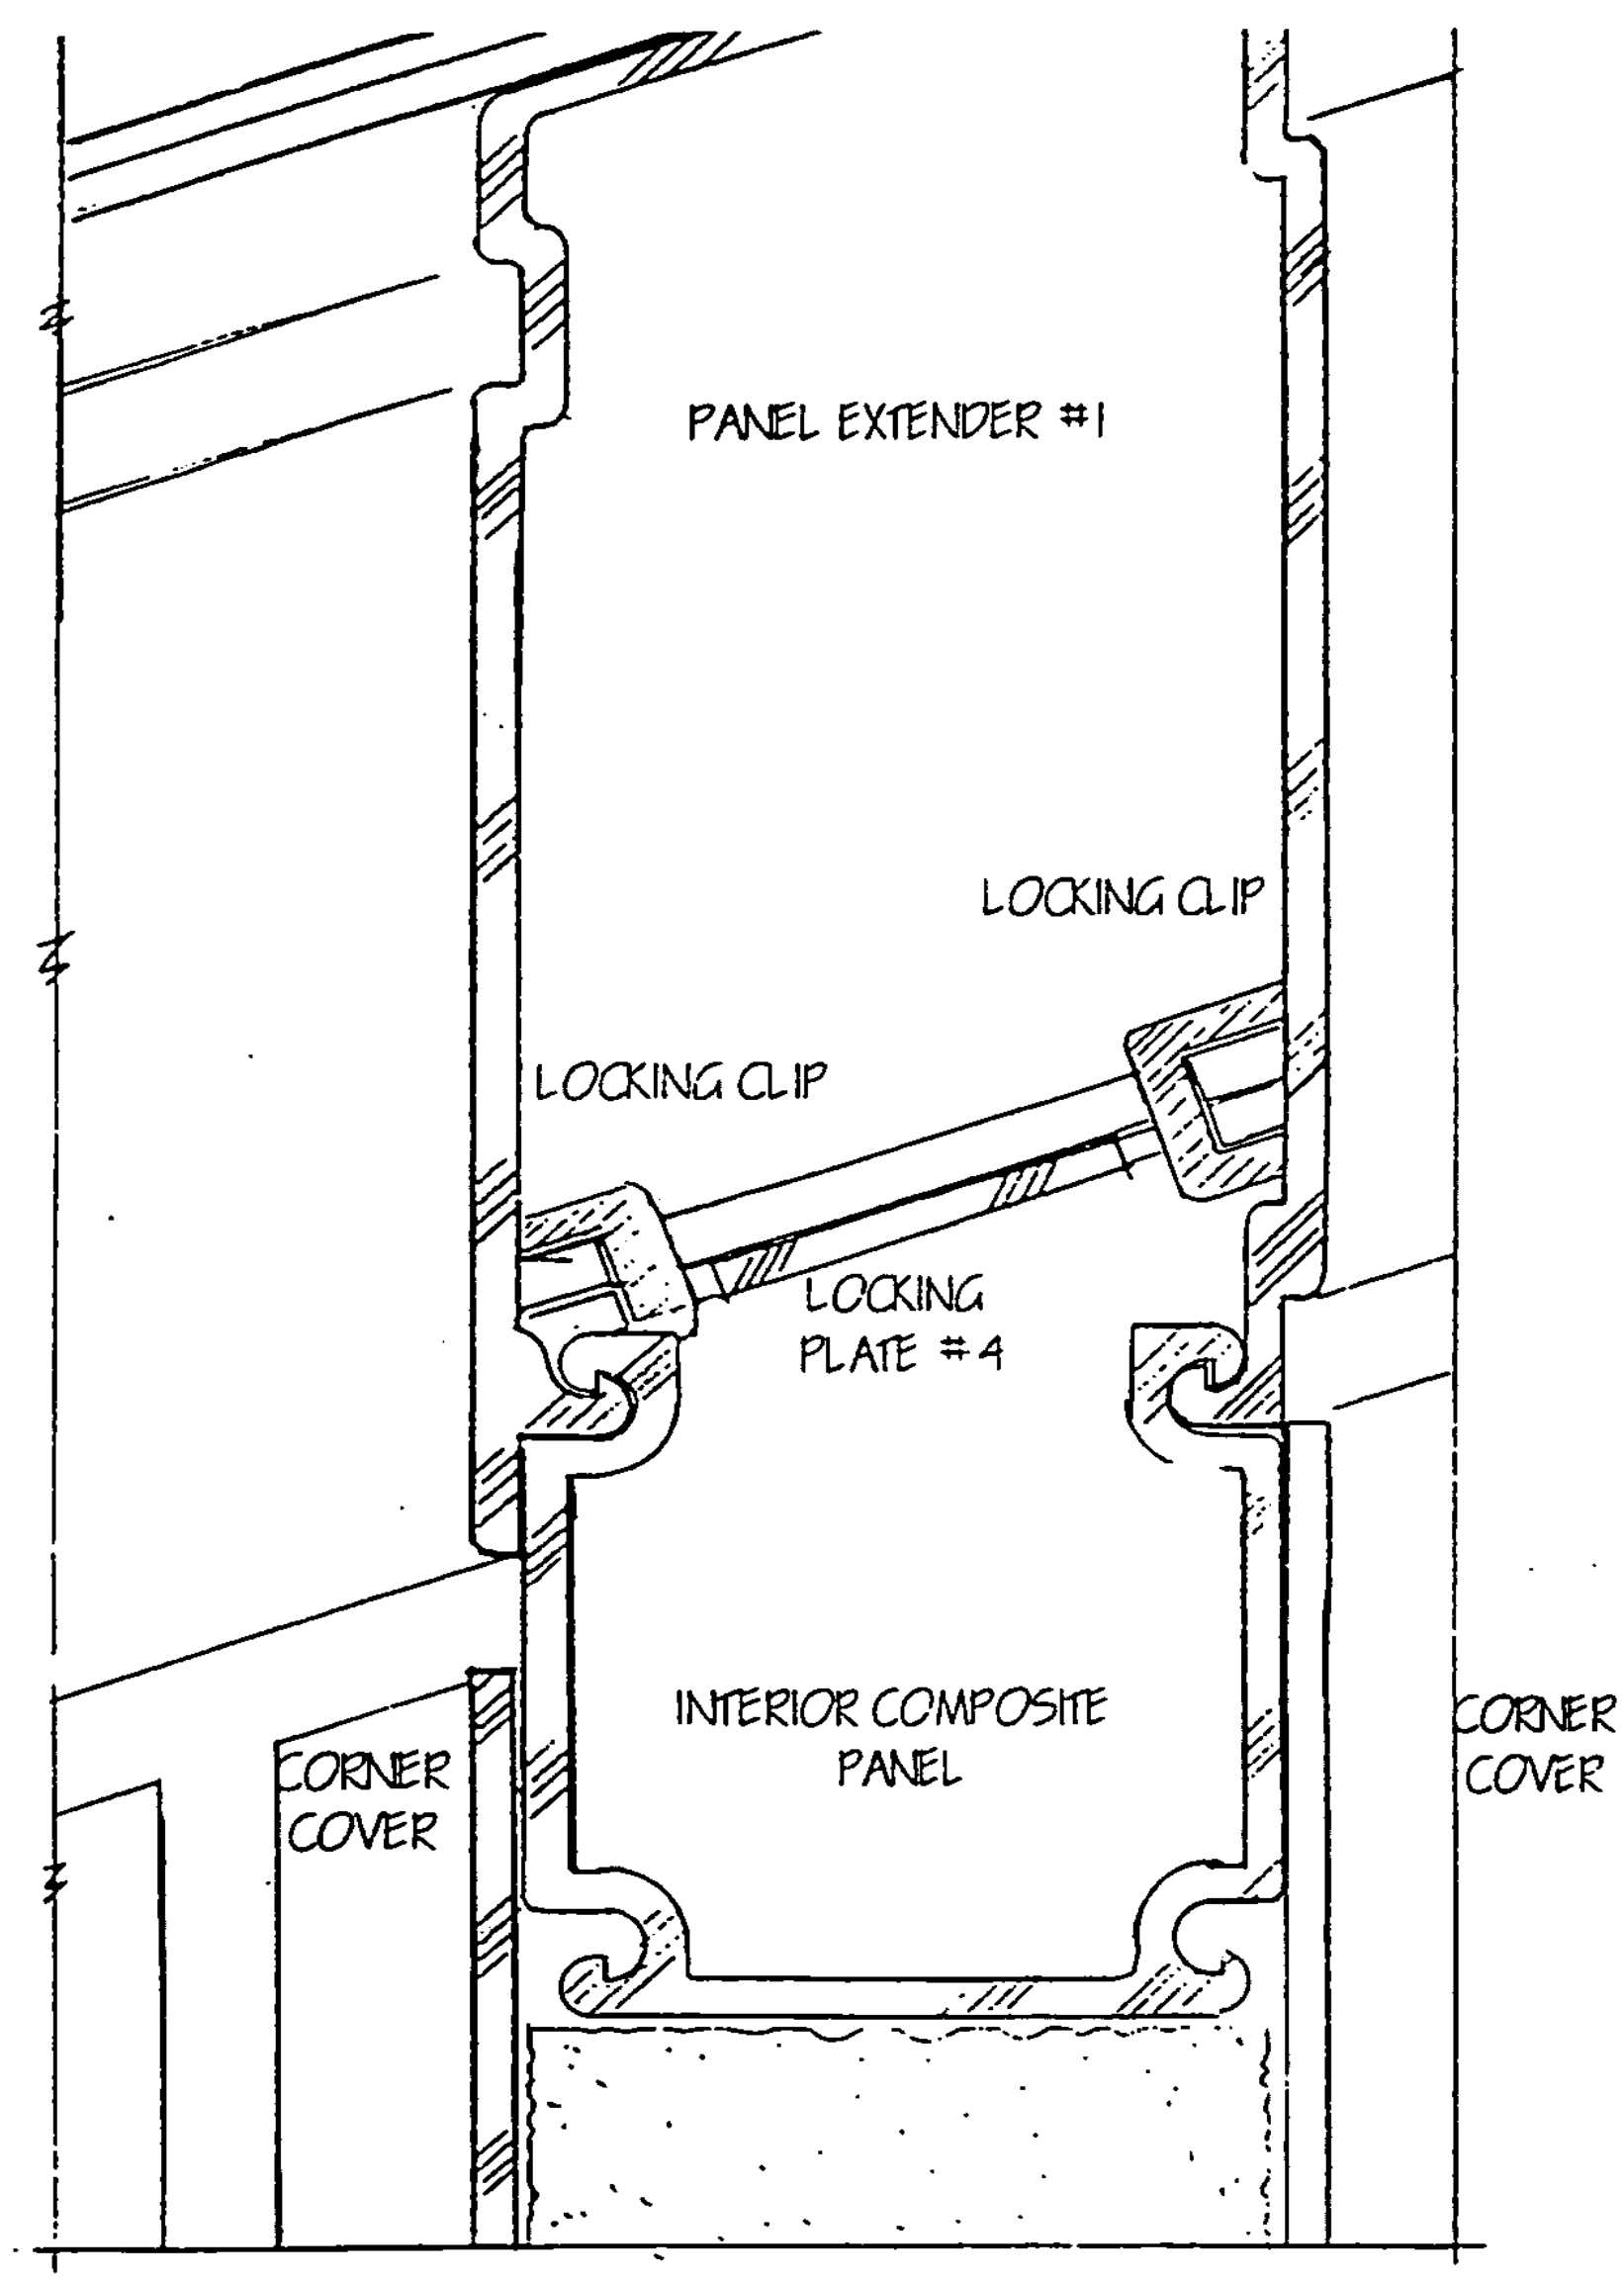
PANEL EXTENDER #1
LOCKING CLIP
LOCKING CLIP
LOCKING PLATE #4
INTERIOR COMPOSITE PANEL
CORNER COVER
CORNER COVER

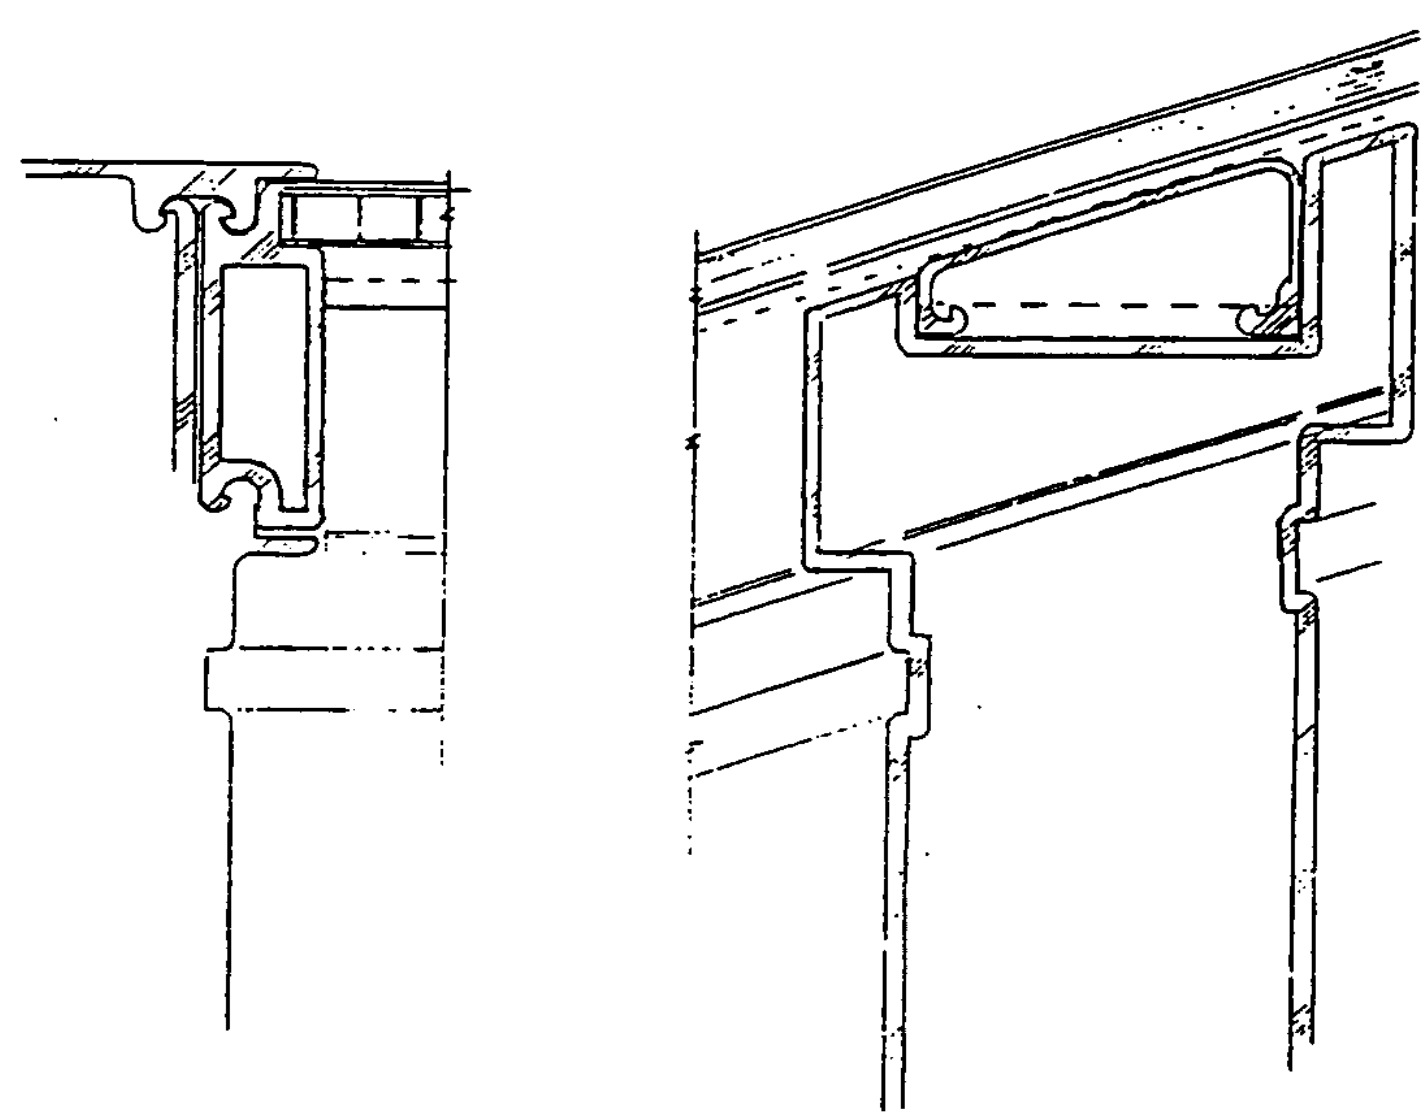

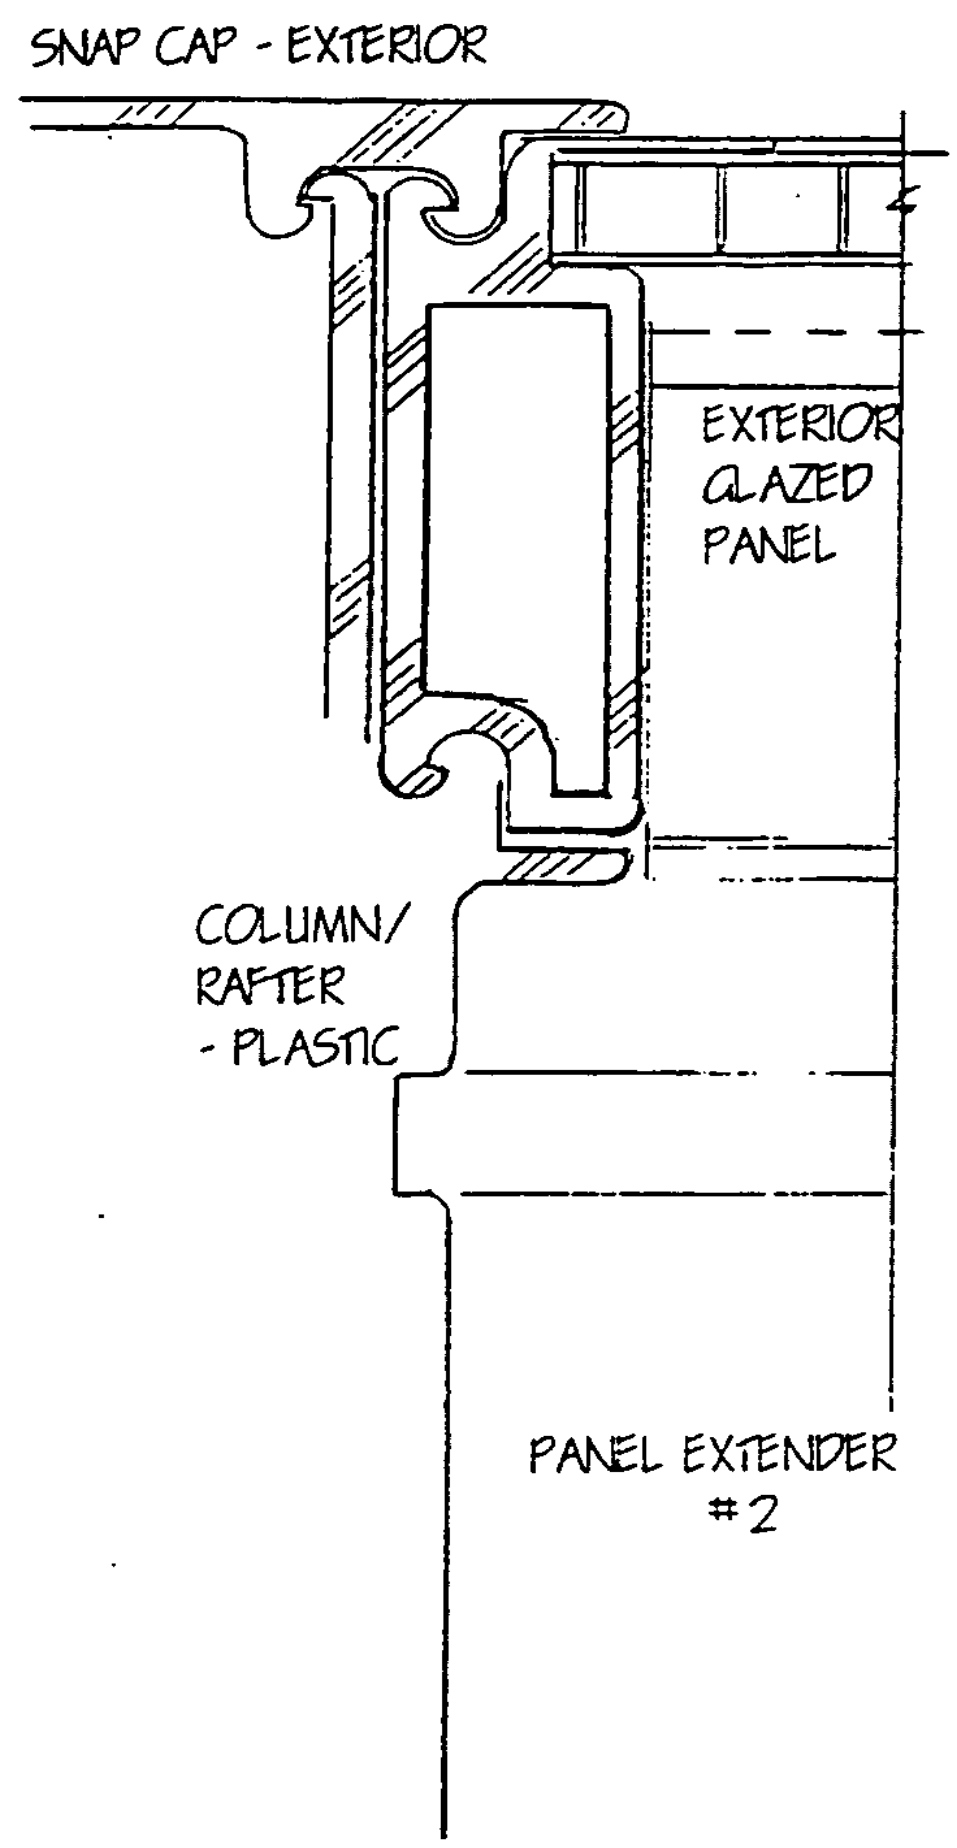
SNAP CAP - EXTERIOR
EXTERIOR GLAZED PANEL
COLUMN/ RAFTER - PLASTIC
PANEL EXTENDER #2

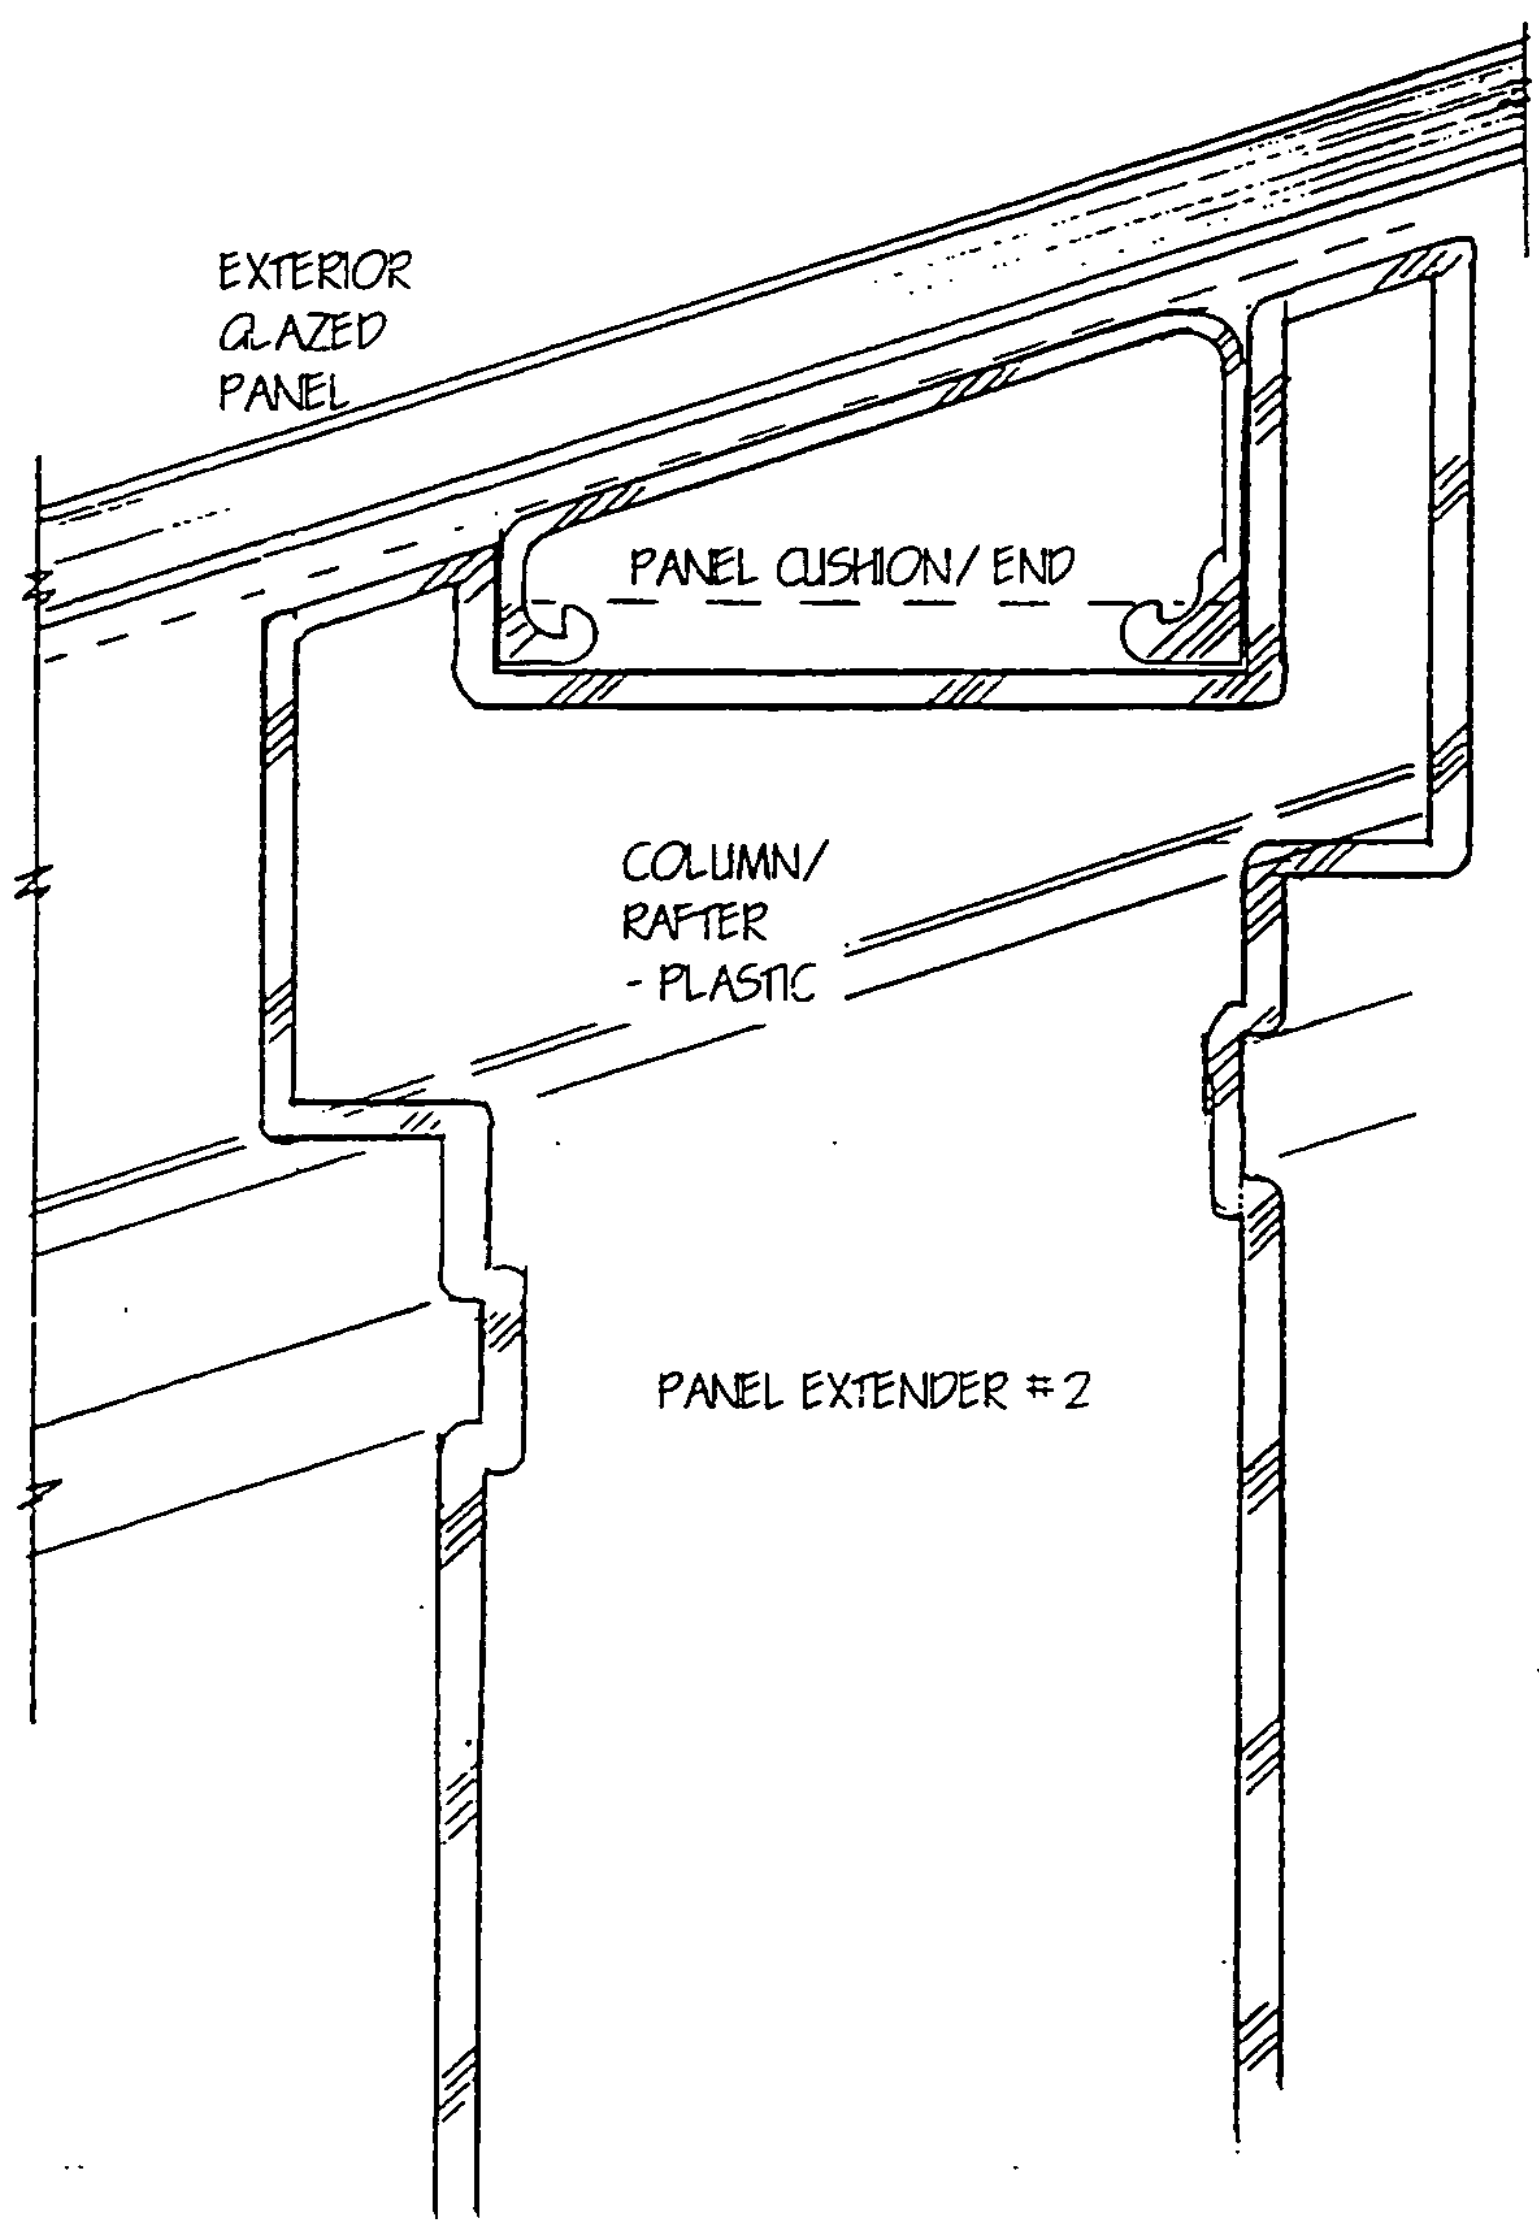
EXTERIOR
GLAZED
PANEL
PANEL CUSHION/ END
COLUMN/
RAFTER
- PLASTIC
PANEL EXTENDER # 2

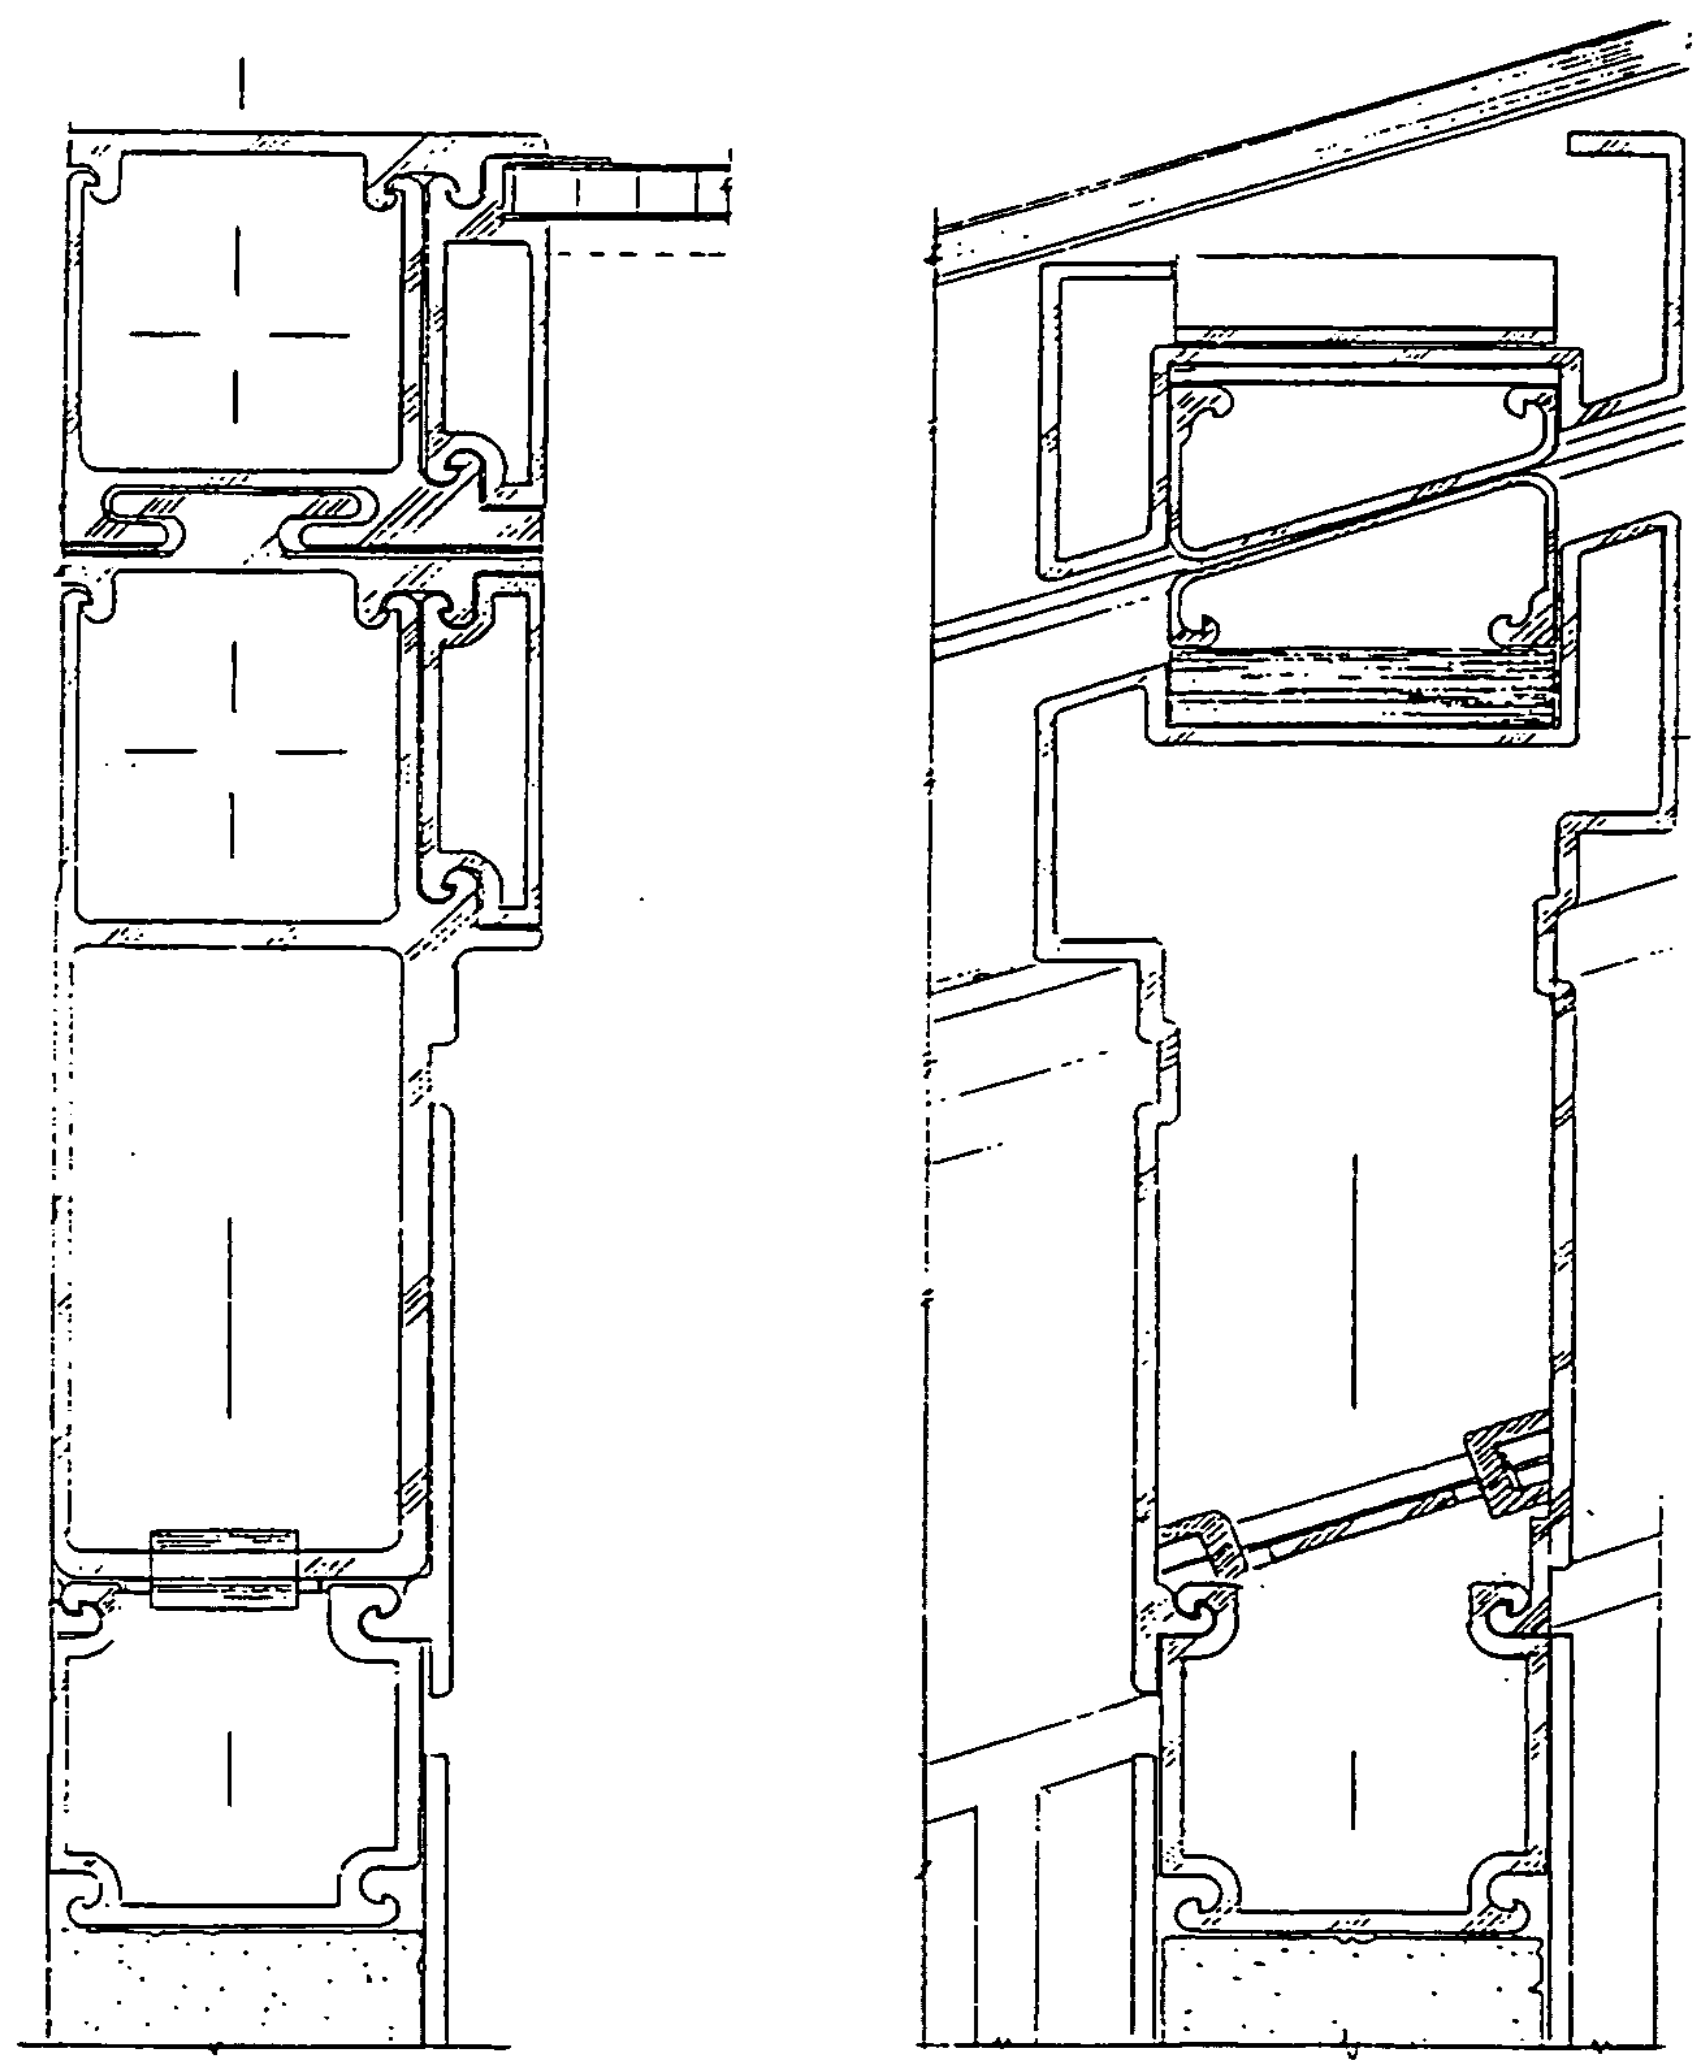

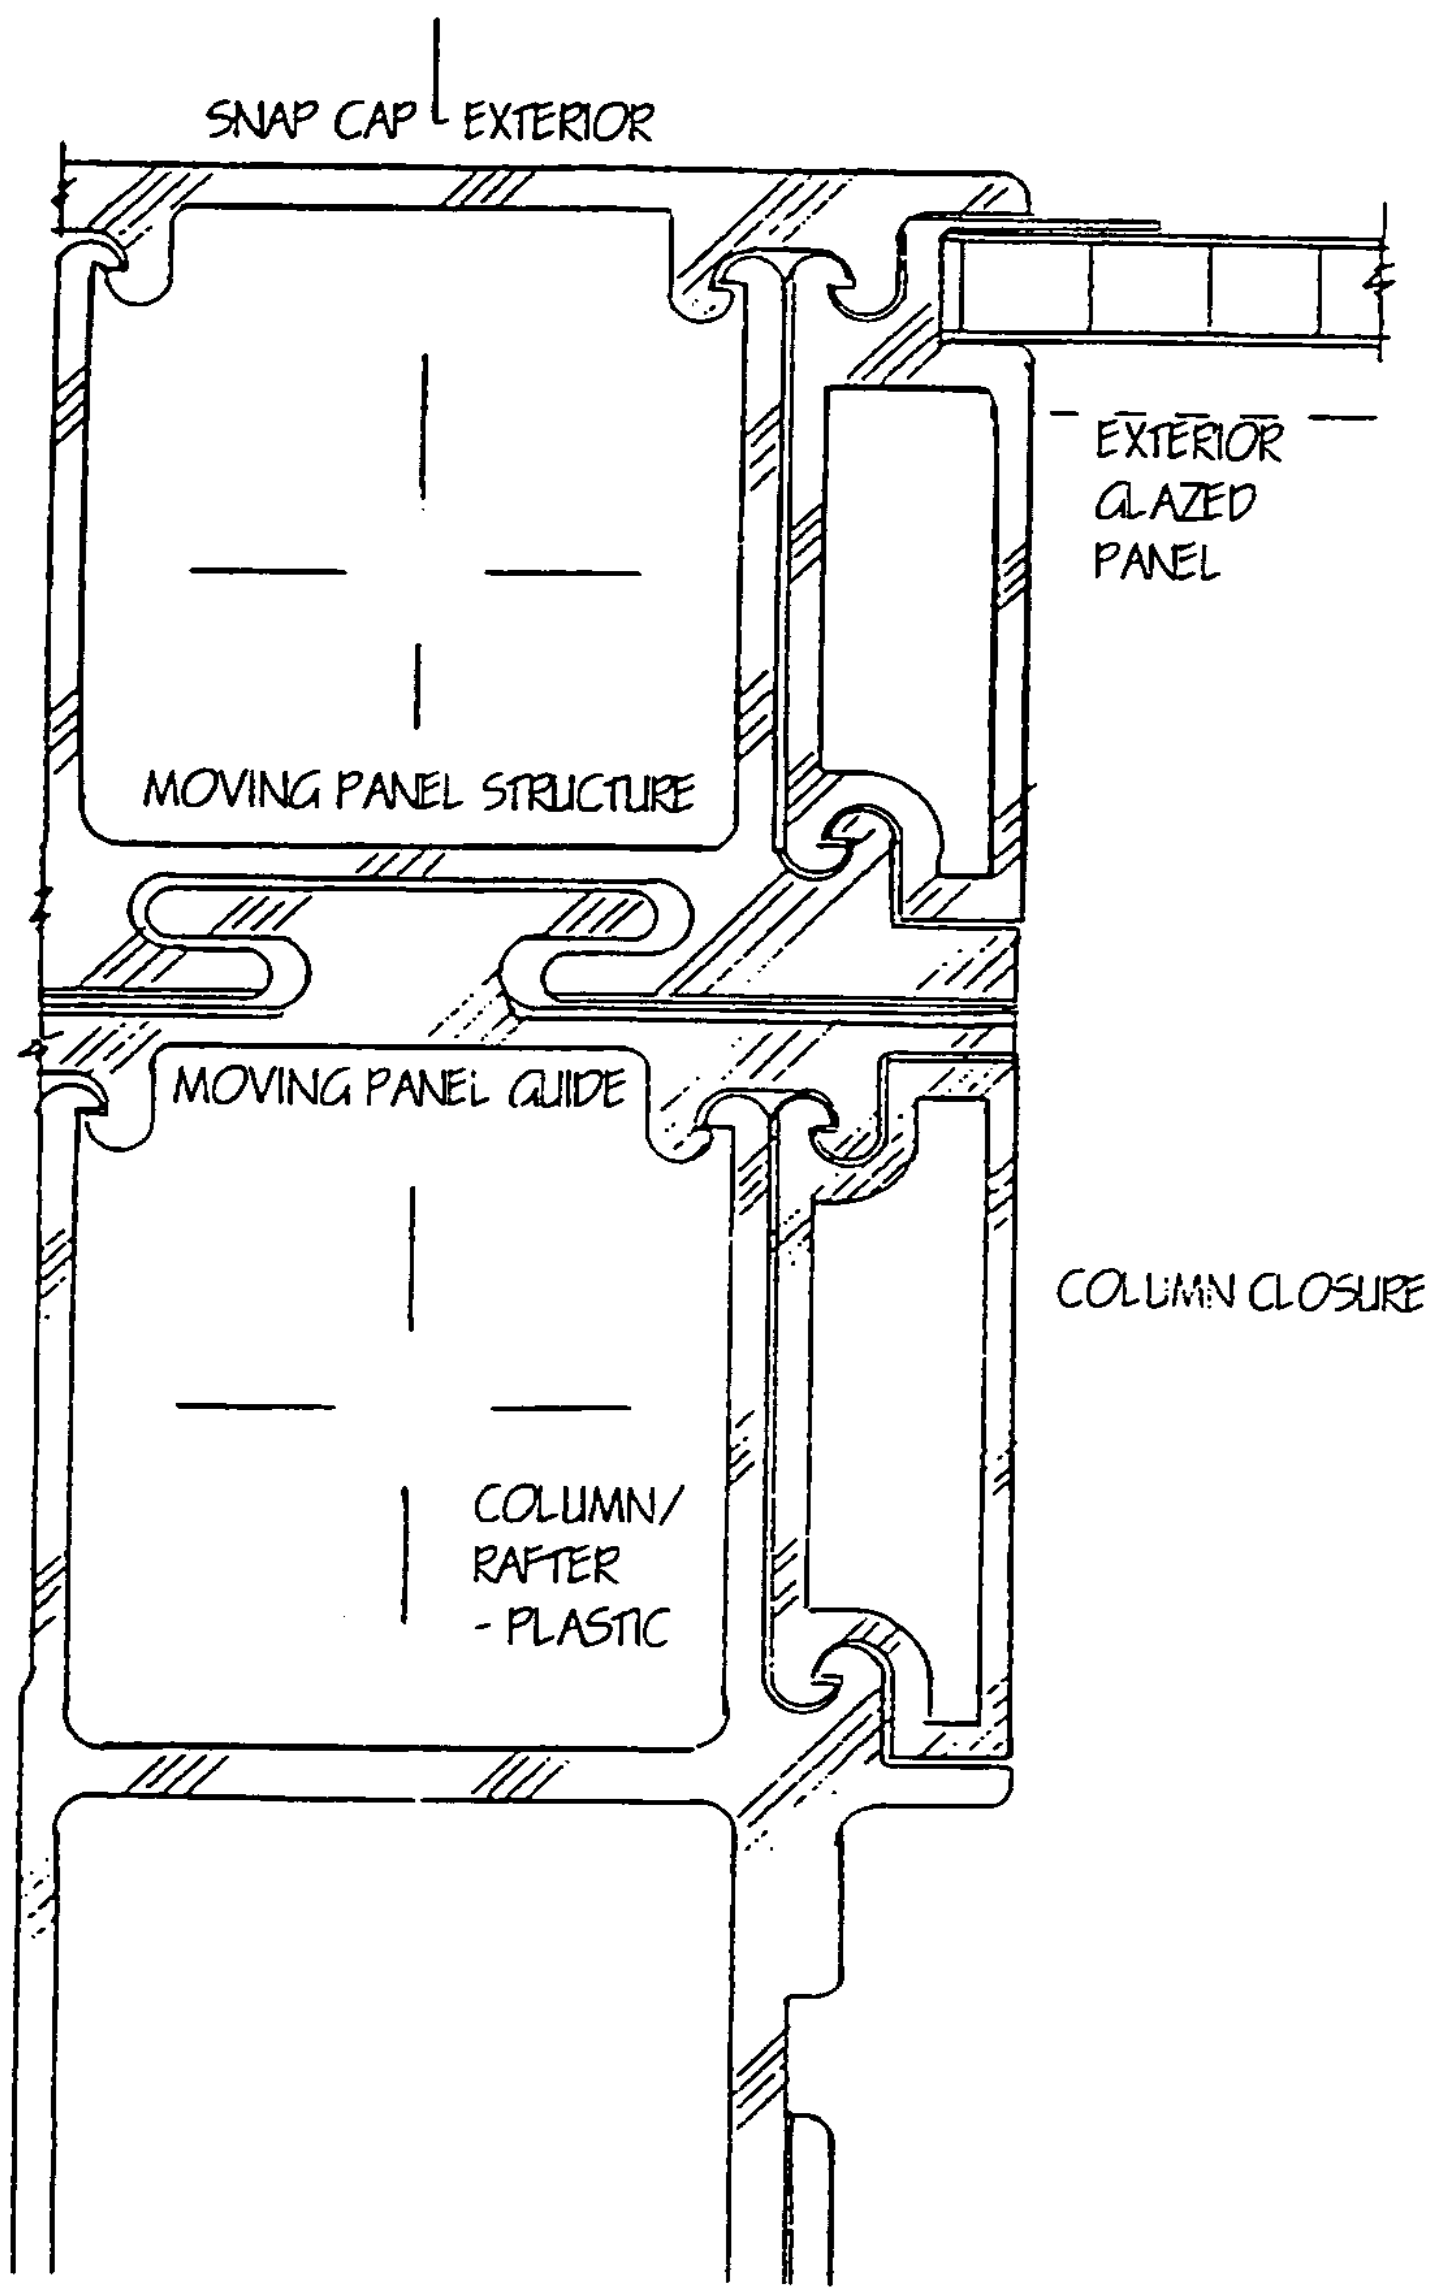
SNAP CAP
EXTERIOR
EXTERIOR GLAZED PANEL
MOVING PANEL STRUCTURE
MOVING PANEL GUIDE
COLUMN CLOSURE
COLUMN/ RAFTER - PLASTIC

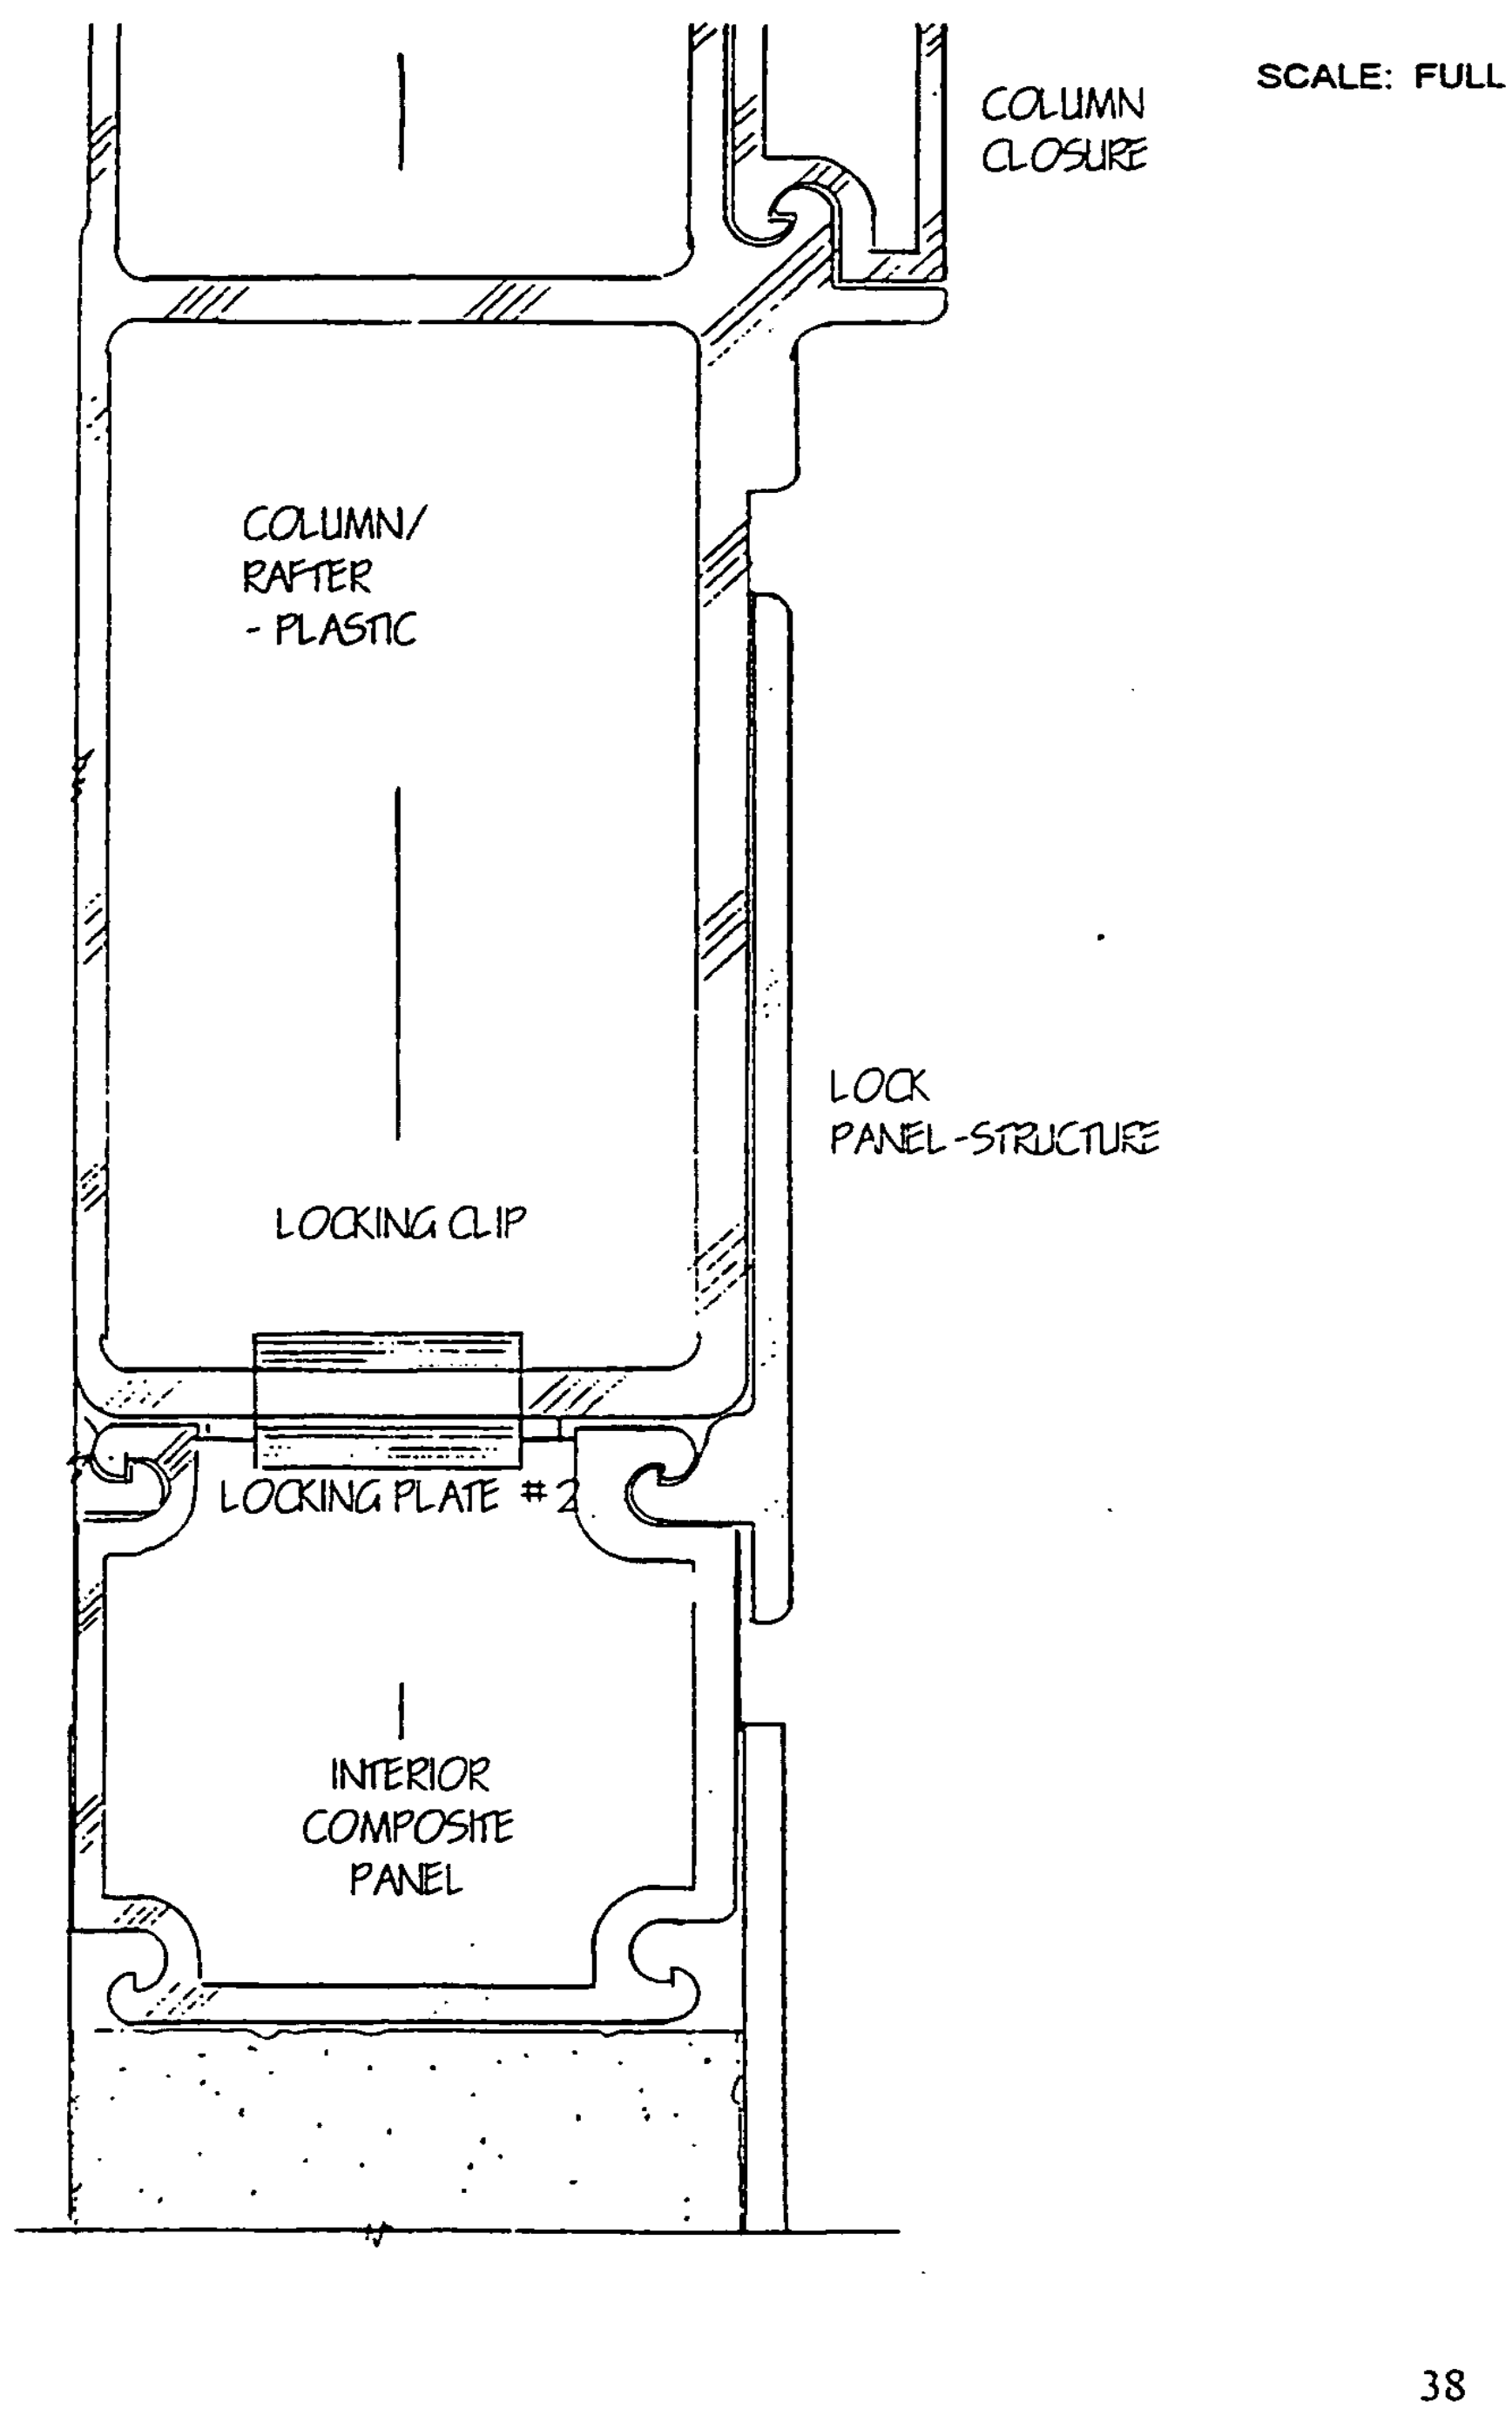
COLUMN
CLOSURE
SCALE: FULL
COLUMN/
RAFTER
- PLASTIC
LOCK
PANEL-STRUCTURE
LOCKING CLIP
LOCKING PLATE #2
INTERIOR
COMPOSITE
PANEL

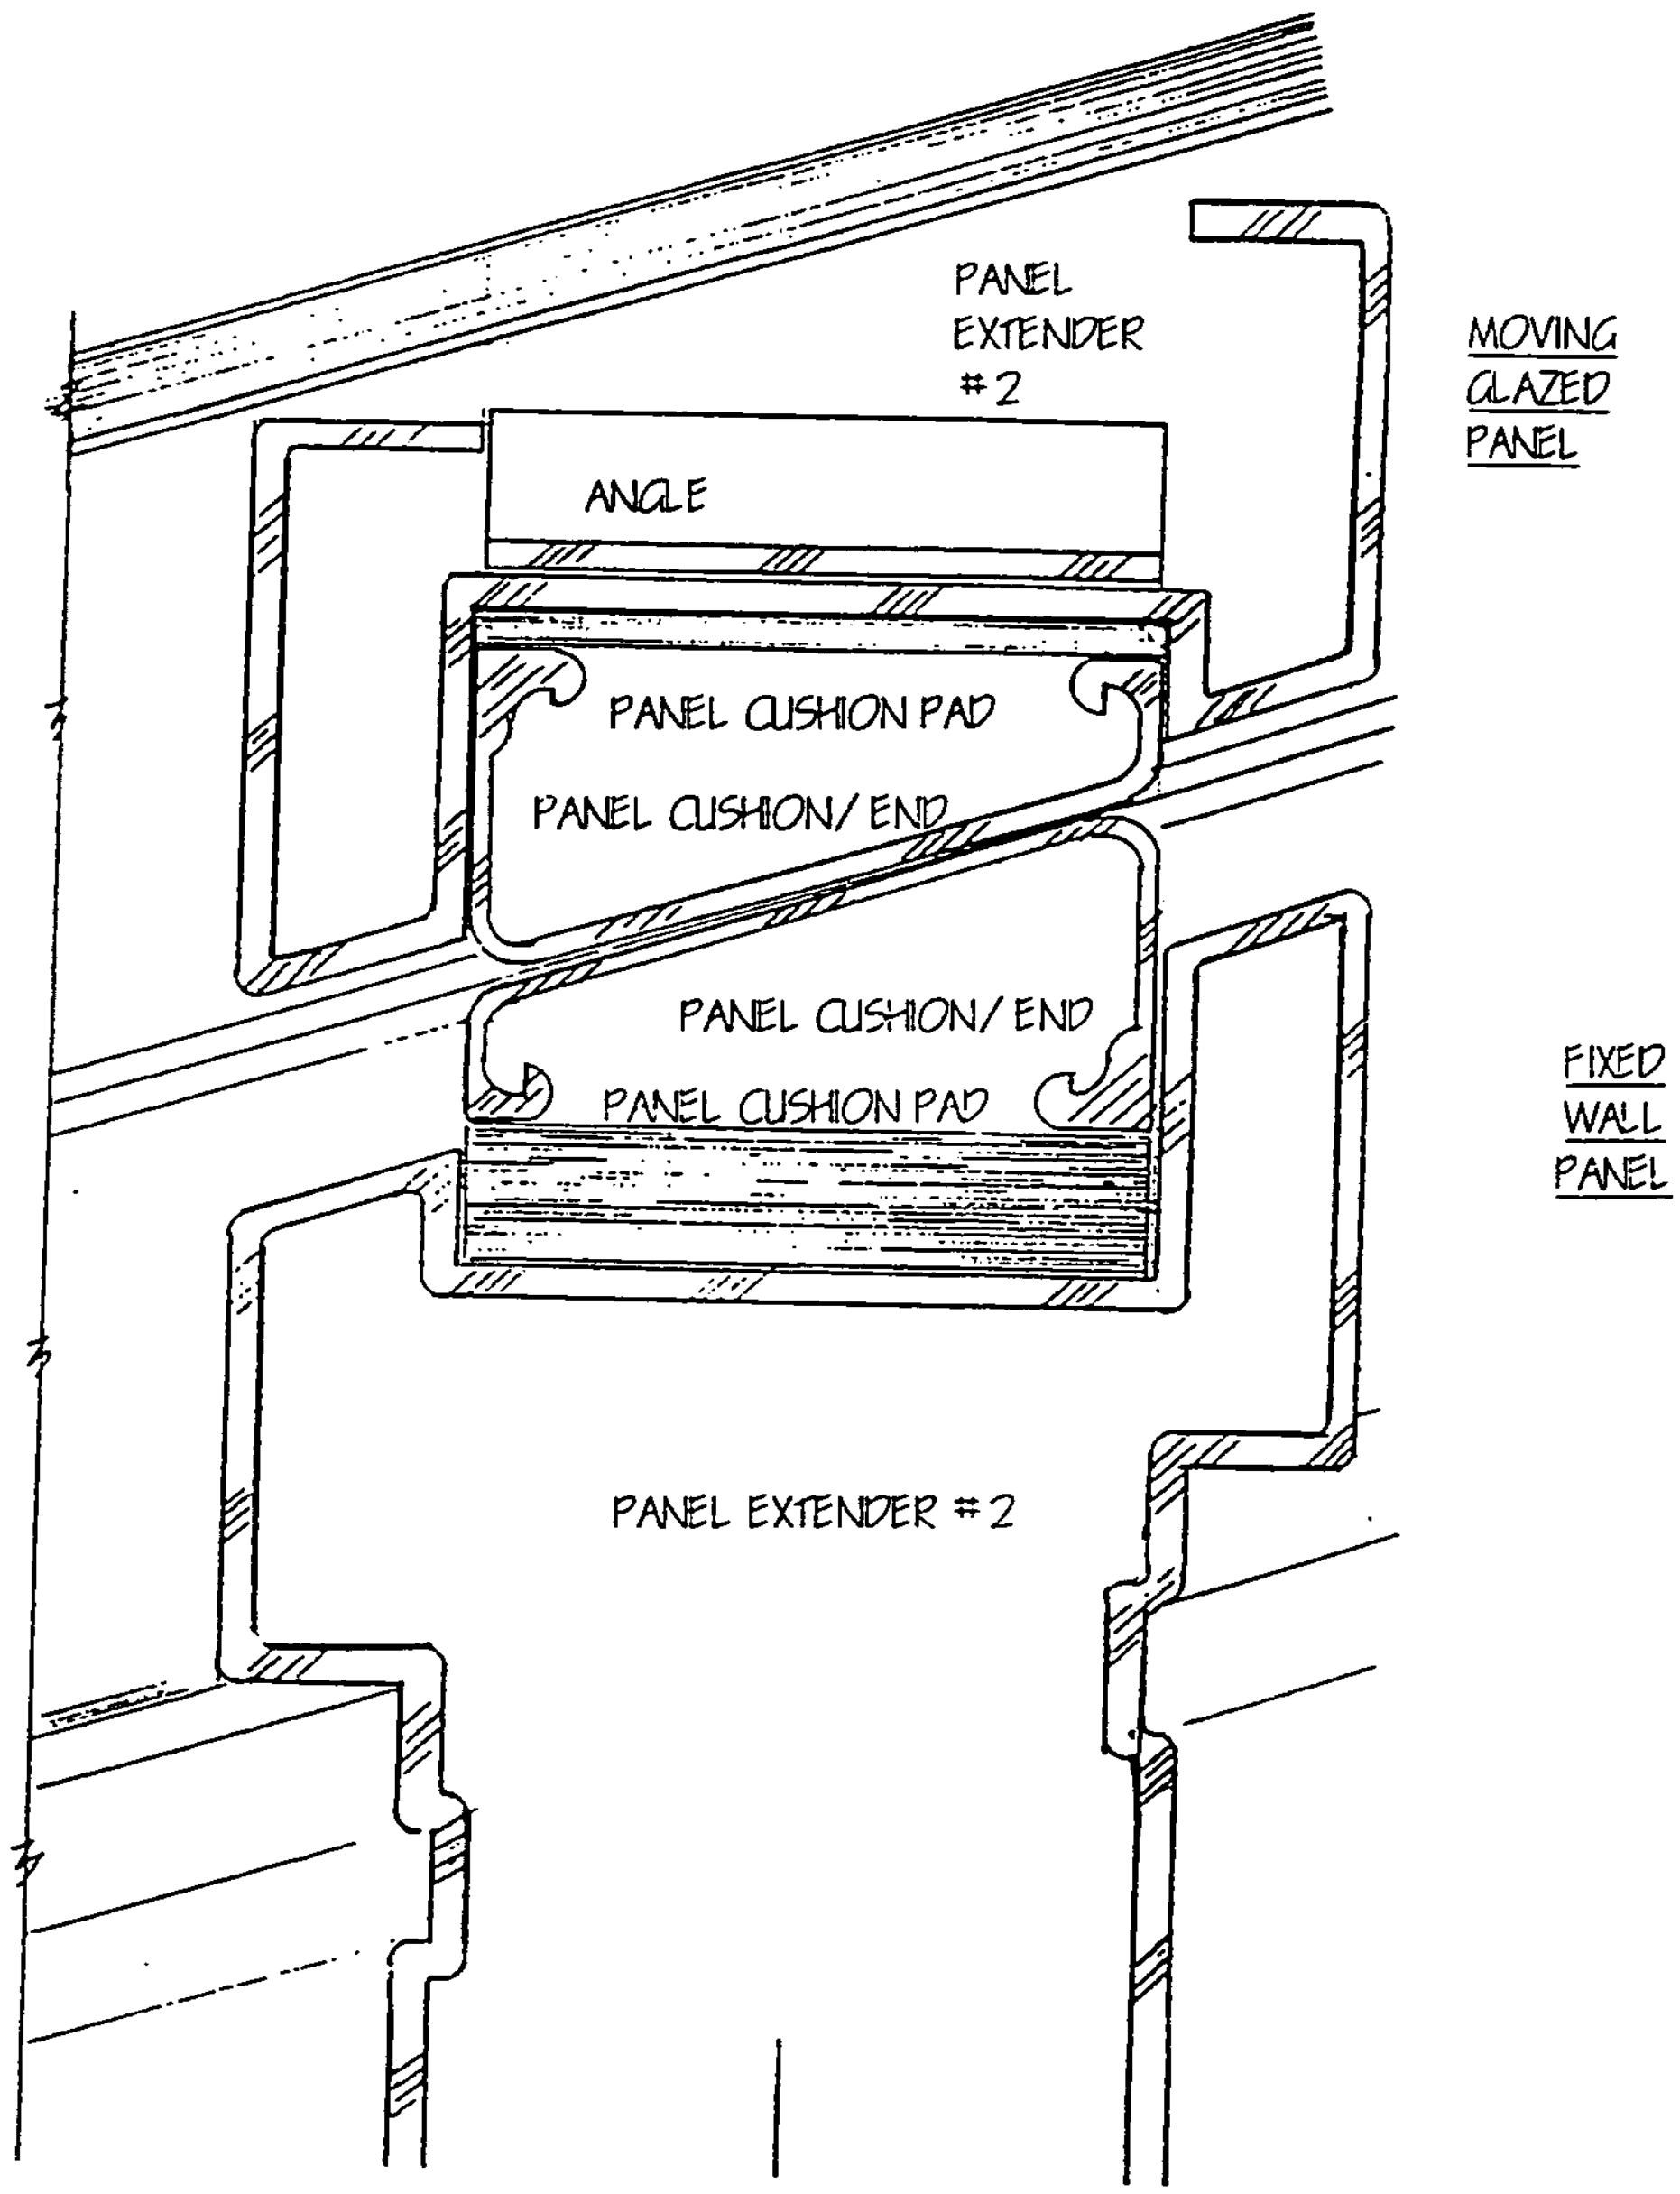
PANEL
EXTENDER
#2
MOVING
GLAZED
PANEL
ANGLE
PANEL CUSHION PAD
PANEL CUSHION/ END
PANEL CUSHION/ END
PANEL CUSHION PAD
FIXED
WALL
PANEL
PANEL EXTENDER #2

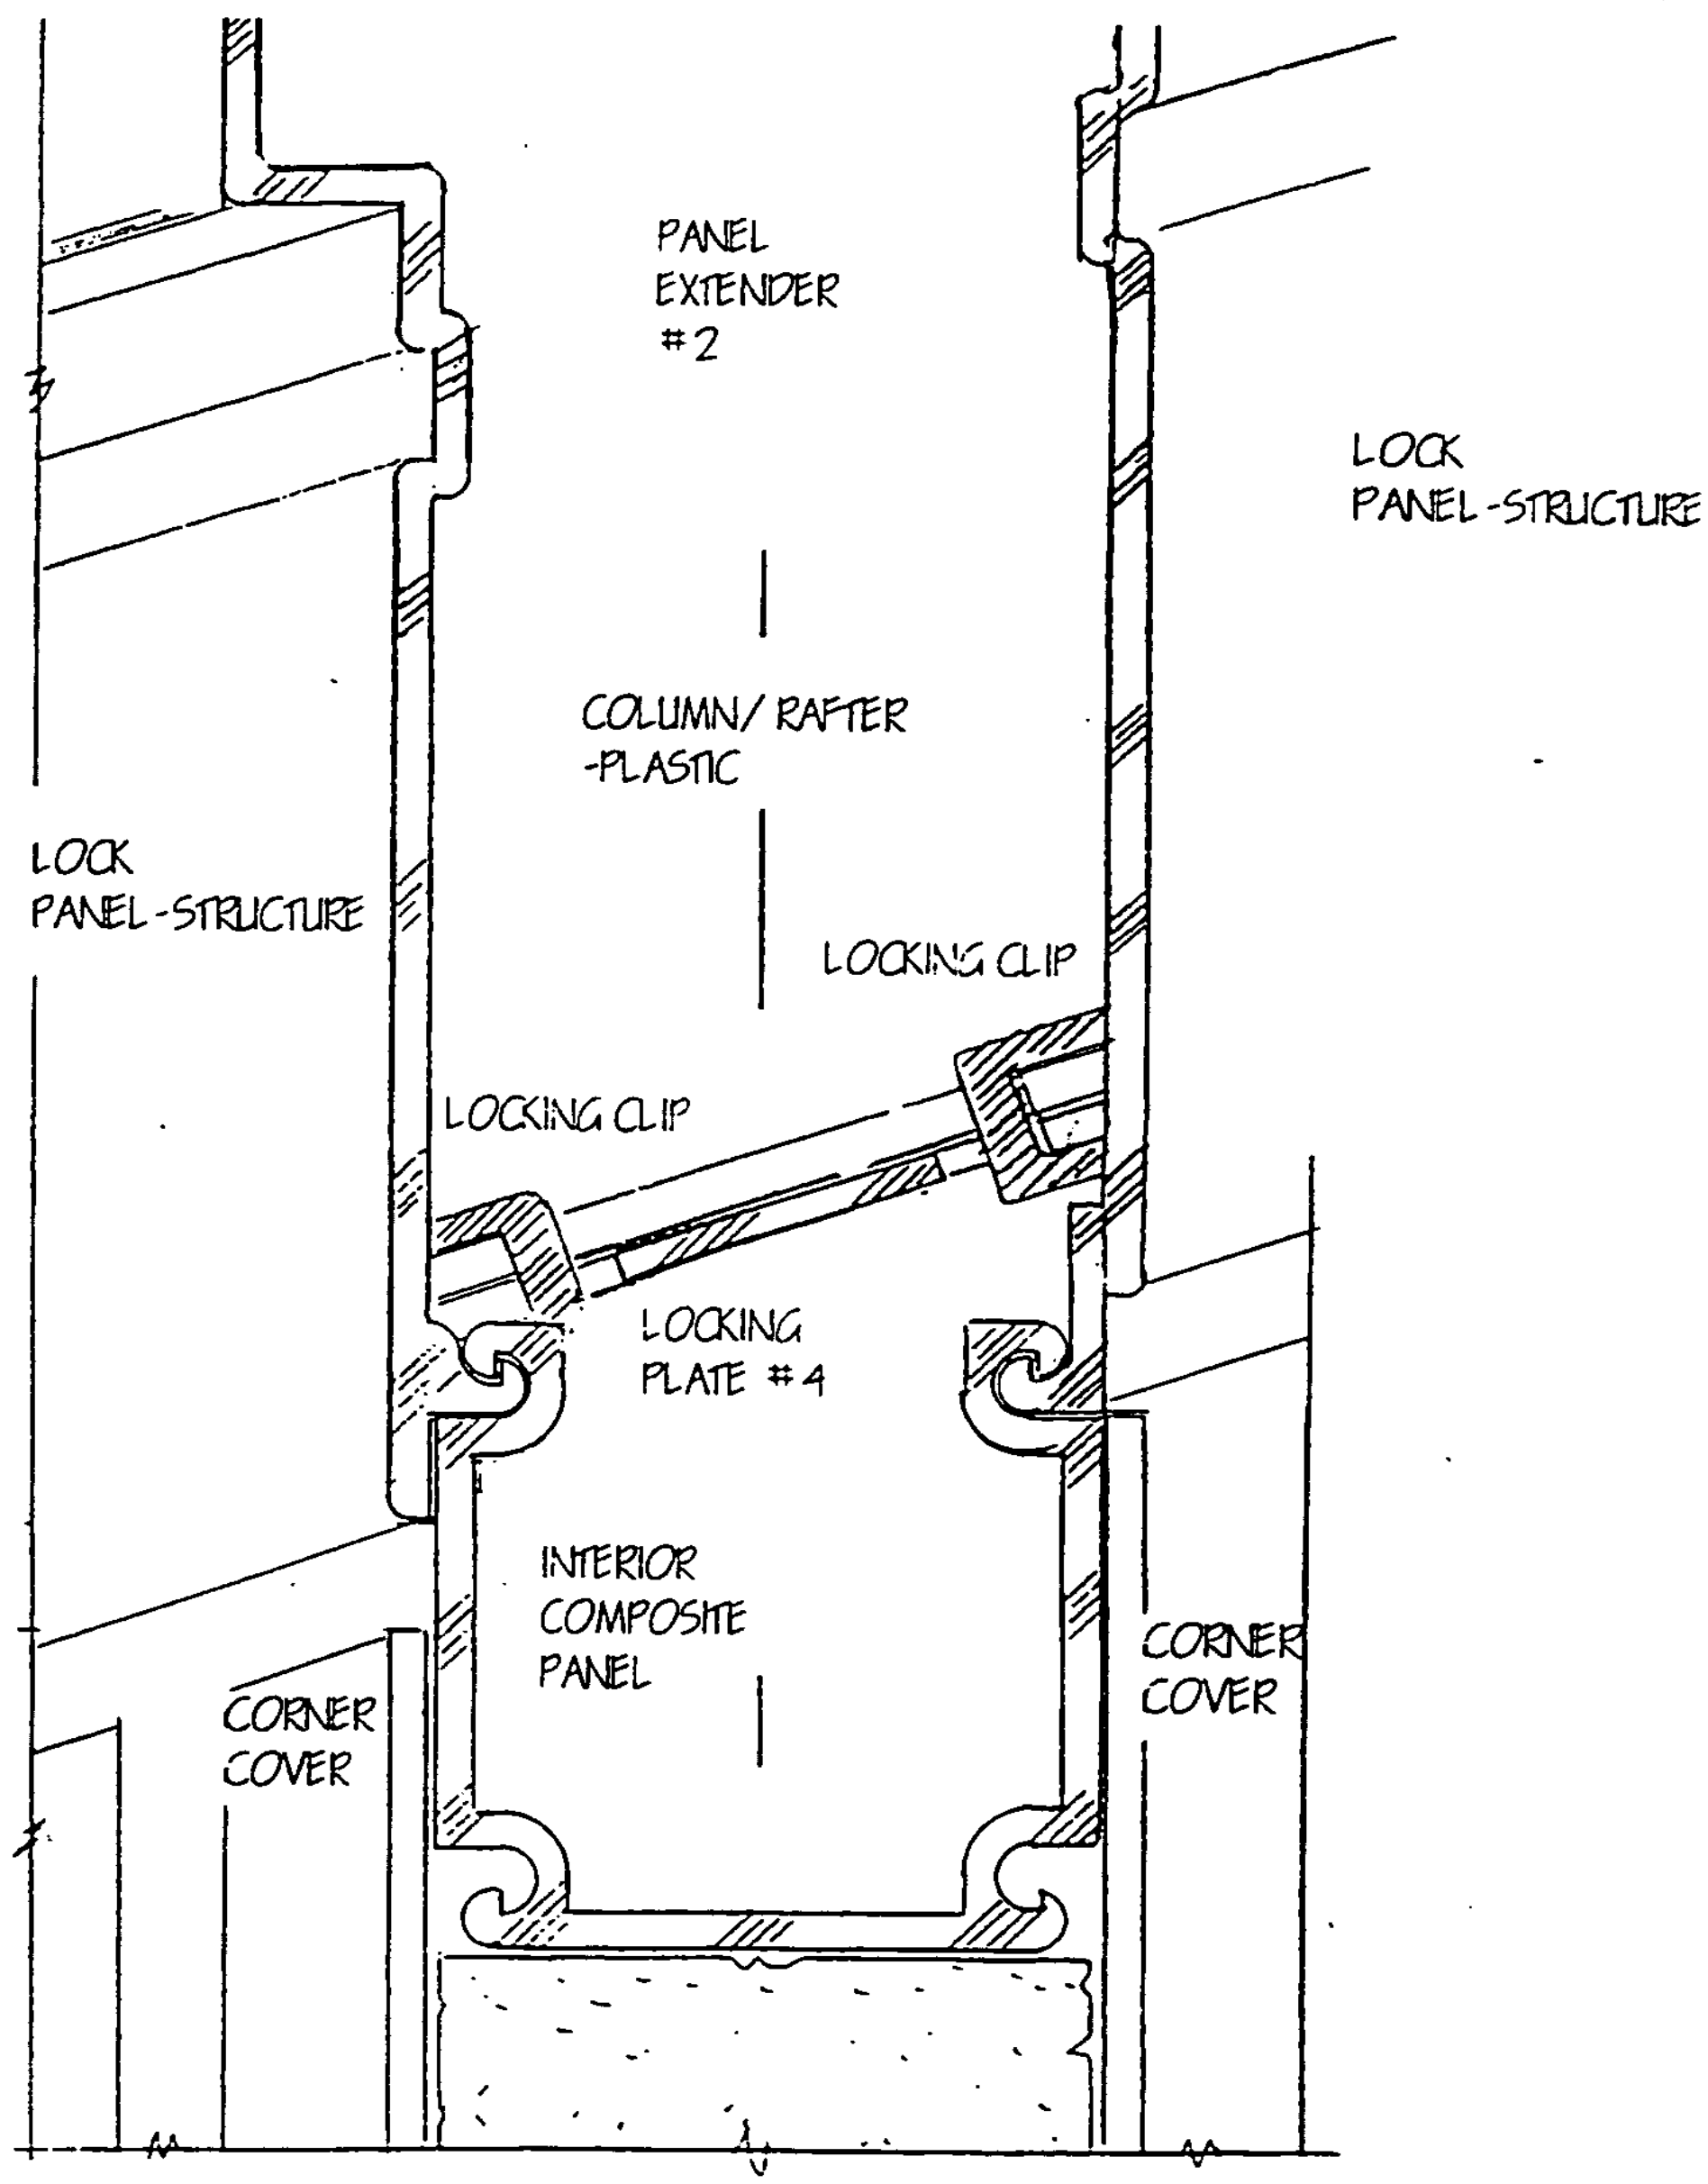
PANEL
EXTENDER
#2
LOCK
PANEL-STRUCTURE
COLUMN/ RAFTER
-PLASTIC
LOCK
PANEL-STRUCTURE
LOCKING CLIP
LOCKING CLIP
LOCKING
PLATE #4
INTERIOR
COMPOSITE
PANEL
CORNER
COVER
CORNER
COVER

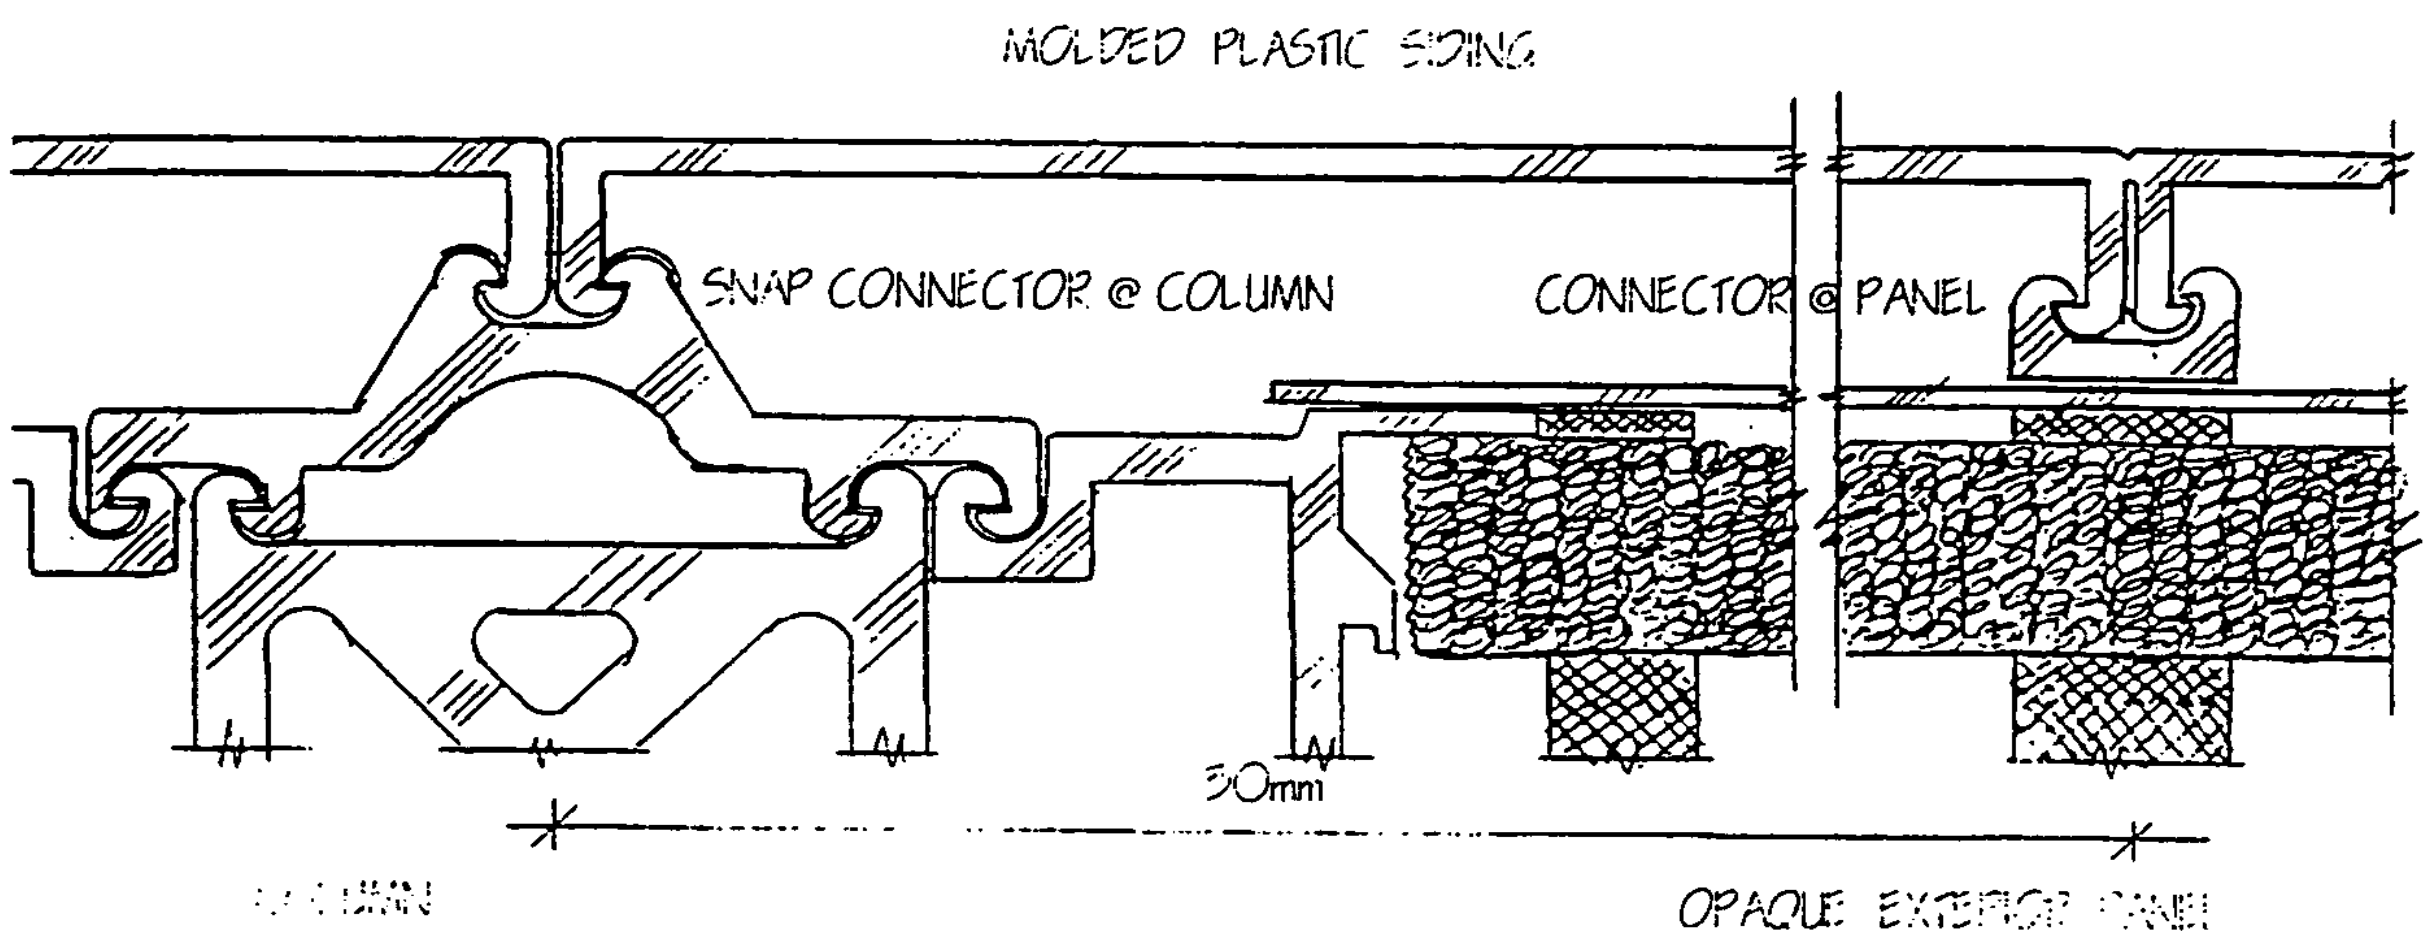
MOLDED PLASTIC SIDING
SNAP CONNECTOR @ COLUMN
CONNECTOR @ PANEL
50mm
OPAQUE EXTERIOR PANEL

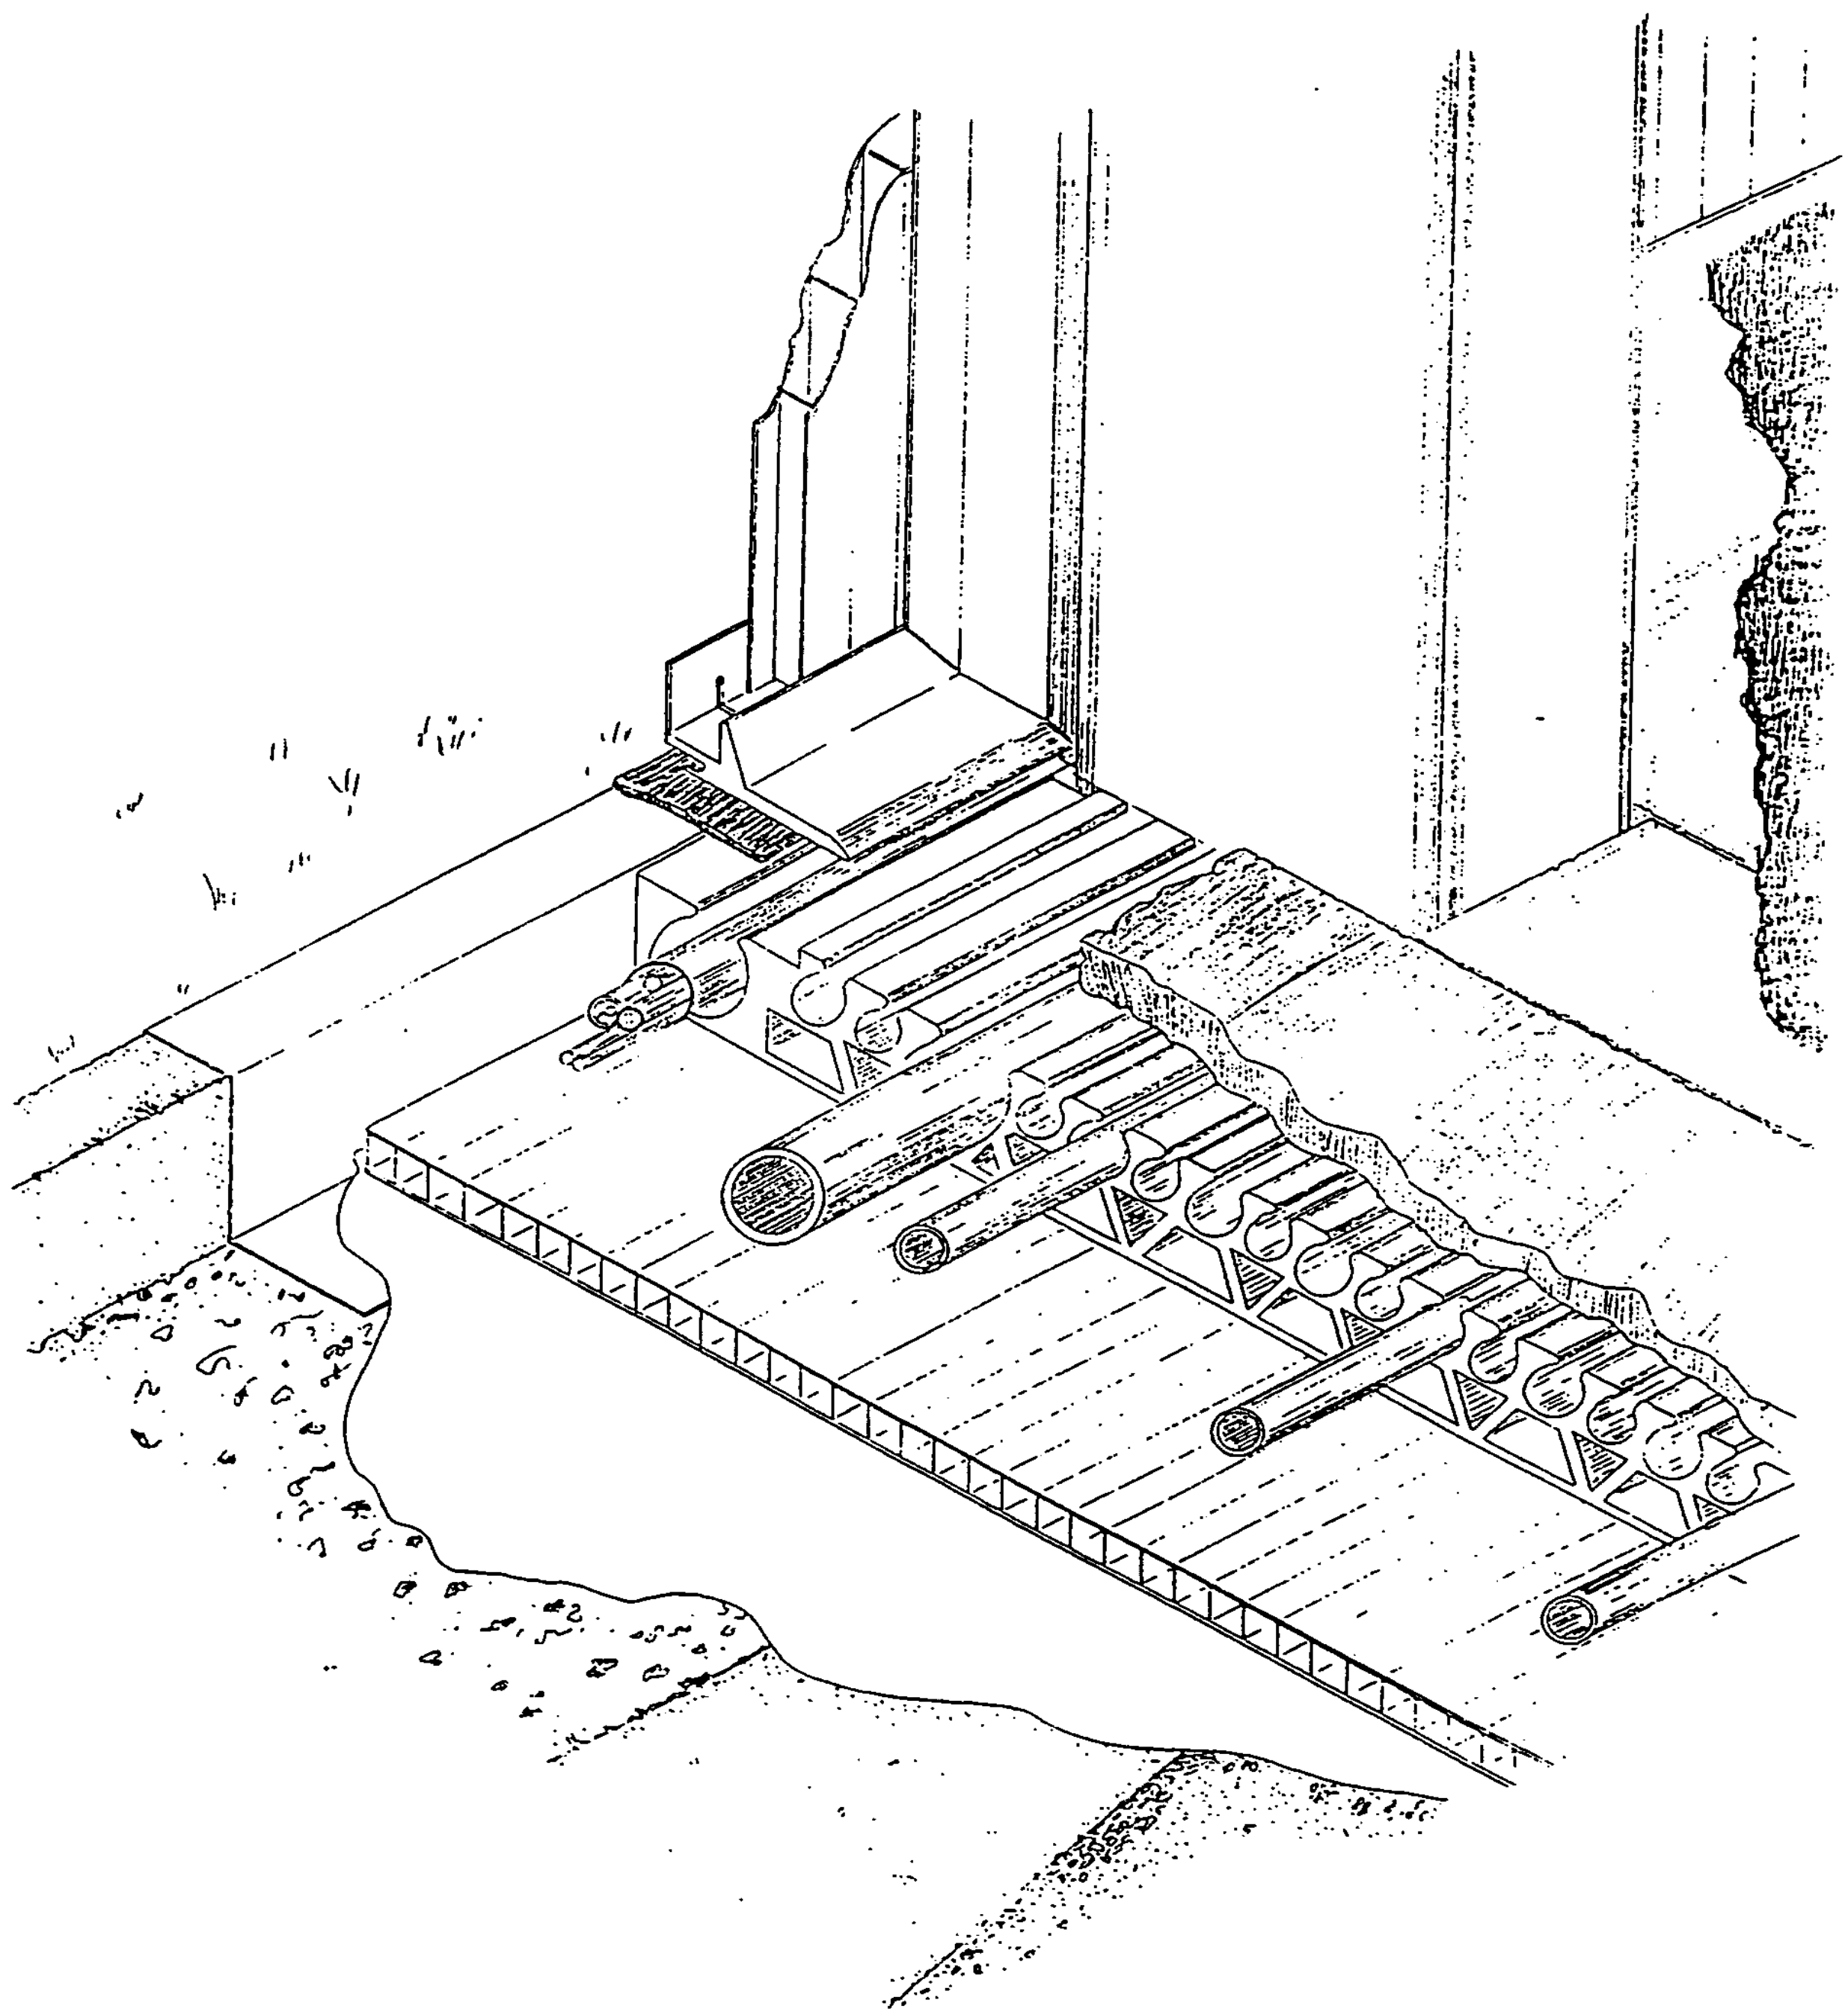

INDEX: DOOR/WINDOW

DRAWING	DESCRIPTION
DW01A-019	PLAN @ EXTERIOR PANEL DOOR/WINDOW
DW01B-019	SECTION @ EXTERIOR DOOR WINDOW - PANEL
DW01B-019-ALT	SECTION @ EXTERIOR DOOR W/ ALTERNATE SILL
DW01C-019	PLAN @ EXTERIOR SLIDINGDOOR/WINDOW
DW01D-019	SECTION @ EXTERIOR DOOR WINDOW - SLIDER
DW01D-019-ALT	SECTION @ EXTERIOR DOOR WINDOW - SLIDER W/ RAIN GAURD
DW01E-019	SECTION @ EXTERIOR WINDOW
DW01F-019	PLAN @ EXTERIOR WALLINTERIOR CORNER
DW02A-019	PLAN @ SCREEN/SHUTTER @ GLAZED UNIT
DW02B-019	PLAN @ WALL SCREEN/SHUTTER @ MOTOR SYSTEM
DW02C-019	PLAN @ SCREEN/SHUTTER @ END
DW02D-019	SECTION @ SCREEN/SHUTTER
DW02E-019	SECTION @ SCREEN/SHUTTER
DW02F-019	SECTION @ SCREEN/SHUTTER
DW02G-019	SECTION @ SCREEN/SHUTTER @ SIDE WALL
DW02H-019	SECTION @ WINDOW/DOOR @ EAVE
DW03A-019	PLAN @ INTERIOR DOOR
DW04A-019	PLAN @ INTERIOR HINGED DOOR
DW04B-019	SECTION @ INTERIOR HINGED DOOR @ HEADER
DW04C-019	SECTION @ INTERIOR HINGED DOOR @ SILL
DW05A-019	PLAN @ INTERIOR BI-FOLD DOOR
DW05B-019	SECTION @ INTERIOR BI-FOLD DOOR @ HEADER
DW05C-019	SECTION @ INTERIOR BI-FOLD DOOR @ SILL
DW06A-019	PLAN @ SLIDING DOORS
DW06B-019	SECTION @ SLIDING DOORS @ HEADER
DW06C-019	SECTION @ SLIDING DOOR @ SILL
DW07A-019	PLAN @ MANIFOLD @ DOOR

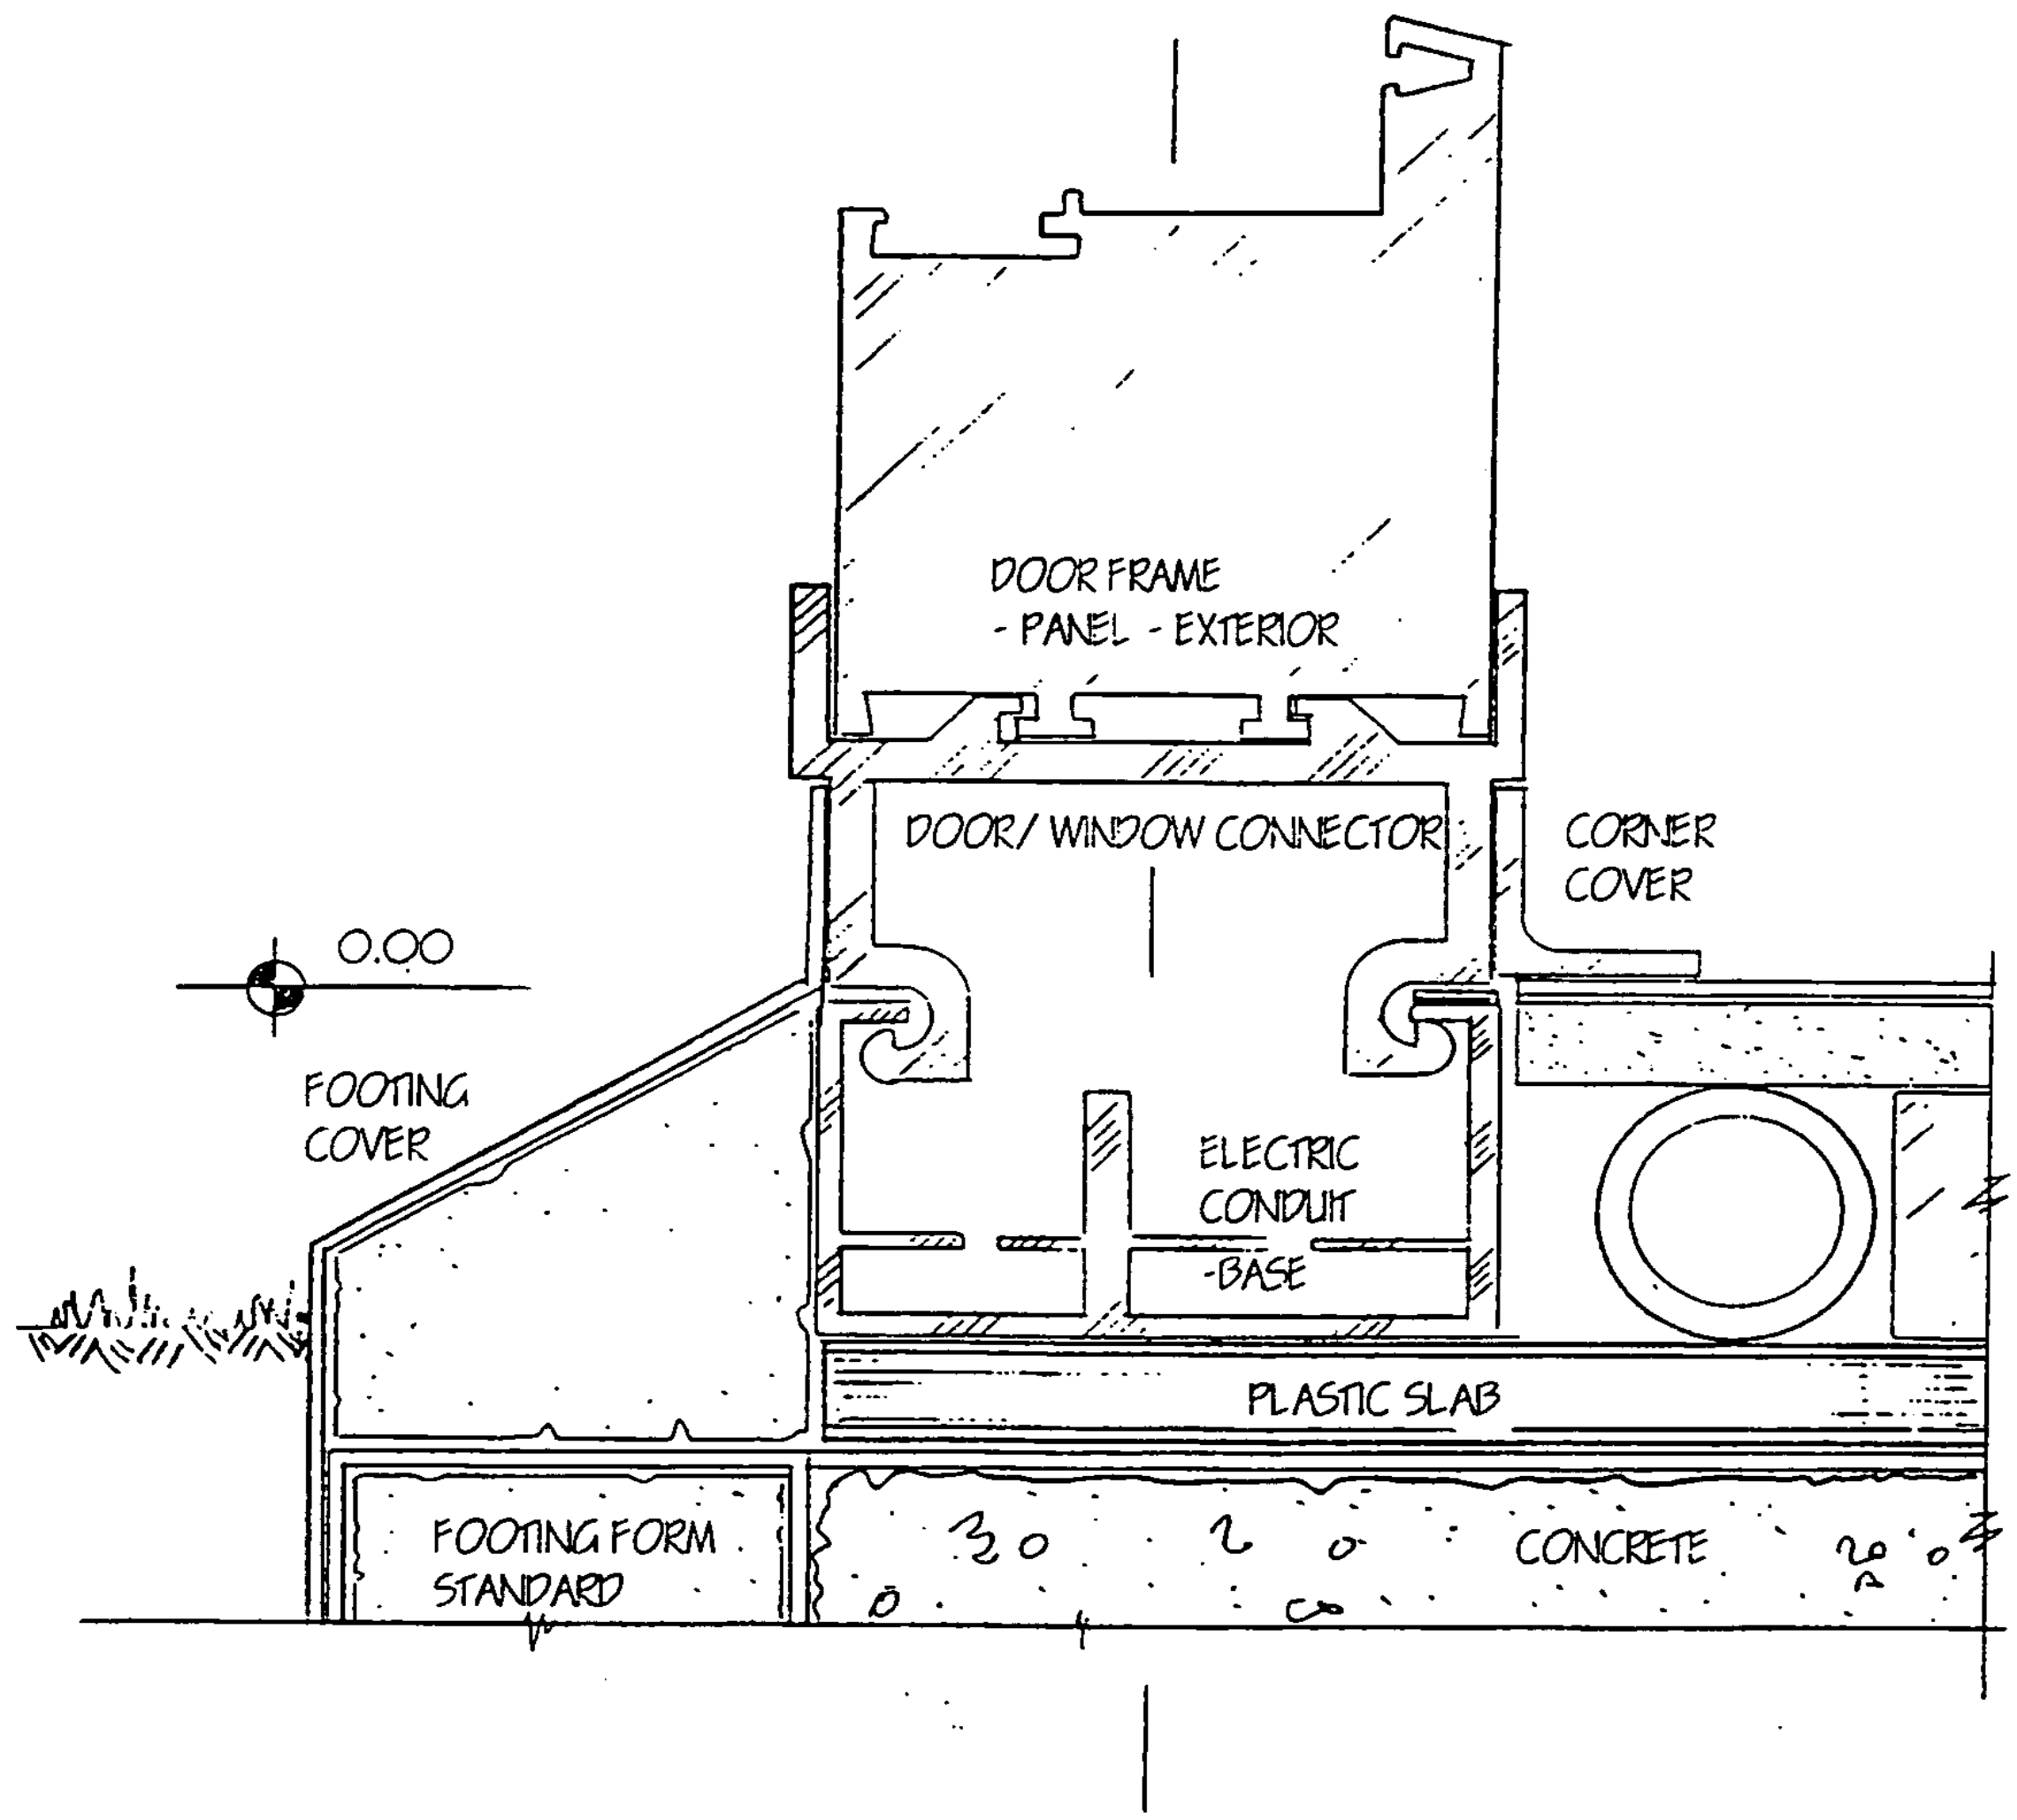
DOOR FRAME
- PANEL - EXTERIOR
DOOR/ WINDOW CONNECTOR
CORNER
COVER
0.00
FOOTING
COVER
ELECTRIC
CONDUIT
-BASE
PLASTIC SLAB
FOOTING FORM
STANDARD
CONCRETE

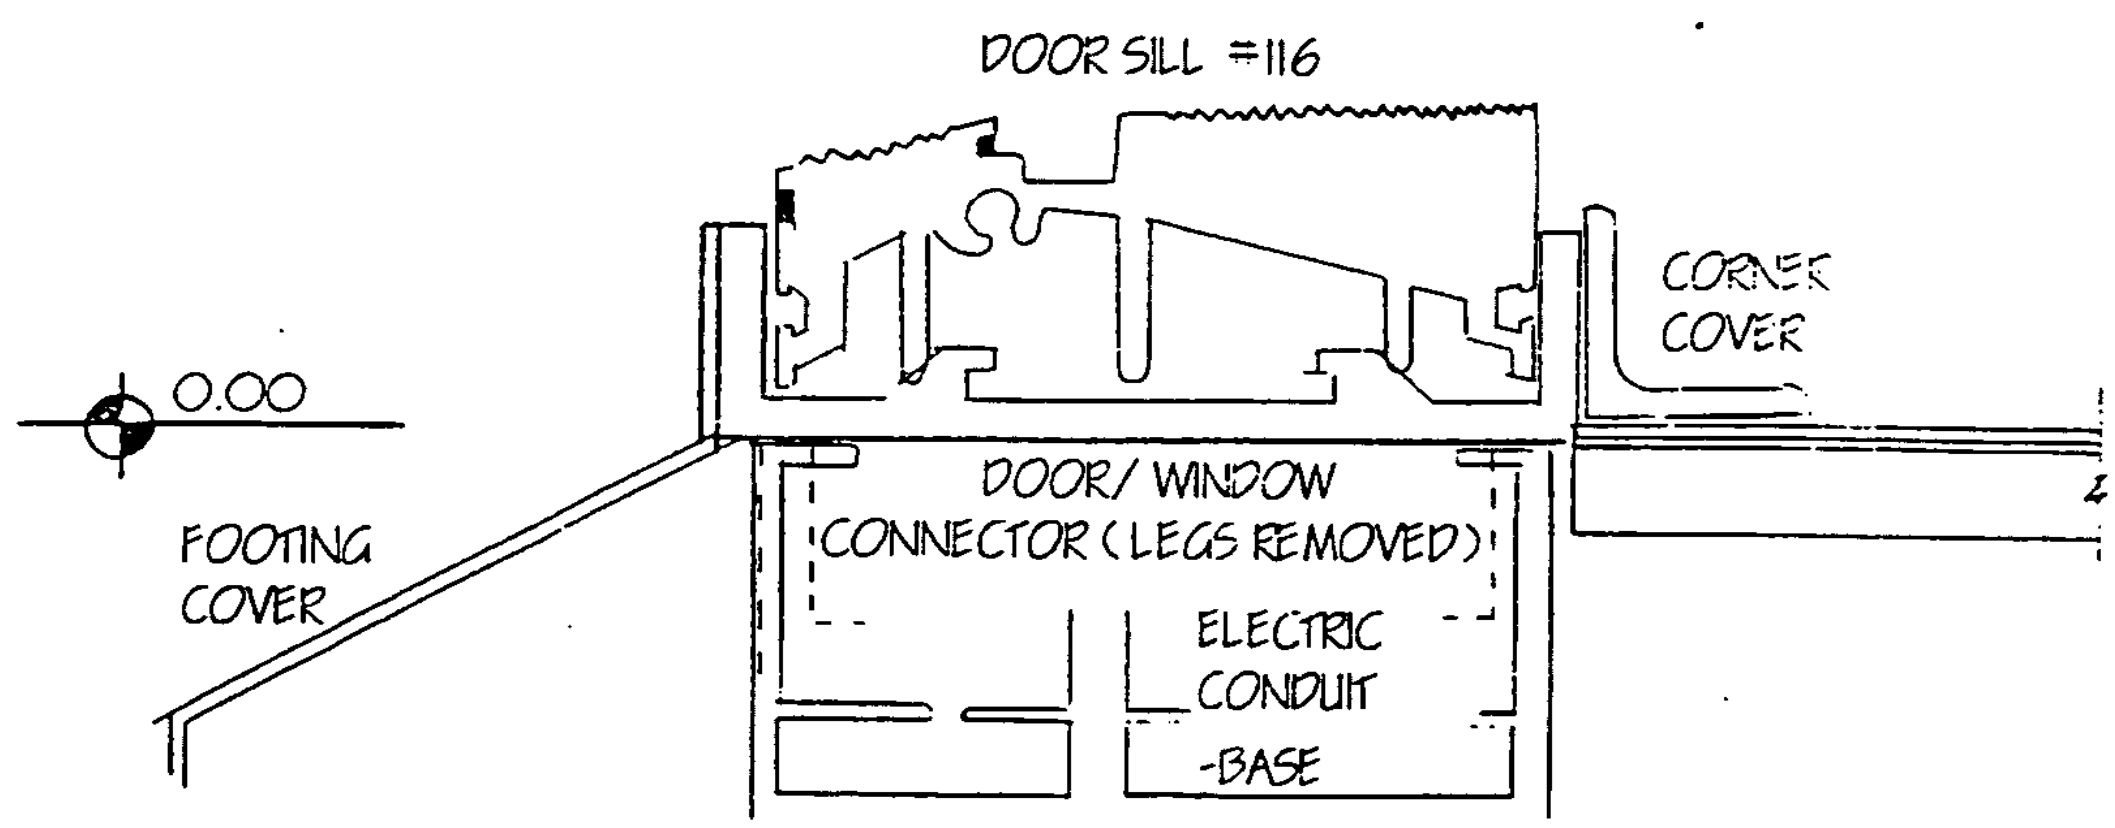
DOOR SILL #116
CORNER COVER
0.00
FOOTING COVER
DOOR/ WINDOW CONNECTOR (LEGS REMOVED)
ELECTRIC CONDUIT
-BASE

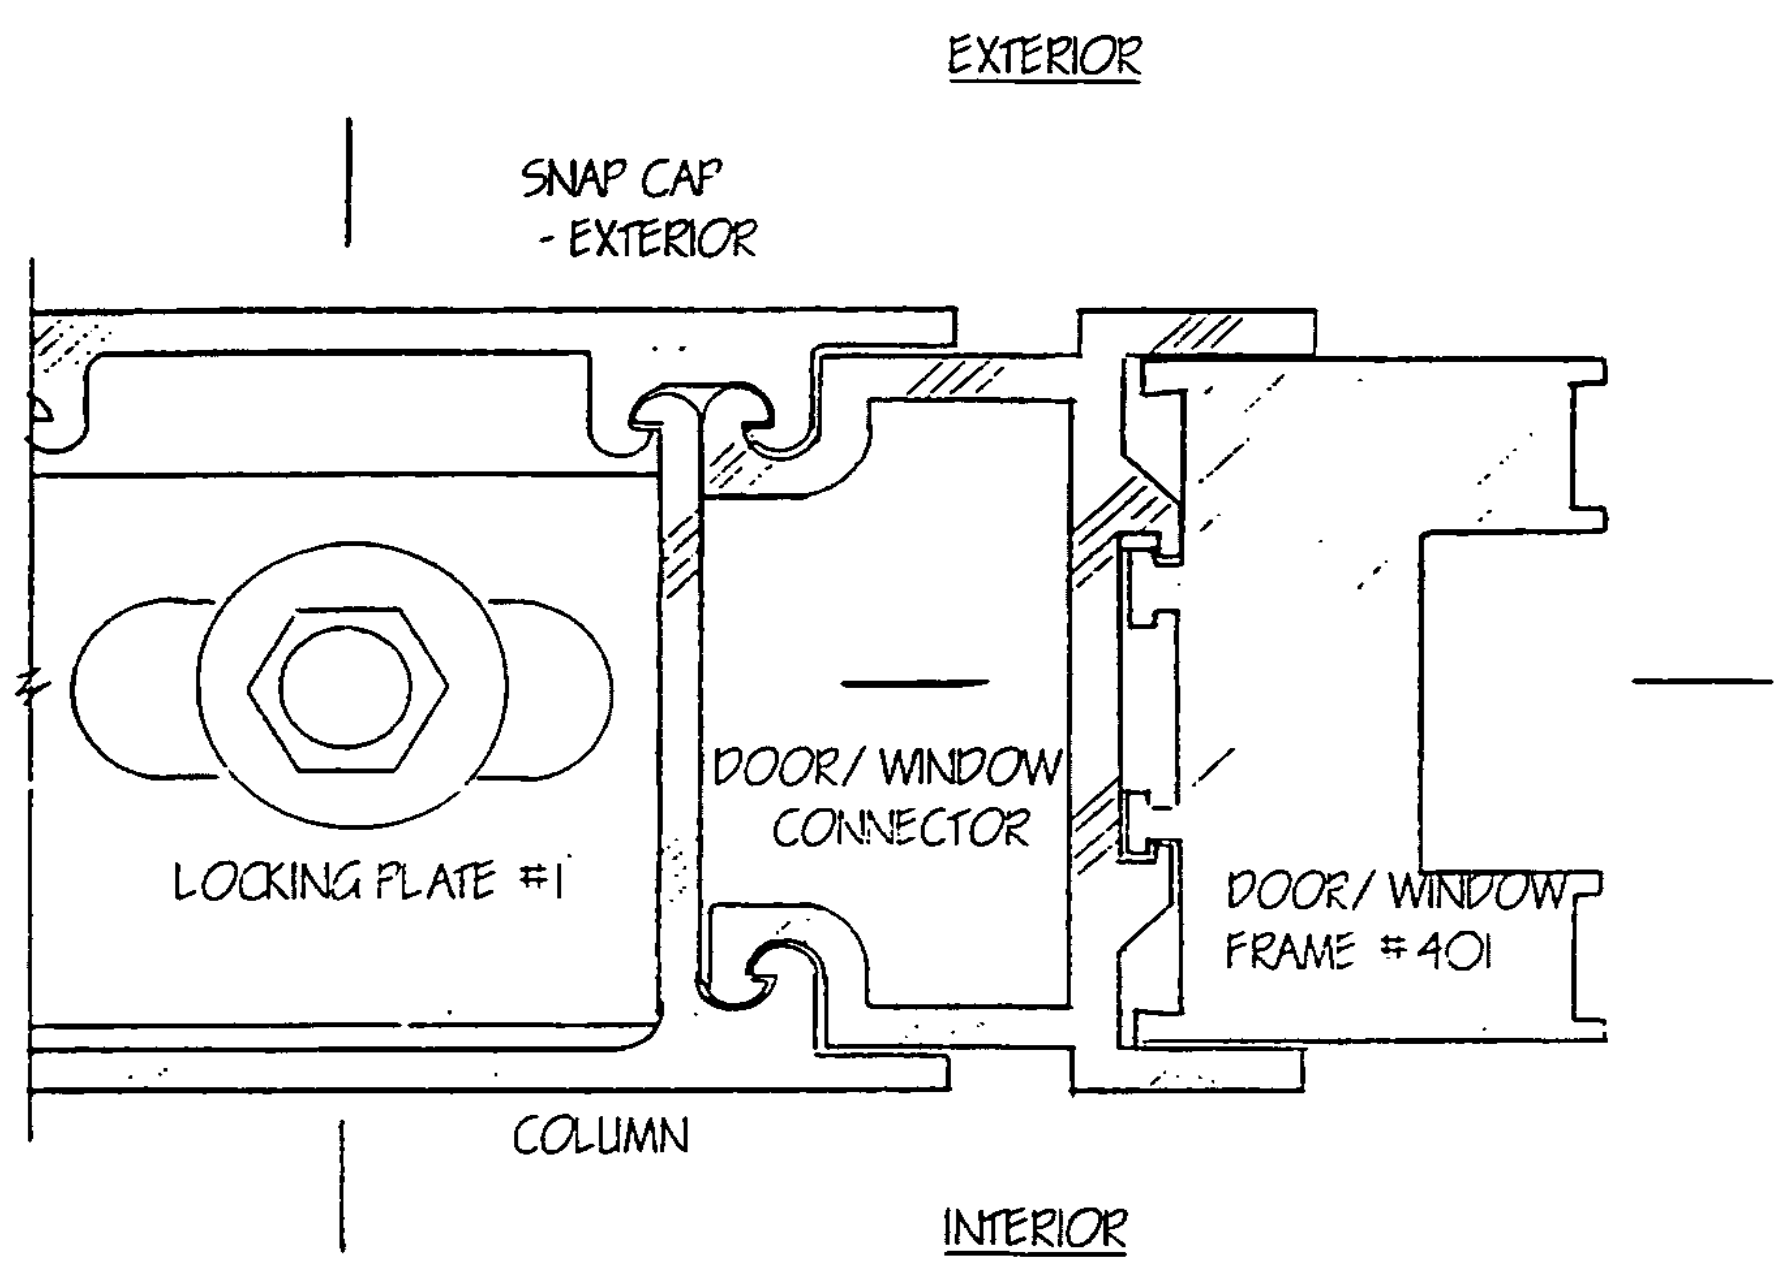
EXTERIOR
SNAP CAP
- EXTERIOR
LOCKING PLATE #1
DOOR/ WINDOW
CONNECTOR
DOOR/ WINDOW
FRAME #401
COLUMN
INTERIOR

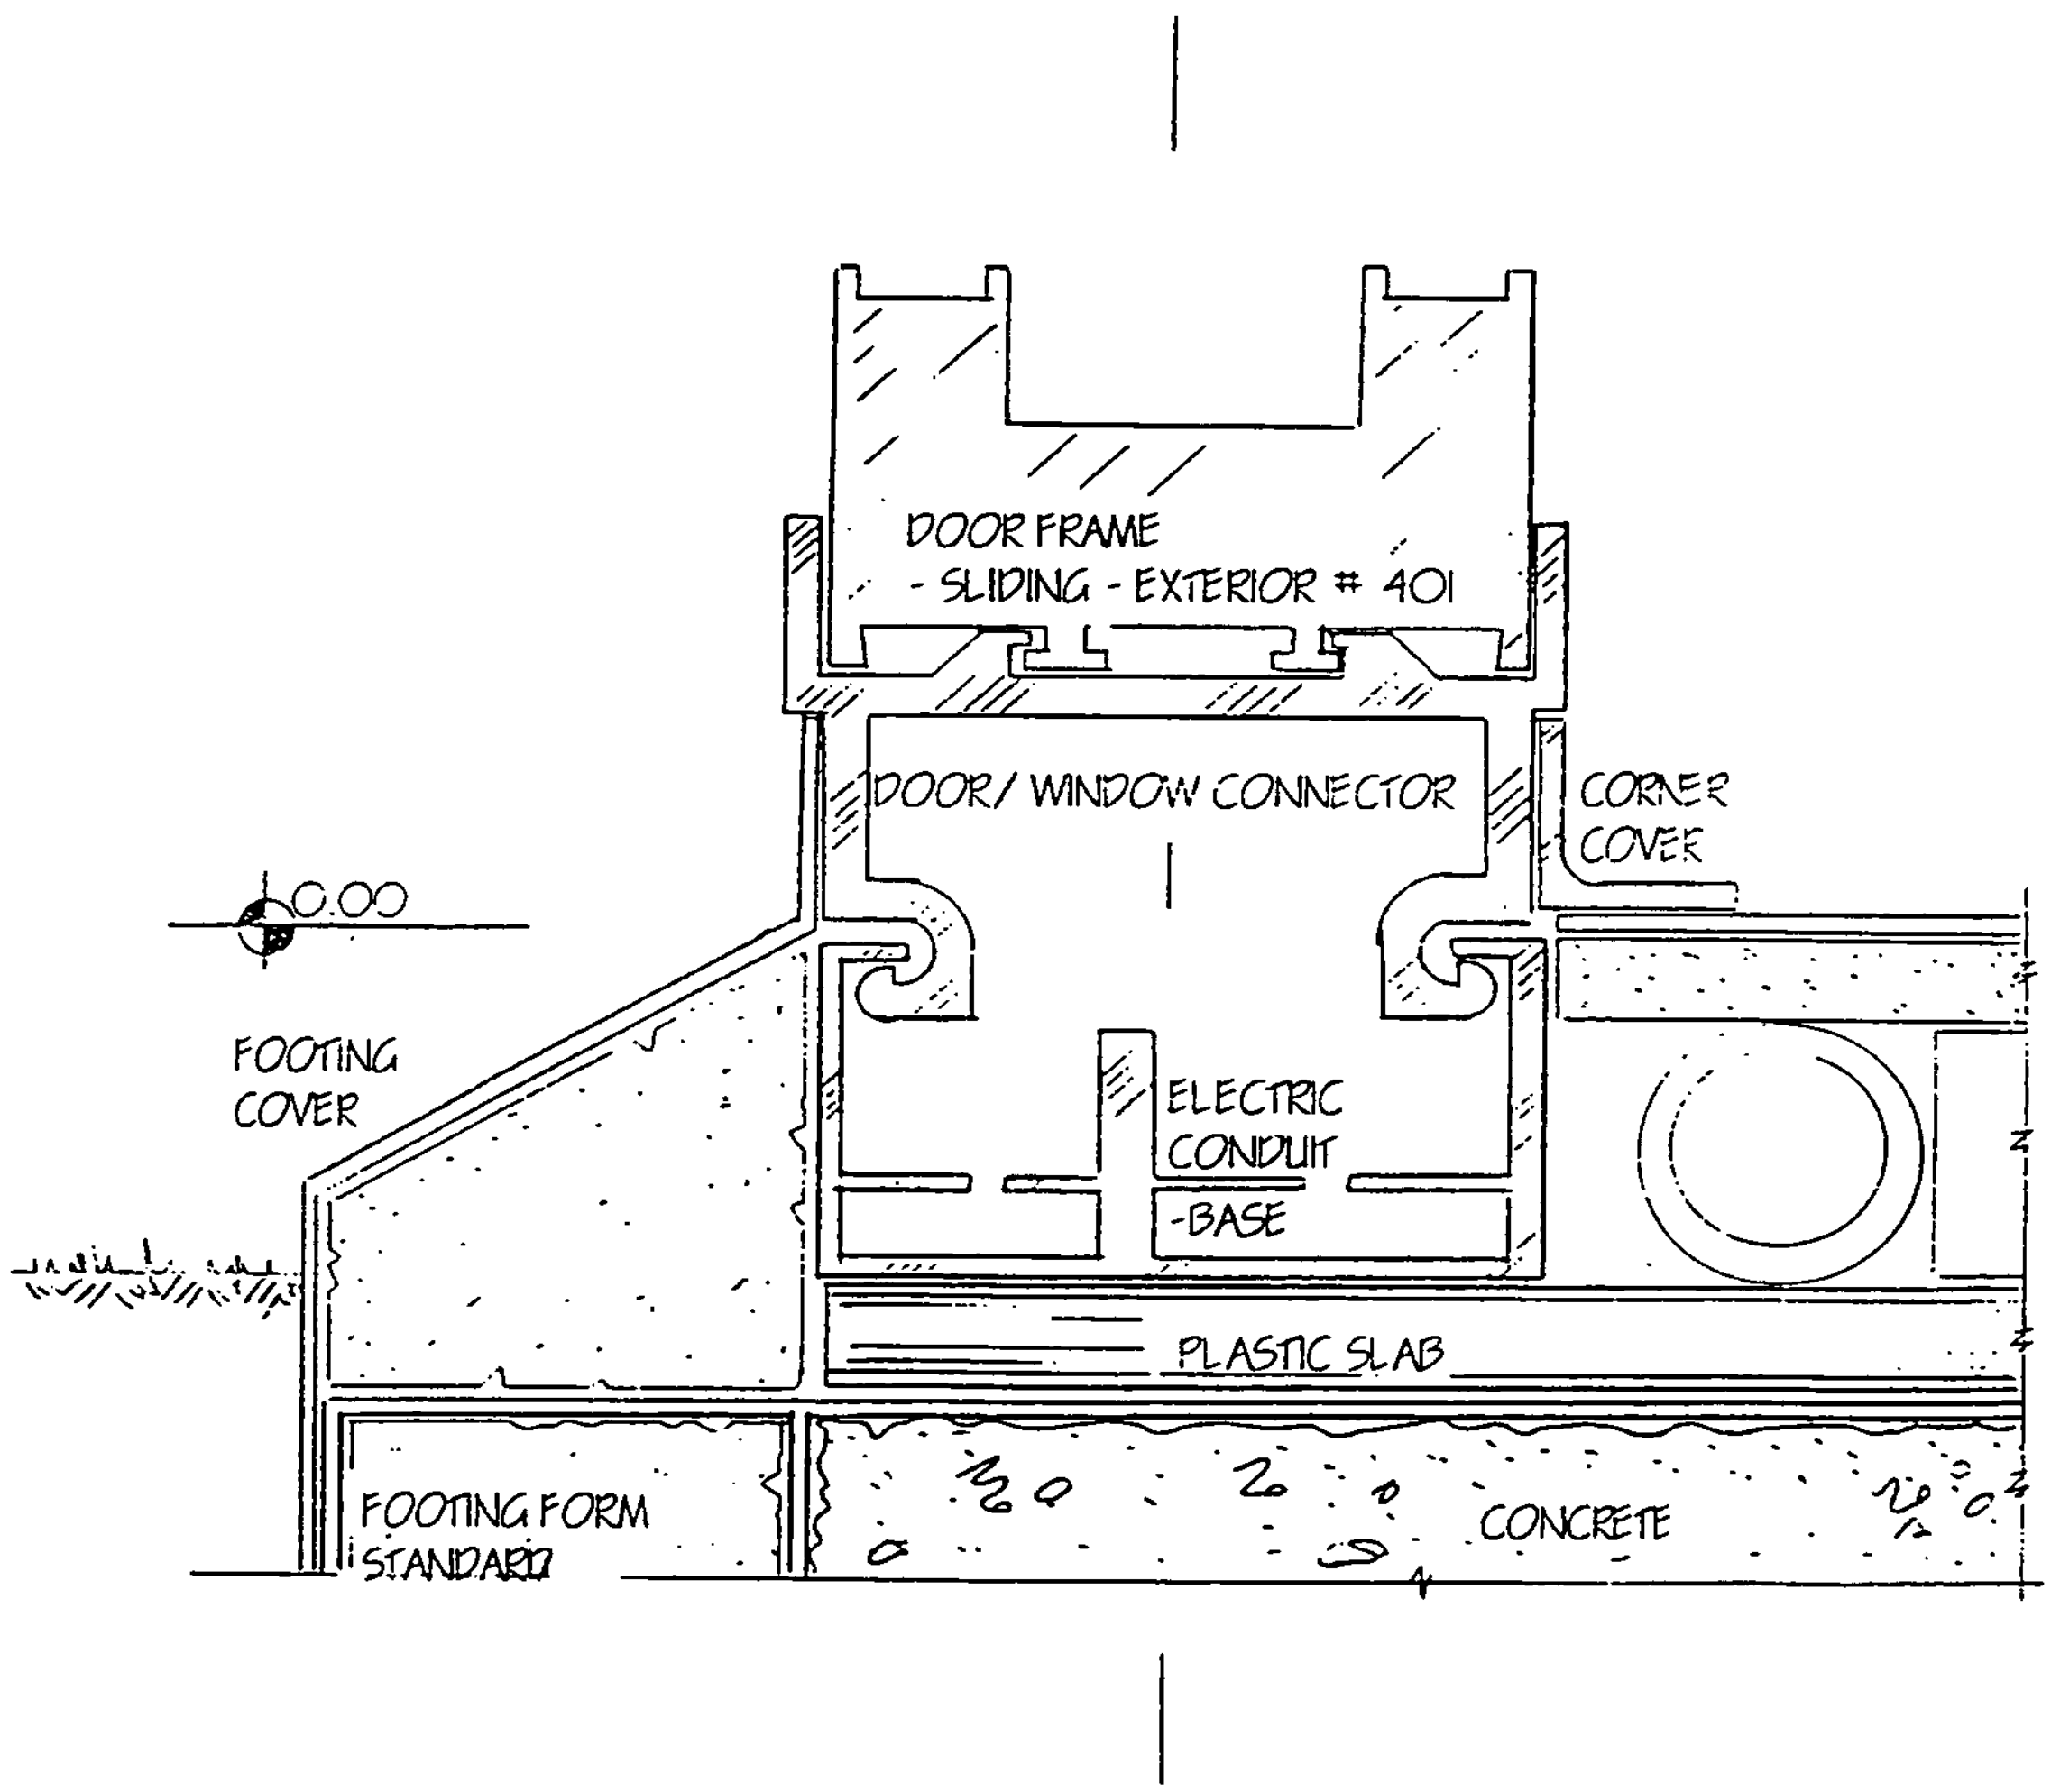
DOOR FRAME
- SLIDING - EXTERIOR # 401
DOOR/ WINDOW CONNECTOR
CORNER
COVER
0.00
FOOTING
COVER
ELECTRIC
CONDUIT
-BASE
PLASTIC SLAB
FOOTING FORM
STANDARD
CONCRETE

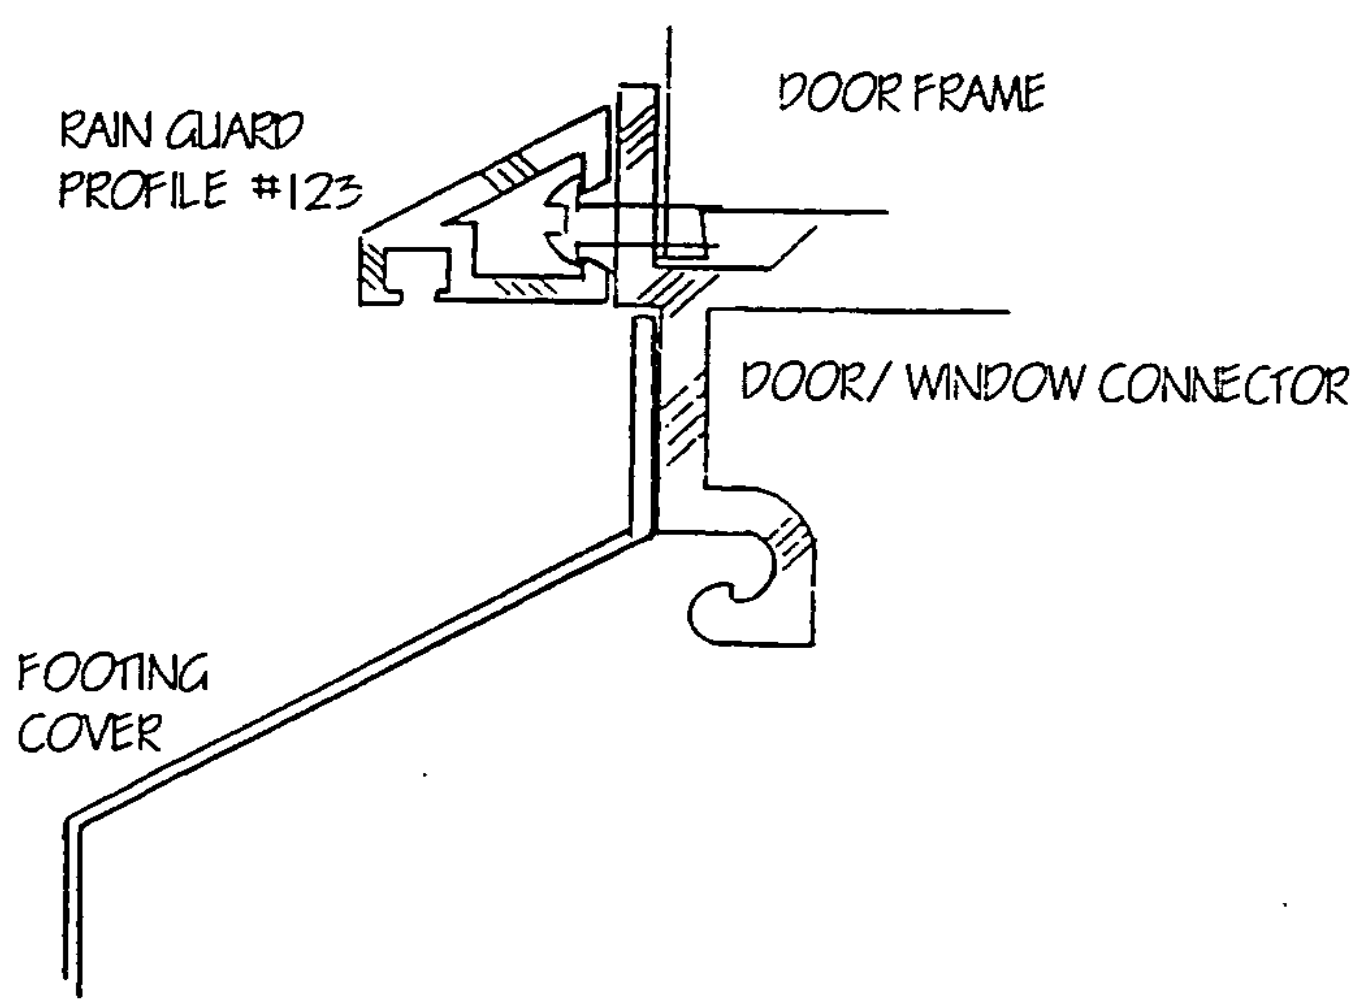
RAIN GUARD
PROFILE #123
DOOR FRAME
DOOR/ WINDOW CONNECTOR
FOOTING
COVER

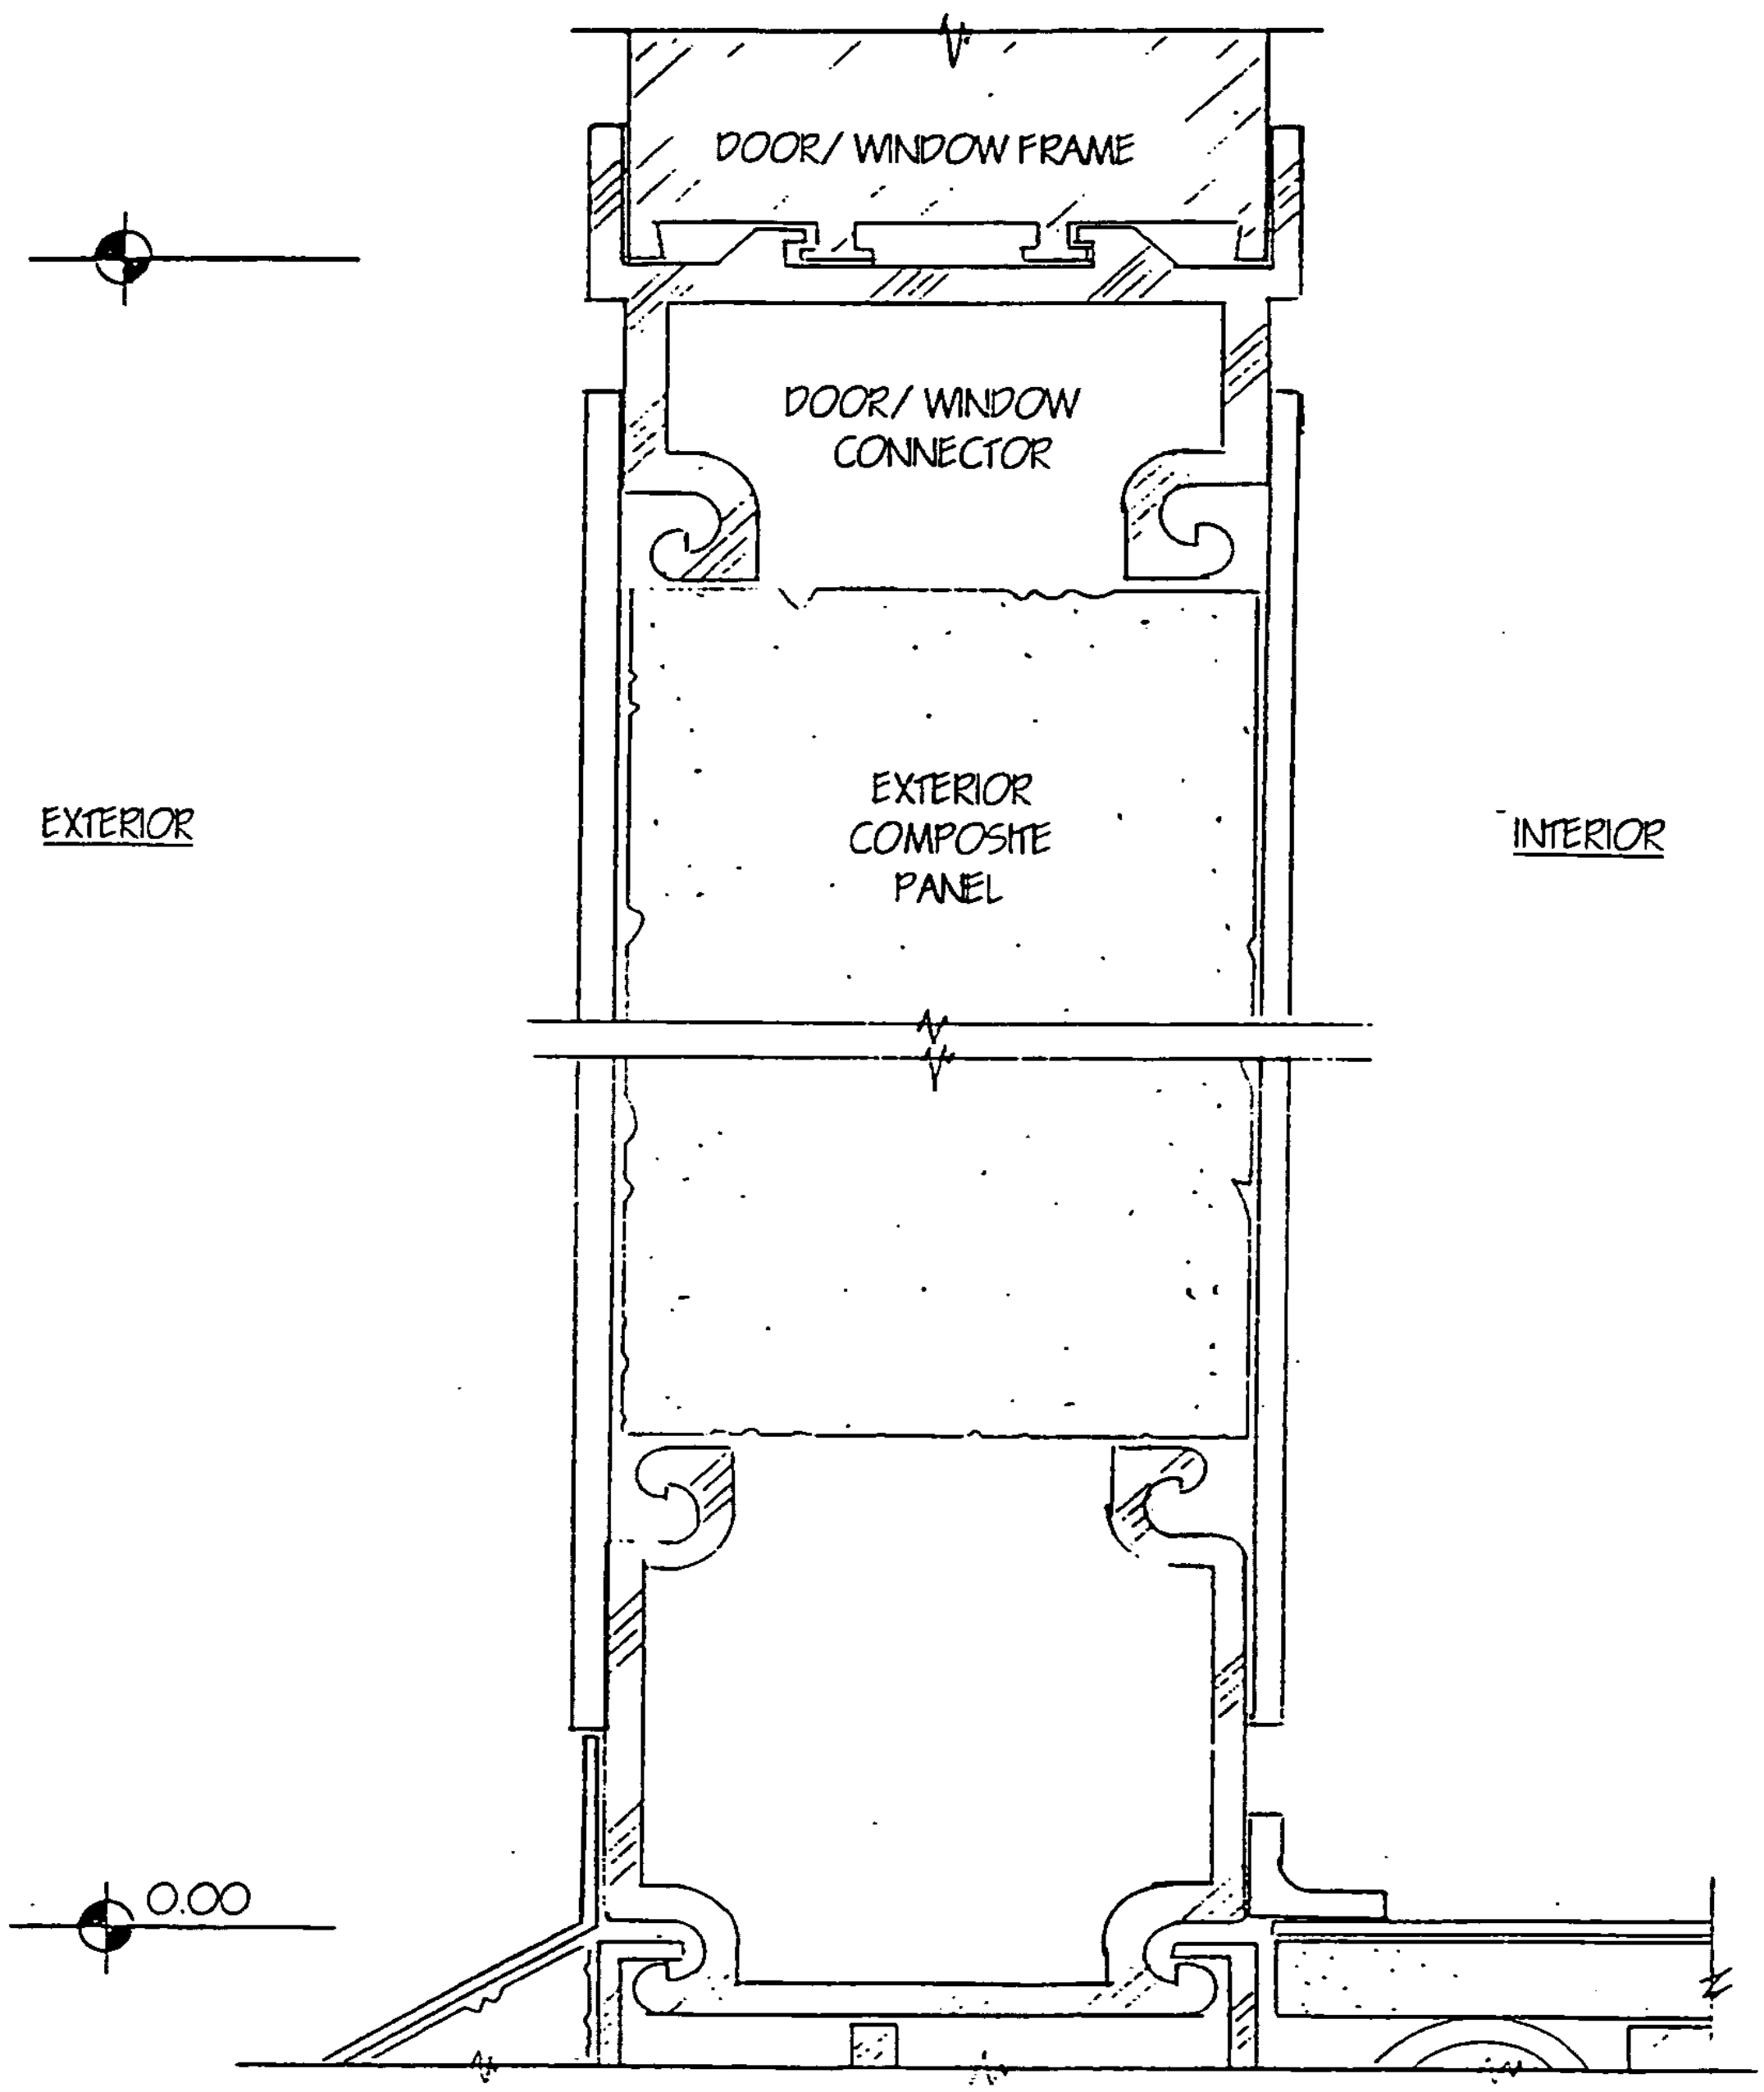
DOOR/ WINDOW FRAME
DOOR/ WINDOW CONNECTOR
EXTERIOR
EXTERIOR COMPOSITE PANEL
INTERIOR
0.00

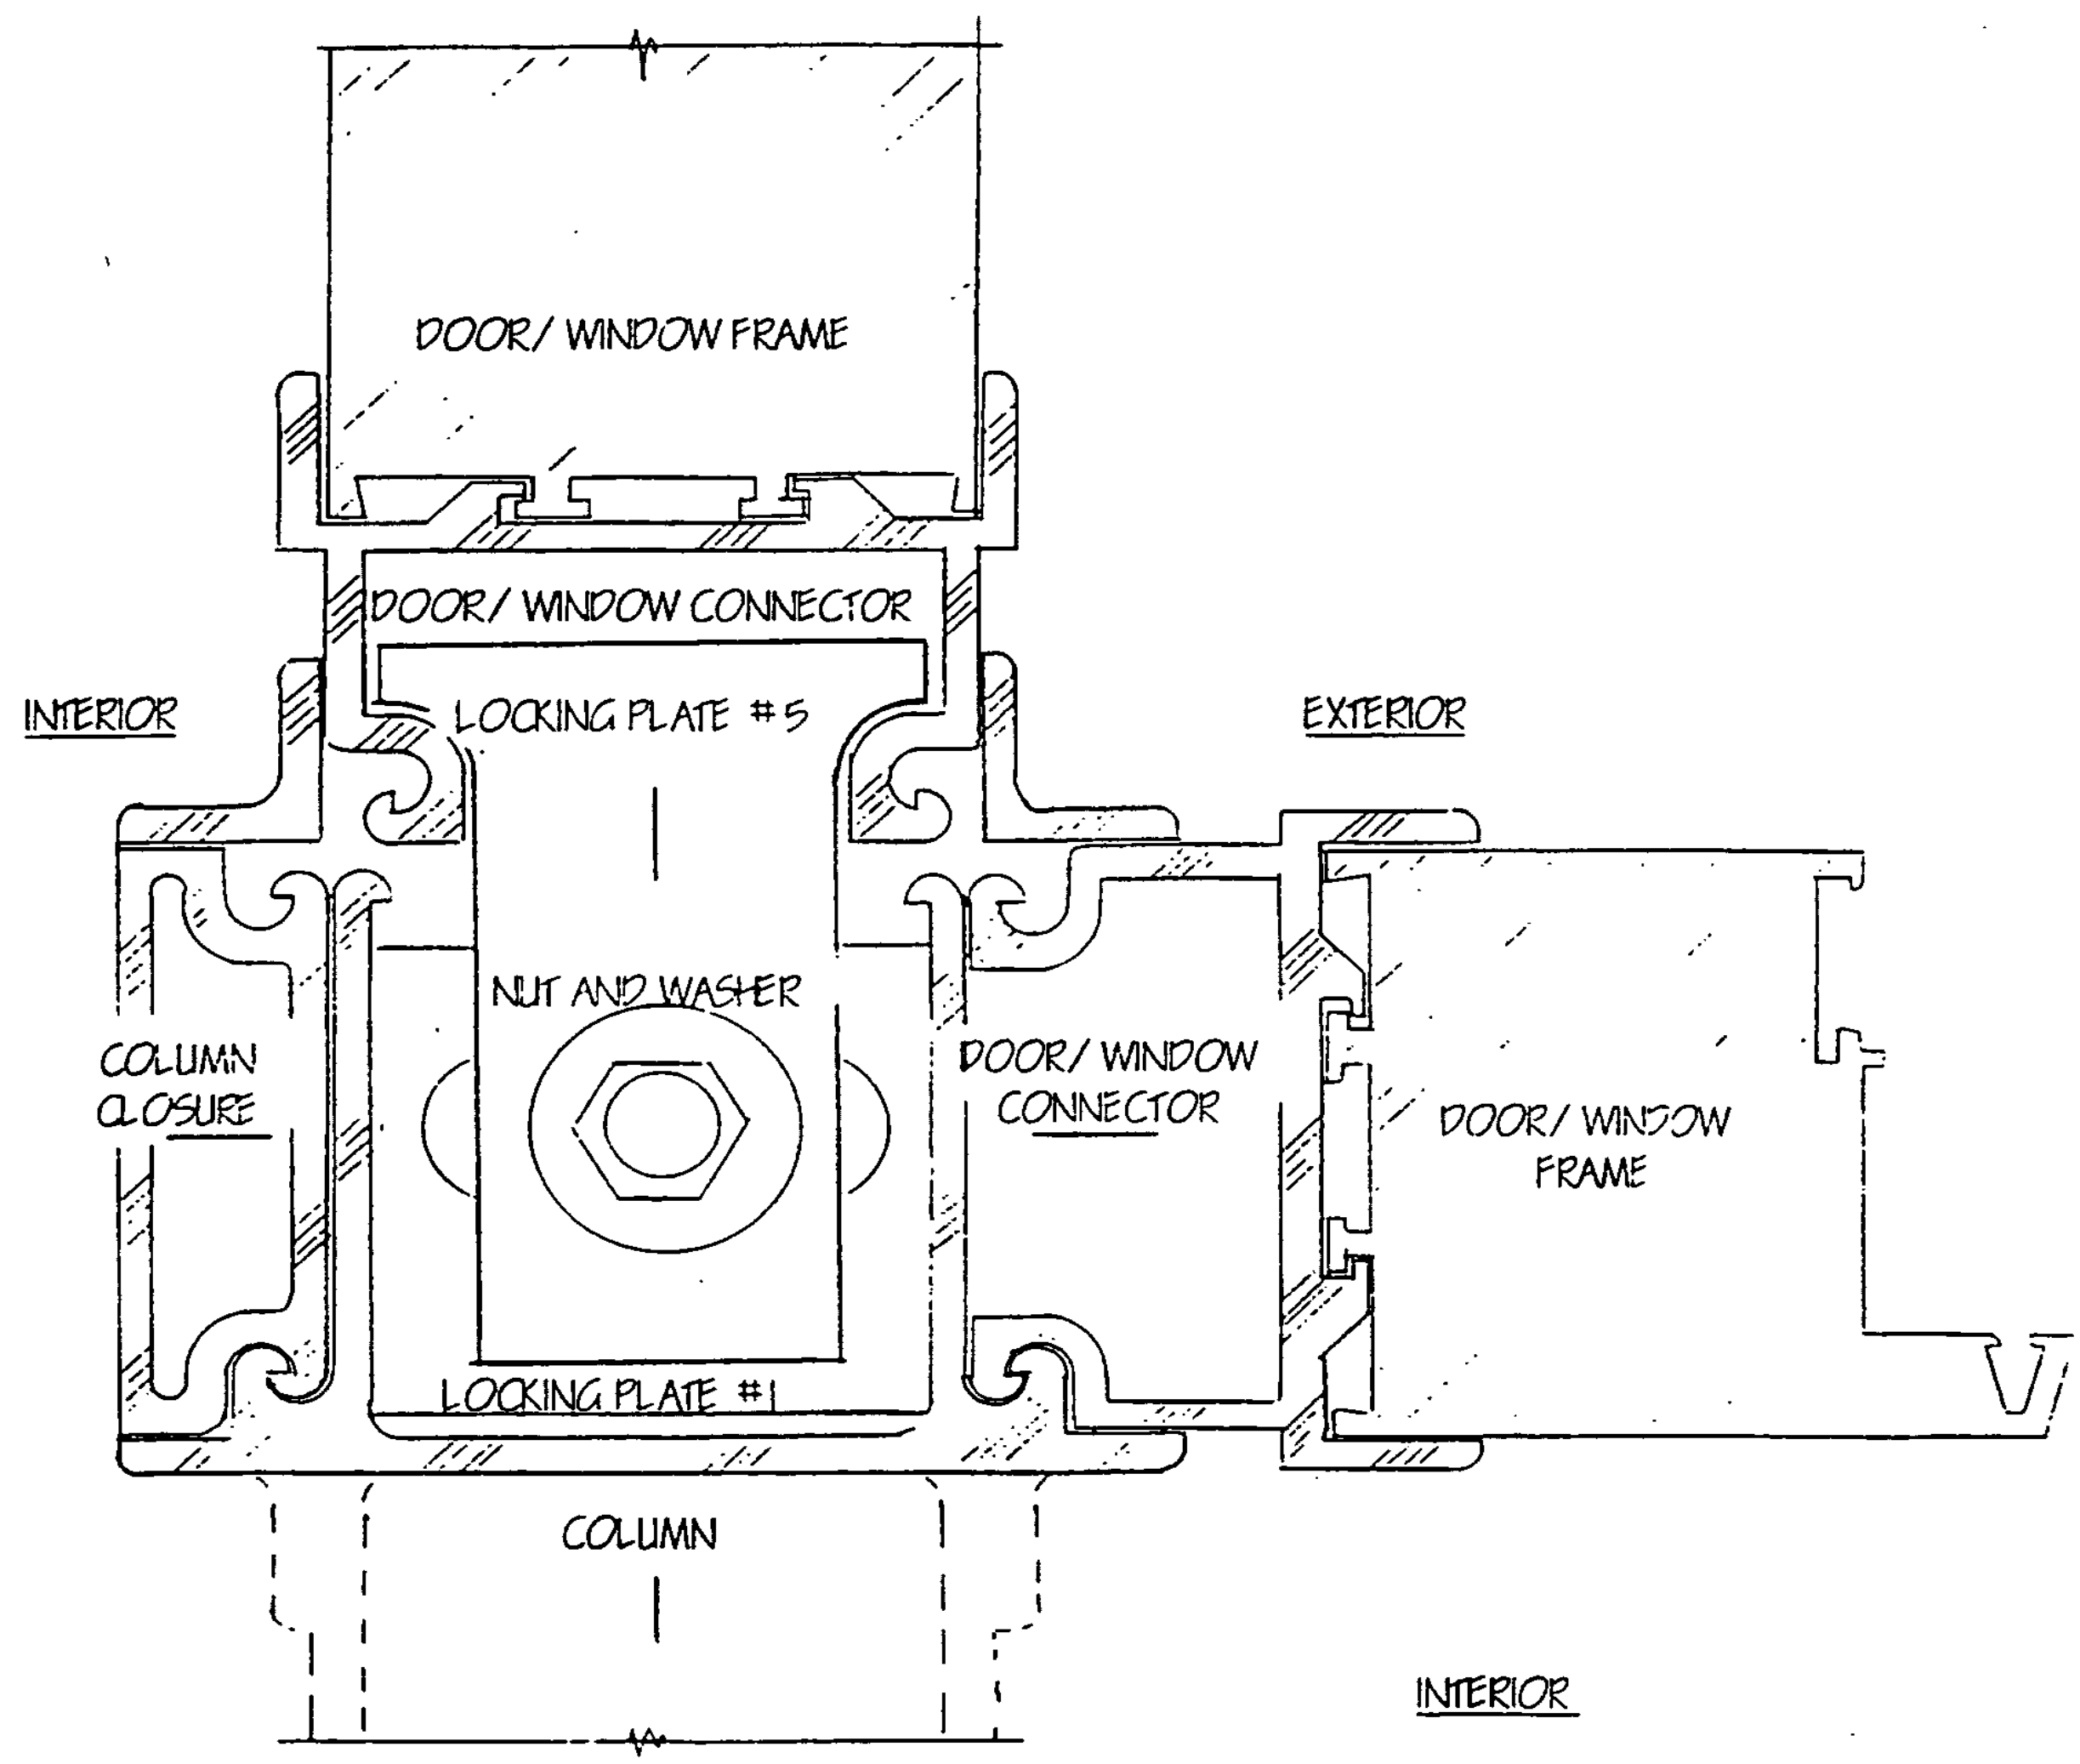
DOOR/ WINDOW FRAME
DOOR/ WINDOW CONNECTOR
INTERIOR
LOCKING PLATE #5
EXTERIOR
NUT AND WASHER
COLUMN CLOSURE
DOOR/ WINDOW CONNECTOR
DOOR/ WINDOW FRAME
LOCKING PLATE #1
COLUMN
INTERIOR

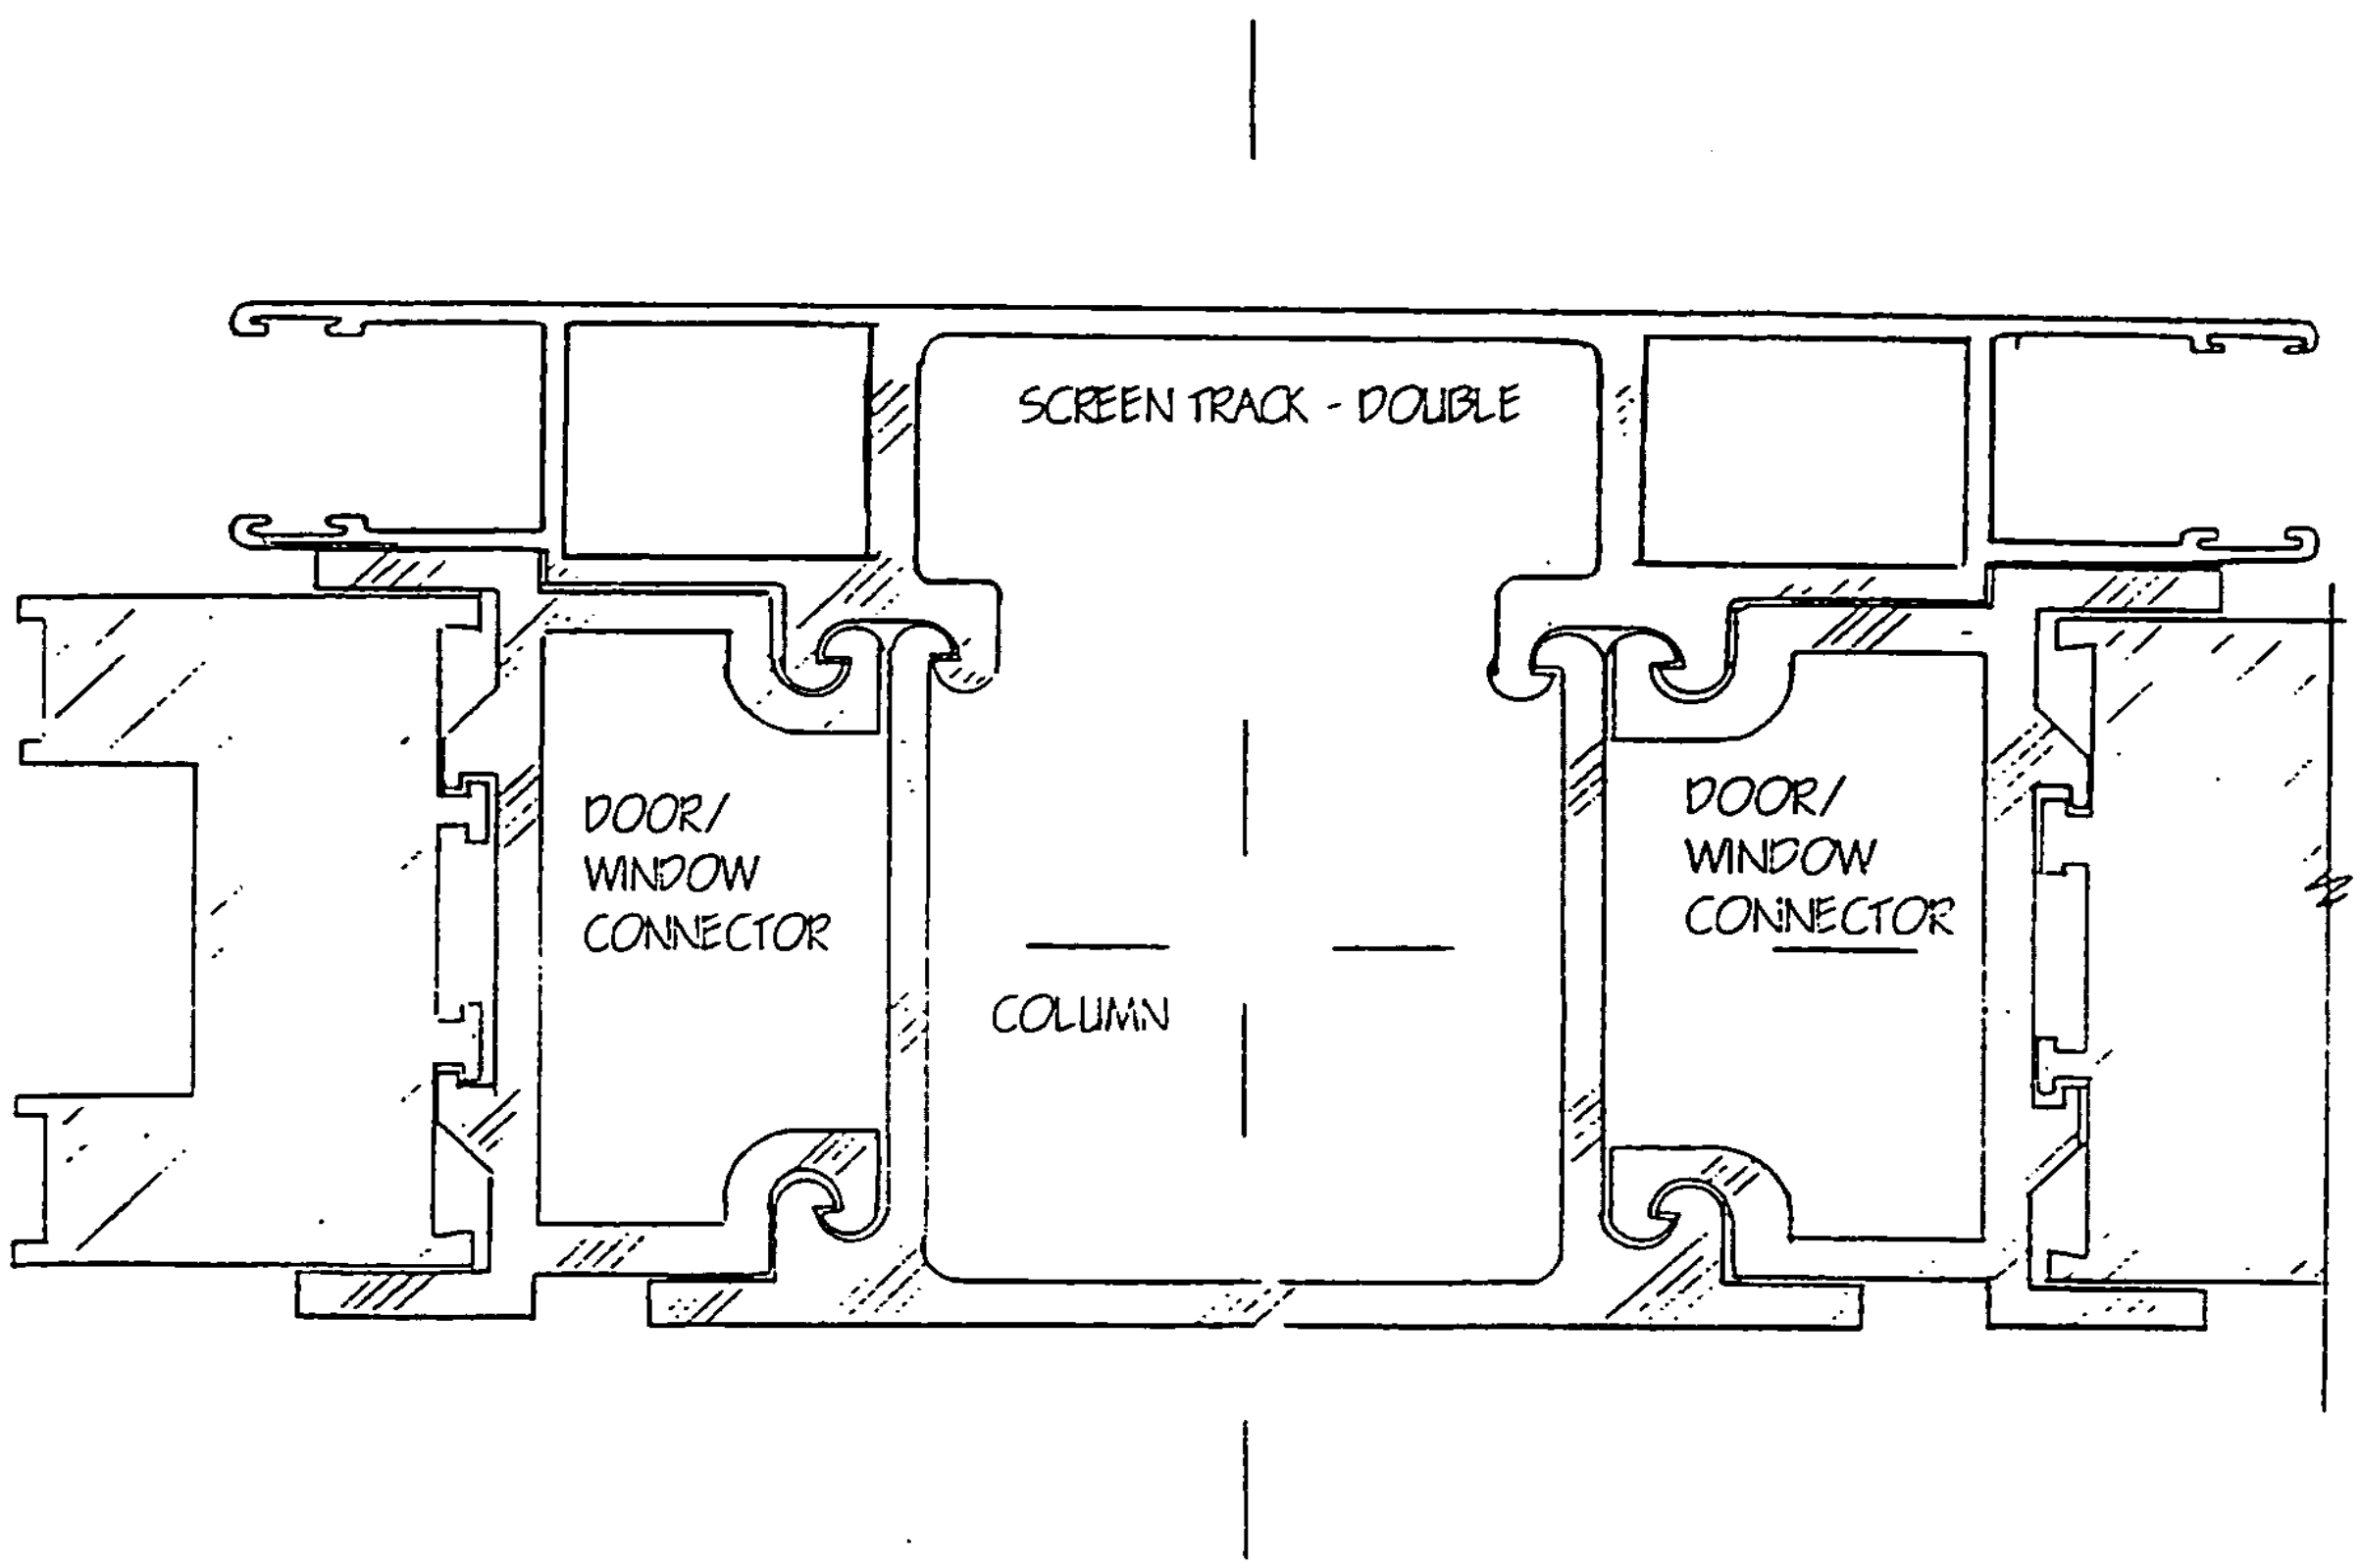
SCREEN TRACK - DOUBLE
DOOR/
WINDOW
CONNECTOR
COLUMN
DOOR/
WINDOW
CONNECTOR

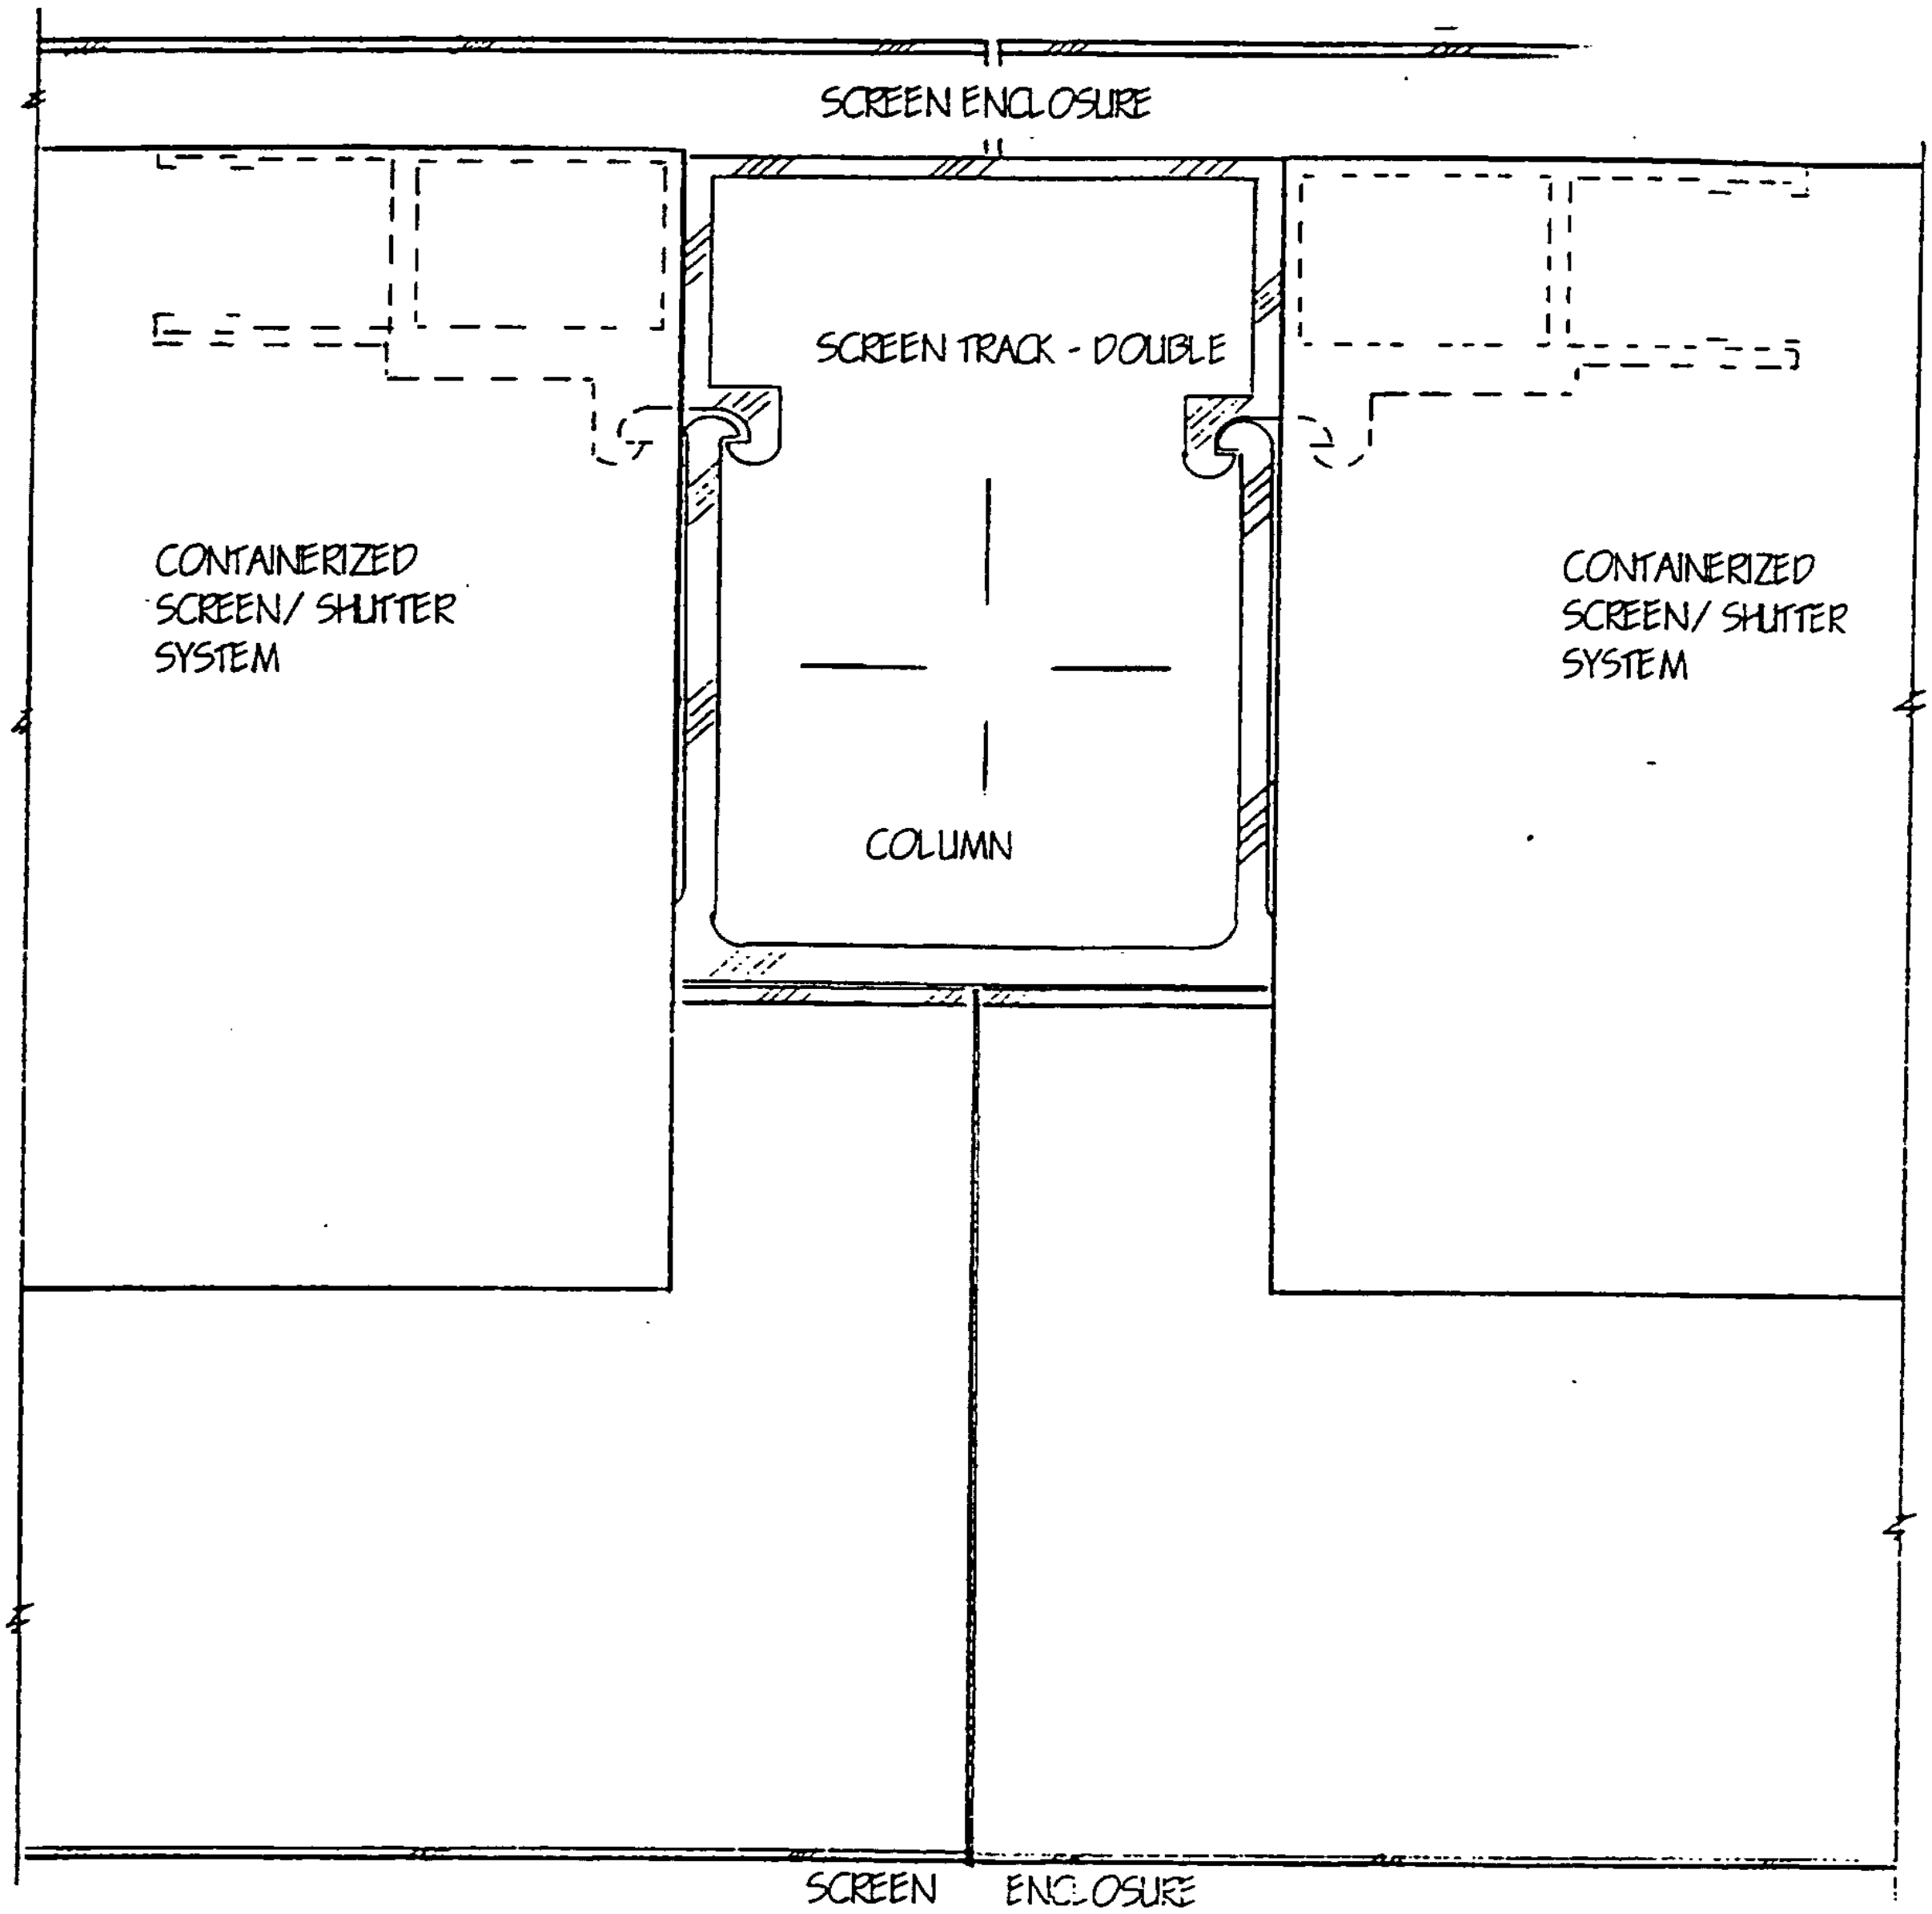
SCREEN ENCLOSURE
SCREEN TRACK - DOUBLE
CONTAINERIZED SCREEN/ SHUTTER SYSTEM
CONTAINERIZED SCREEN/ SHUTTER SYSTEM
COLUMN
SCREEN ENCLOSURE

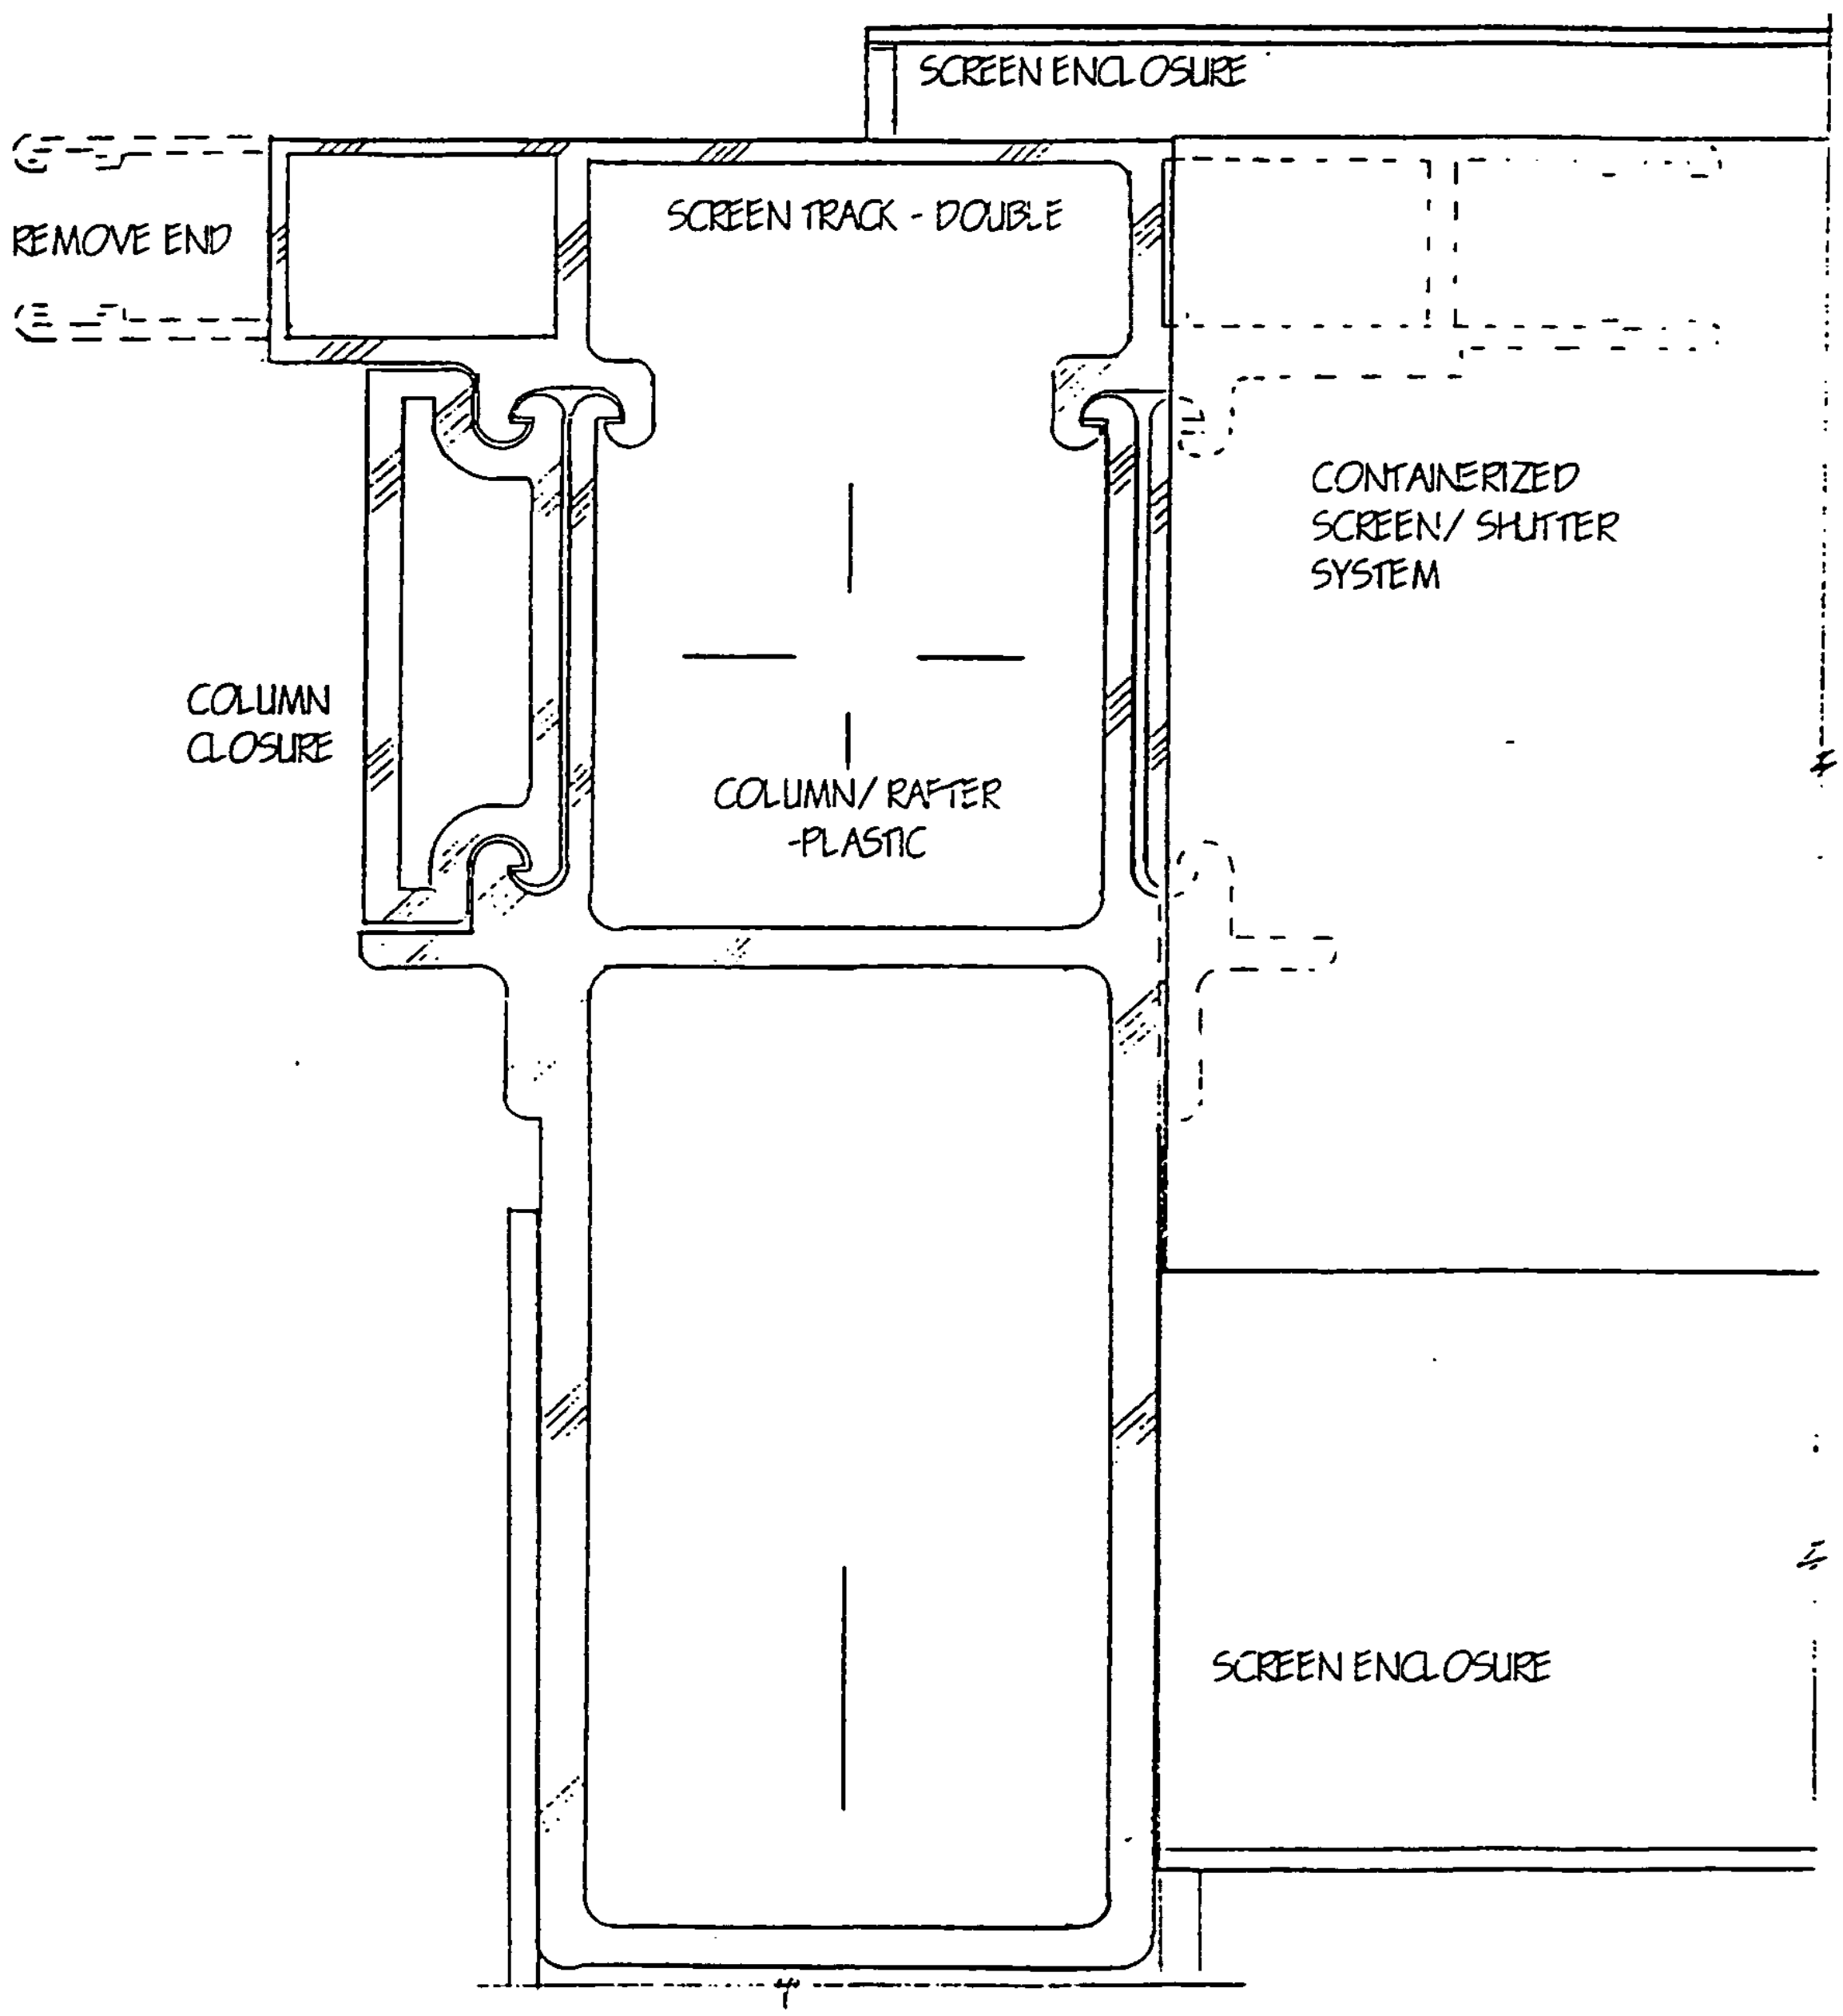
SCREEN ENCLOSURE
REMOVE END
SCREEN TRACK - DOUBLE
CONTAINERIZED SCREEN/ SHUTTER SYSTEM
COLUMN CLOSURE
COLUMN/ RAFTER -PLASTIC
SCREEN ENCLOSURE

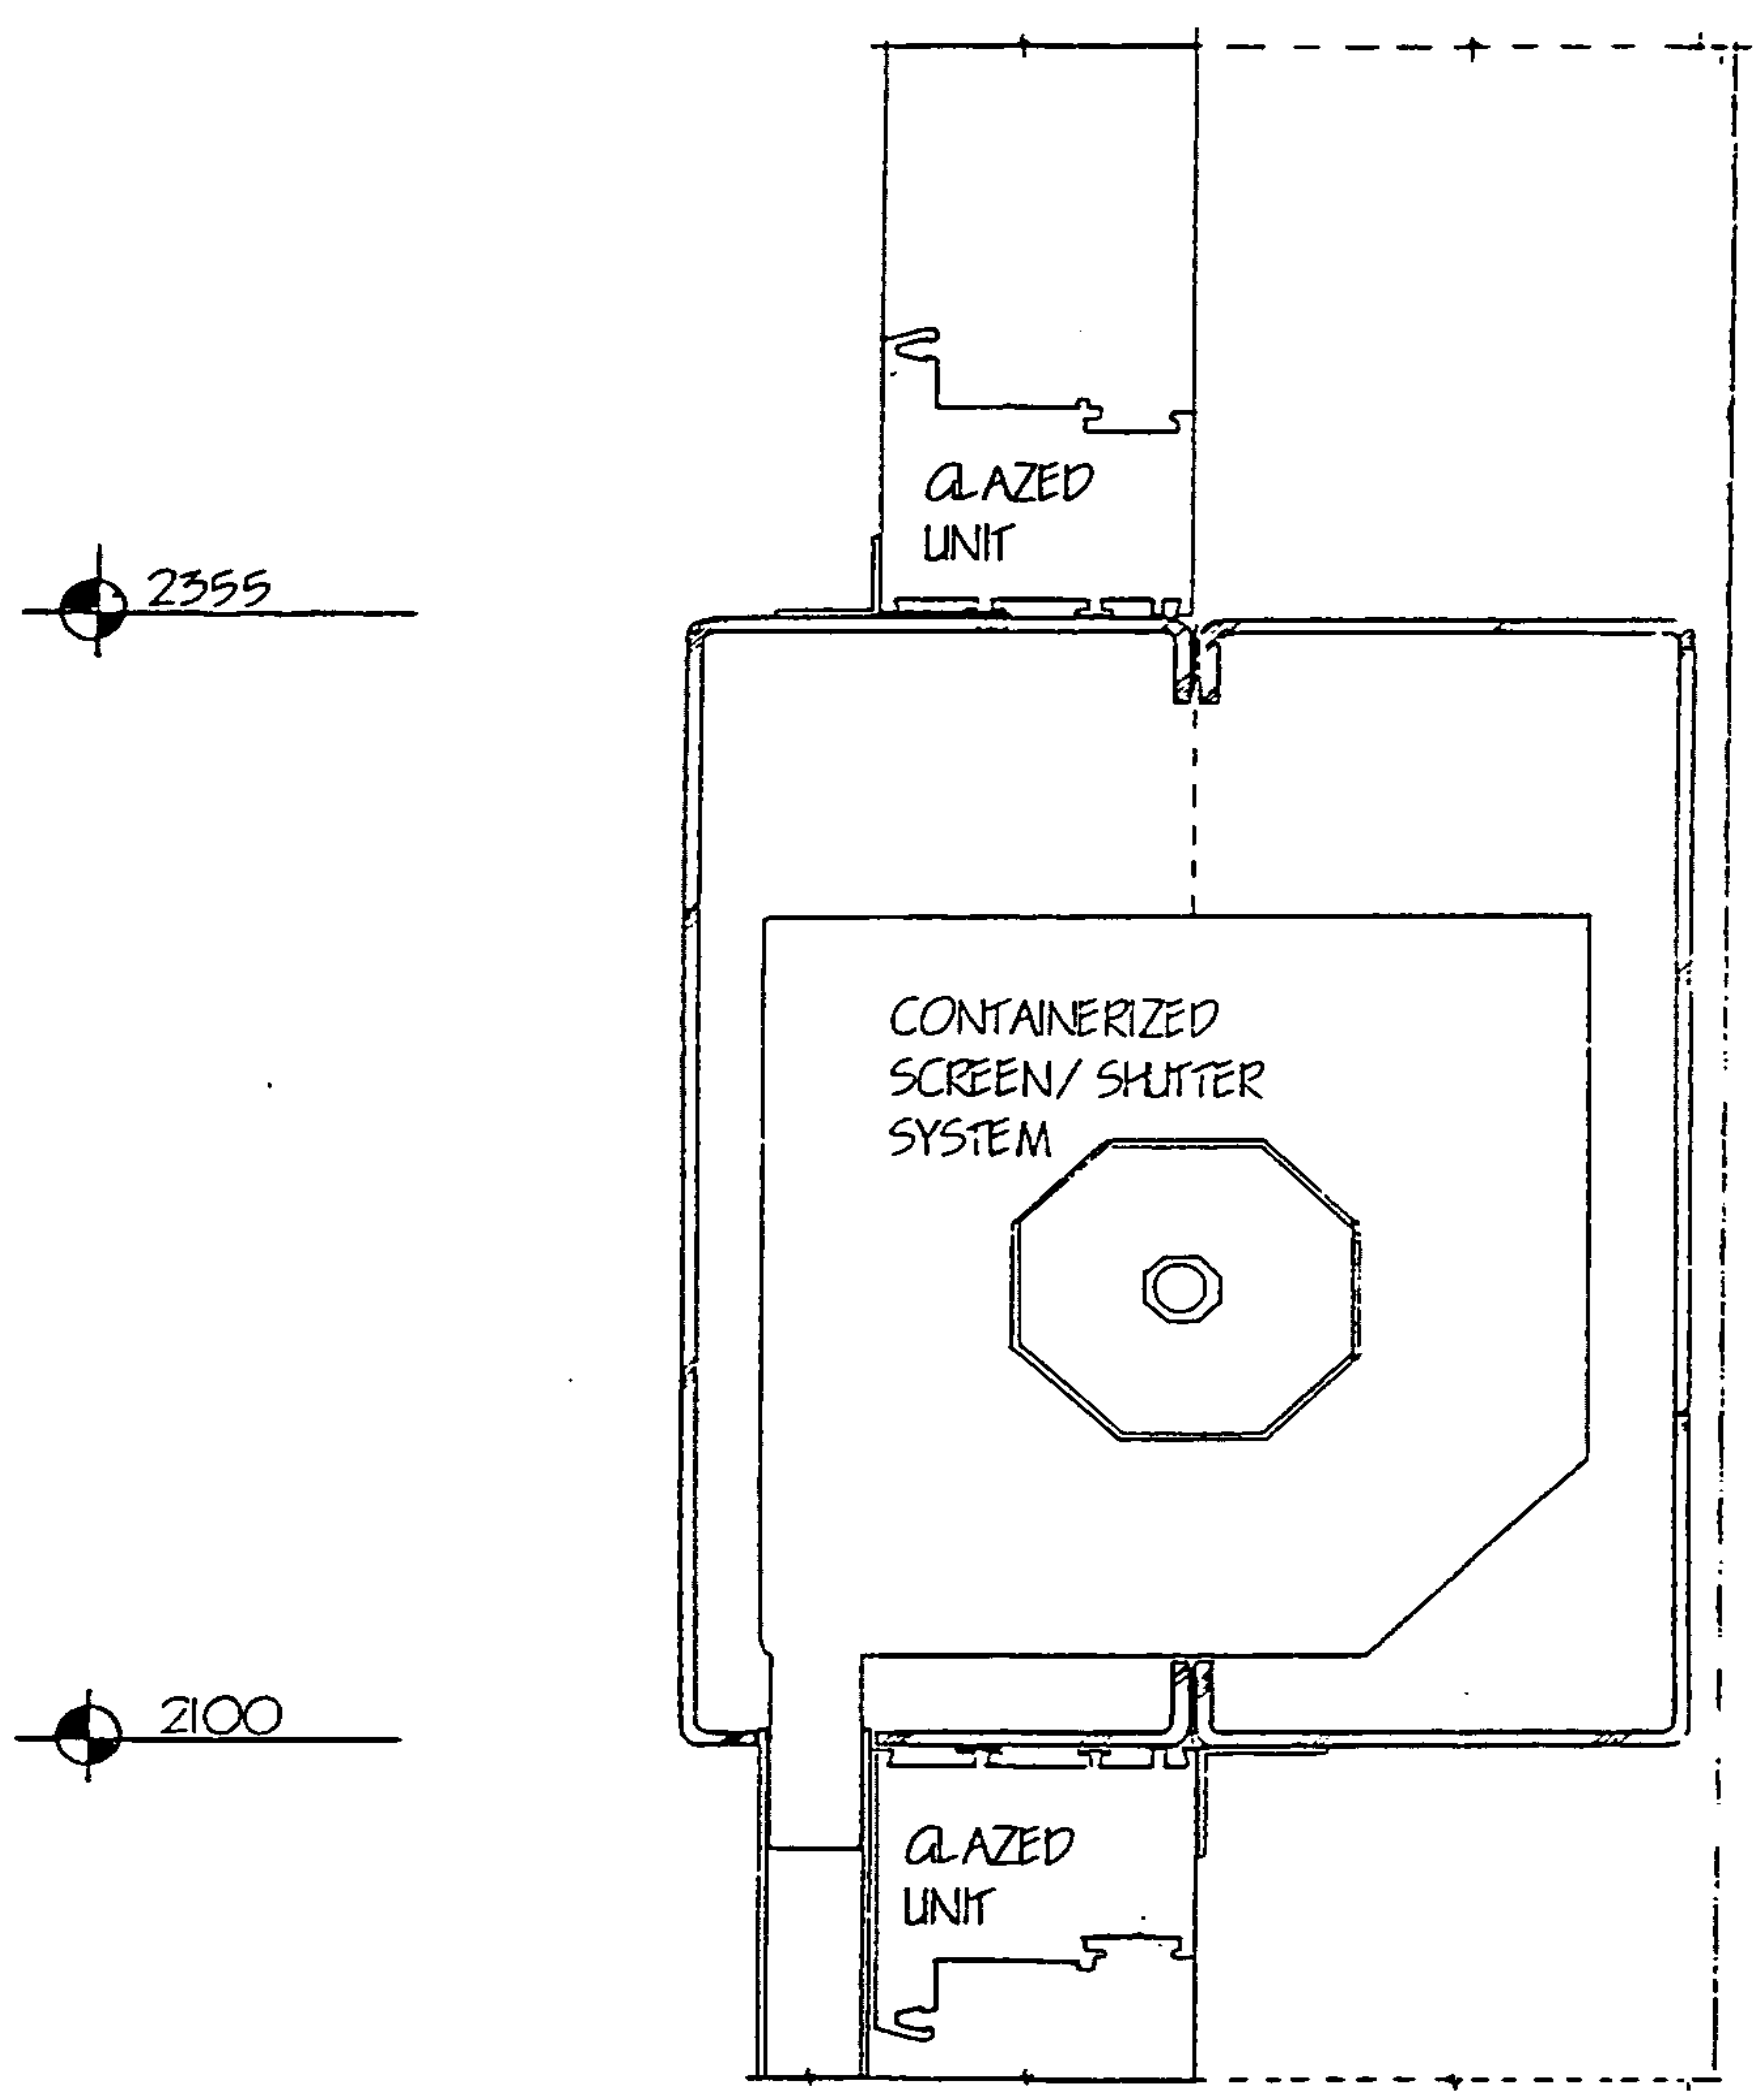
GLAZED
UNIT
2355
CONTAINERIZED
SCREEN/ SHUTTER
SYSTEM
2100
GLAZED
UNIT

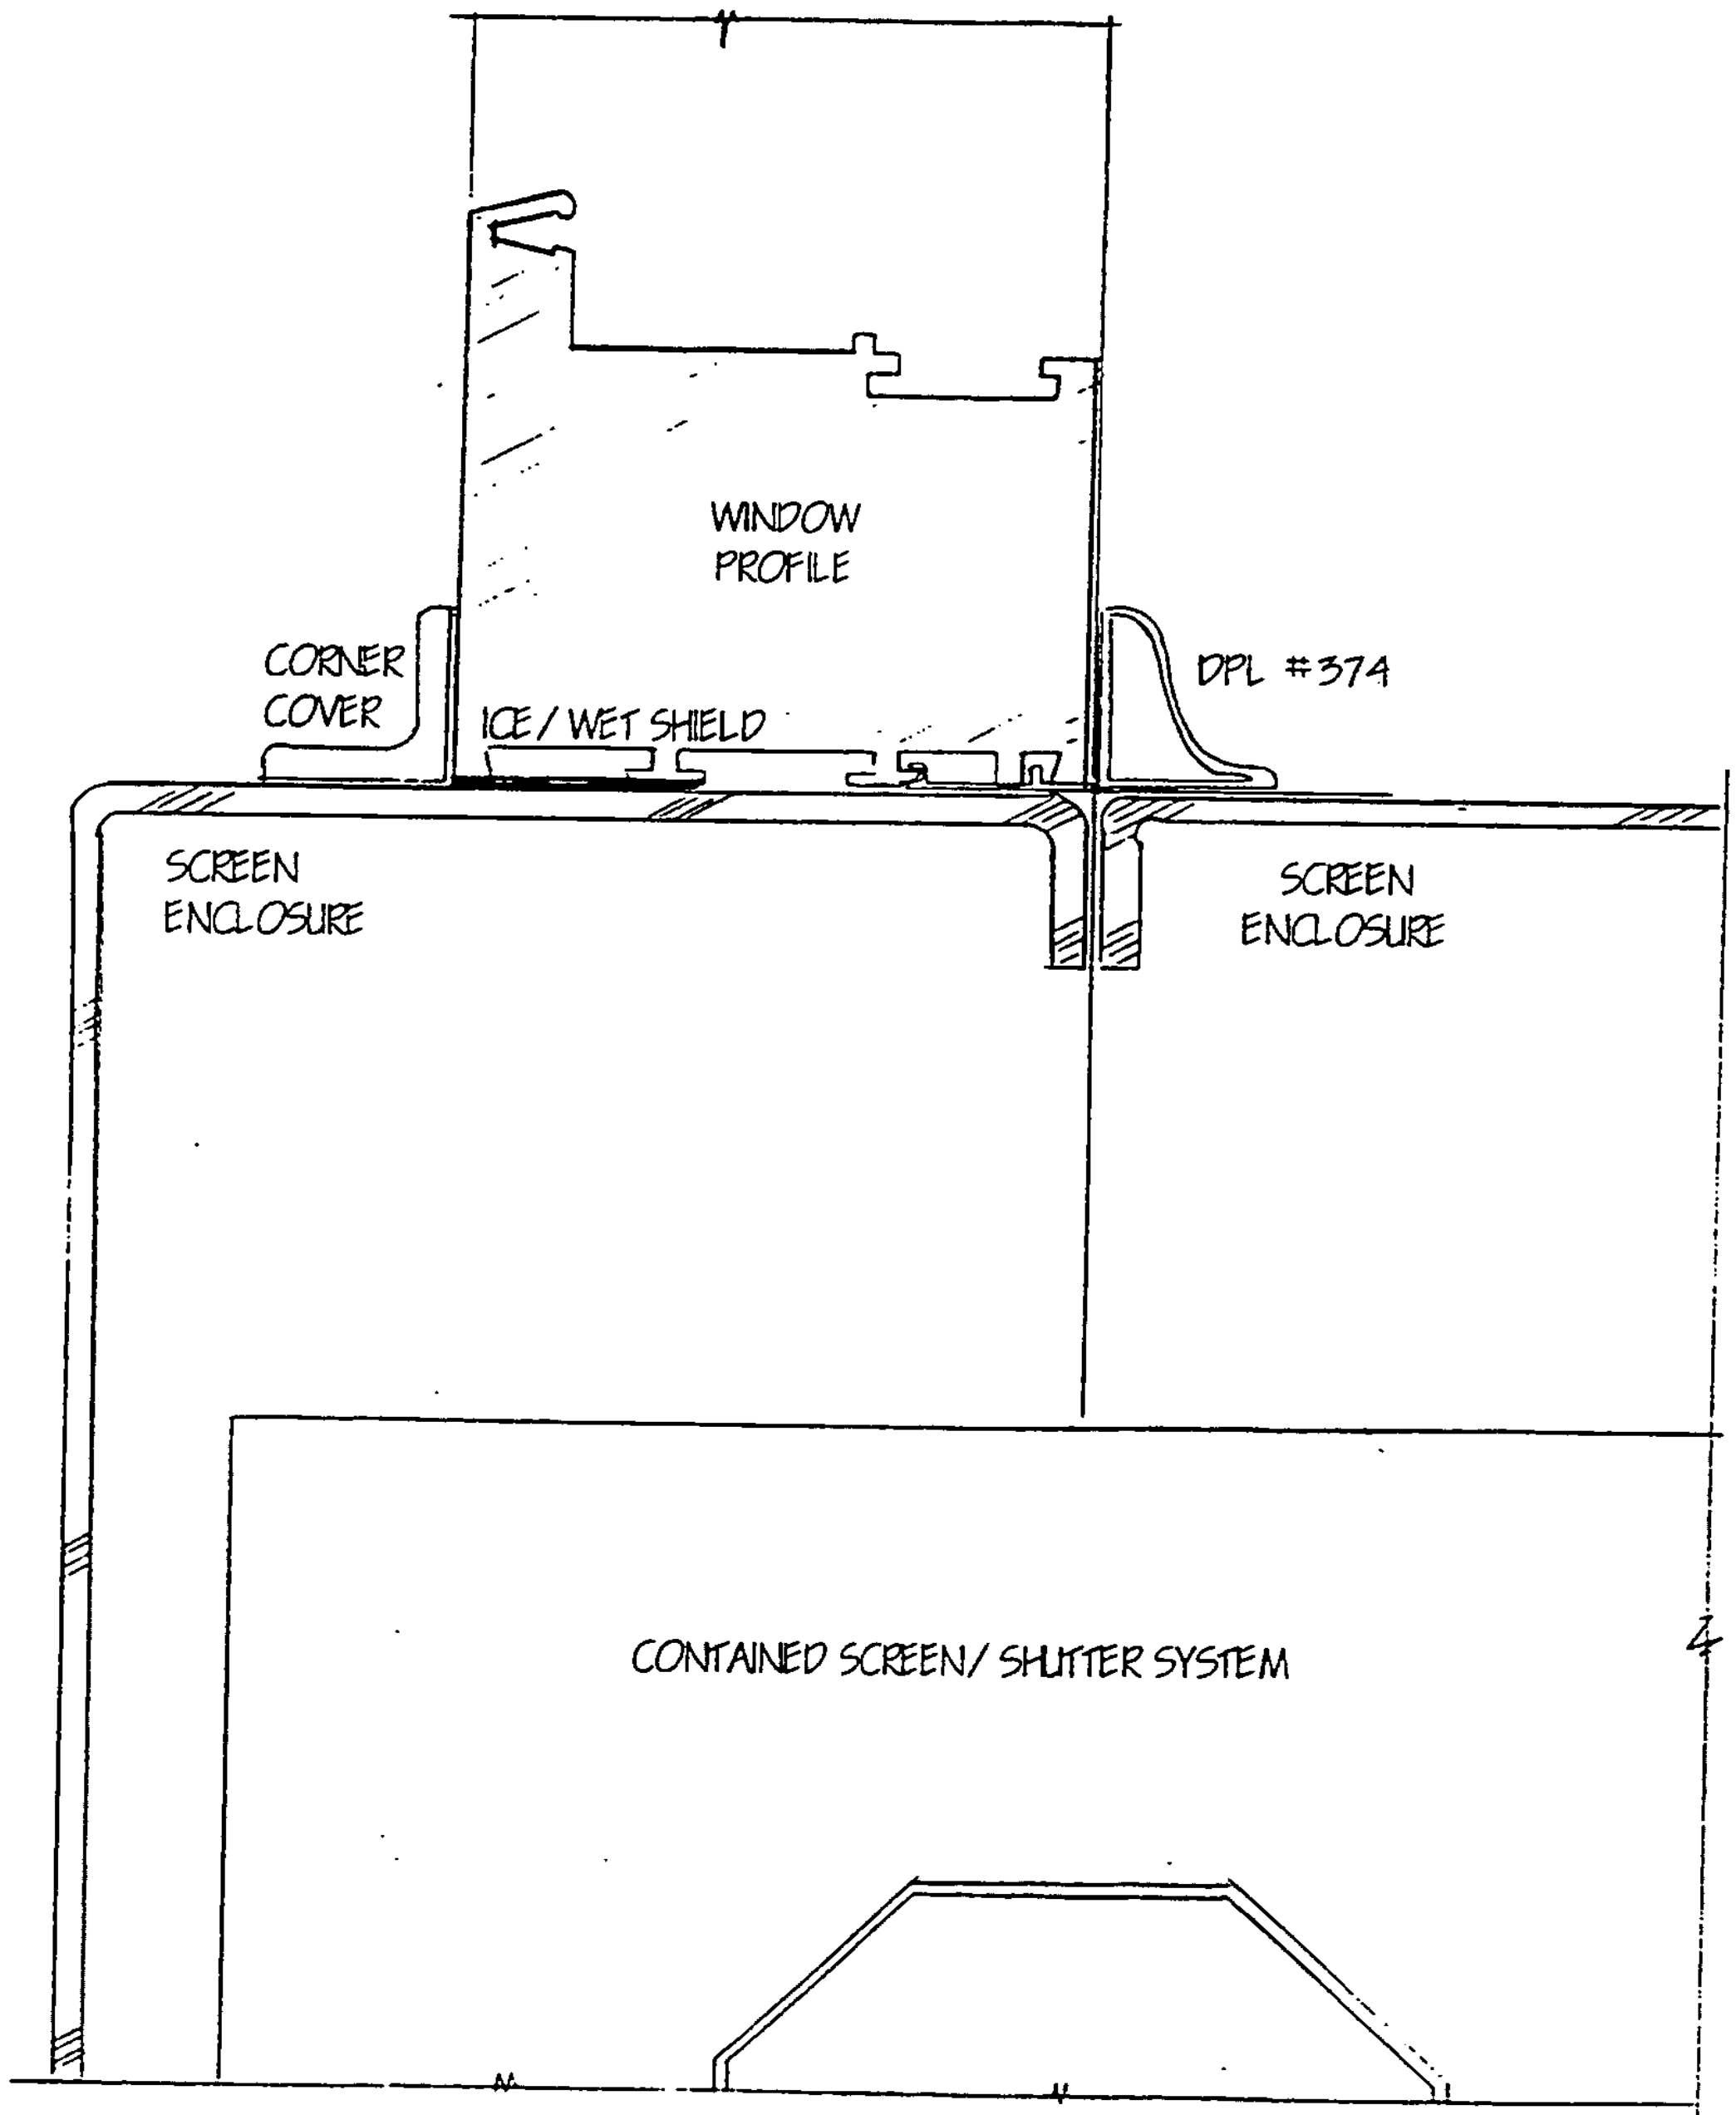
WINDOW PROFILE
CORNER COVER
ICE / WET SHIELD
DPL #374
SCREEN ENCLOSURE
SCREEN ENCLOSURE
CONTAINED SCREEN/ SHUTTER SYSTEM

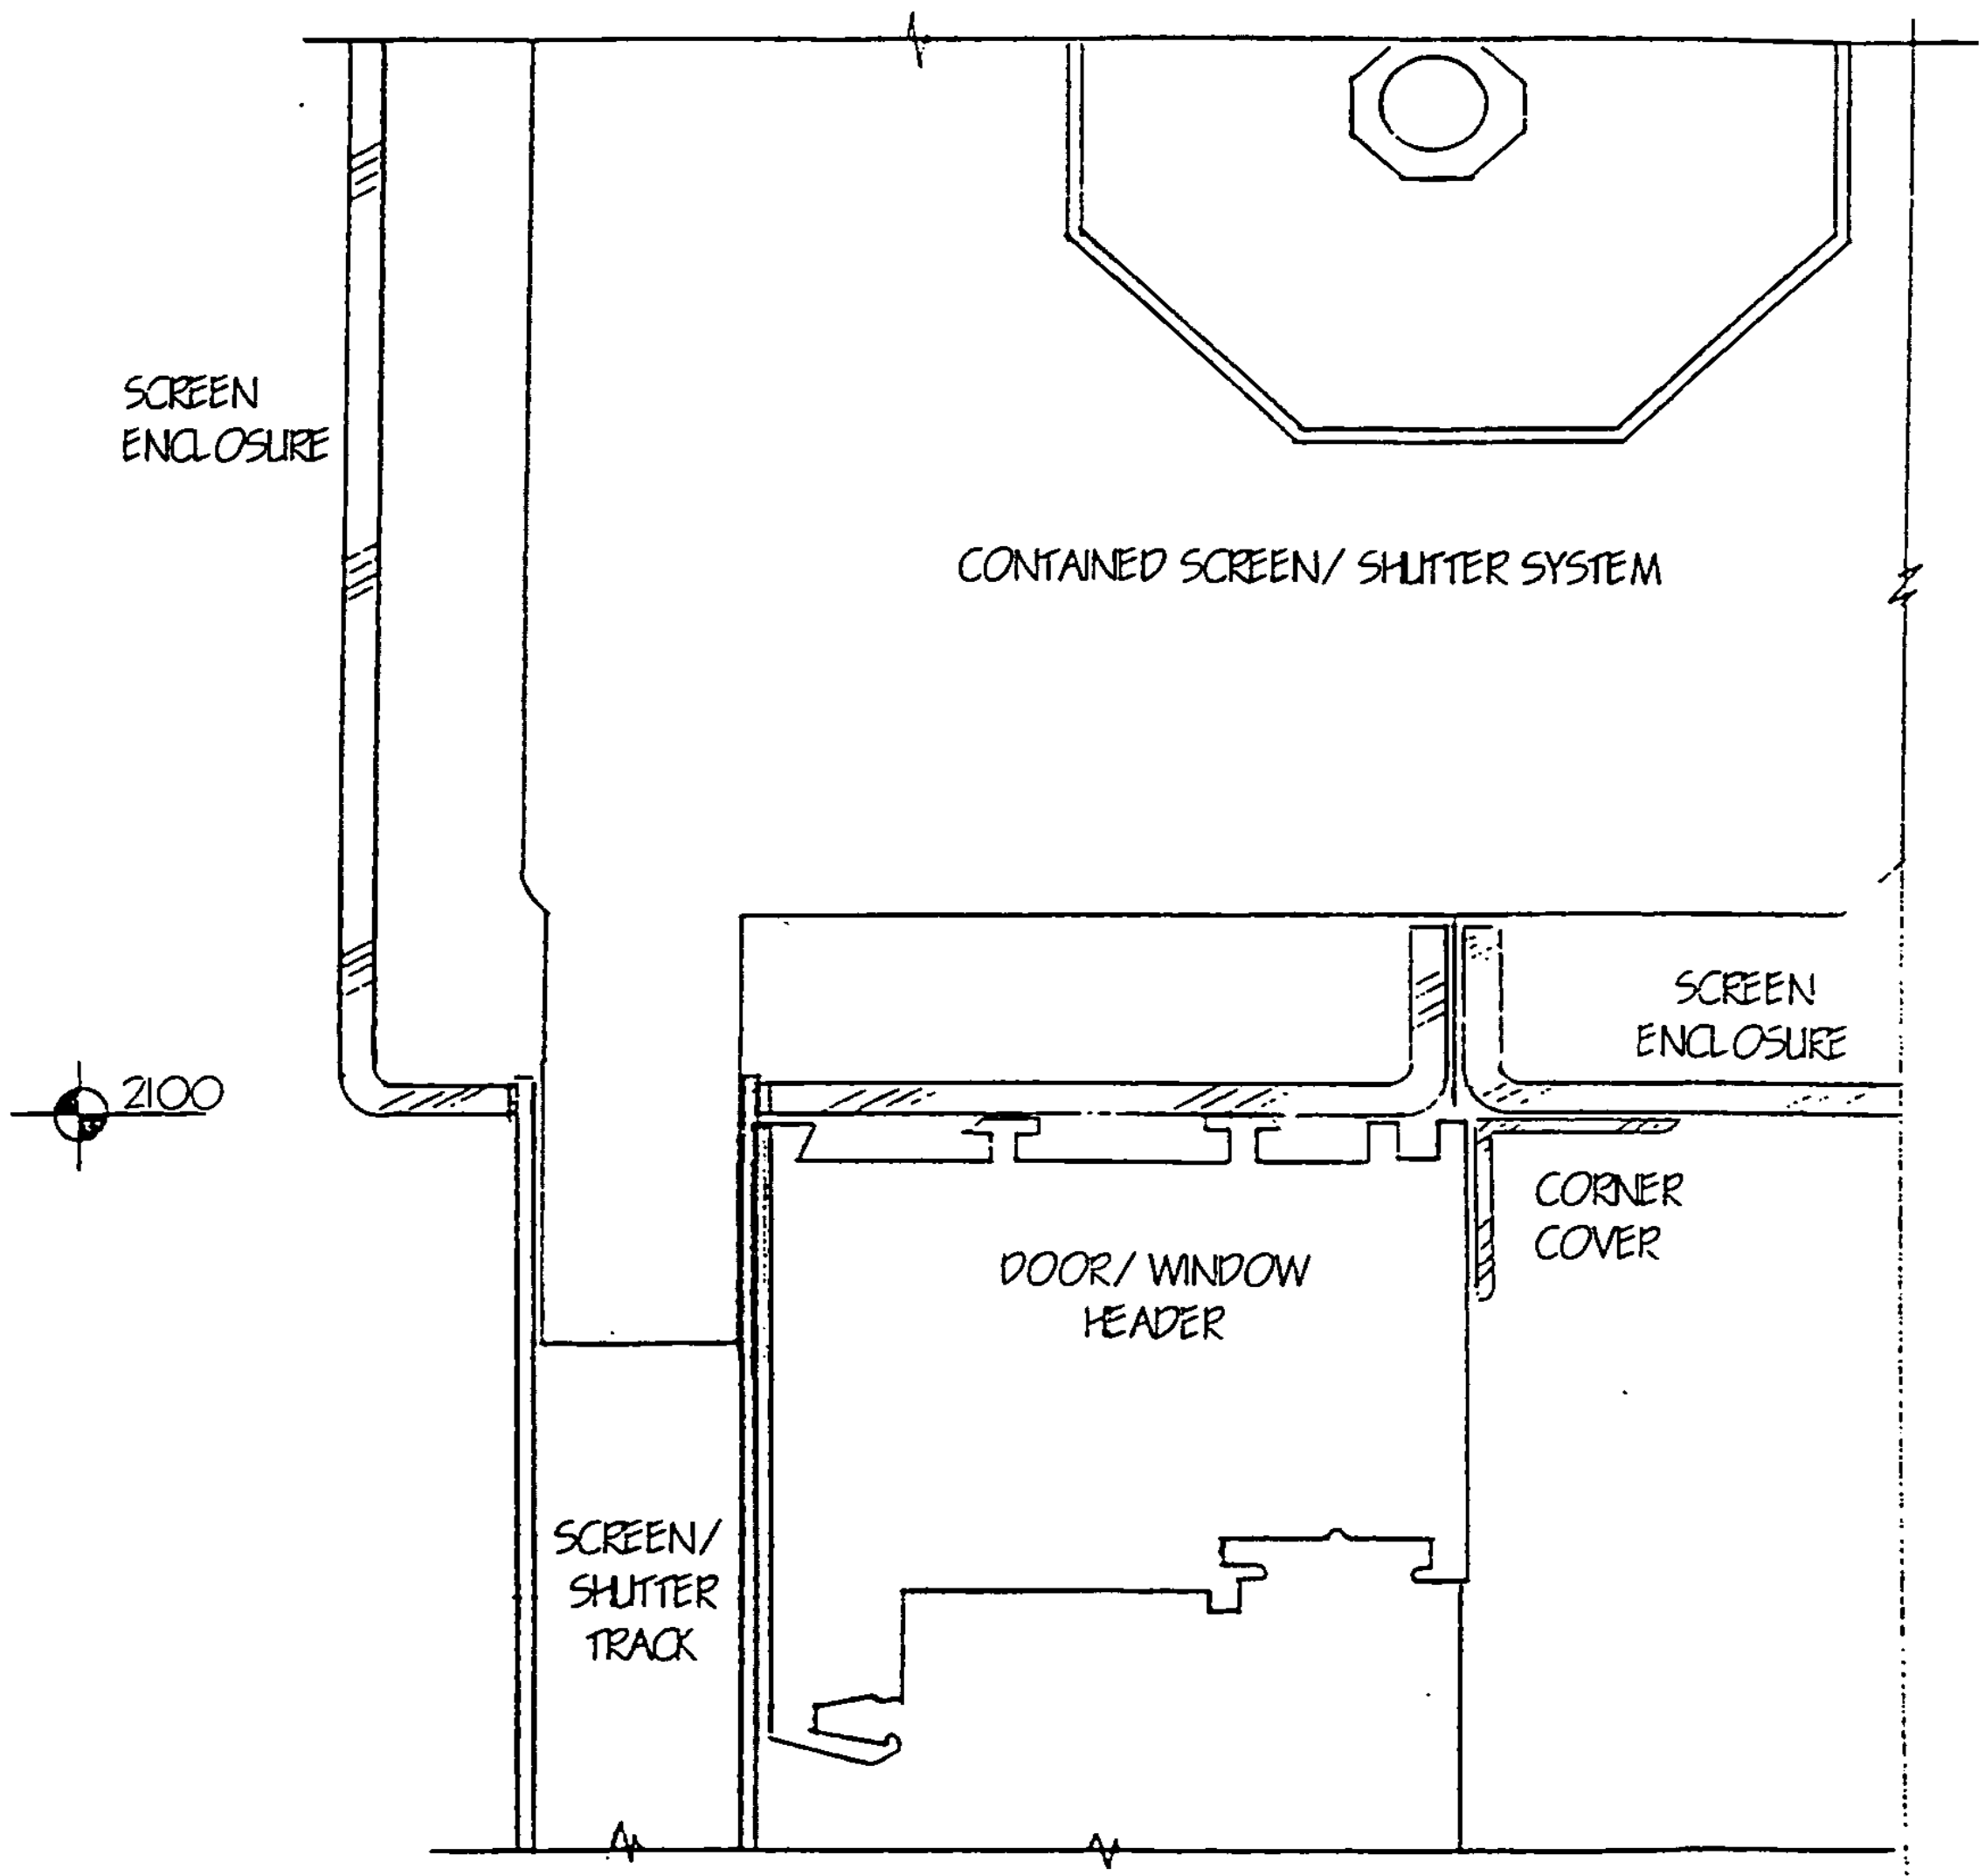
SCREEN ENCLOSURE
CONTAINED SCREEN/ SHUTTER SYSTEM
2100
SCREEN ENCLOSURE
CORNER COVER
DOOR/ WINDOW HEADER
SCREEN/ SHUTTER TRACK

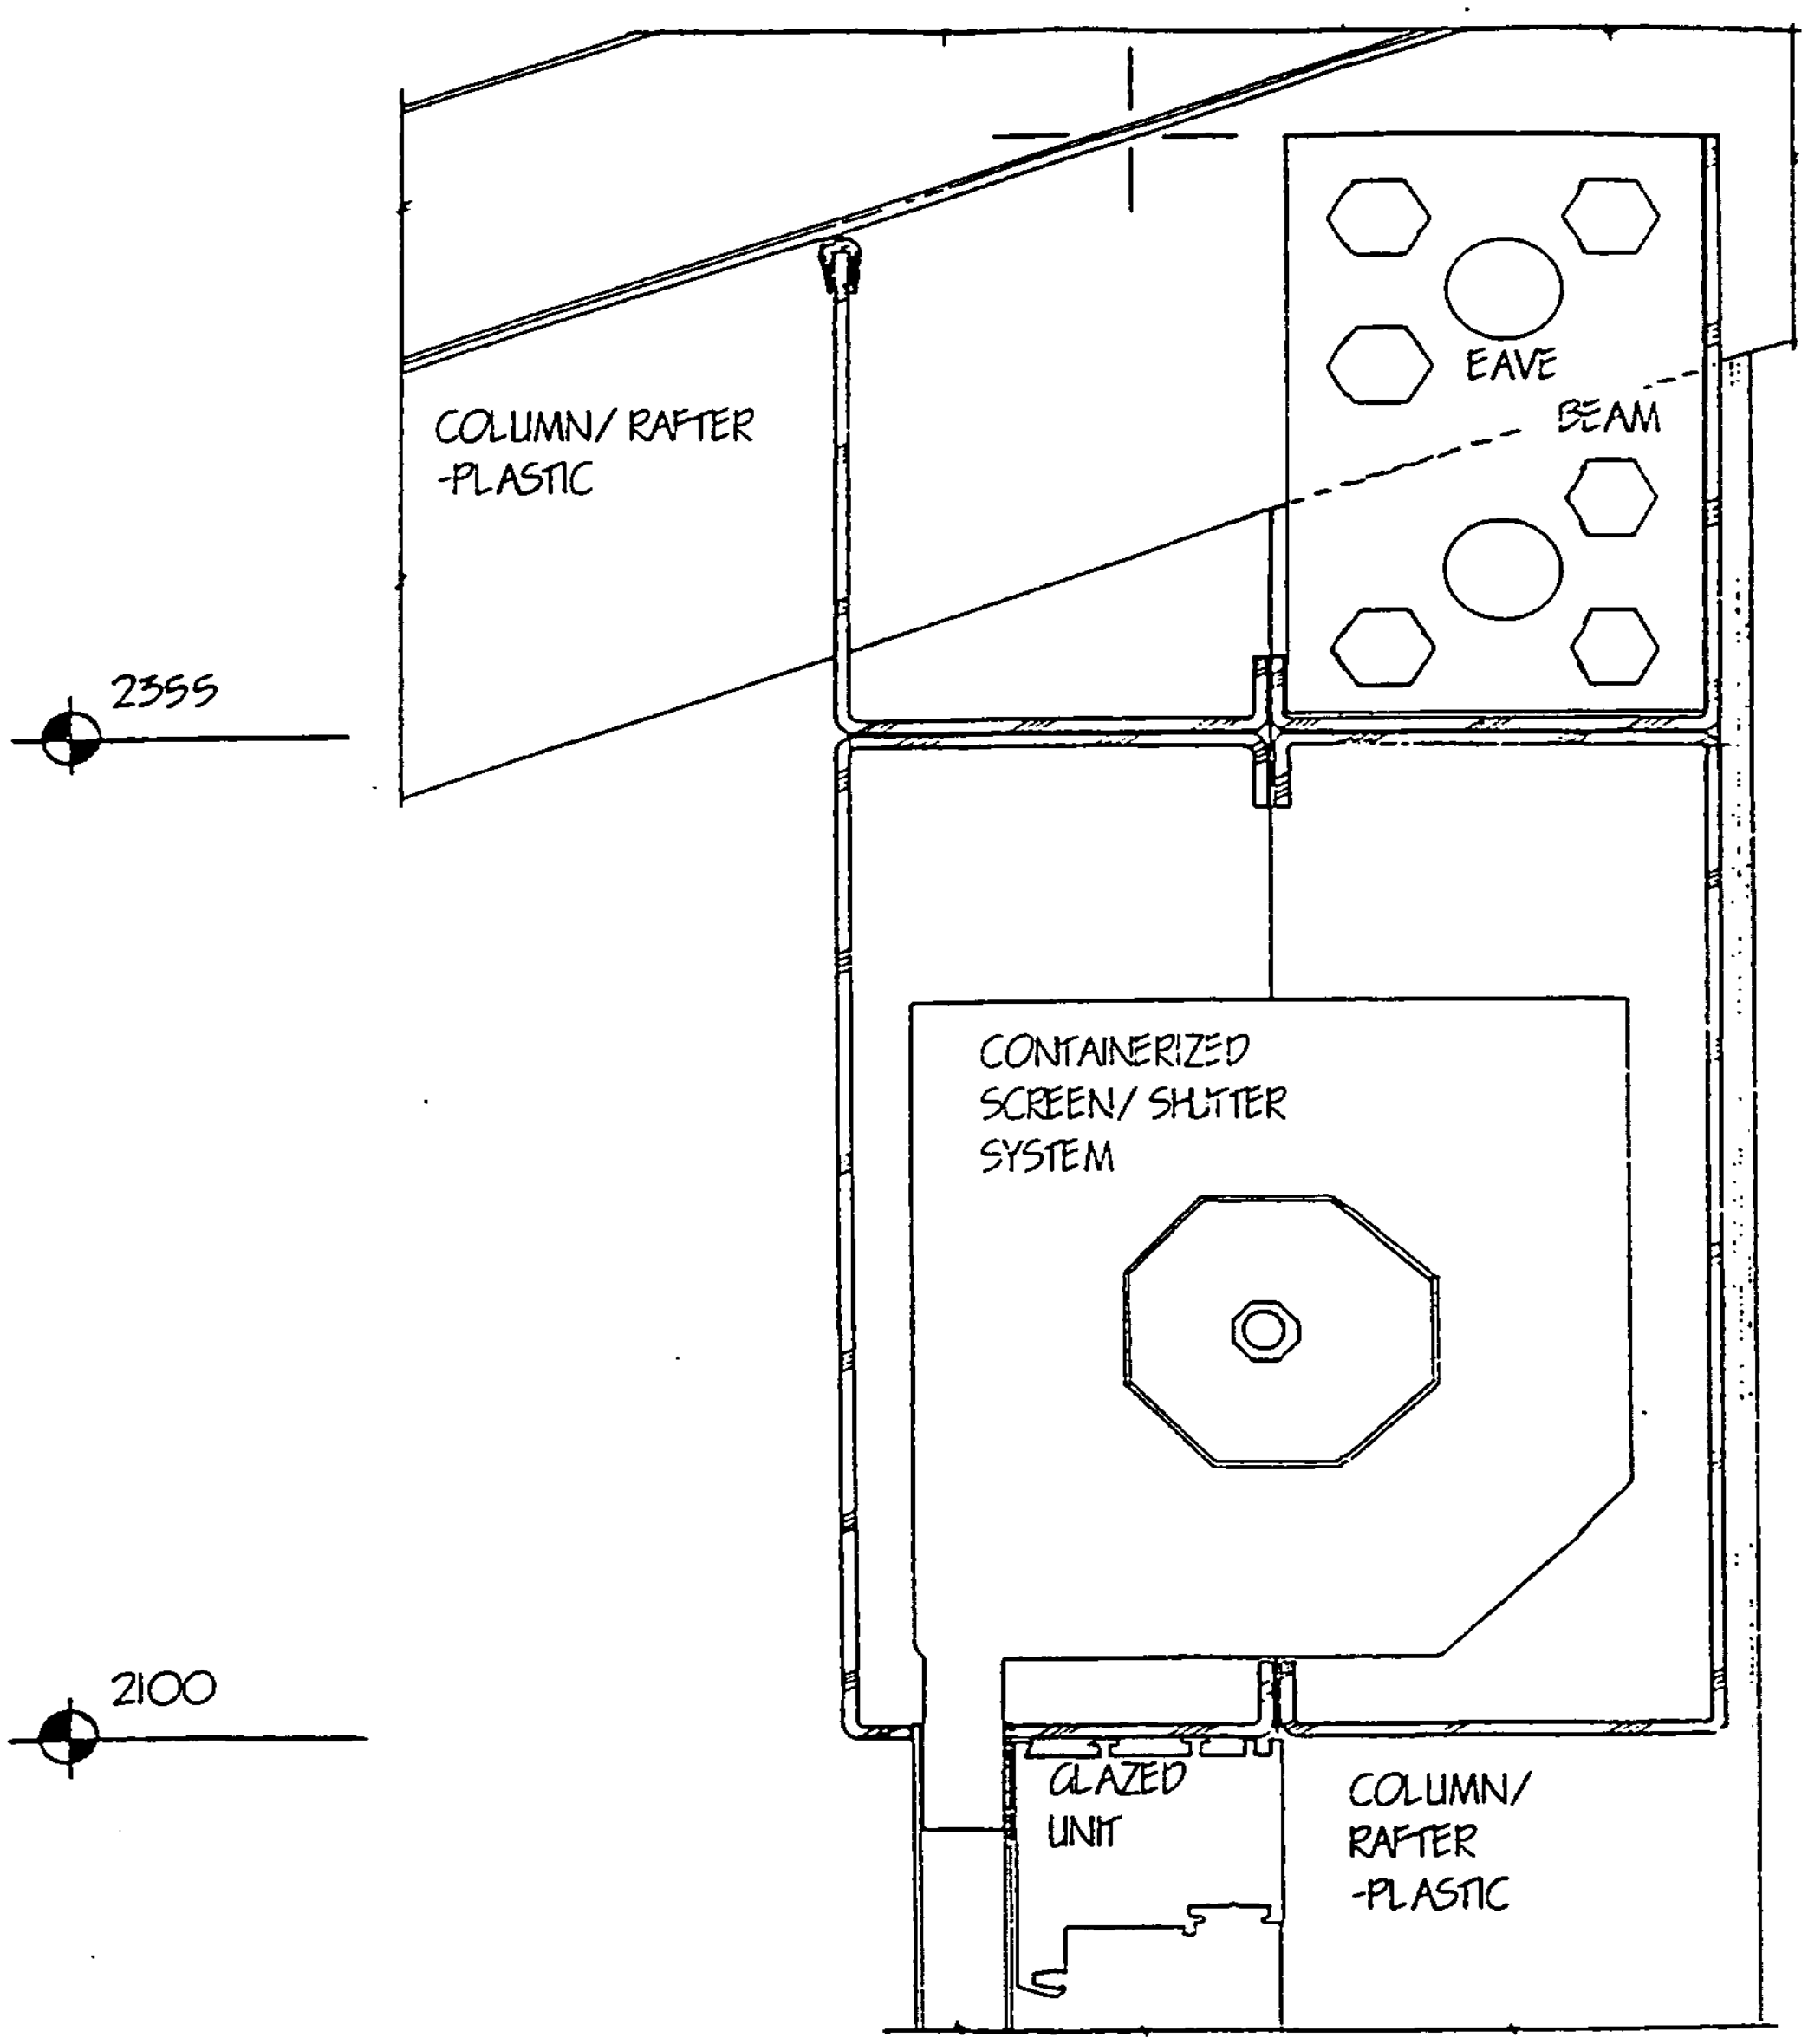
COLUMN/ RAFTER
-PLASTIC
EAVE
BEAM
2355
CONTAINERIZED
SCREEN/ SHUTTER
SYSTEM
2100
GLAZED
UNIT
COLUMN/
RAFTER
-PLASTIC

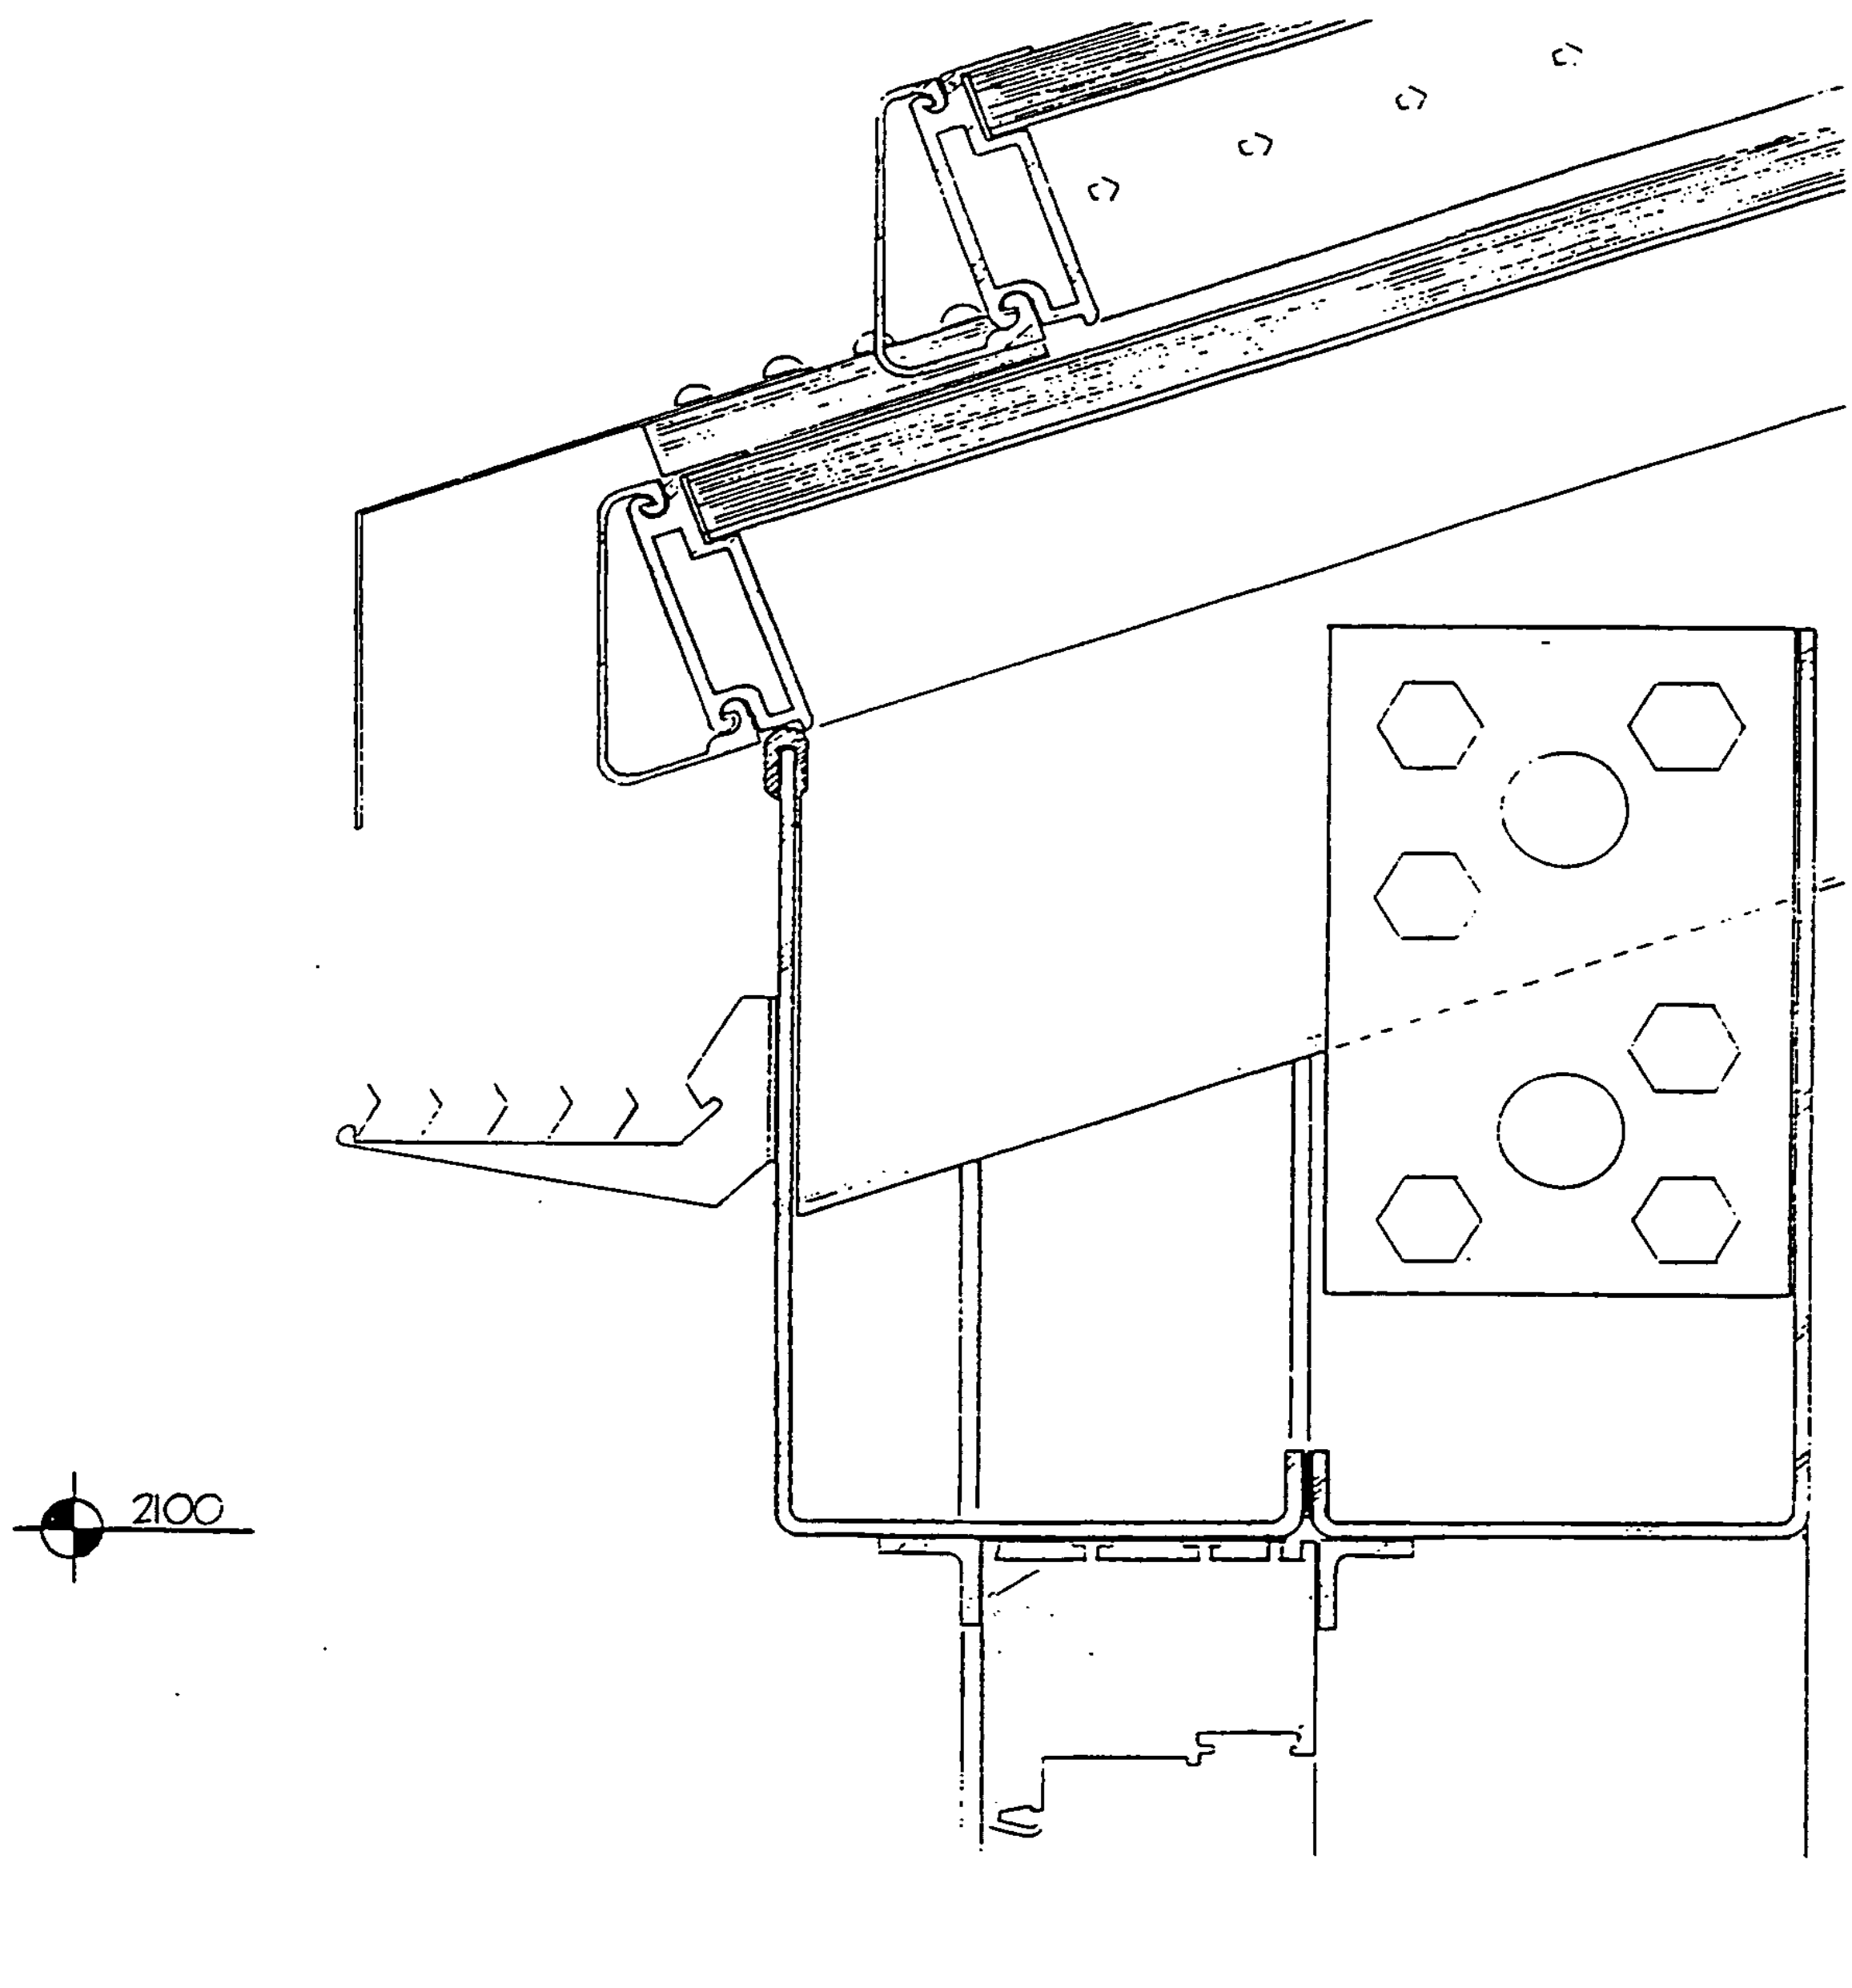
2100

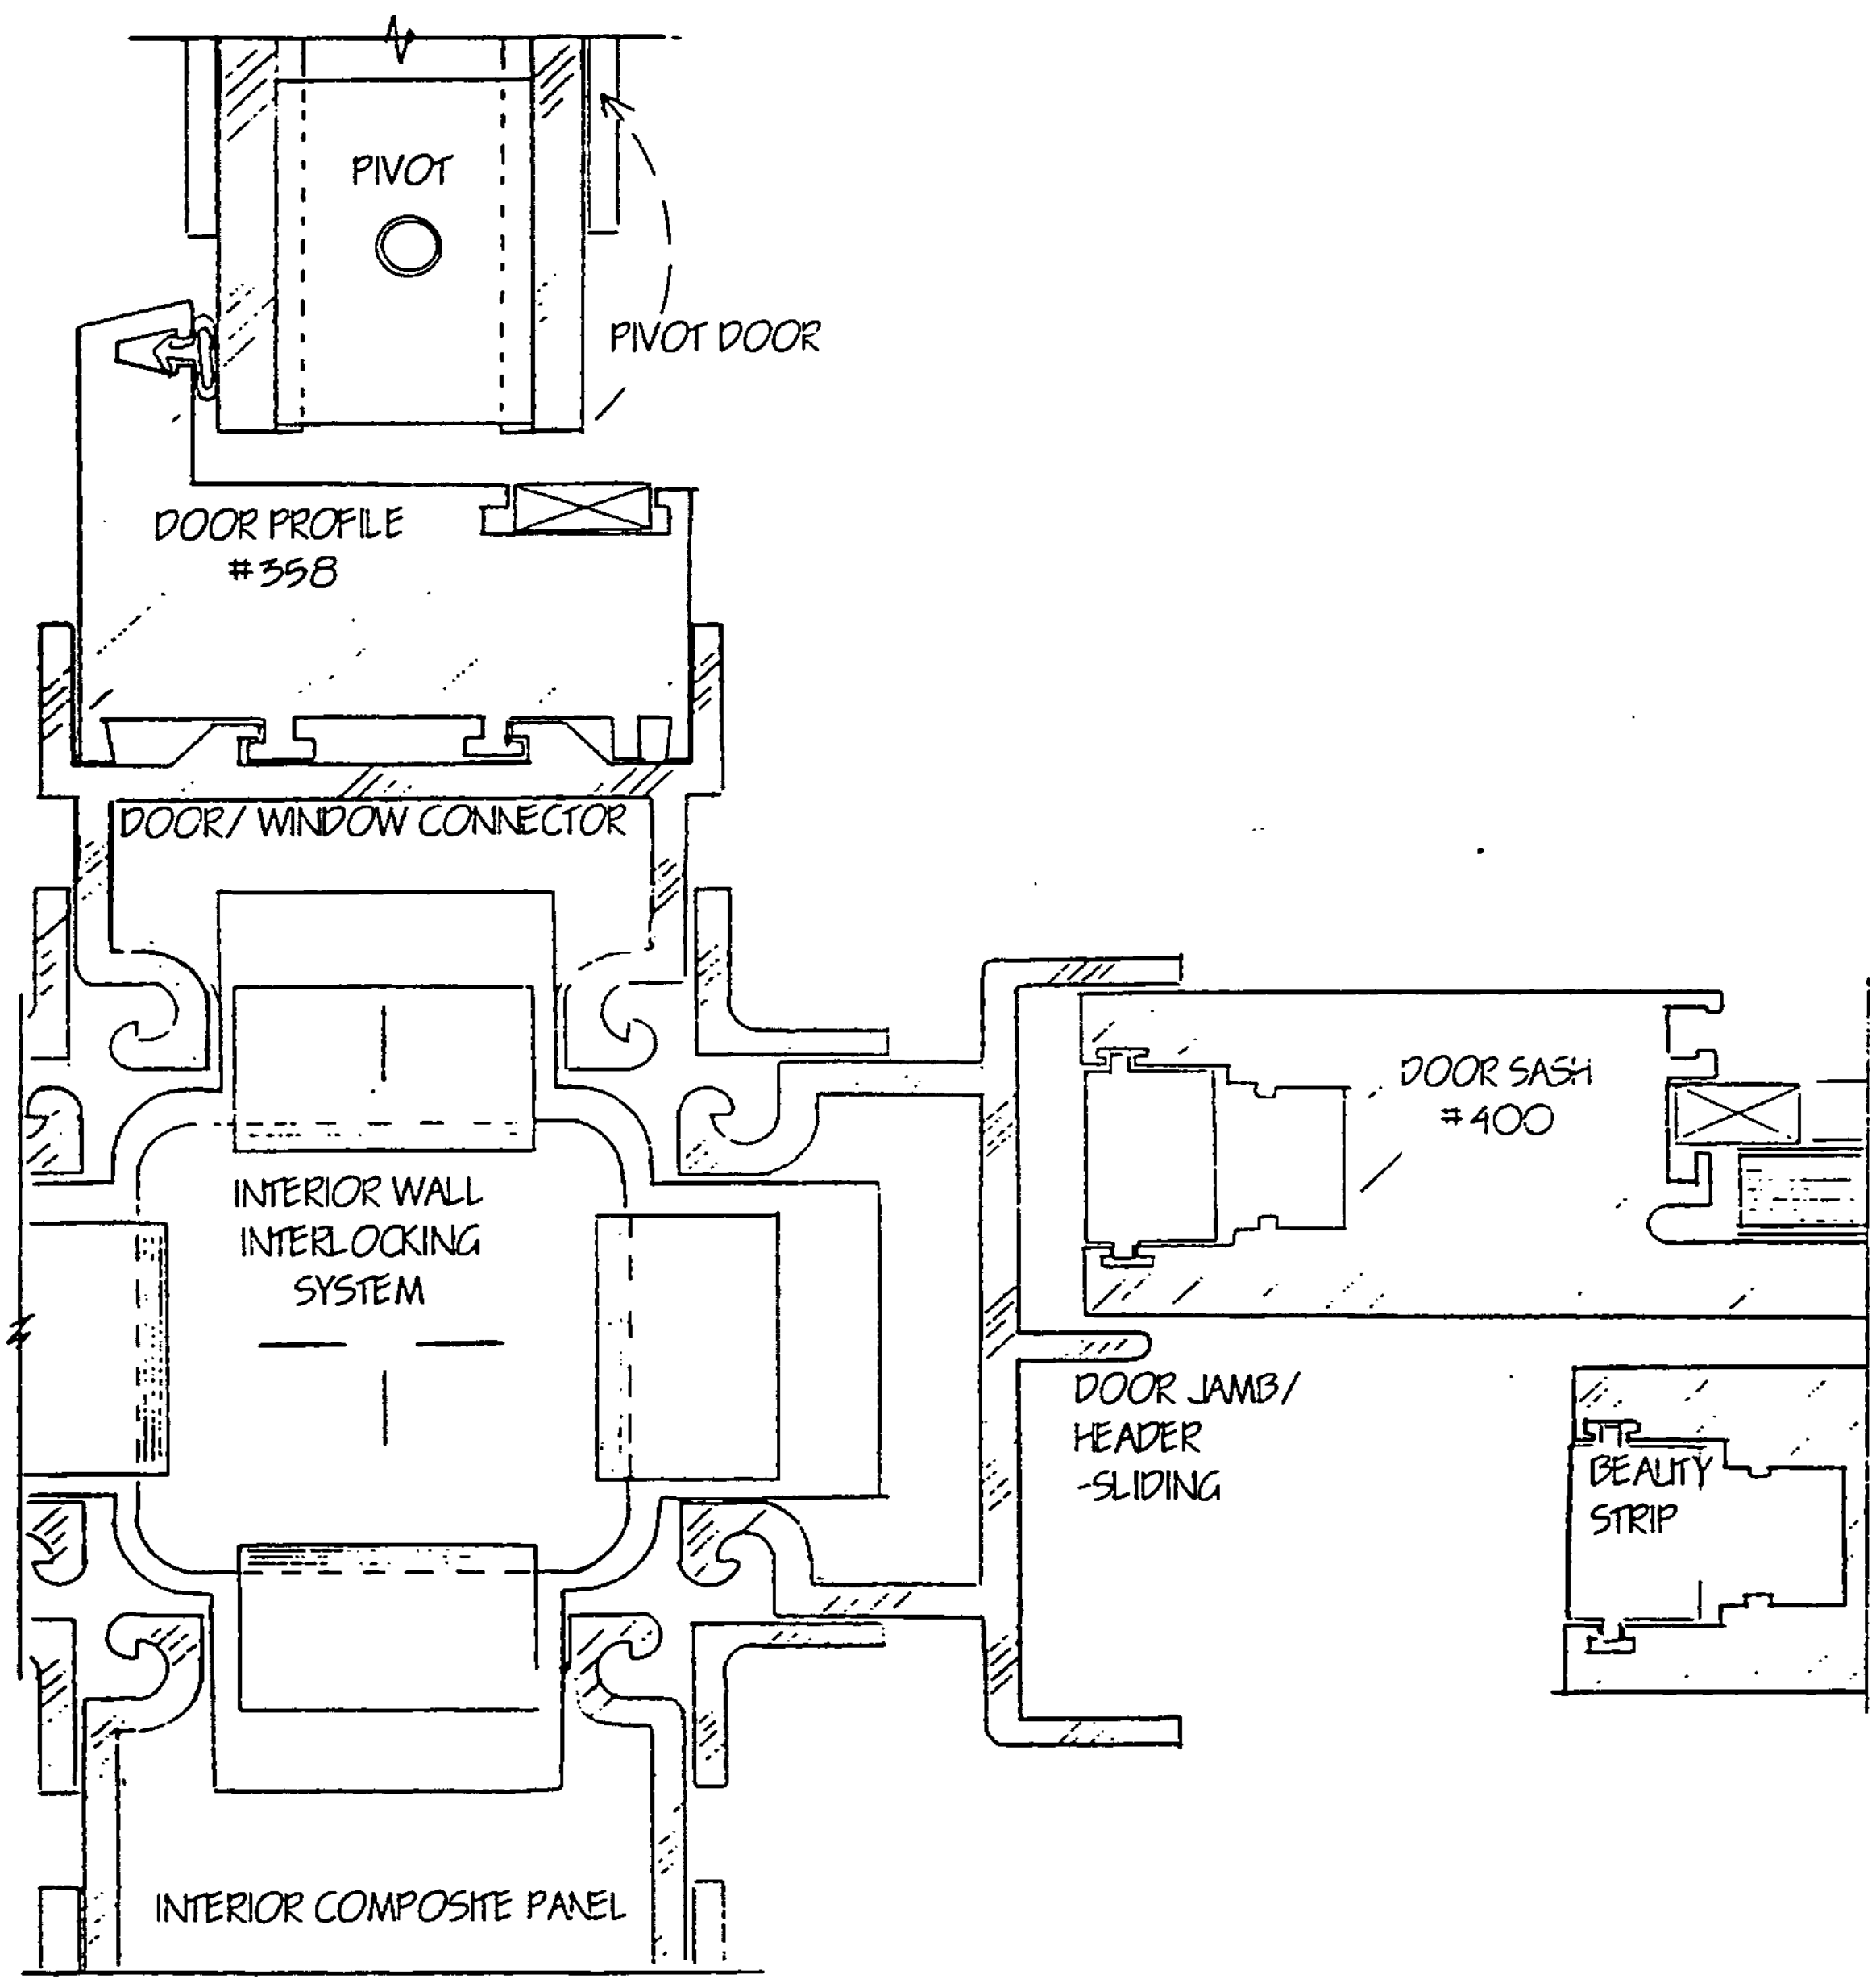
PIVOT
PIVOT DOOR
DOOR PROFILE
#358
DOOR/ WINDOW CONNECTOR
INTERIOR WALL
INTERLOCKING
SYSTEM
DOOR SASH
#400
DOOR JAMB/
HEADER
-SLIDING
BEAUTY
STRIP
INTERIOR COMPOSITE PANEL

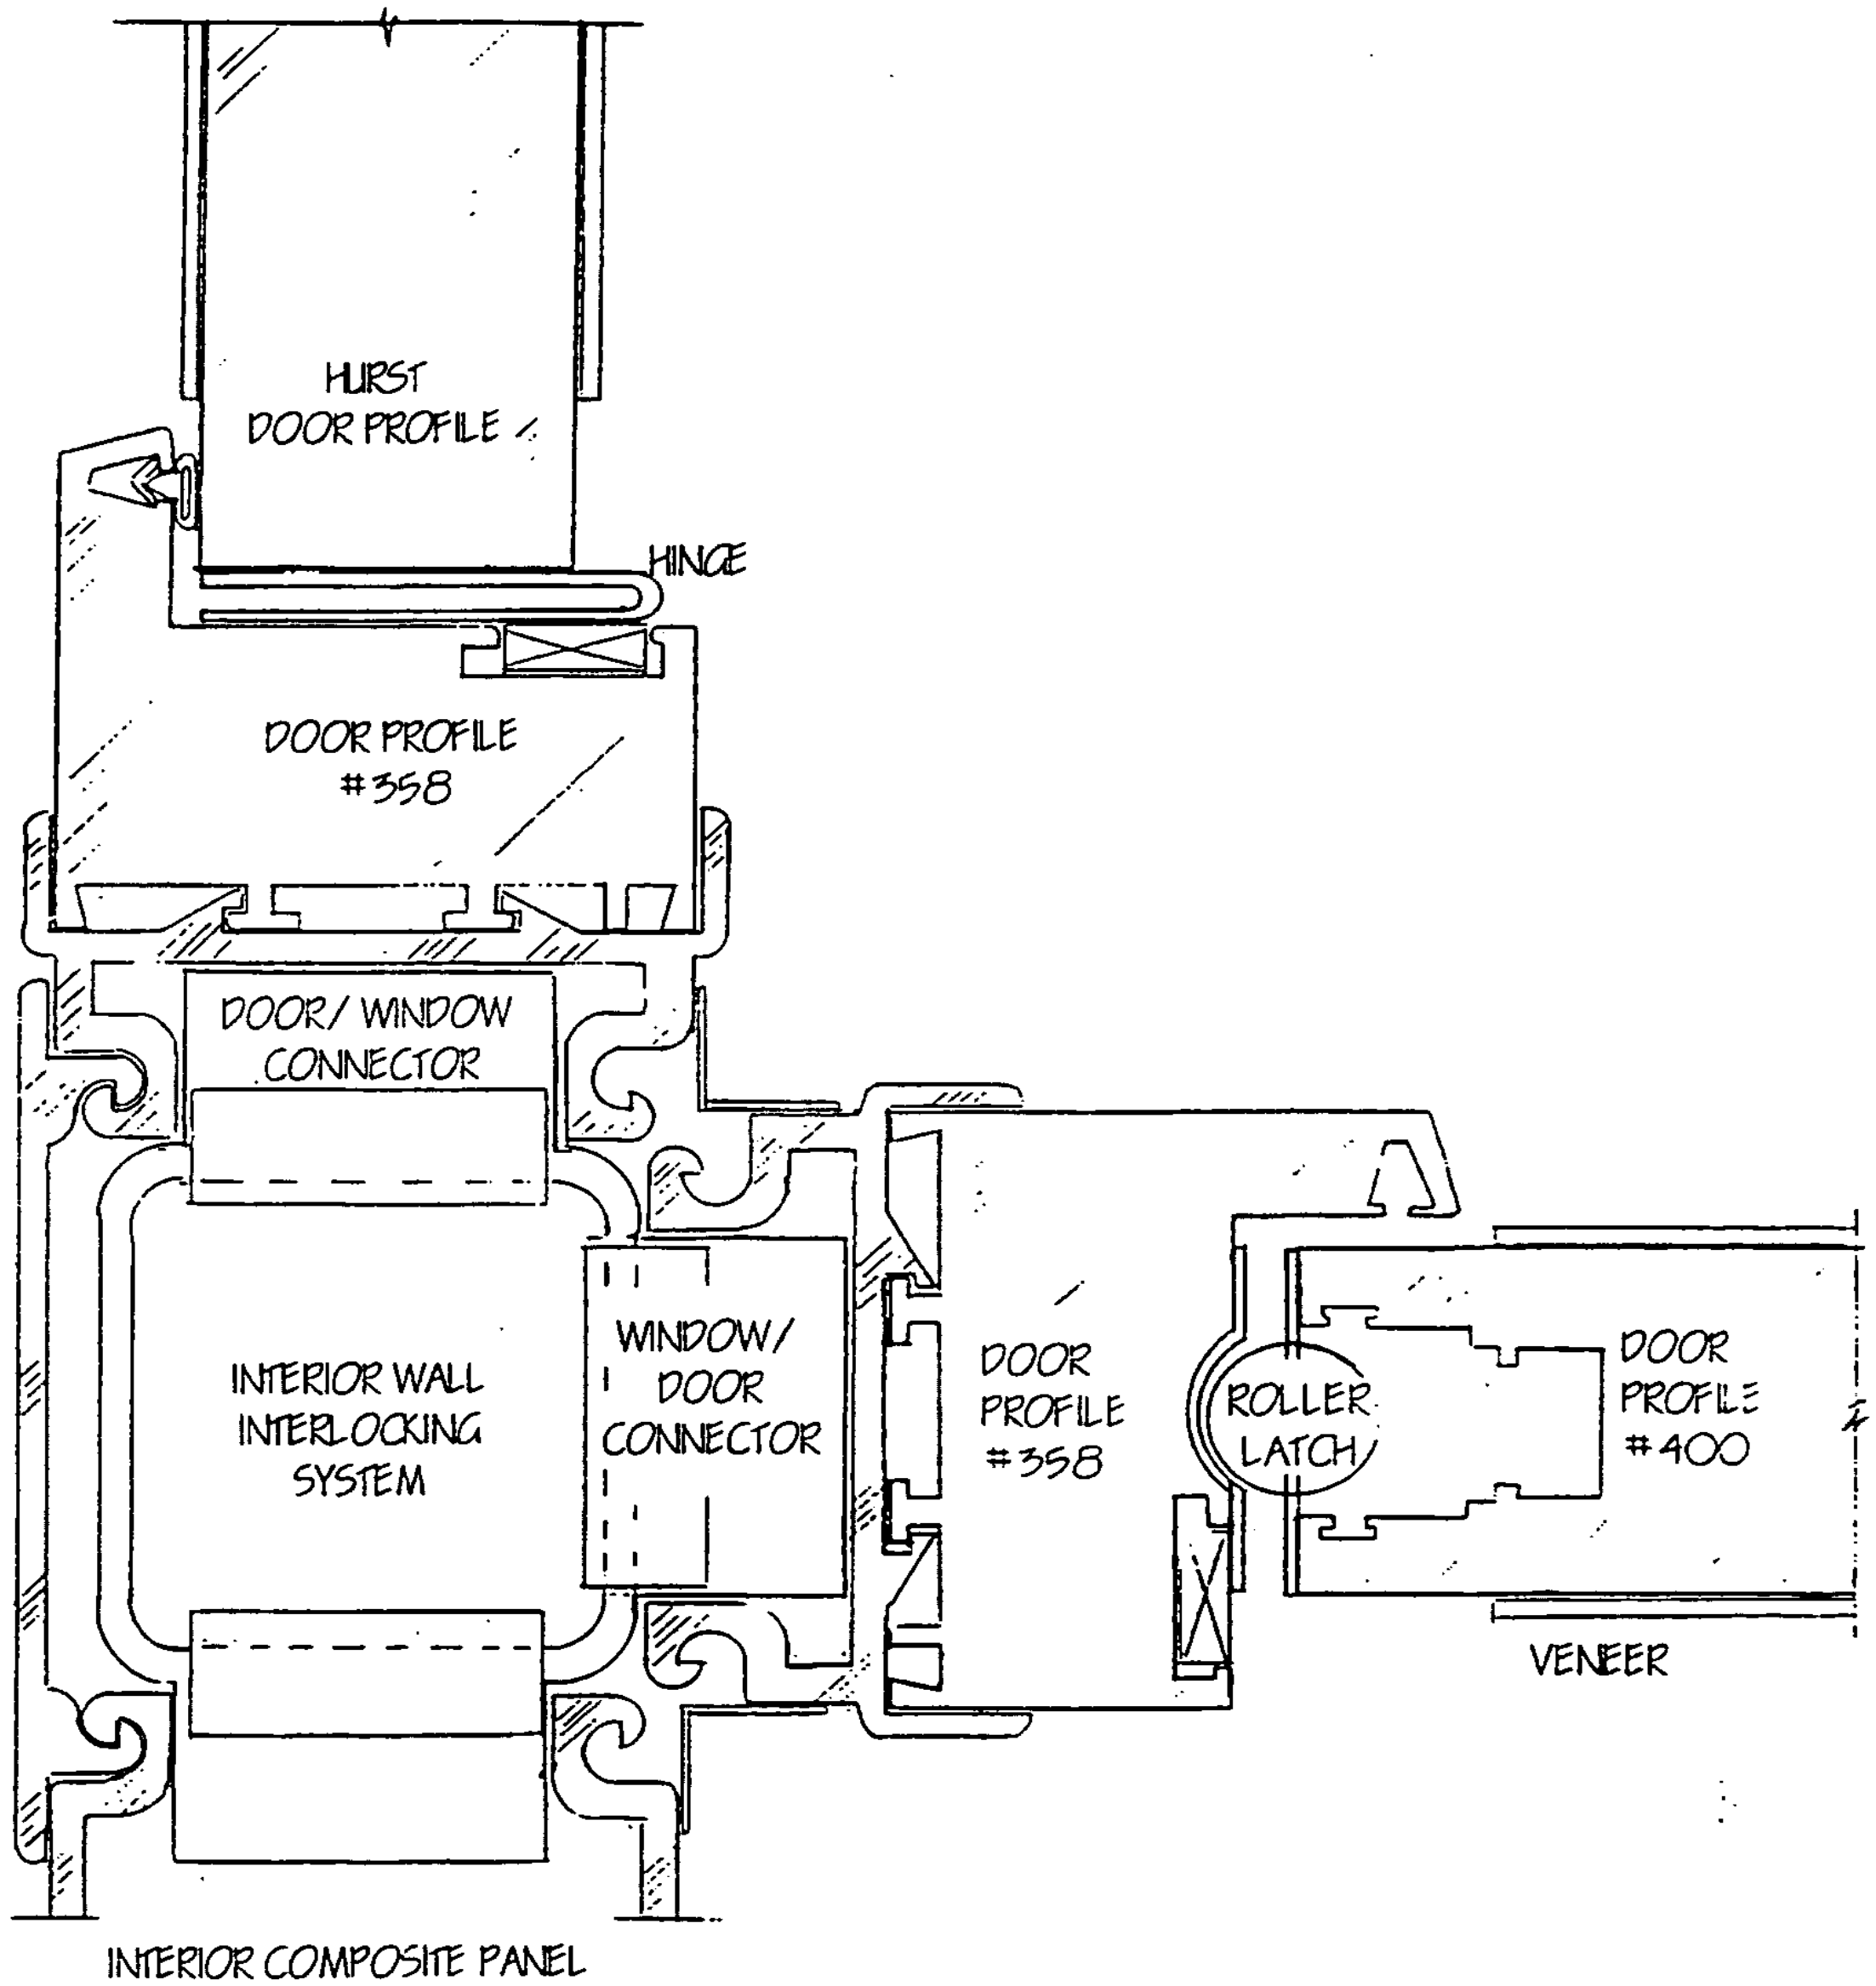
HURST
DOOR PROFILE
HINGE
DOOR PROFILE
#358
DOOR/ WINDOW
CONNECTOR
INTERIOR WALL
INTERLOCKING
SYSTEM
WINDOW/
DOOR
CONNECTOR
DOOR
PROFILE
#358
ROLLER
LATCH
DOOR
PROFILE
#400
VENEER
INTERIOR COMPOSITE PANEL

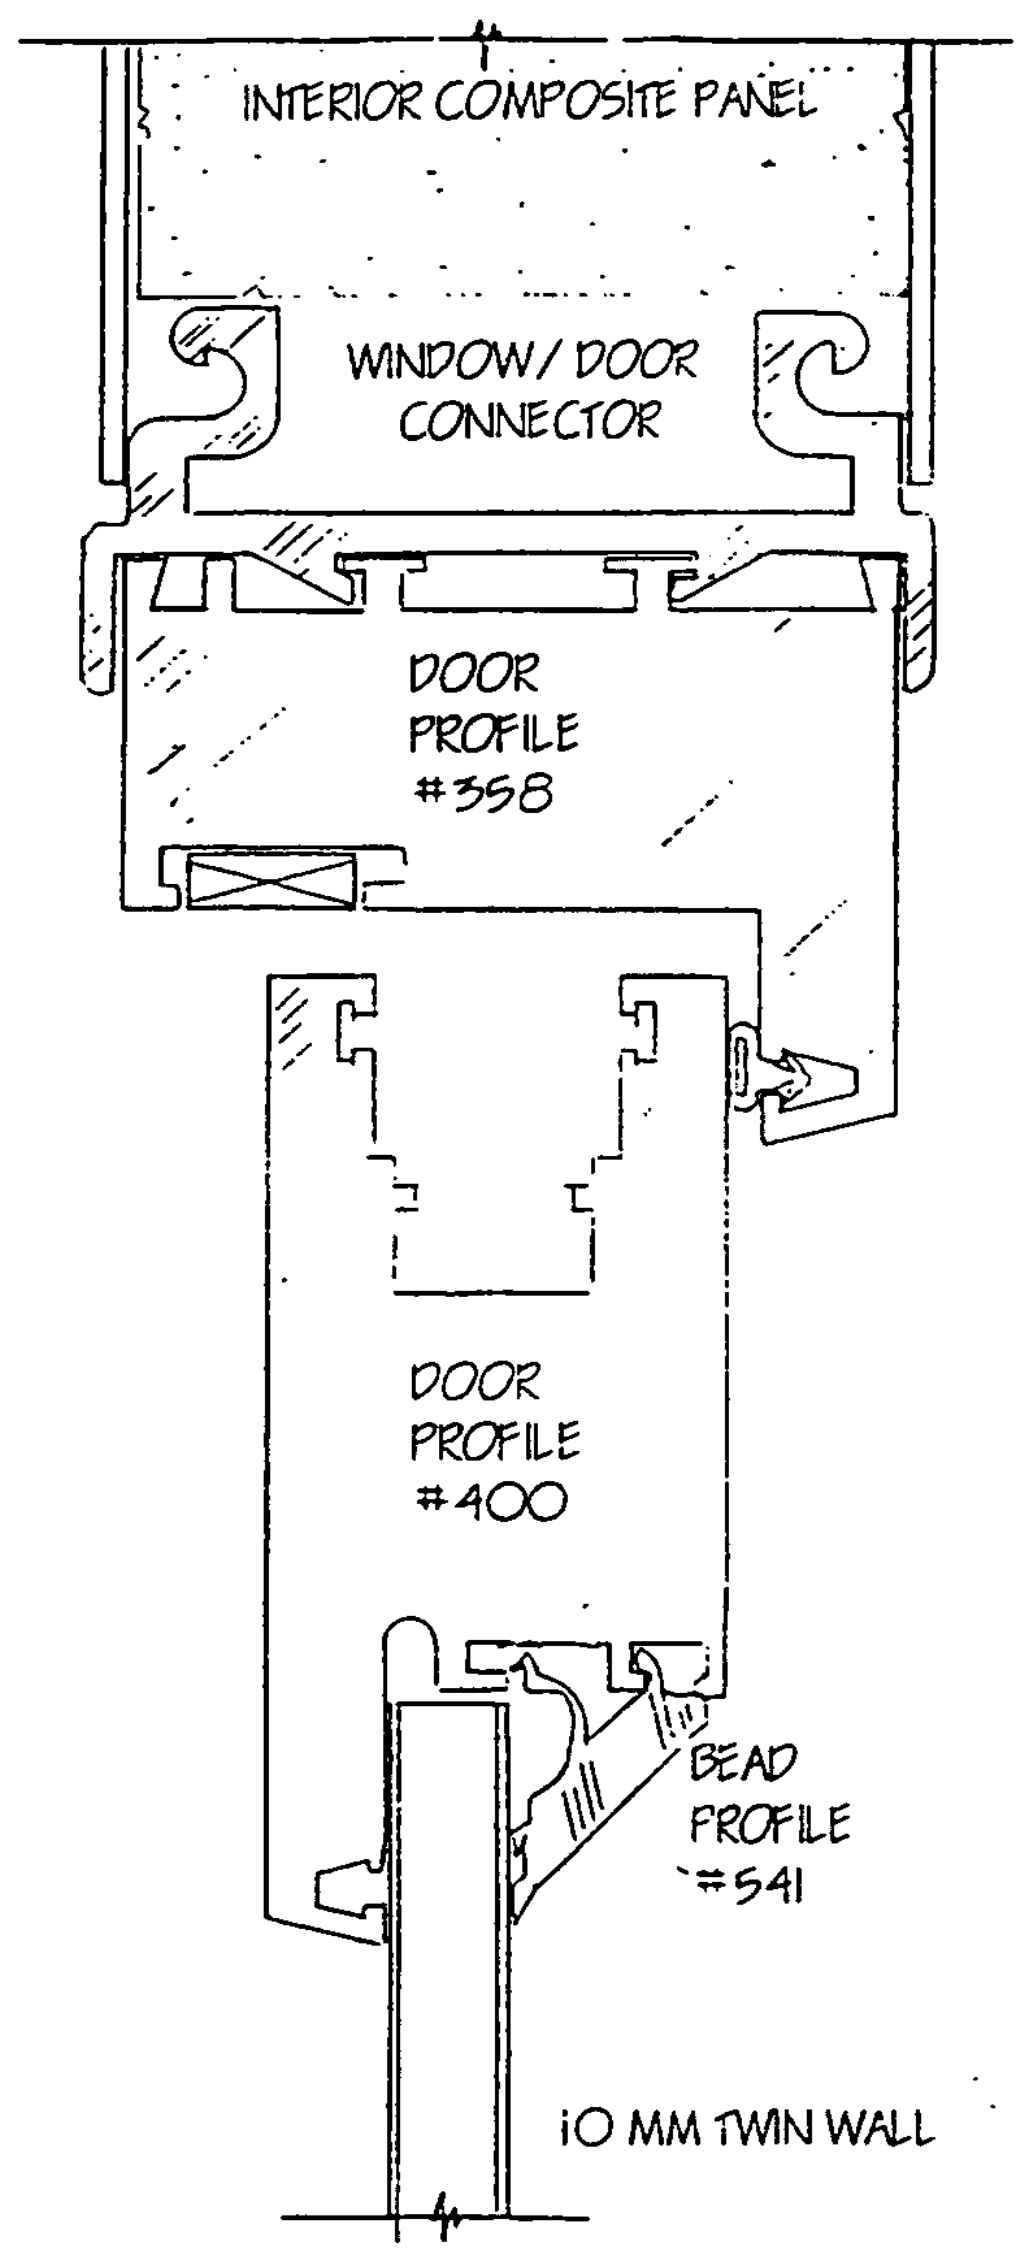
INTERIOR COMPOSITE PANEL
WINDOW / DOOR CONNECTOR
DOOR PROFILE #358
DOOR PROFILE #400
BEAD PROFILE #541
10 MM TWIN WALL

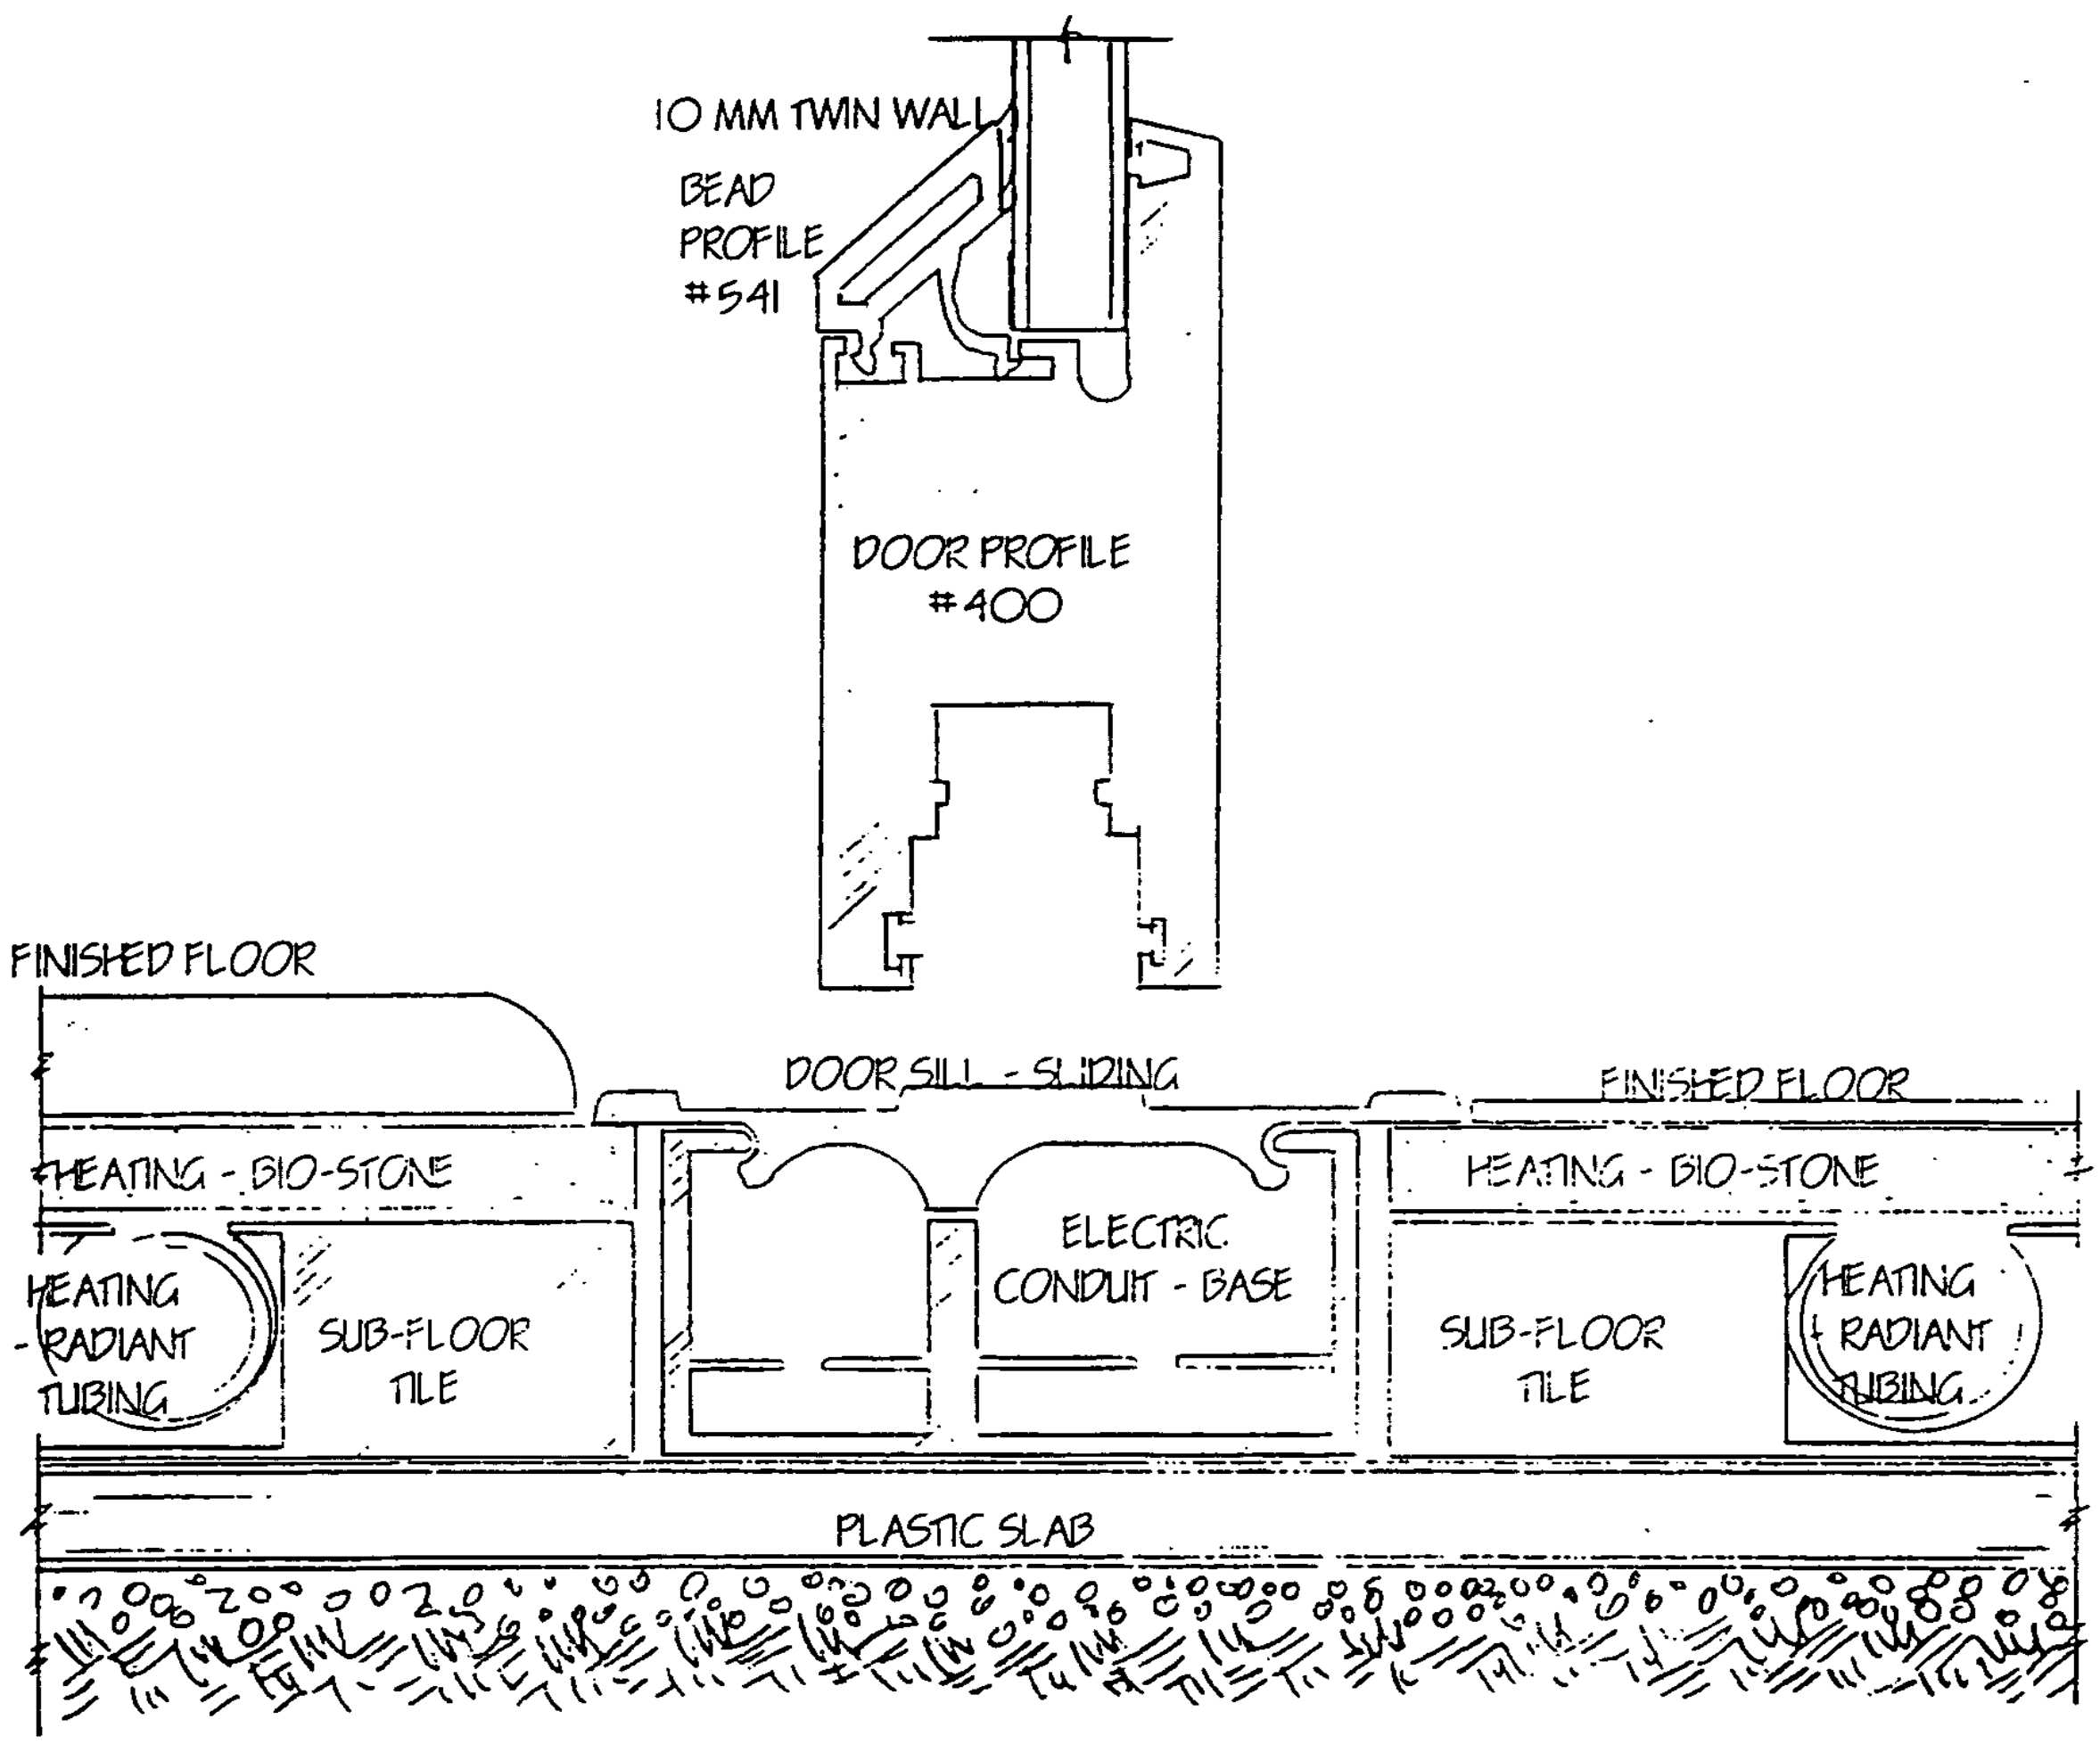
10 MM TWIN WALL
BEAD PROFILE #541
DOOR PROFILE #400
FINISHED FLOOR
DOOR SILL - SLIDING
FINISHED FLOOR
HEATING - BIO-STONE
HEATING - BIO-STONE
HEATING - RADIANT TUBING
SUB-FLOOR TILE
ELECTRIC CONDUIT - BASE
SUB-FLOOR TILE
HEATING RADIANT TUBING
PLASTIC SLAB

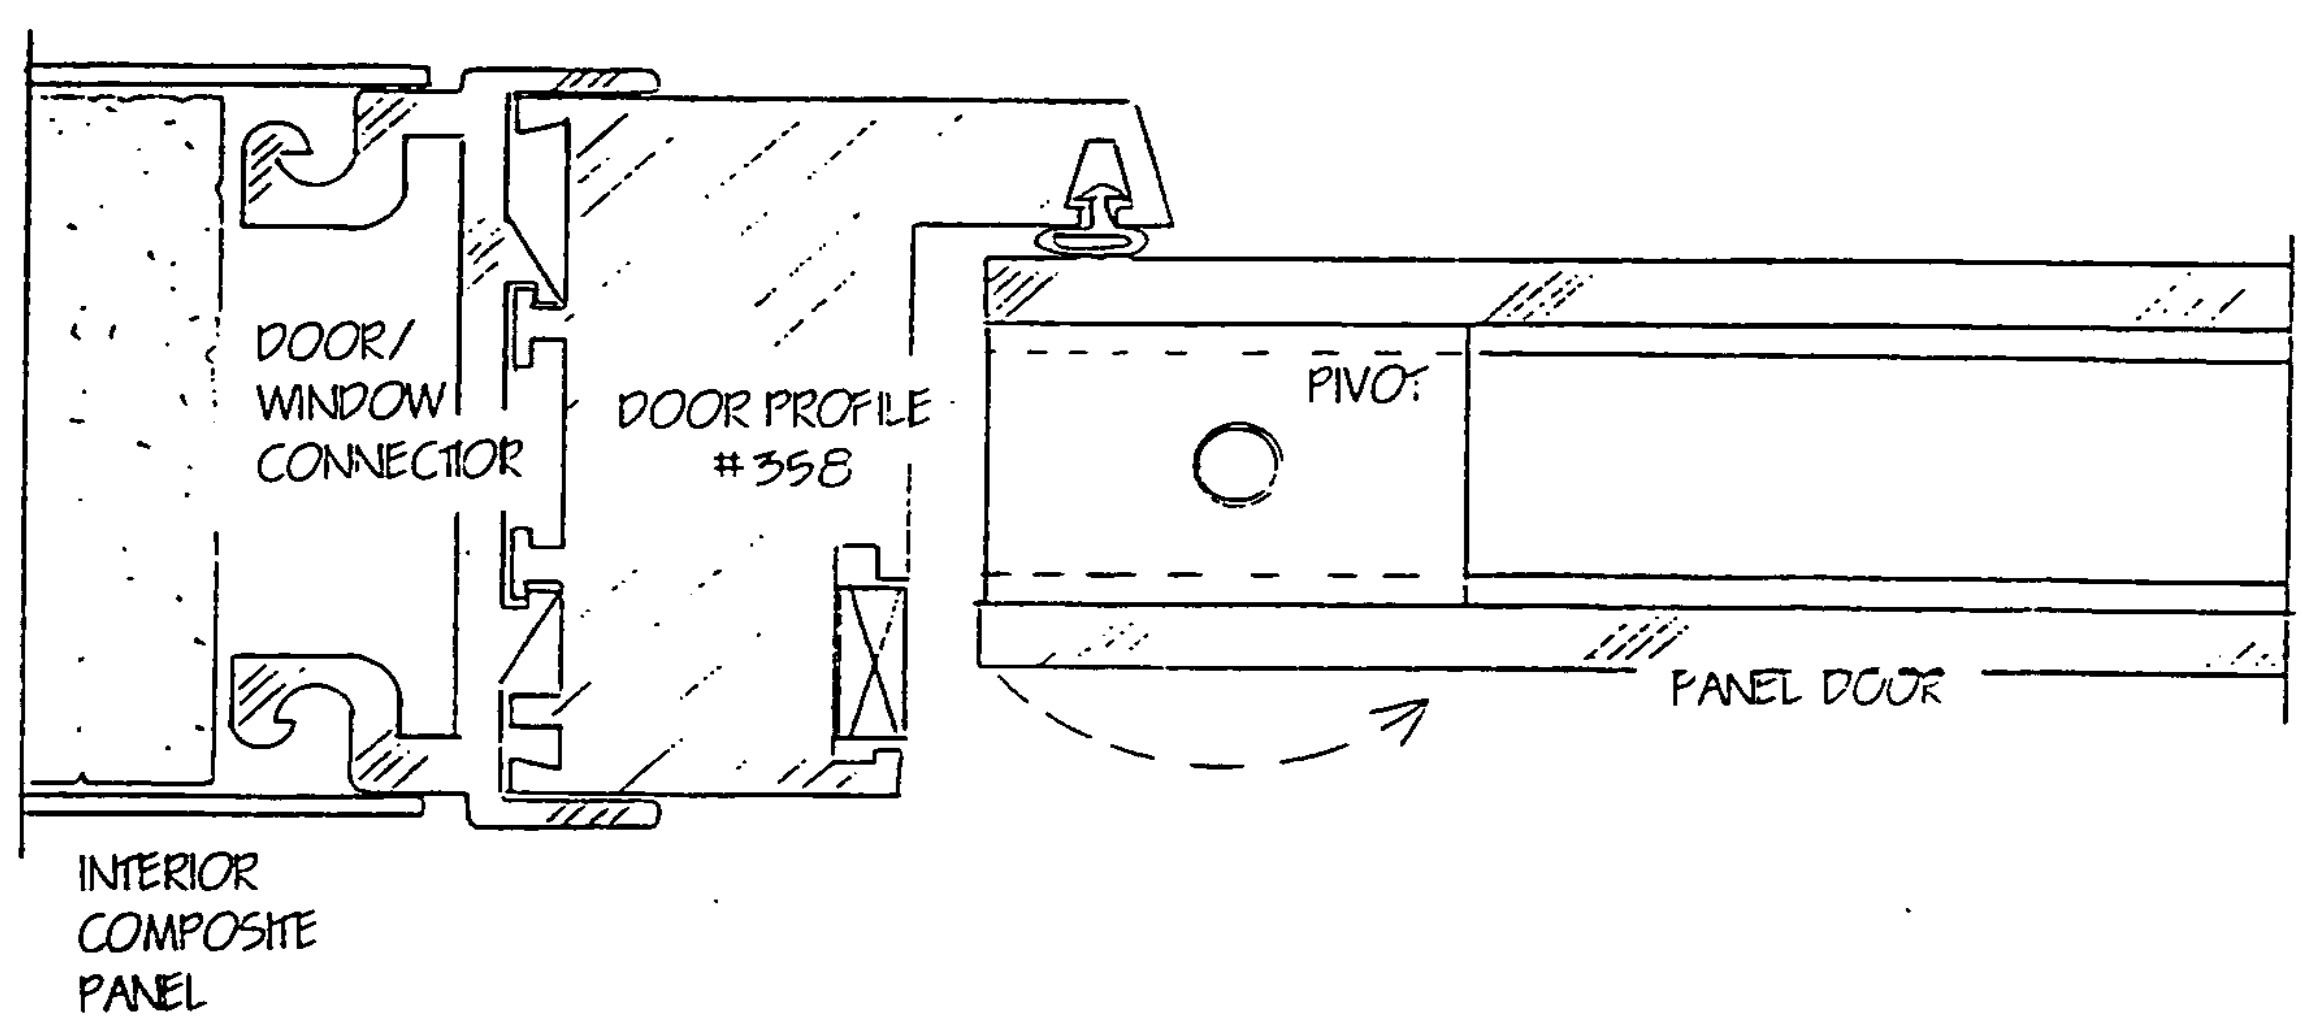
DOOR/
WINDOW
CONNECTOR
DOOR PROFILE
#358
PIVOT
PANEL DOOR
INTERIOR
COMPOSITE
PANEL

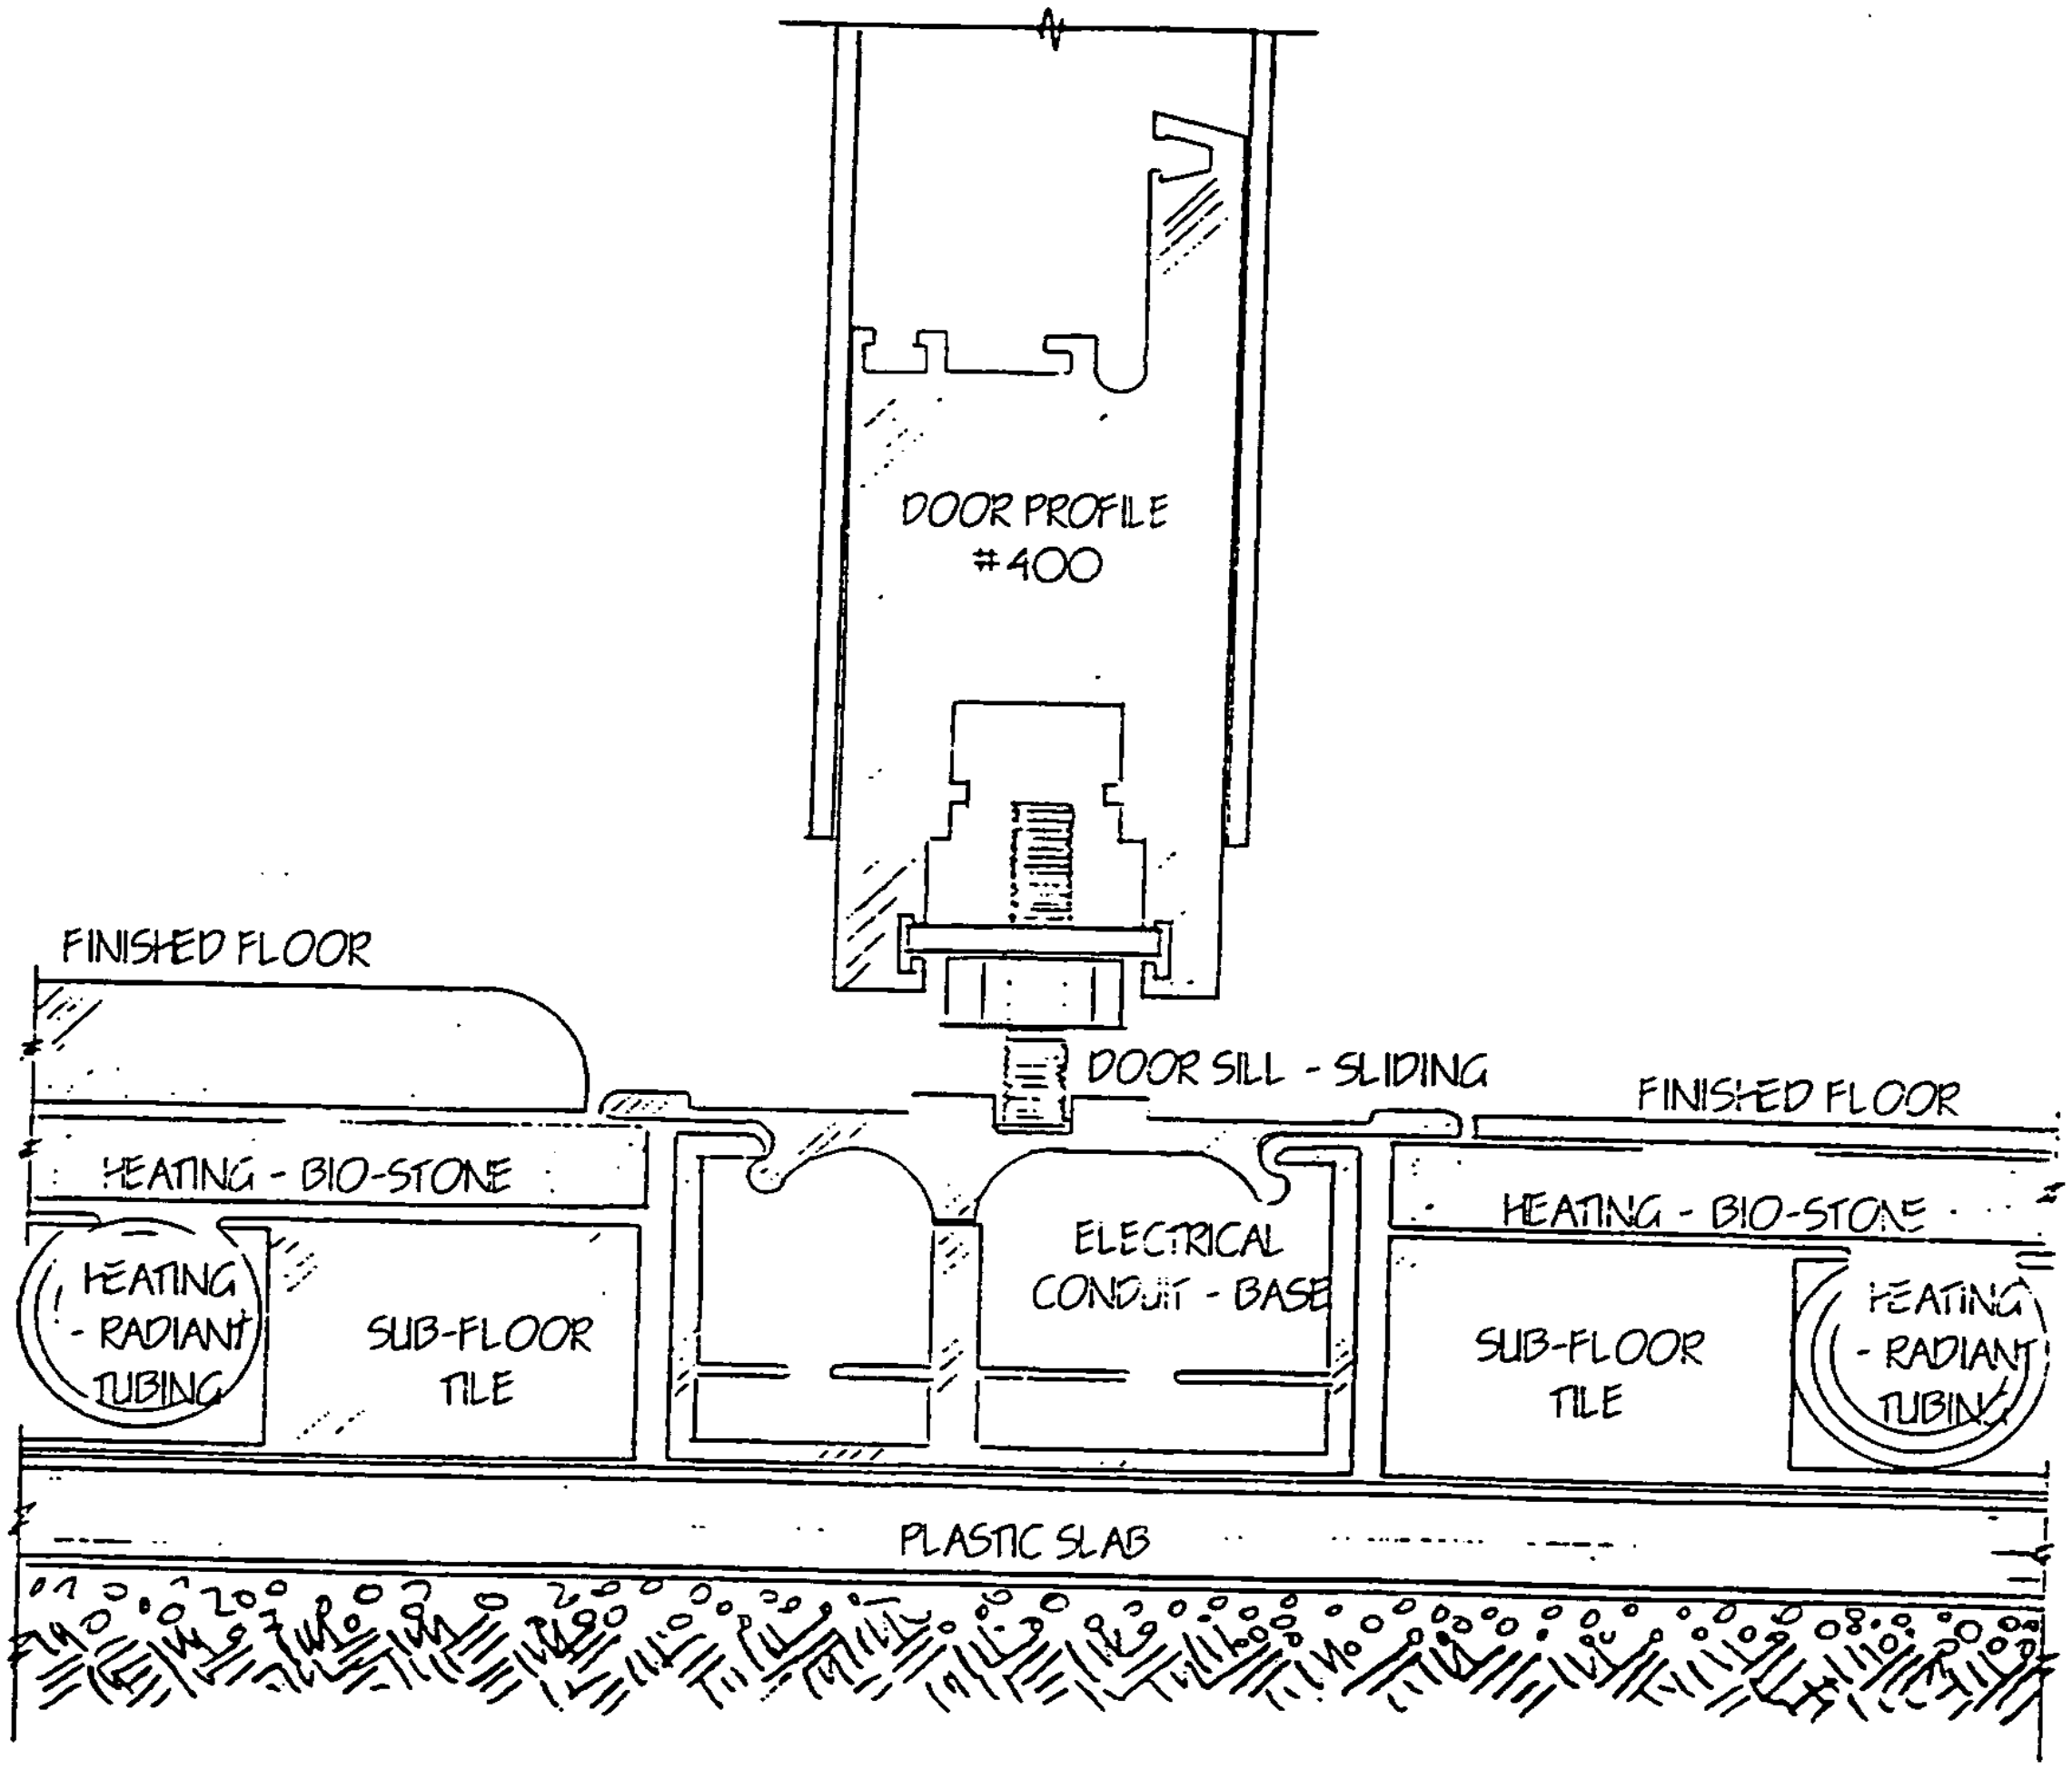
DOOR PROFILE
#400
FINISHED FLOOR
DOOR SILL - SLIDING
FINISHED FLOOR
HEATING - BIO-STONE
ELECTRICAL
CONDUIT - BASE
HEATING - BIO-STONE
HEATING
- RADIANT
TUBING
SUB-FLOOR
TILE
SUB-FLOOR
TILE
HEATING
- RADIANT
TUBING
PLASTIC SLAB

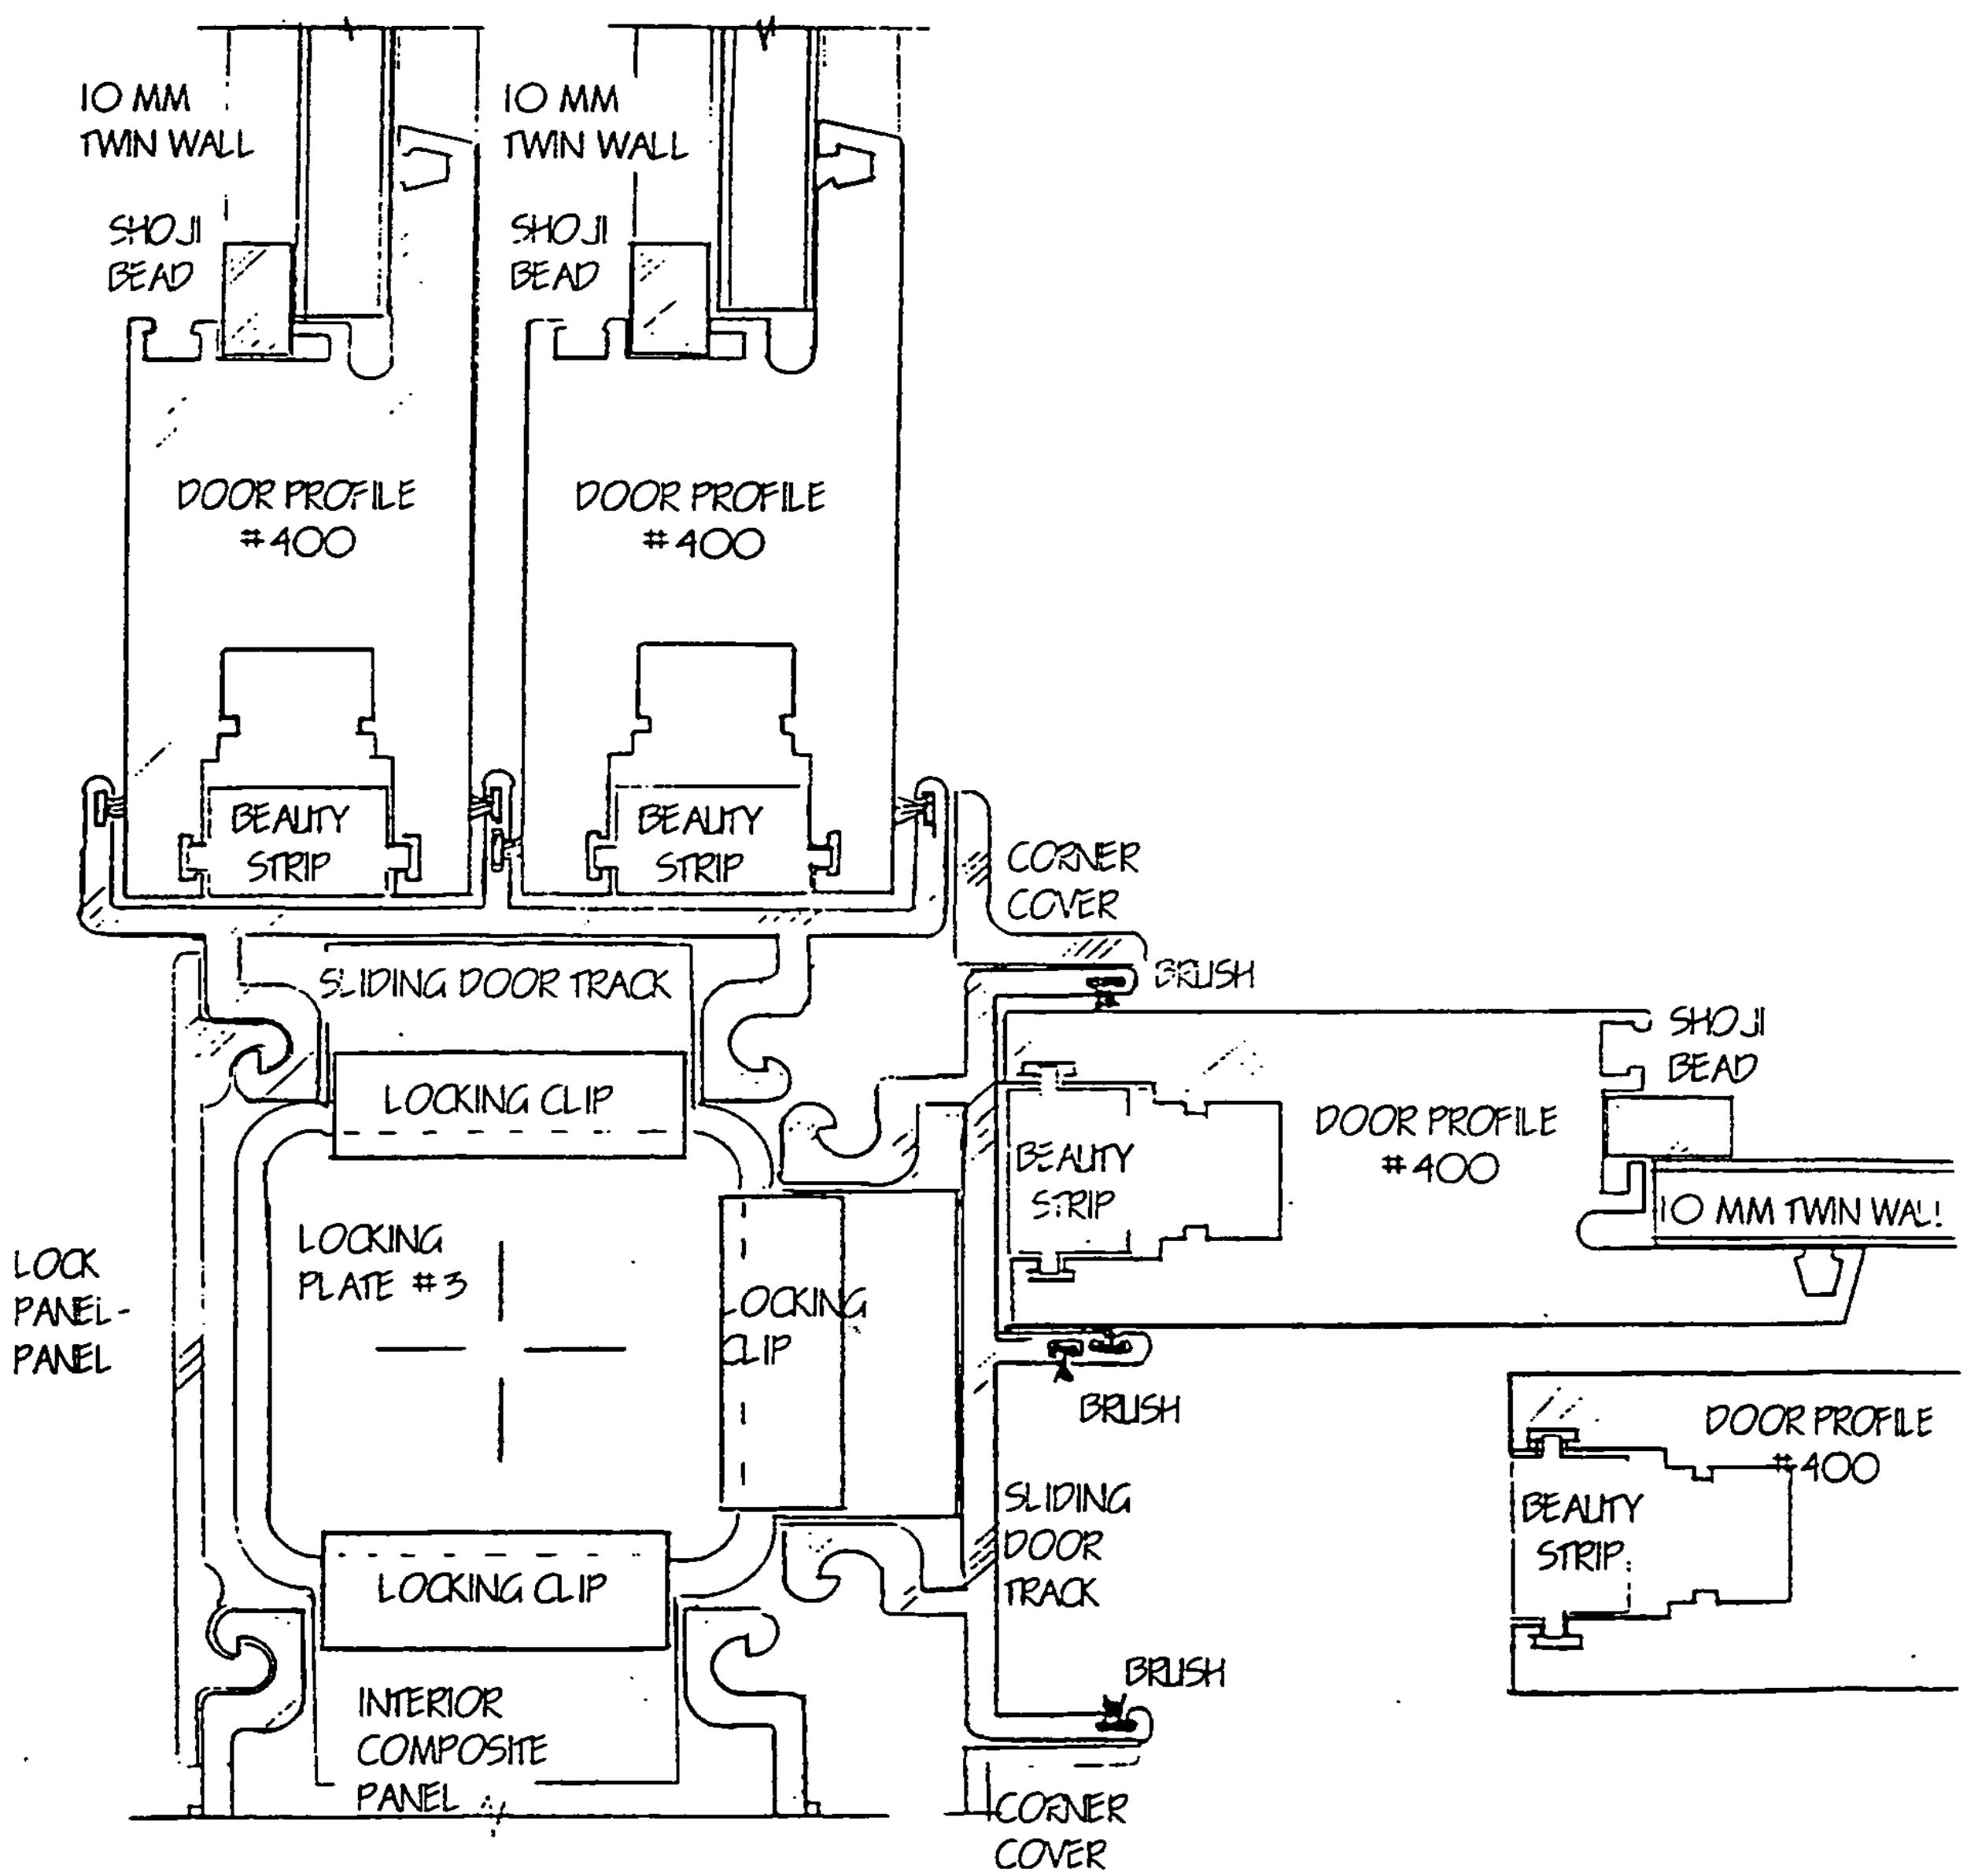
10 MM TWIN WALL
SHOJI BEAD
DOOR PROFILE #400
BEAUTY STRIP
10 MM TWIN WALL
SHOJI BEAD
DOOR PROFILE #400
BEAUTY STRIP
CORNER COVER
BRUSH
SLIDING DOOR TRACK
LOCKING CLIP
SHOJI BEAD
DOOR PROFILE #400
BEAUTY STRIP
10 MM TWIN WALL
LOCK PANEL-PANEL
LOCKING PLATE #3
LOCKING CLIP
BRUSH
DOOR PROFILE #400
BEAUTY STRIP
SLIDING DOOR TRACK
LOCKING CLIP
BRUSH
INTERIOR COMPOSITE PANEL
CORNER COVER

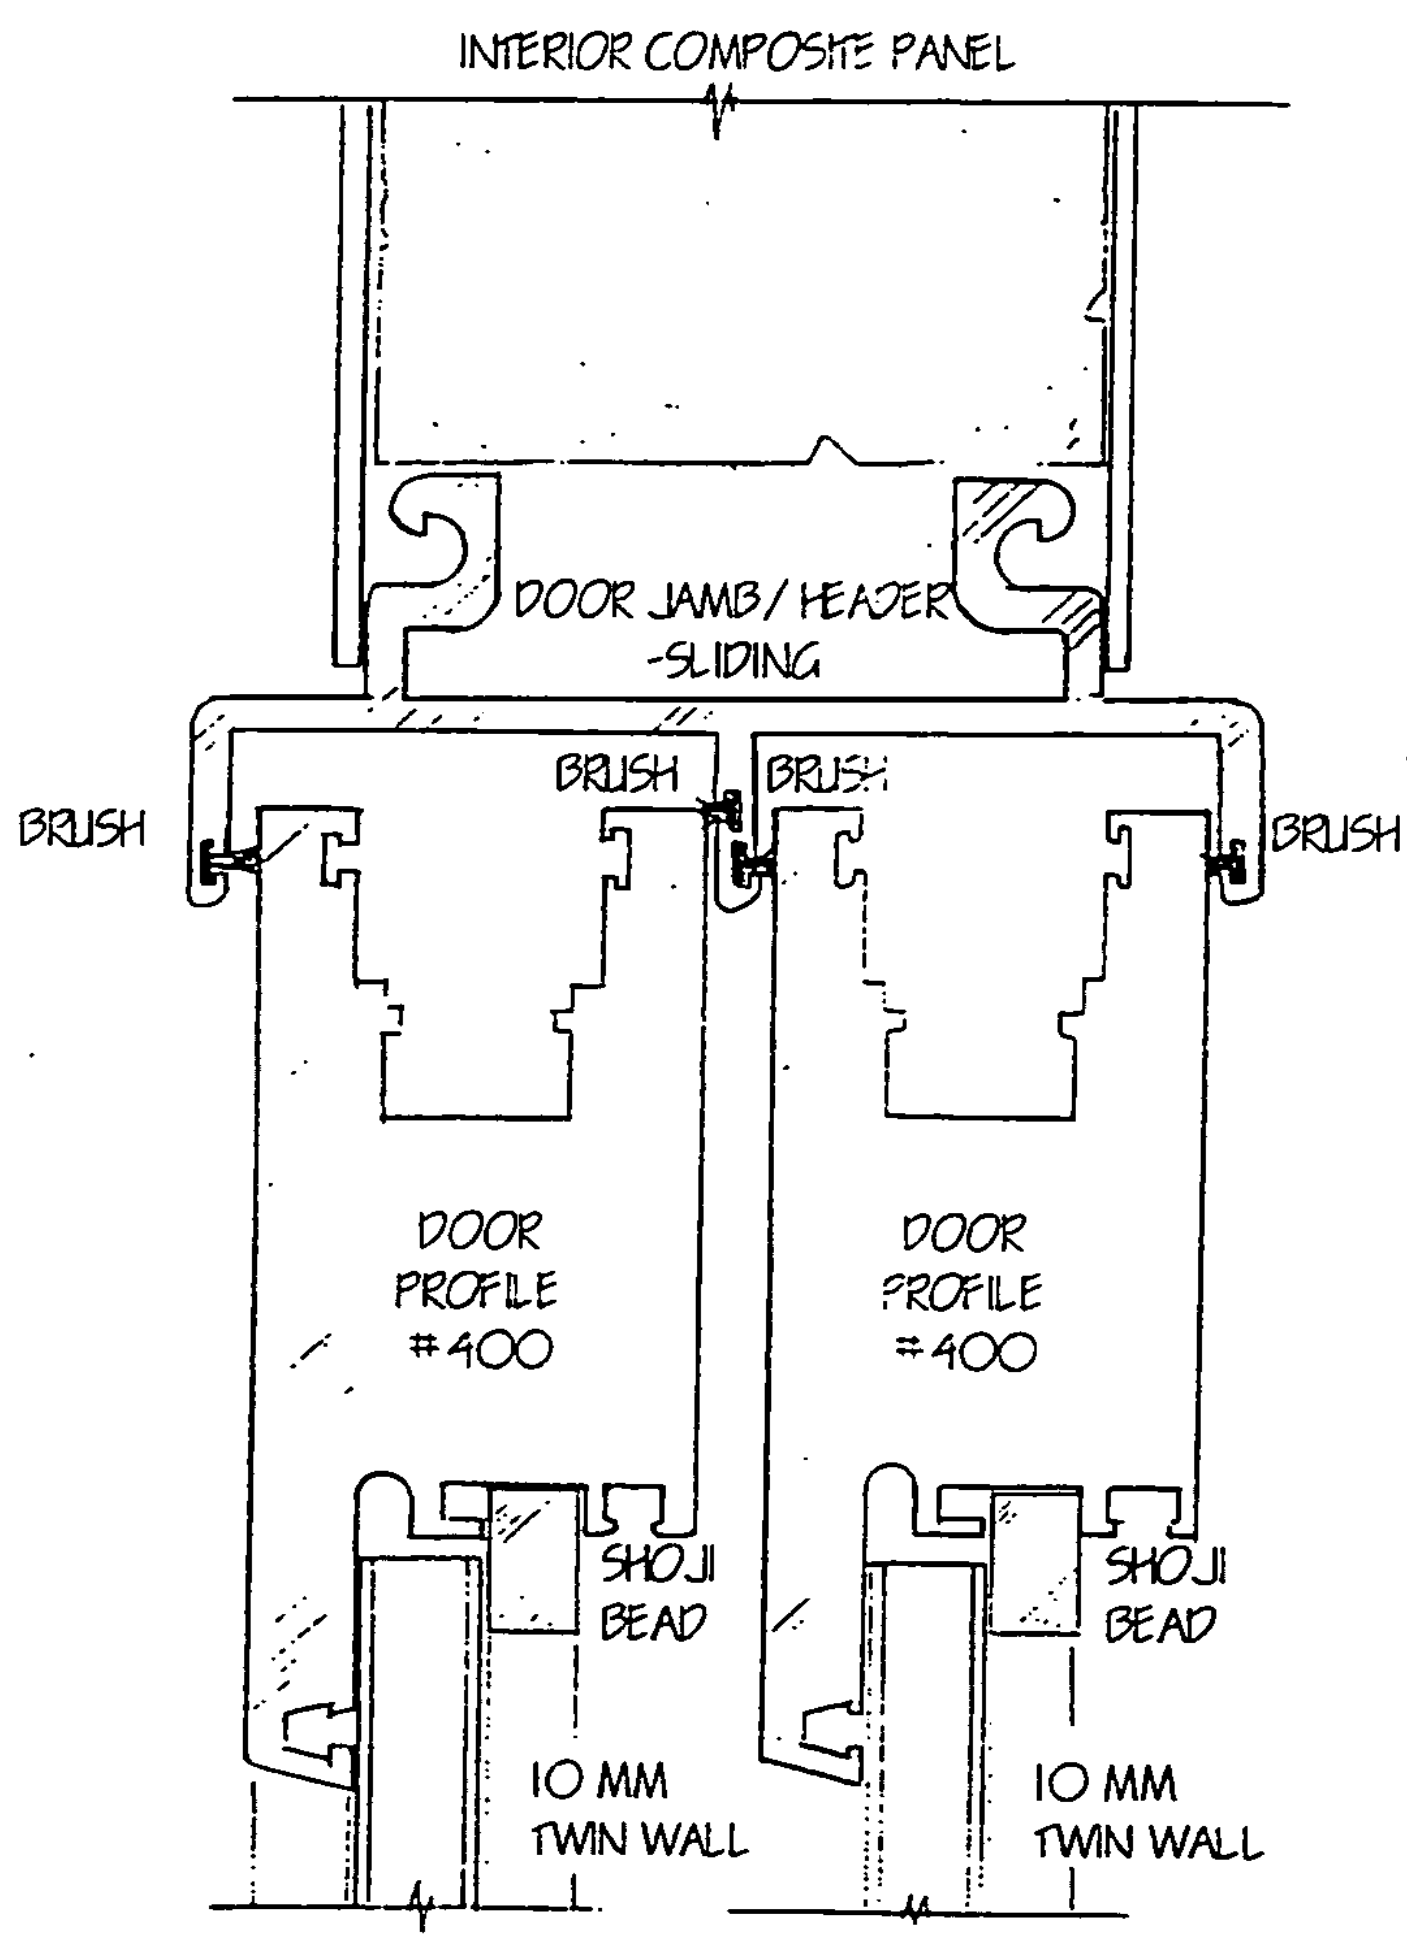
INTERIOR COMPOSITE PANEL
DOOR JAMB / HEADER -SLIDING
BRUSH
BRUSH
BRUSH
BRUSH
DOOR PROFILE #400
DOOR PROFILE #400
SHOJI BEAD
SHOJI BEAD
10 MM TWIN WALL
10 MM TWIN WALL

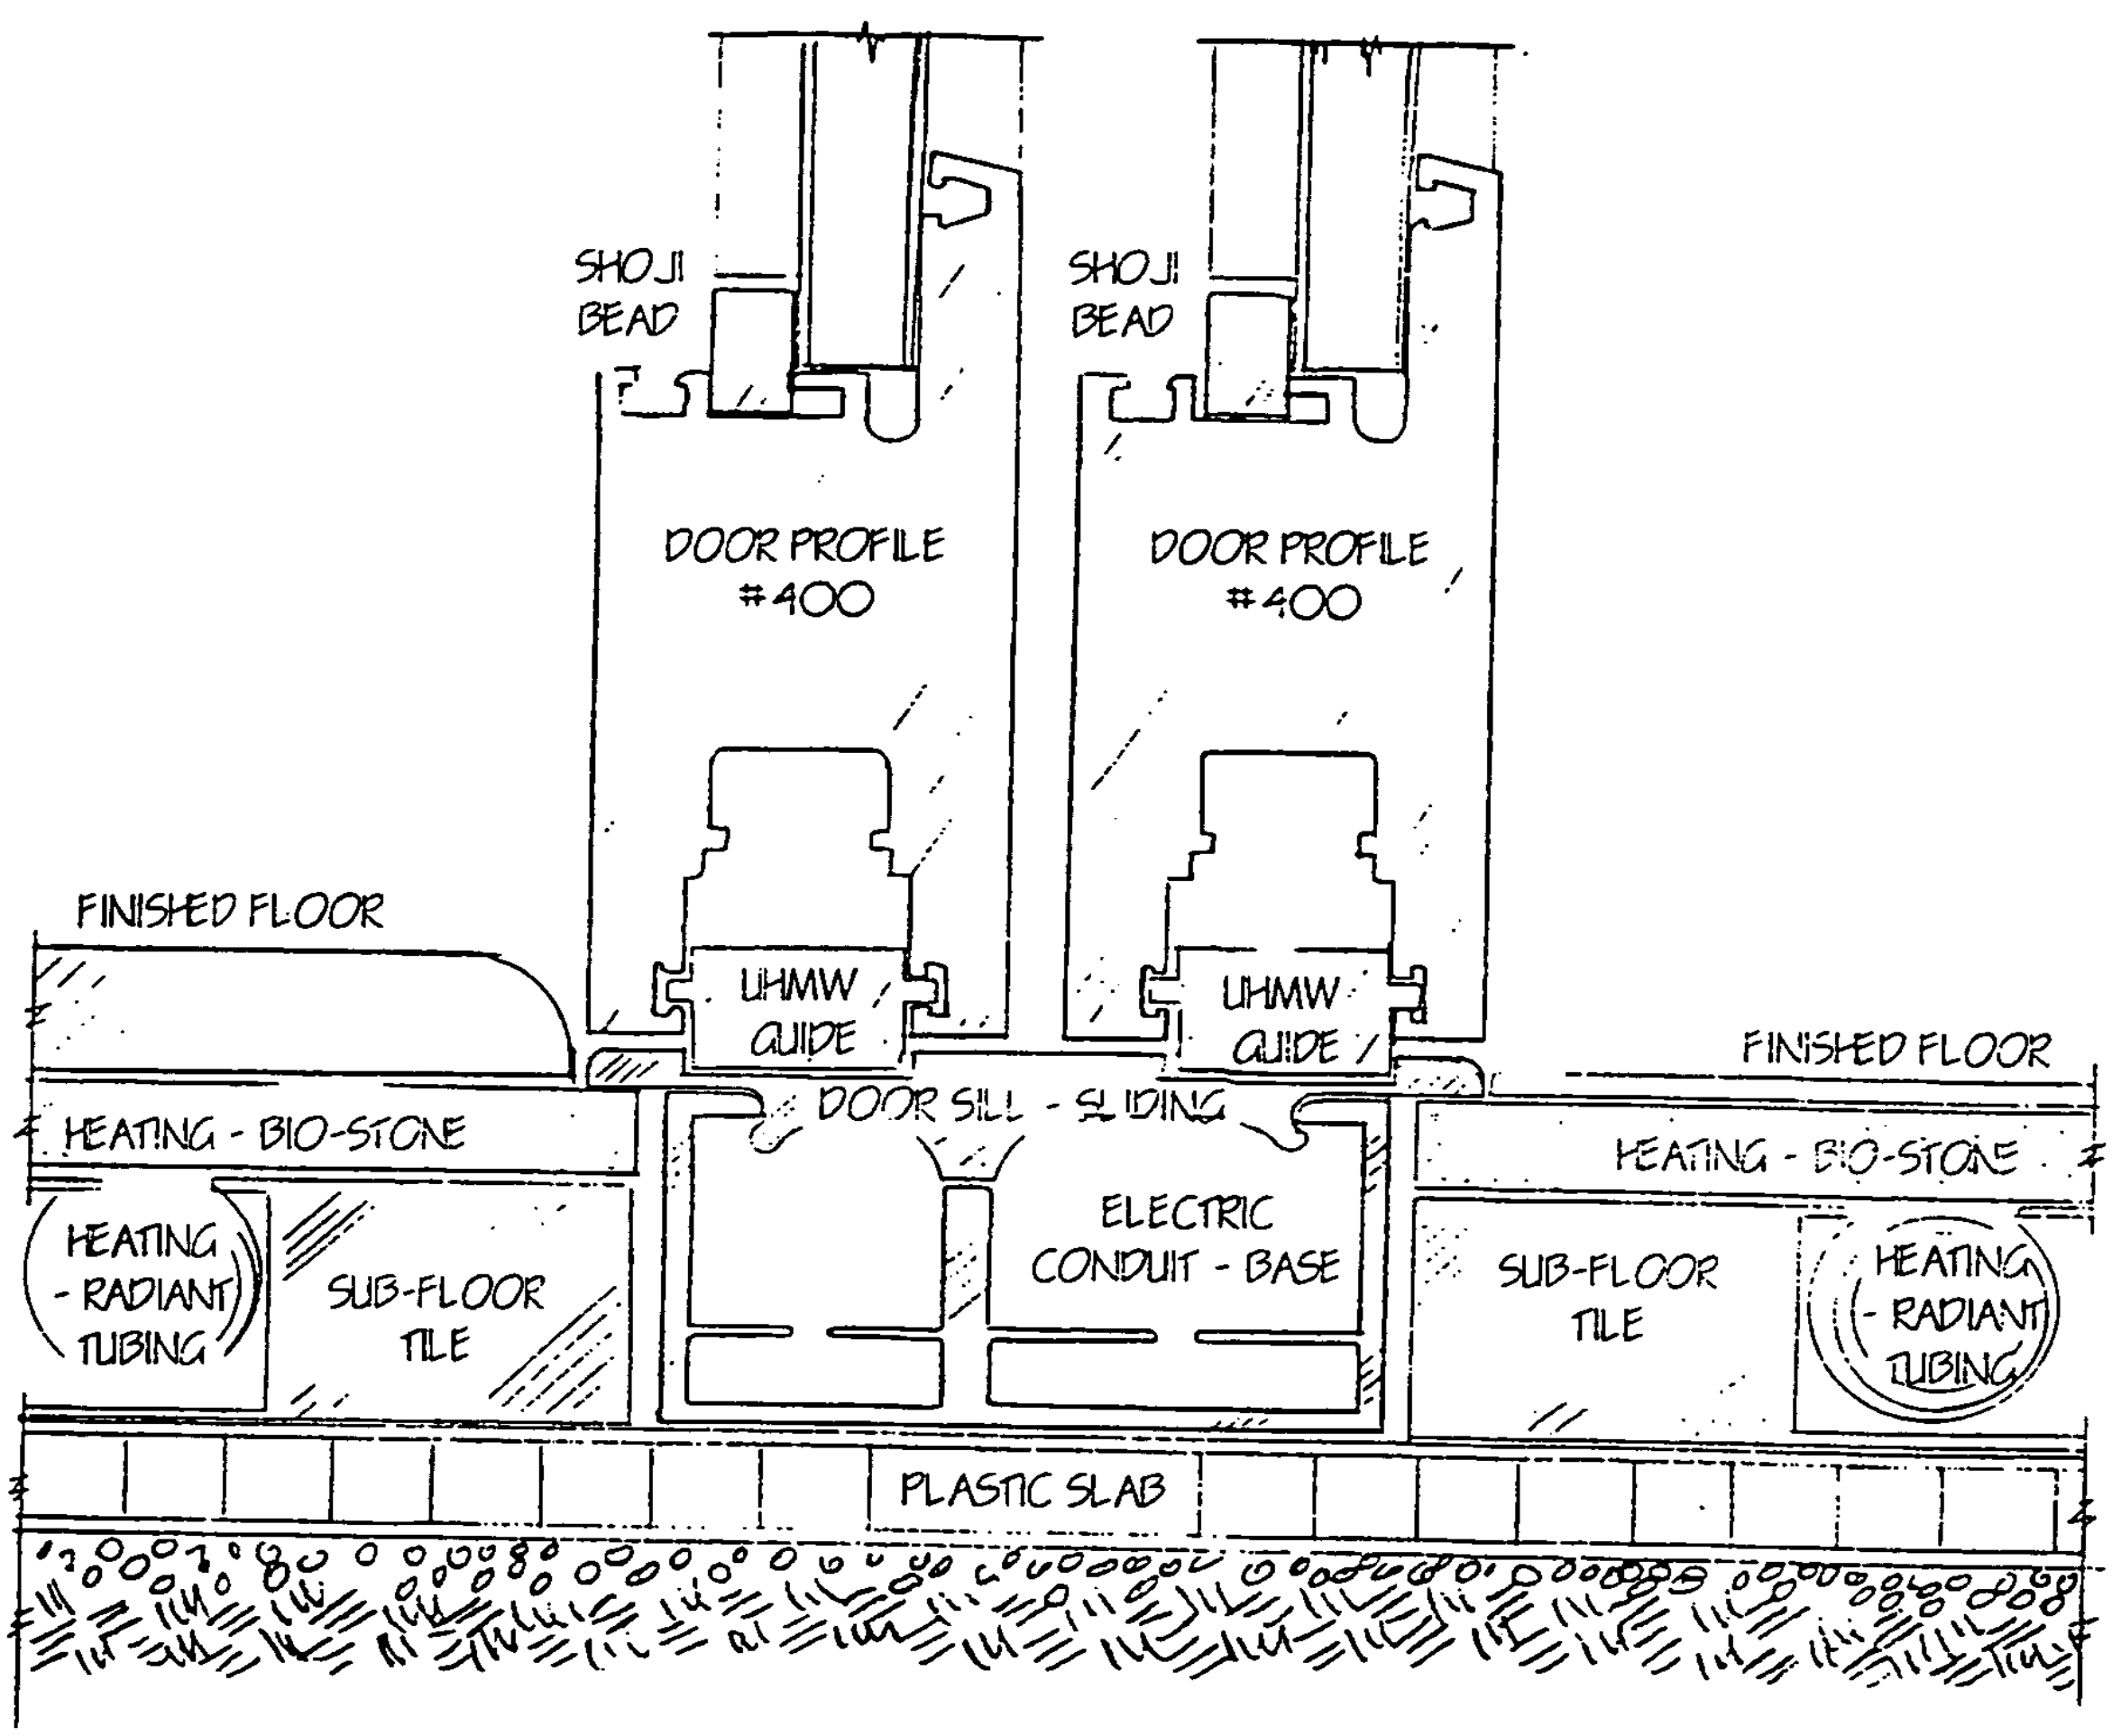
SHOJI BEAD
SHOJI BEAD
DOOR PROFILE #400
DOOR PROFILE #400
UHMW GUIDE
UHMW GUIDE
FINISHED FLOOR
FINISHED FLOOR
DOOR SILL - SLIDING
HEATING - BIO-STONE
HEATING - BIO-STONE
HEATING - RADIANT TUBING
HEATING - RADIANT TUBING
SUB-FLOOR TILE
SUB-FLOOR TILE
ELECTRIC CONDUIT - BASE
PLASTIC SLAB

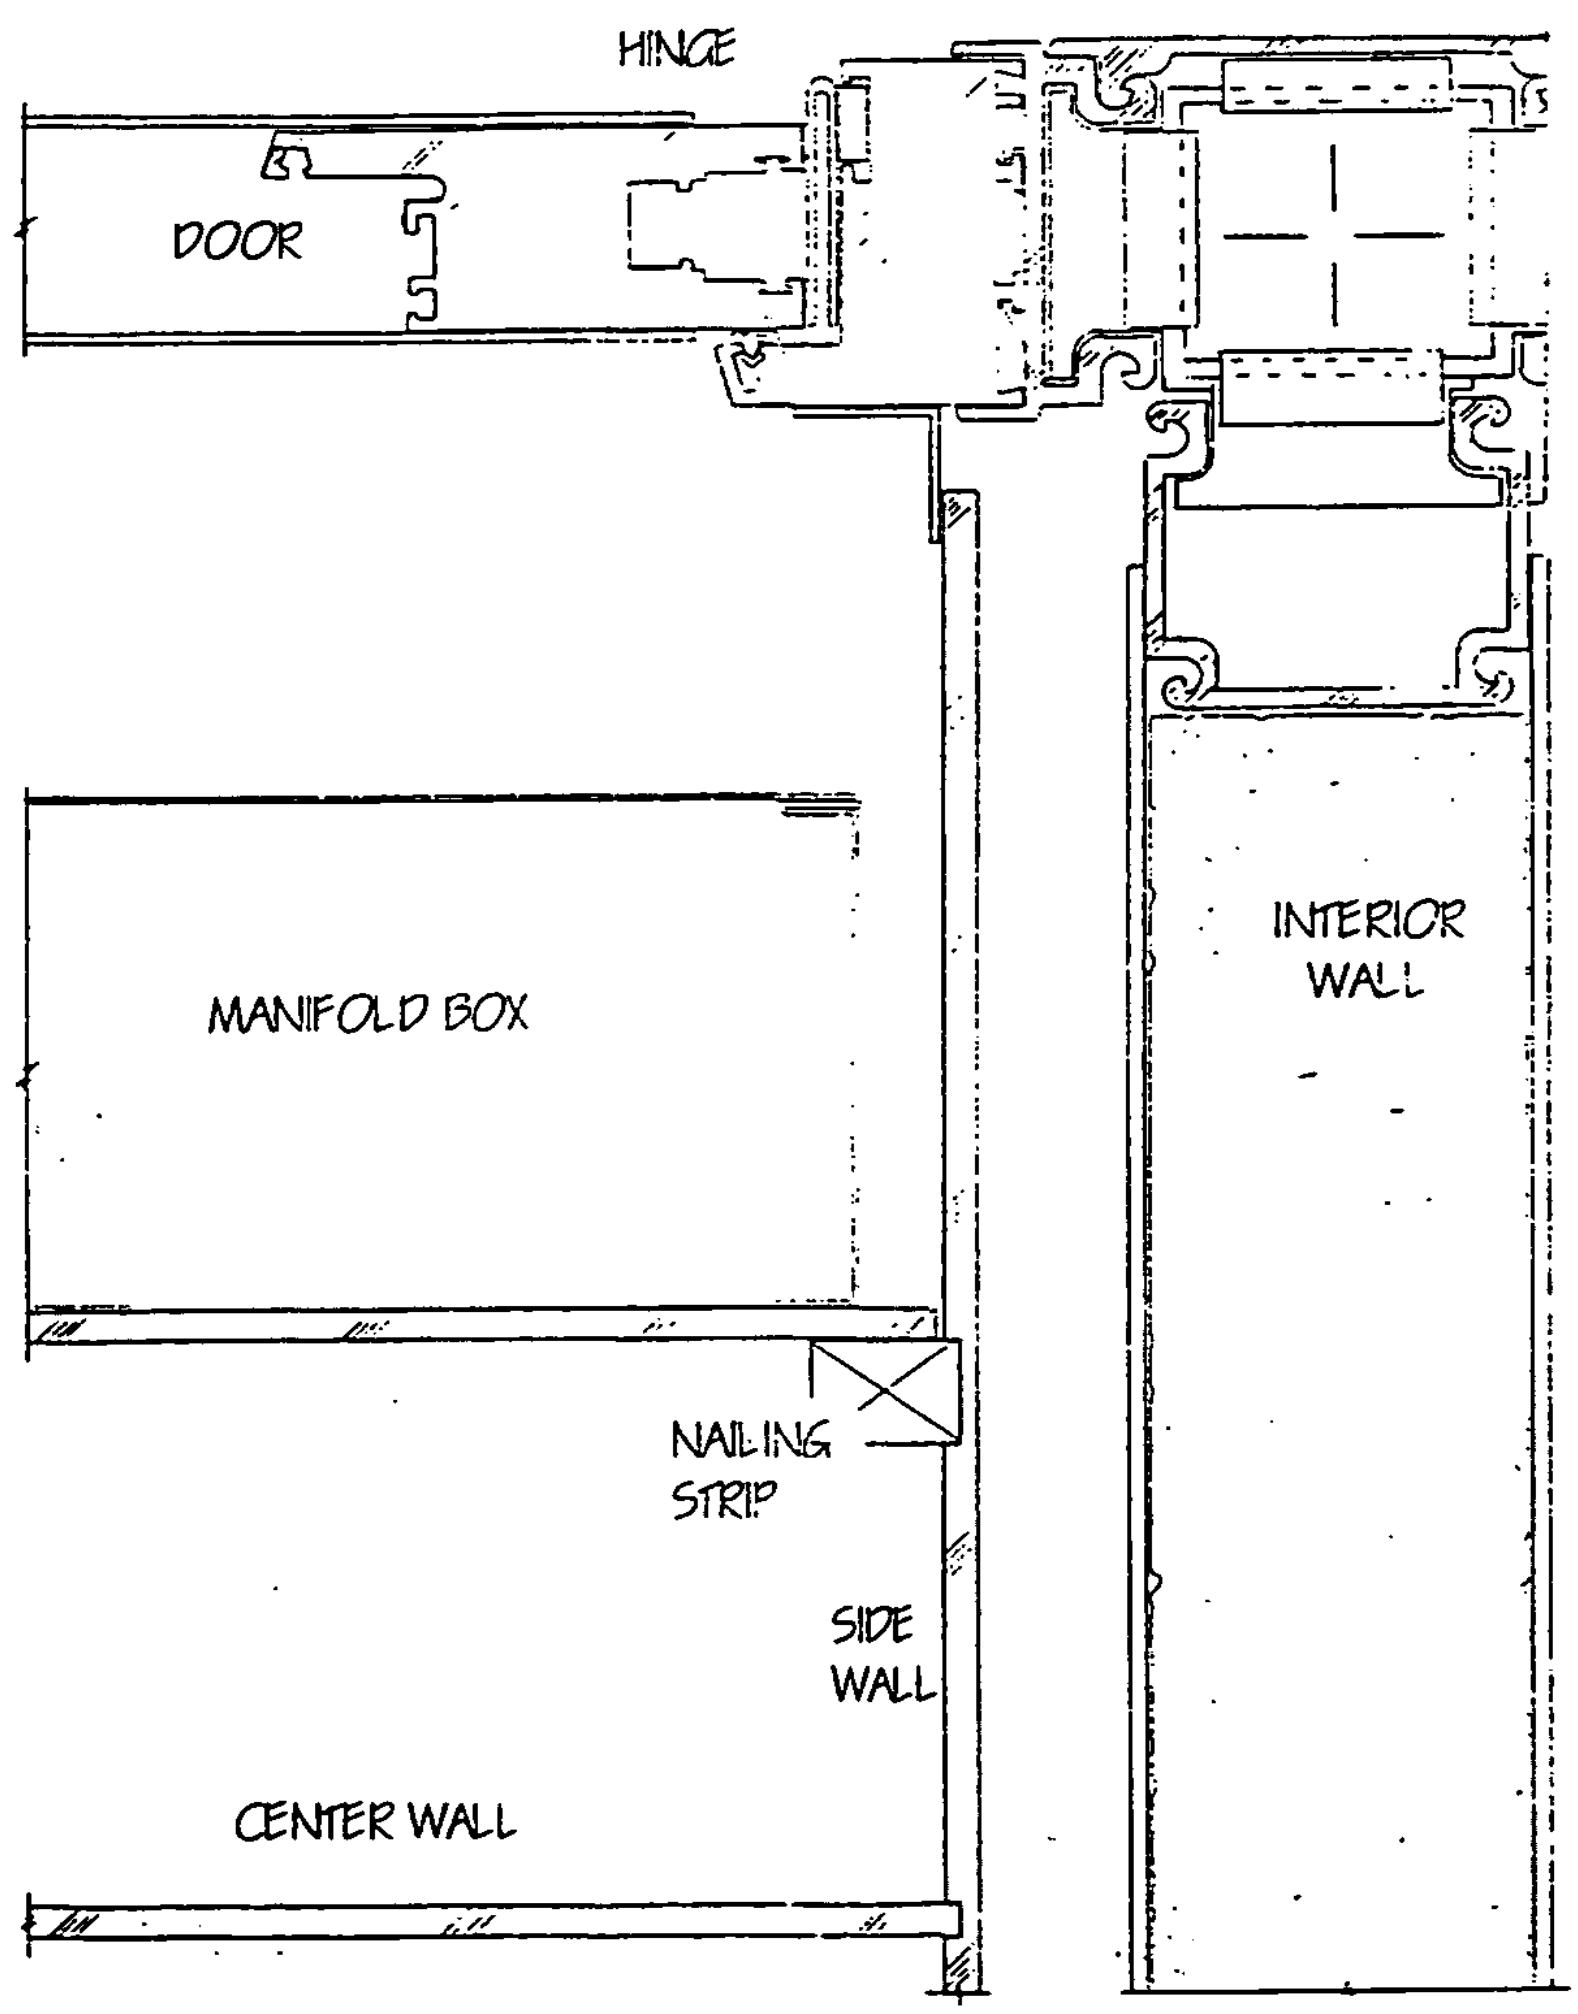
HINGE
DOOR
MANIFOLD BOX
INTERIOR WALL
NAILING STRIP
SIDE WALL
CENTER WALL

INDEX: ROOF FRAME AND RIDGE MOTOR

DRAWING	DESCRIPTION
RF01A-019	SECTION @ WINDOW/DOOR @ EAVE
RF01B-019	SECTION @ EAVE
RF02A-019	SECTION @ COMBO ROOF
RF02B-019	SECTION @ MOVING ROOF
RF02C-019	SECTION @ MOVING ROOF
RF03A-019	SECTION @ ROOF @ OUTSIDE CORNER
RF03B-019	SECTION @ FIXED ROOF
RF03C-019	SECTION @ MOVING ROOF
RF04A-019	SECTION @ JUNCTION OF WALL @ FIXED COMPOSITE ROOF
RF04B-019	SECTION @ JUNCTION OF WALL @ FIXED COMPOSITE ROOF
RF04C-019	SECTION @ JUNCTION OF WALL @ FIXED COMPOSITE ROOF
RF04D-019	SECTION @ JUNCTION OF WALL @ FIXED COMPOSITE ROOF
RF04E-019	SECTION @ JUNCTION OF WALL @ FIXED COMPOSITE ROOF
RF05A-019	SECTION @ JUNCTION OF WALL @ FIXED GLAZED ROOF
RF05B-019	SECTION @ JUNCTION OF WALL @ FIXED GLAZED ROOF
RF05C-019	SECTION @ JUNCTION OF WALL @ FIXED GLAZED ROOF
RF06A-019	SECTION @ JUNCTION OF WALL @ MOVING ROOF
RF06B-019	SECTION @ JUNCTION OF WALL @ MOVING ROOF
RF06C-019	SECTION @ JUNCTION OF WALL @ MOVING ROOF
RF06D-019	SECTION @ JUNCTION OF WALL @ MOVING ROOF
RF06E-019	SECTION @ JUNCTION OF WALL @ MOVING ROOF
RM01A-019	SECTION @ RIDGE @ RAFTER
RM01B-019	SECTION @ RIDGE @ RAFTER
RM01C-019	SECTION @ RIDGE @ RAFTER
RM02A-019	SECTION @ RAFTER @ RIDGE
RM03A-019	PLAN @ RAFTER @ RIDGE
RM03B-019	PLAN @ RAFTER @ RIDGE
RM04A-019	SECTION @ RIDGE @ PANEL
RM04B-019	SECTION @ RIDGE @ PANEL
RM05A-019	SECTION @ RIDGE - FIXED
RM05B-019	SECTION @ RIDGE - FIXED
RM06A-019	SECTION @ RIDGE @ RIDGE BEAM
RM07A-019	PLAN @ PANEL @ RIDGE

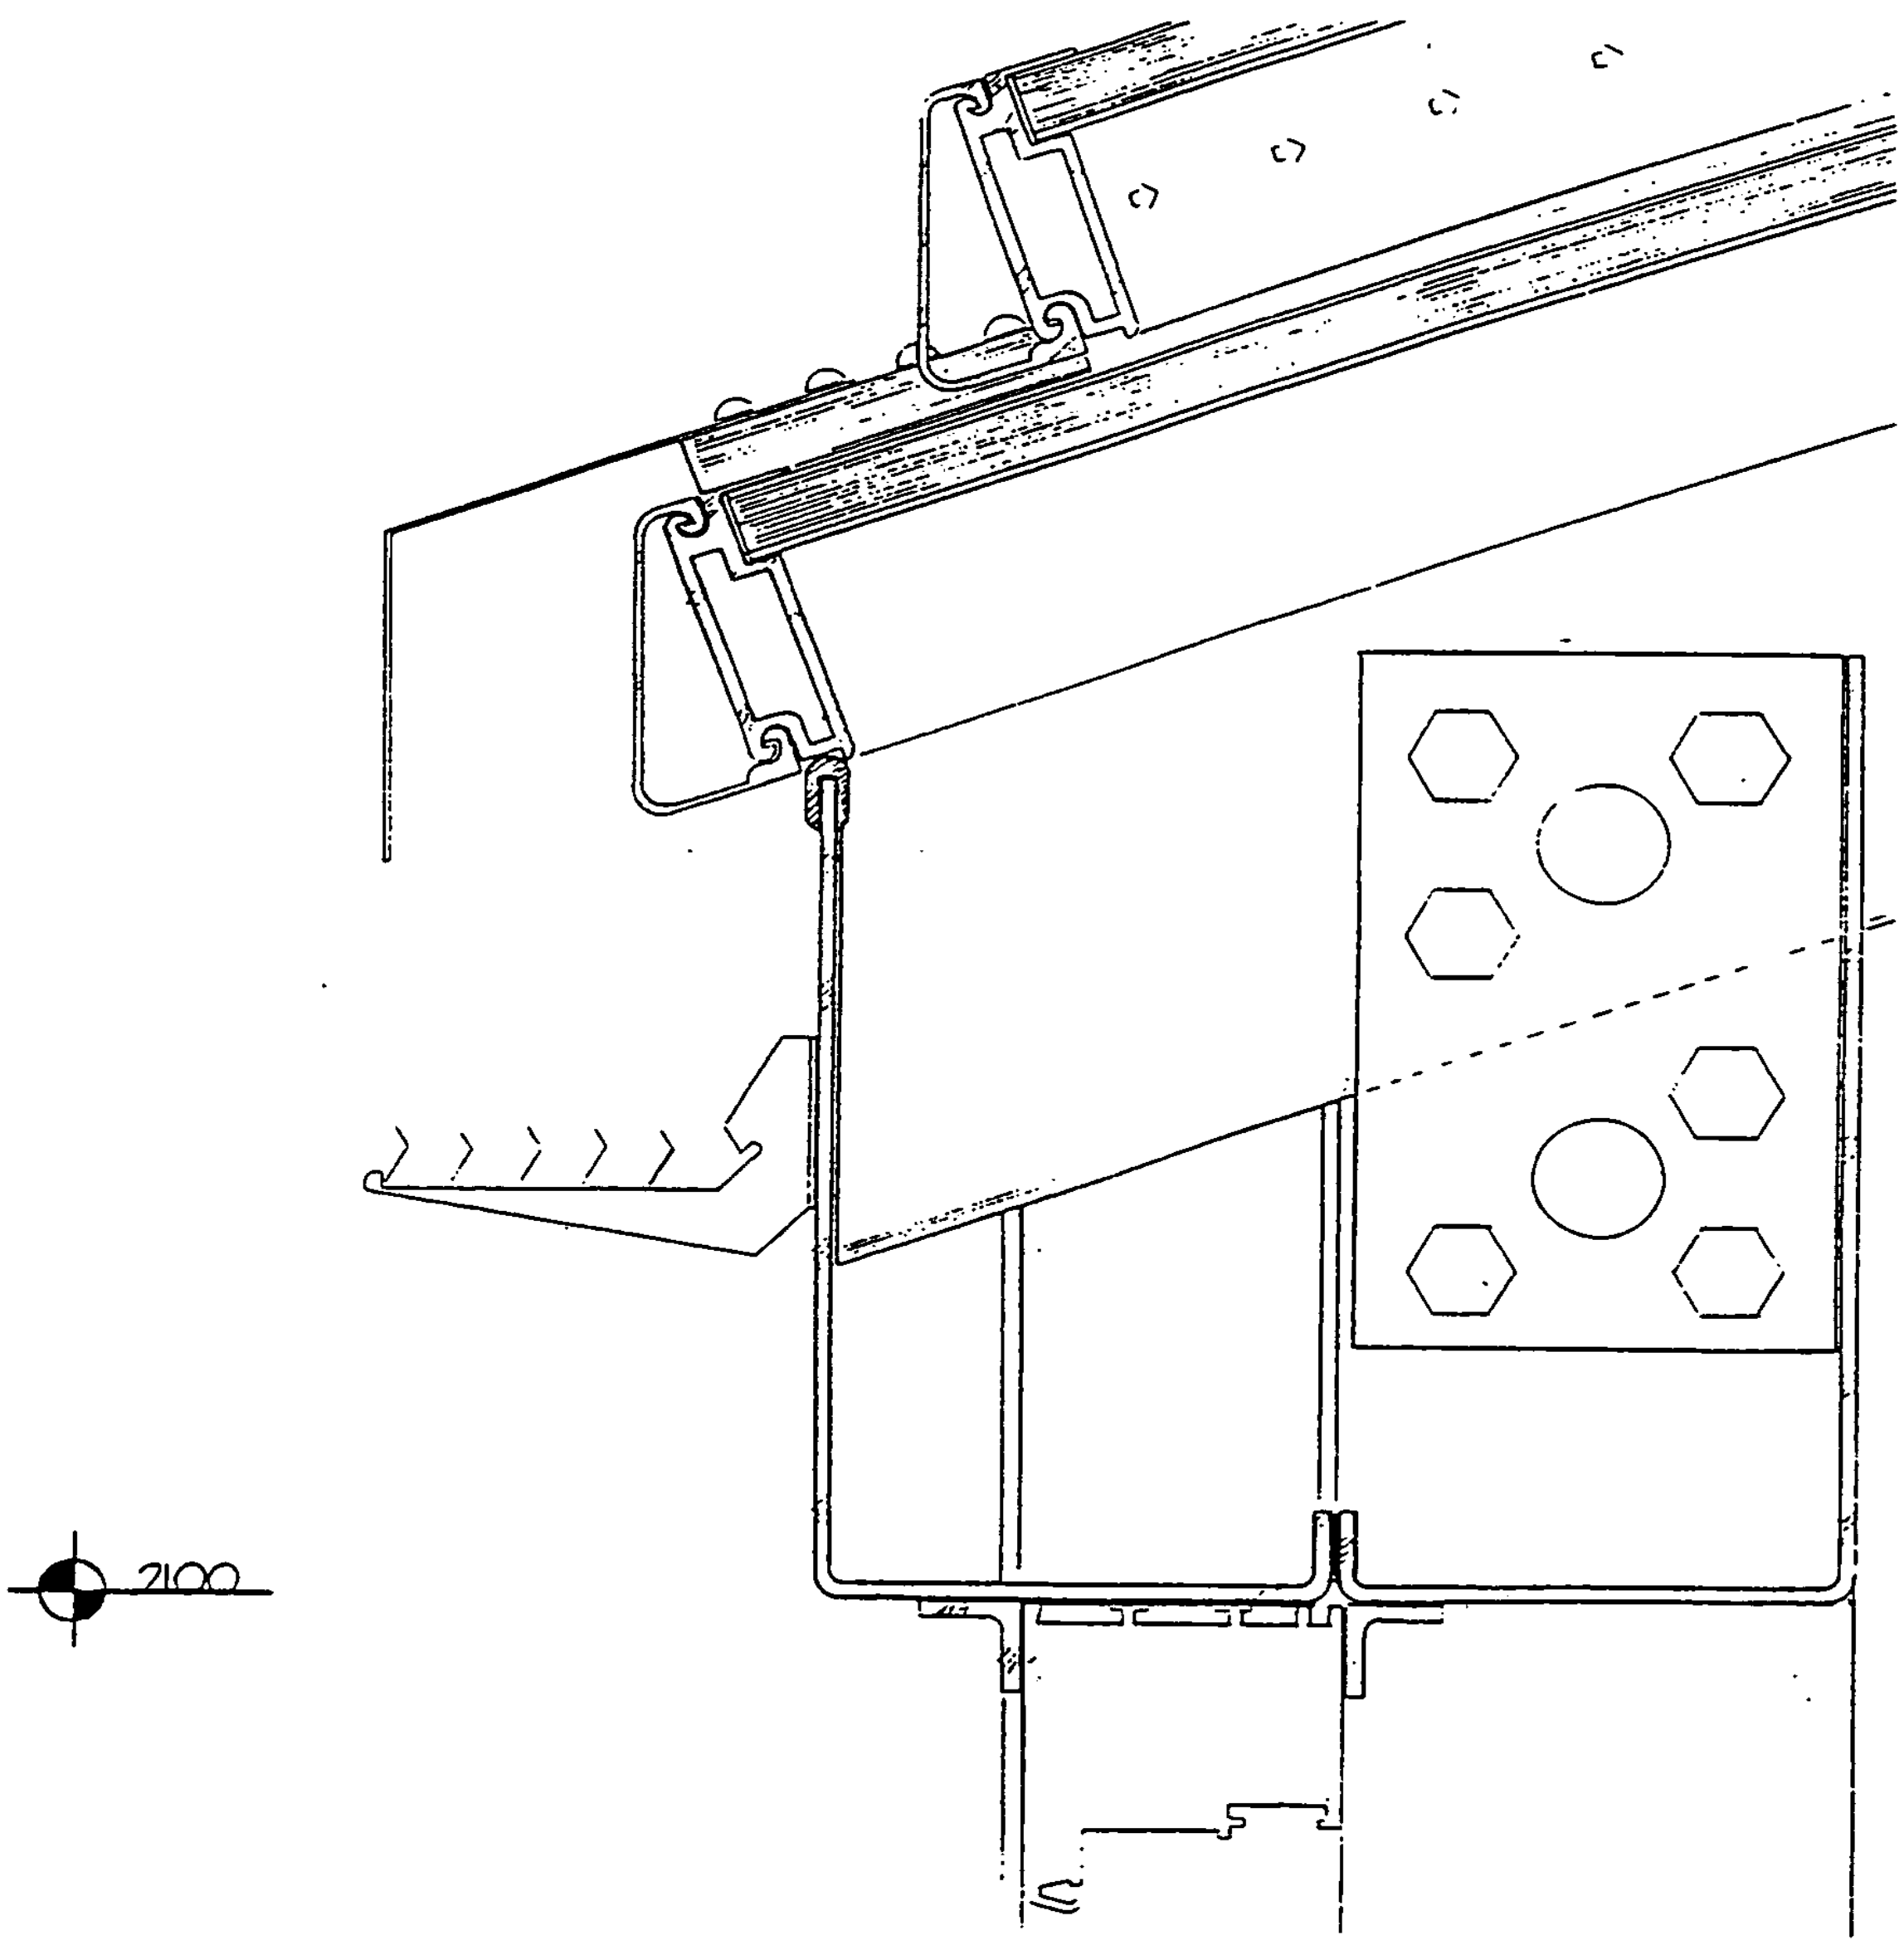
2100

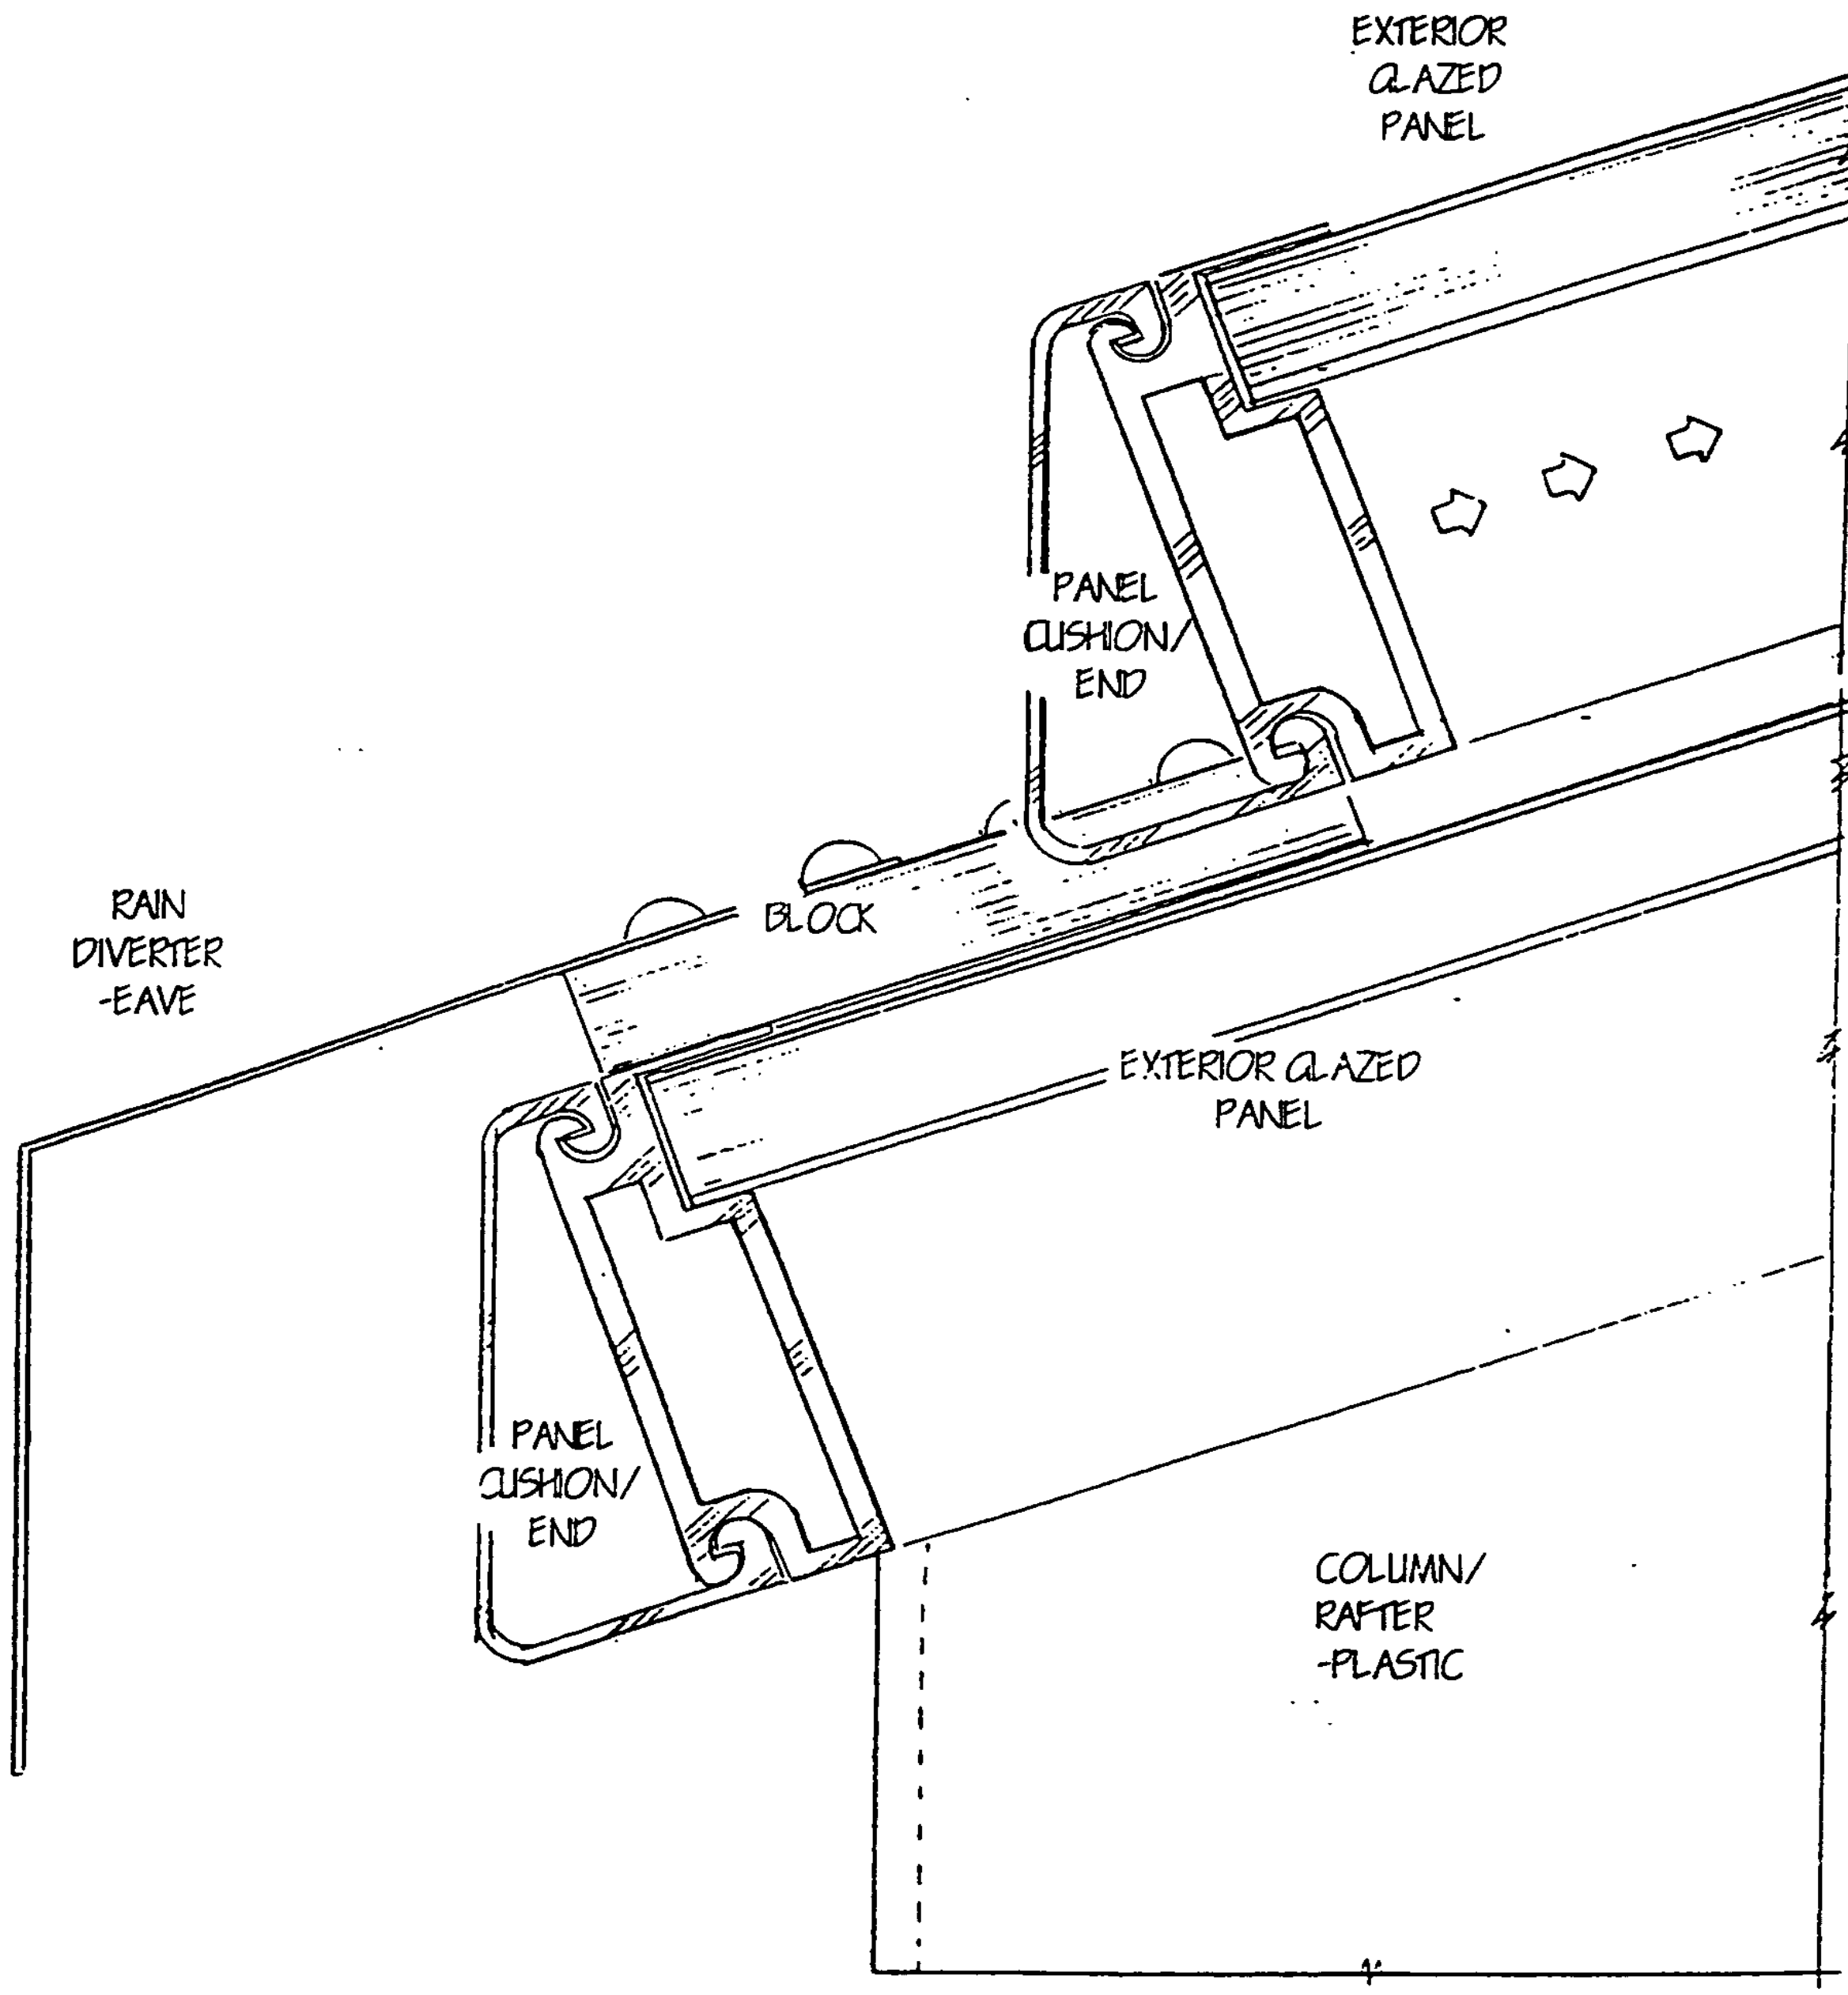
EXTERIOR
GLAZED
PANEL
PANEL
CUSHION/
END
RAIN
DIVERTER
-EAVE
BLOCK
EXTERIOR GLAZED
PANEL
PANEL
CUSHION/
END
COLUMN/
RAFTER
-PLASTIC

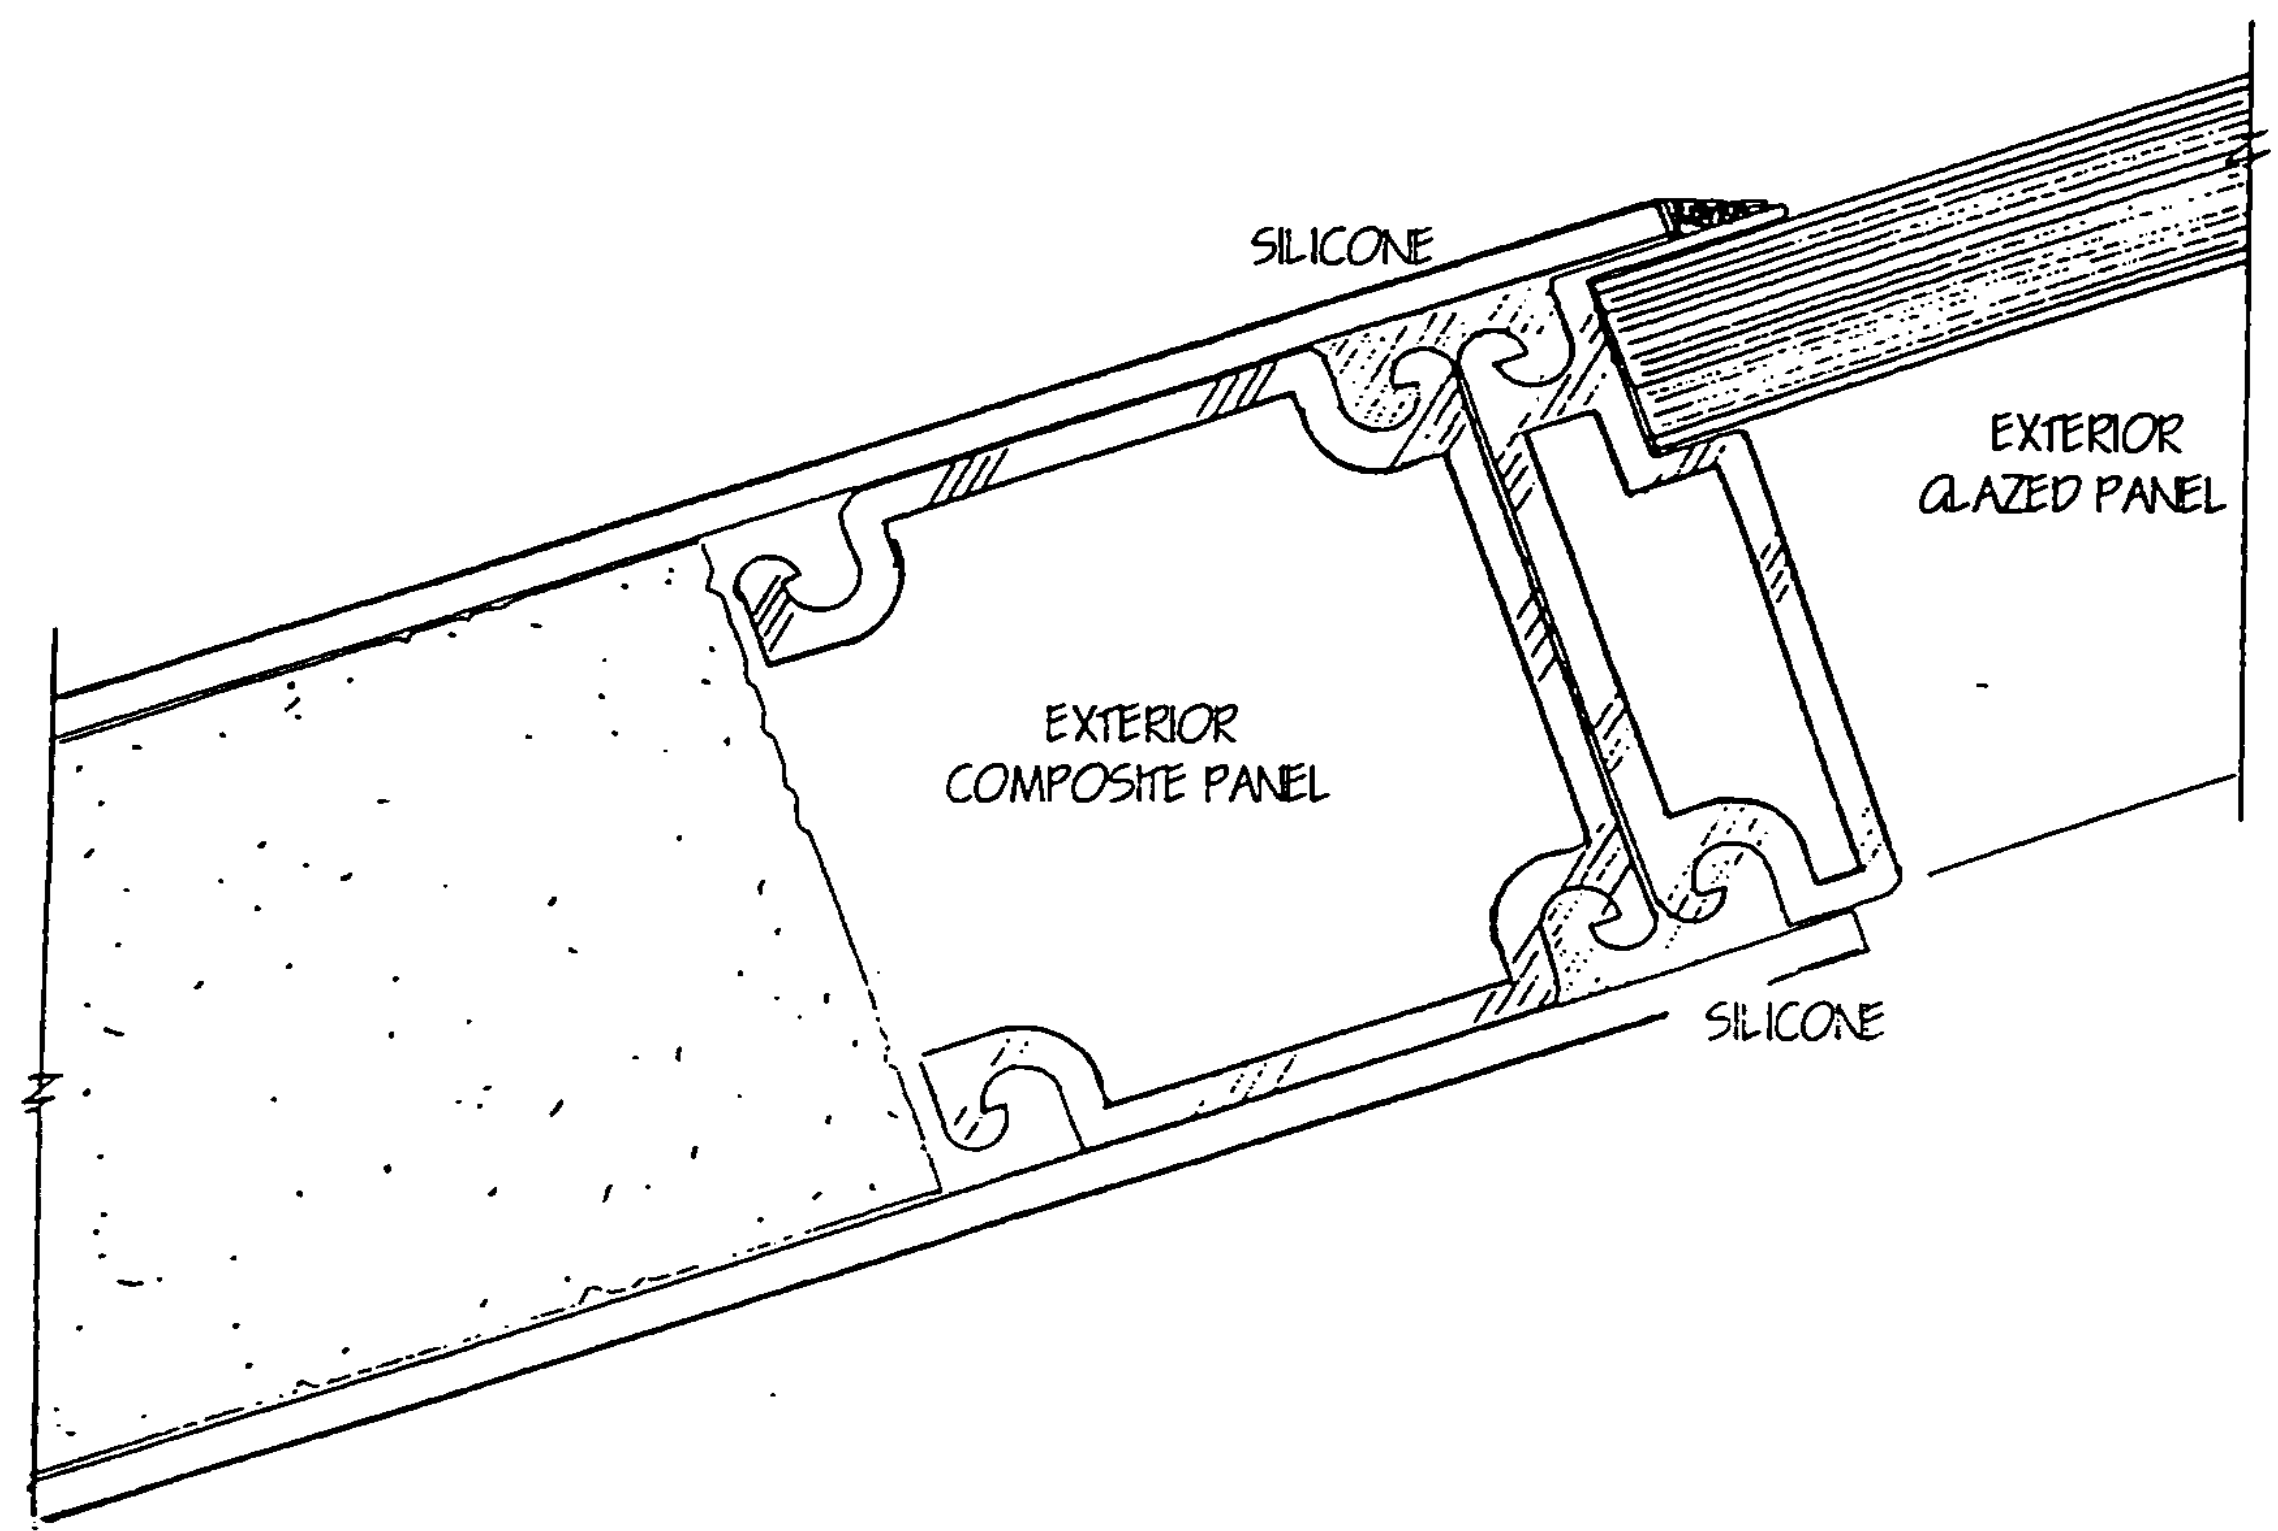
SILICONE
EXTERIOR
GLAZED PANEL
EXTERIOR
COMPOSITE PANEL
SILICONE

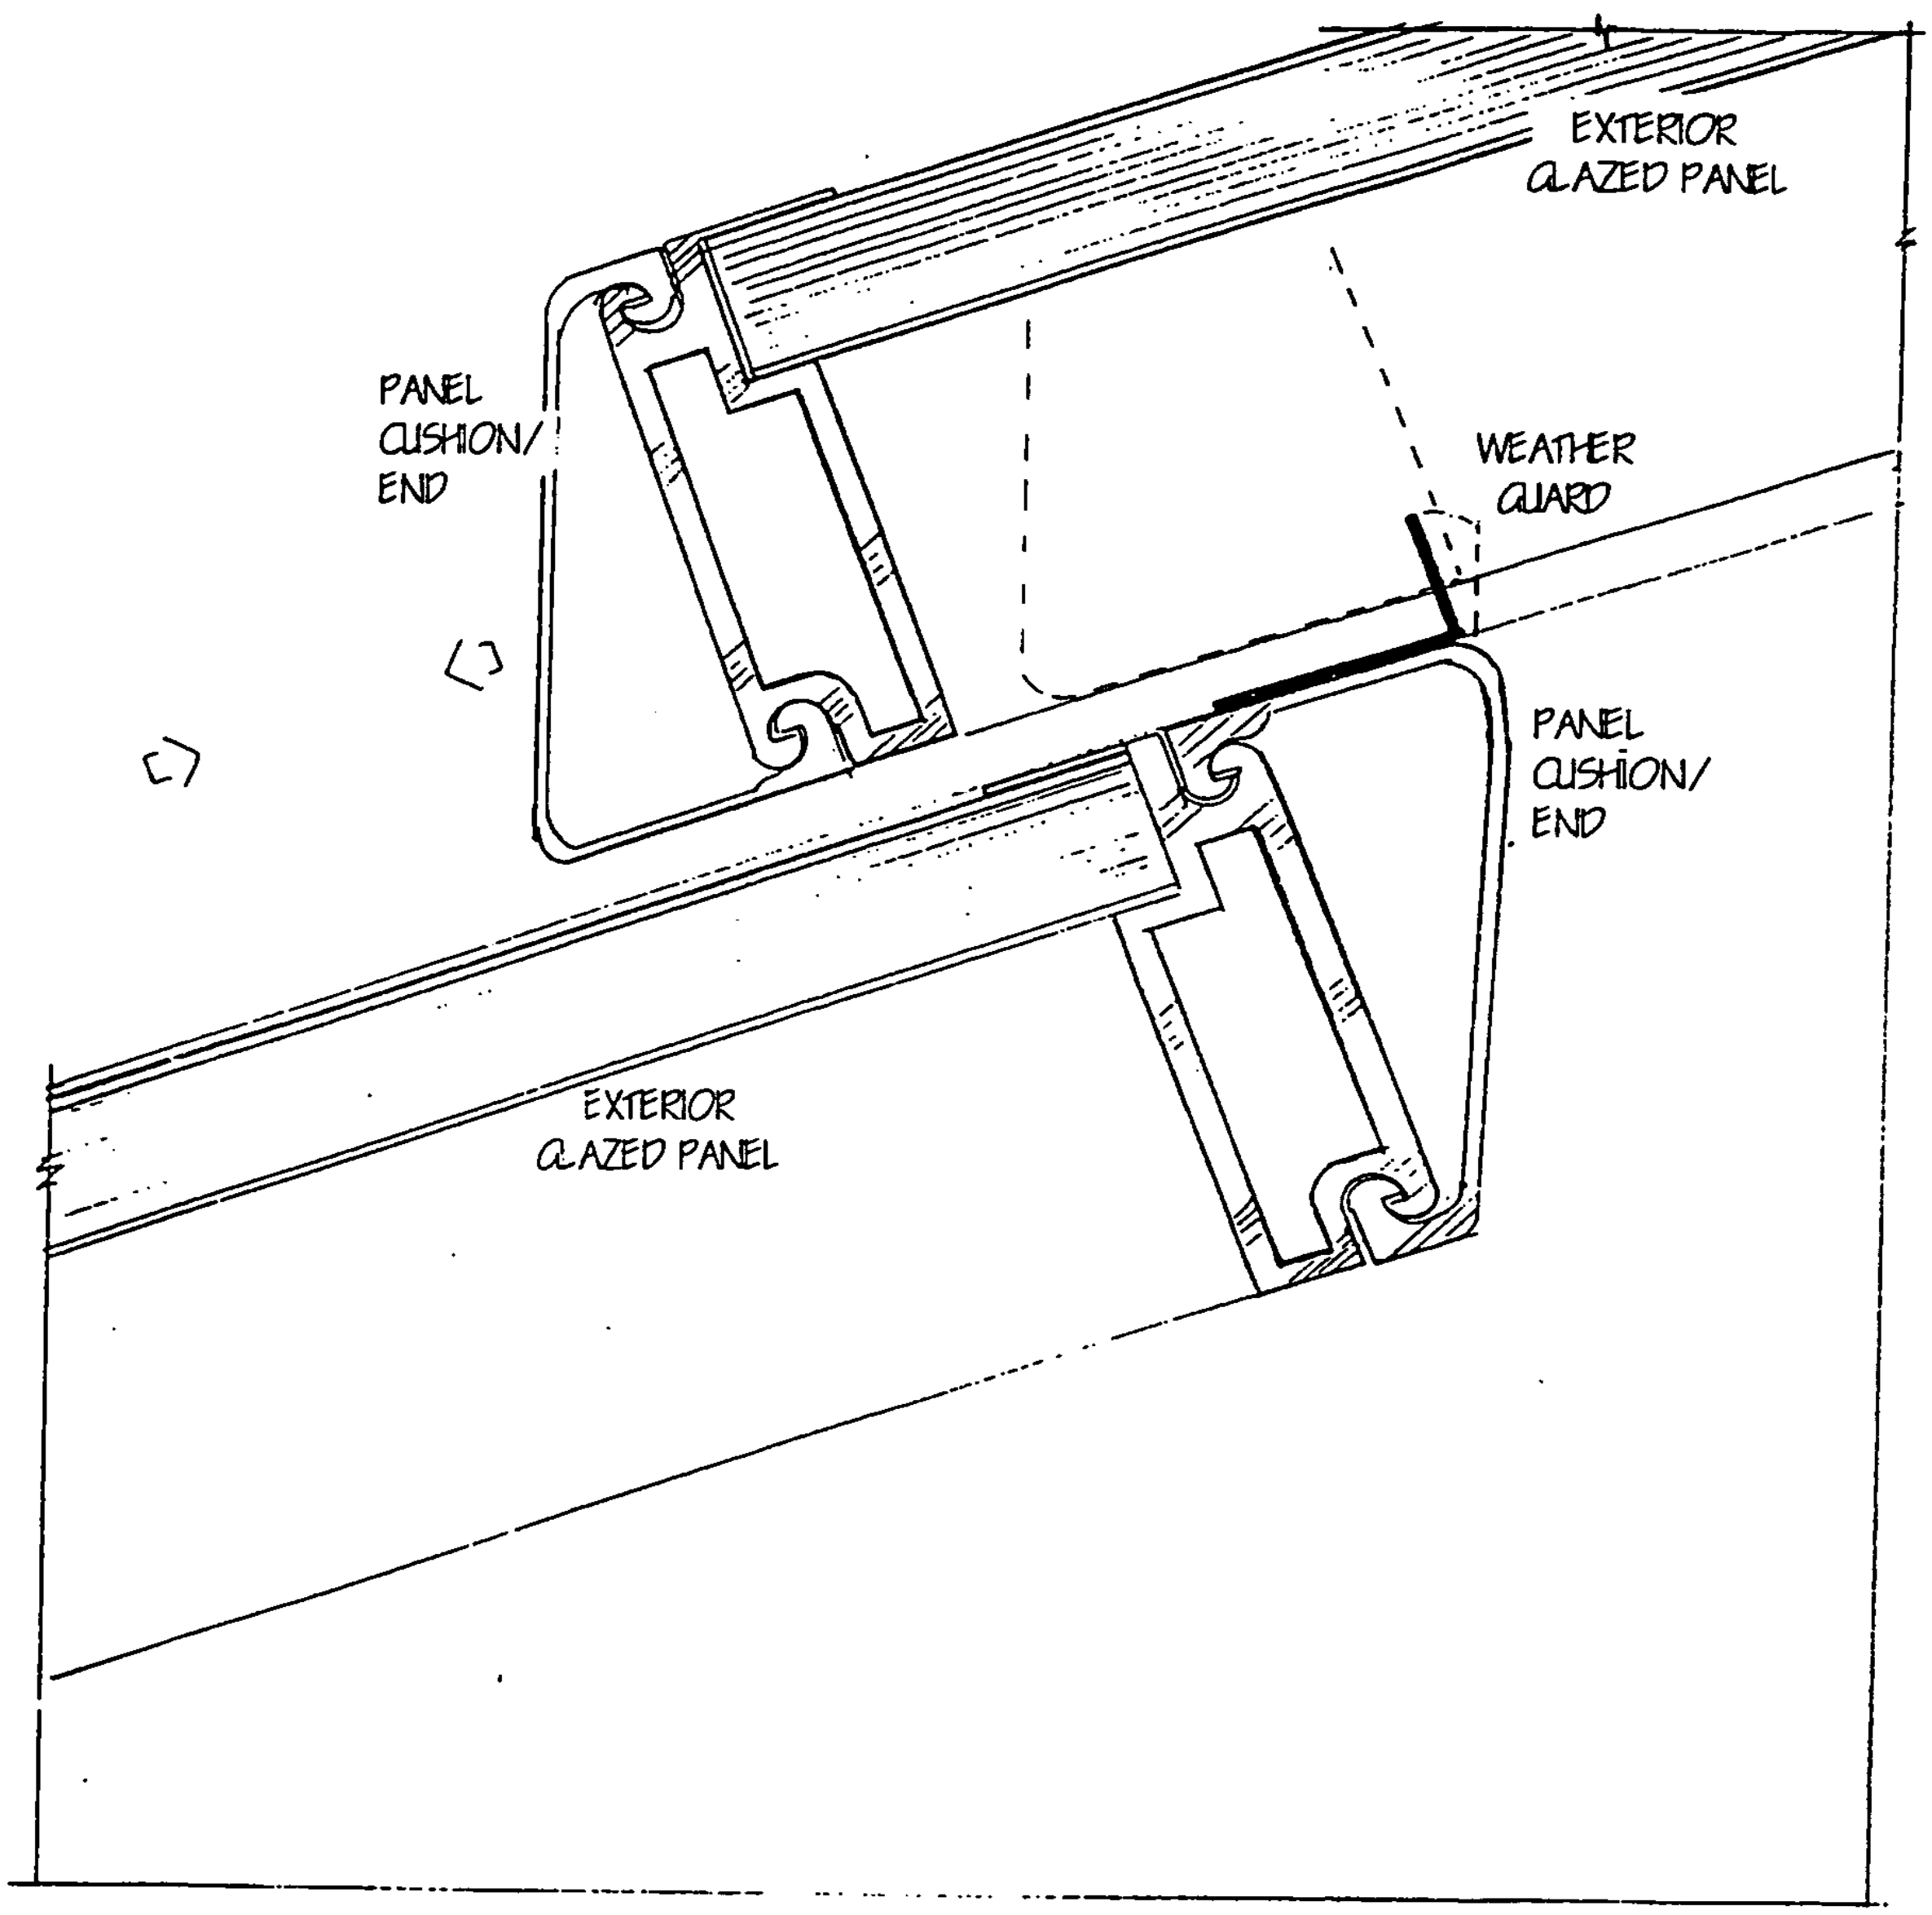
EXTERIOR
GLAZED PANEL
PANEL
CUSHION/
END
WEATHER
GUARD
PANEL
CUSHION/
END
EXTERIOR
GLAZED PANEL

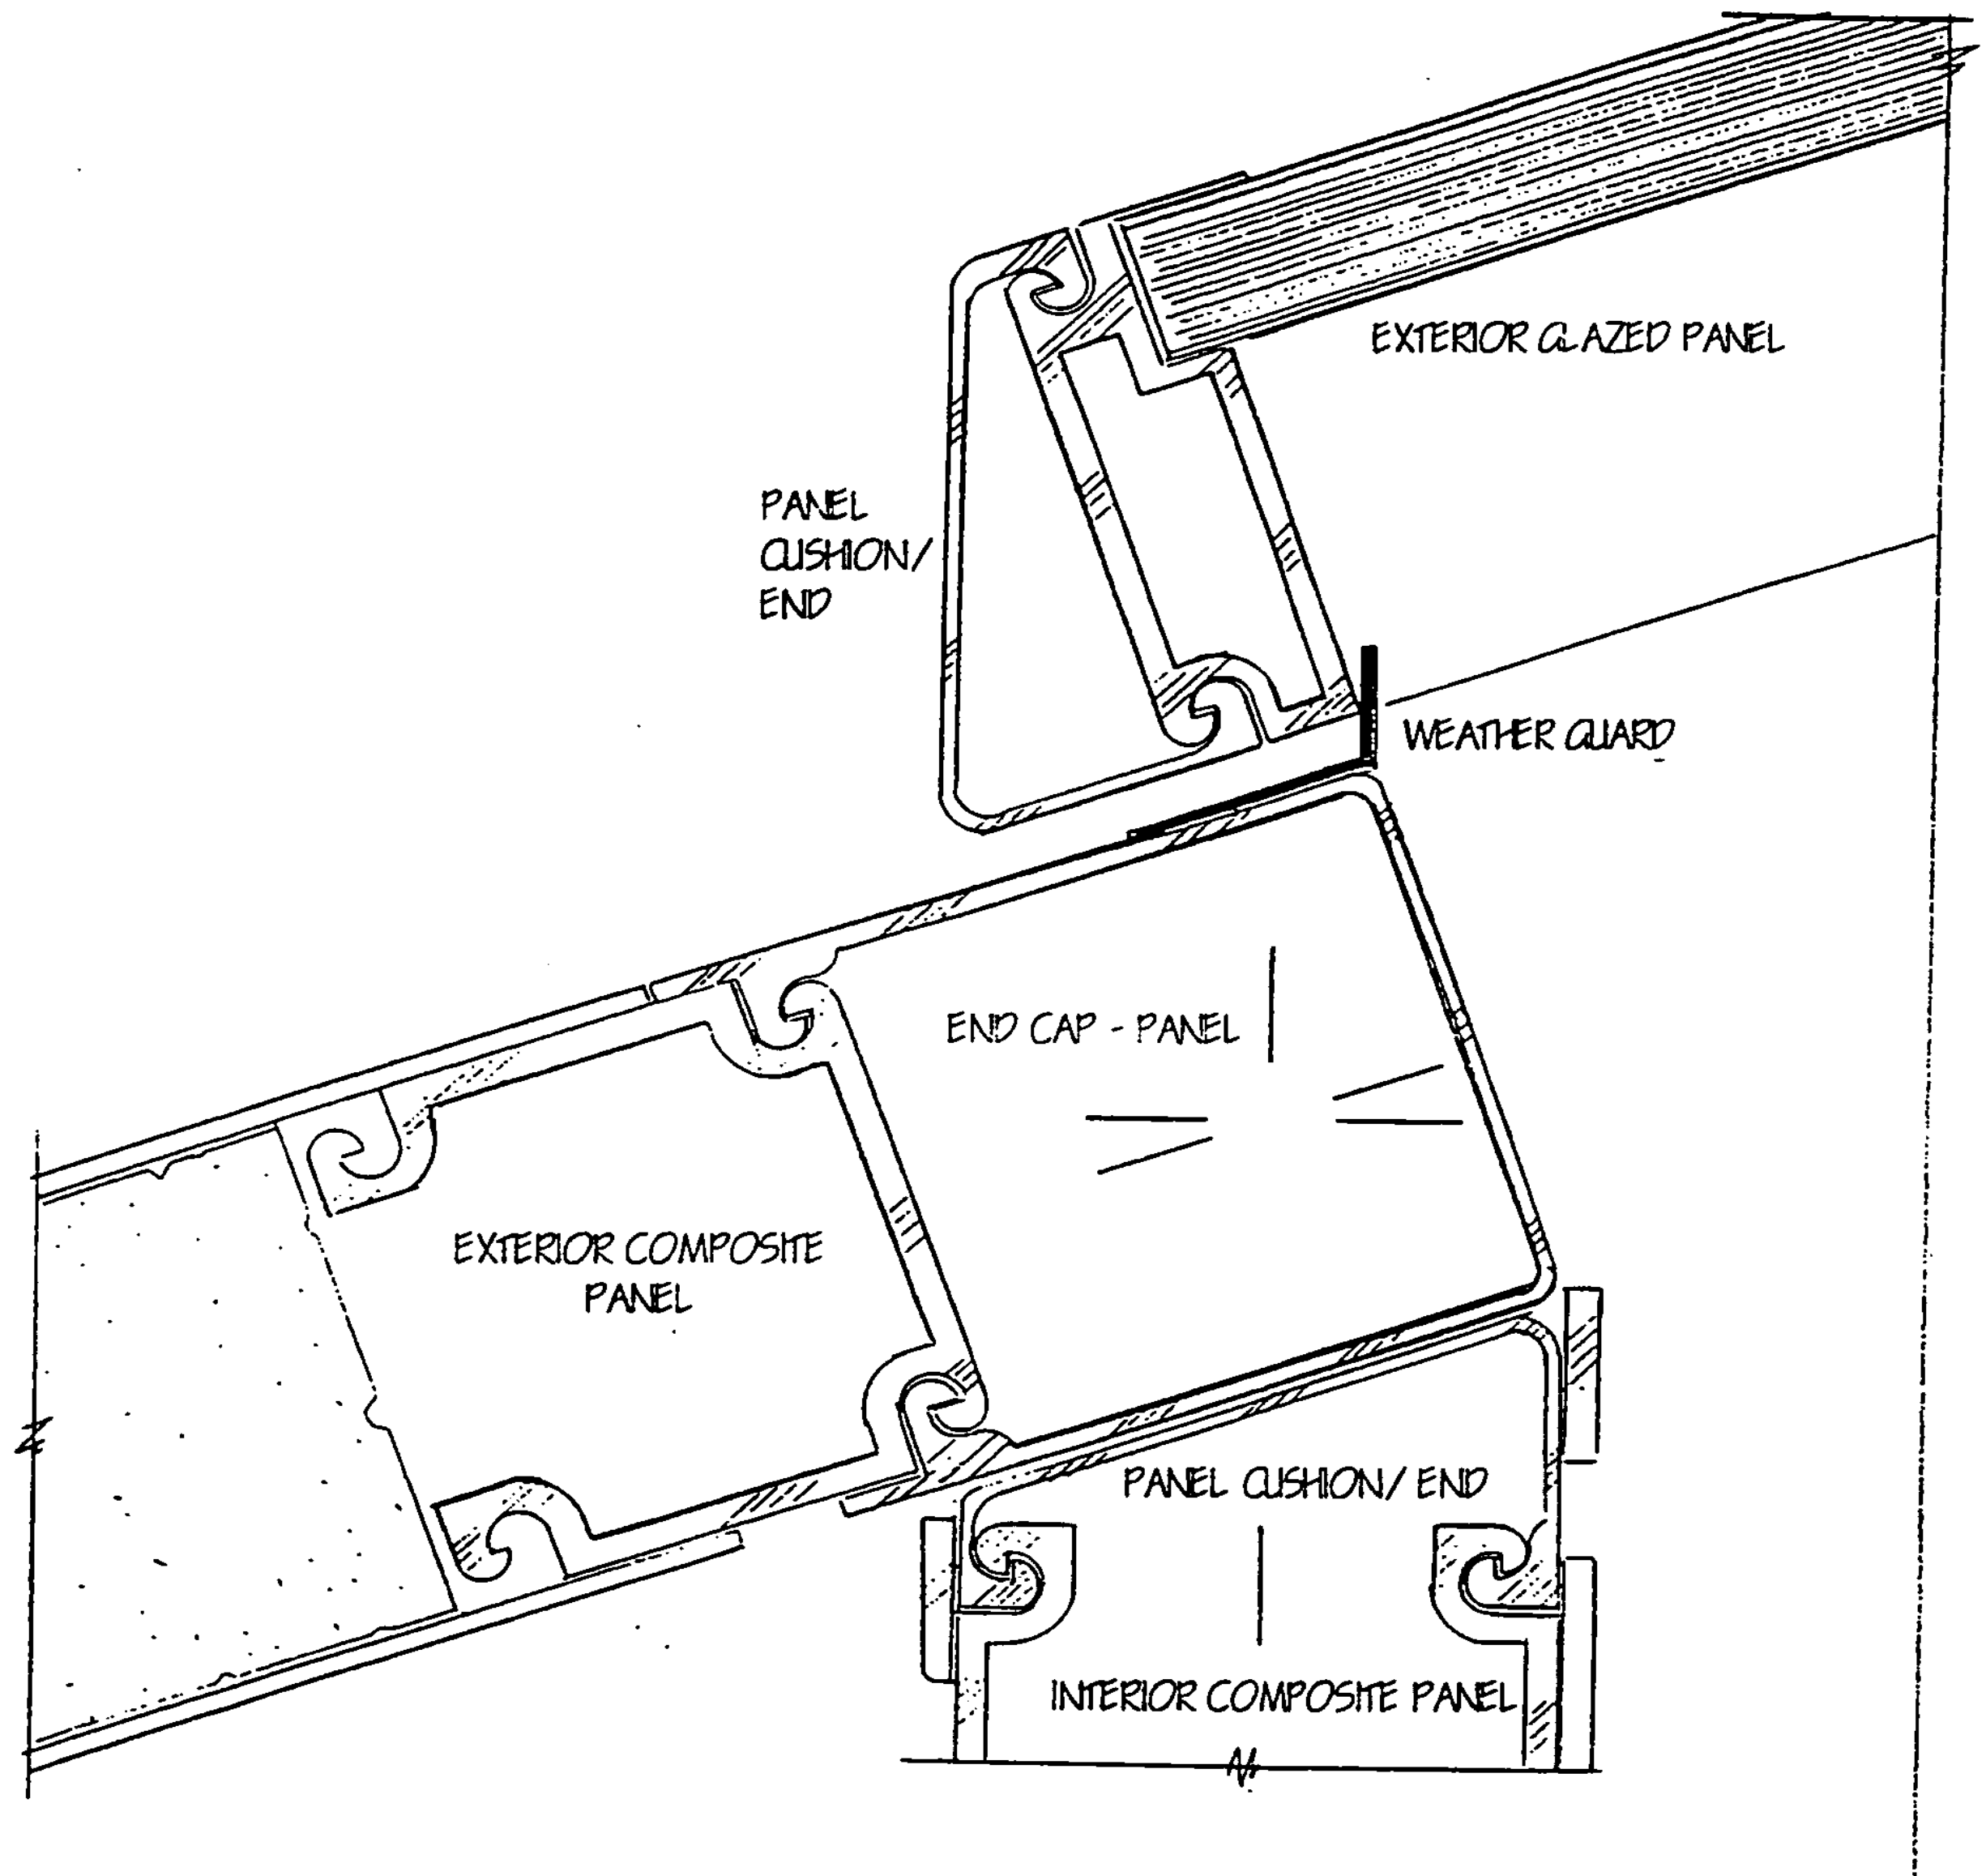
EXTERIOR GLAZED PANEL
PANEL CUSHION/ END
WEATHER GUARD
END CAP - PANEL
EXTERIOR COMPOSITE PANEL
PANEL CUSHION/ END
INTERIOR COMPOSITE PANEL

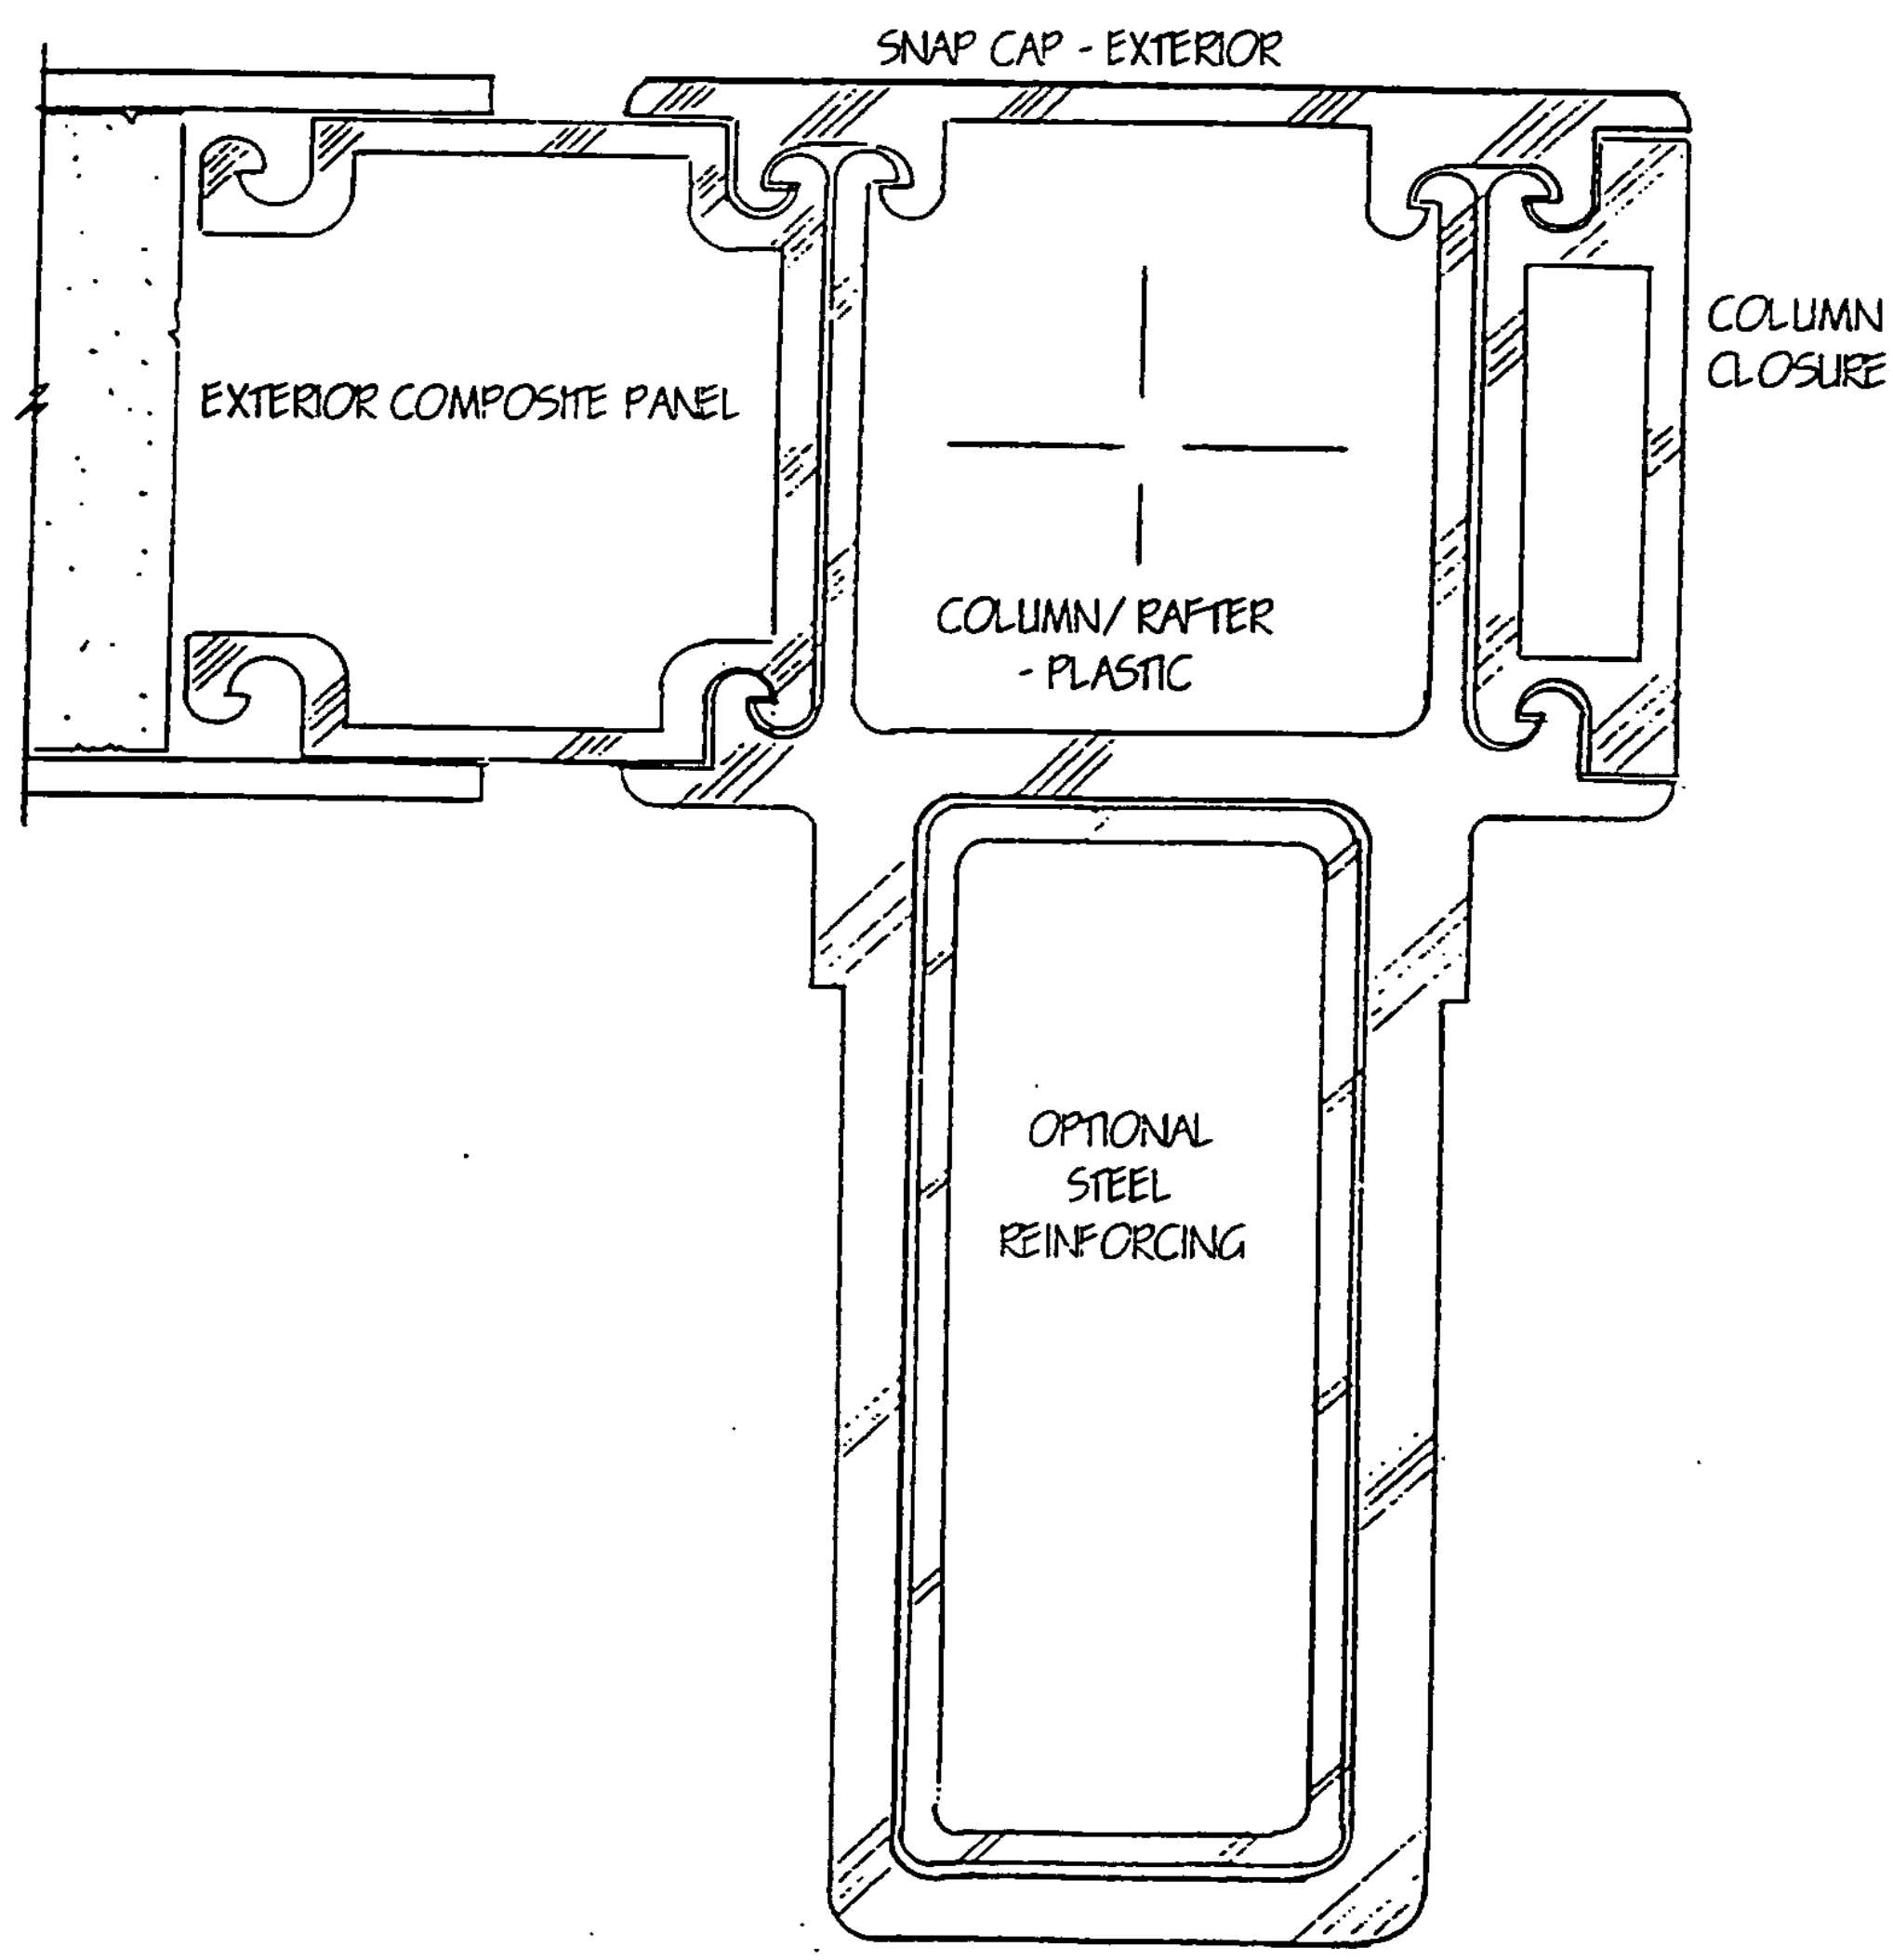
SNAP CAP - EXTERIOR
EXTERIOR COMPOSITE PANEL
COLUMN CLOSURE
COLUMN/ RAFTER - PLASTIC
OPTIONAL STEEL REINFORCING

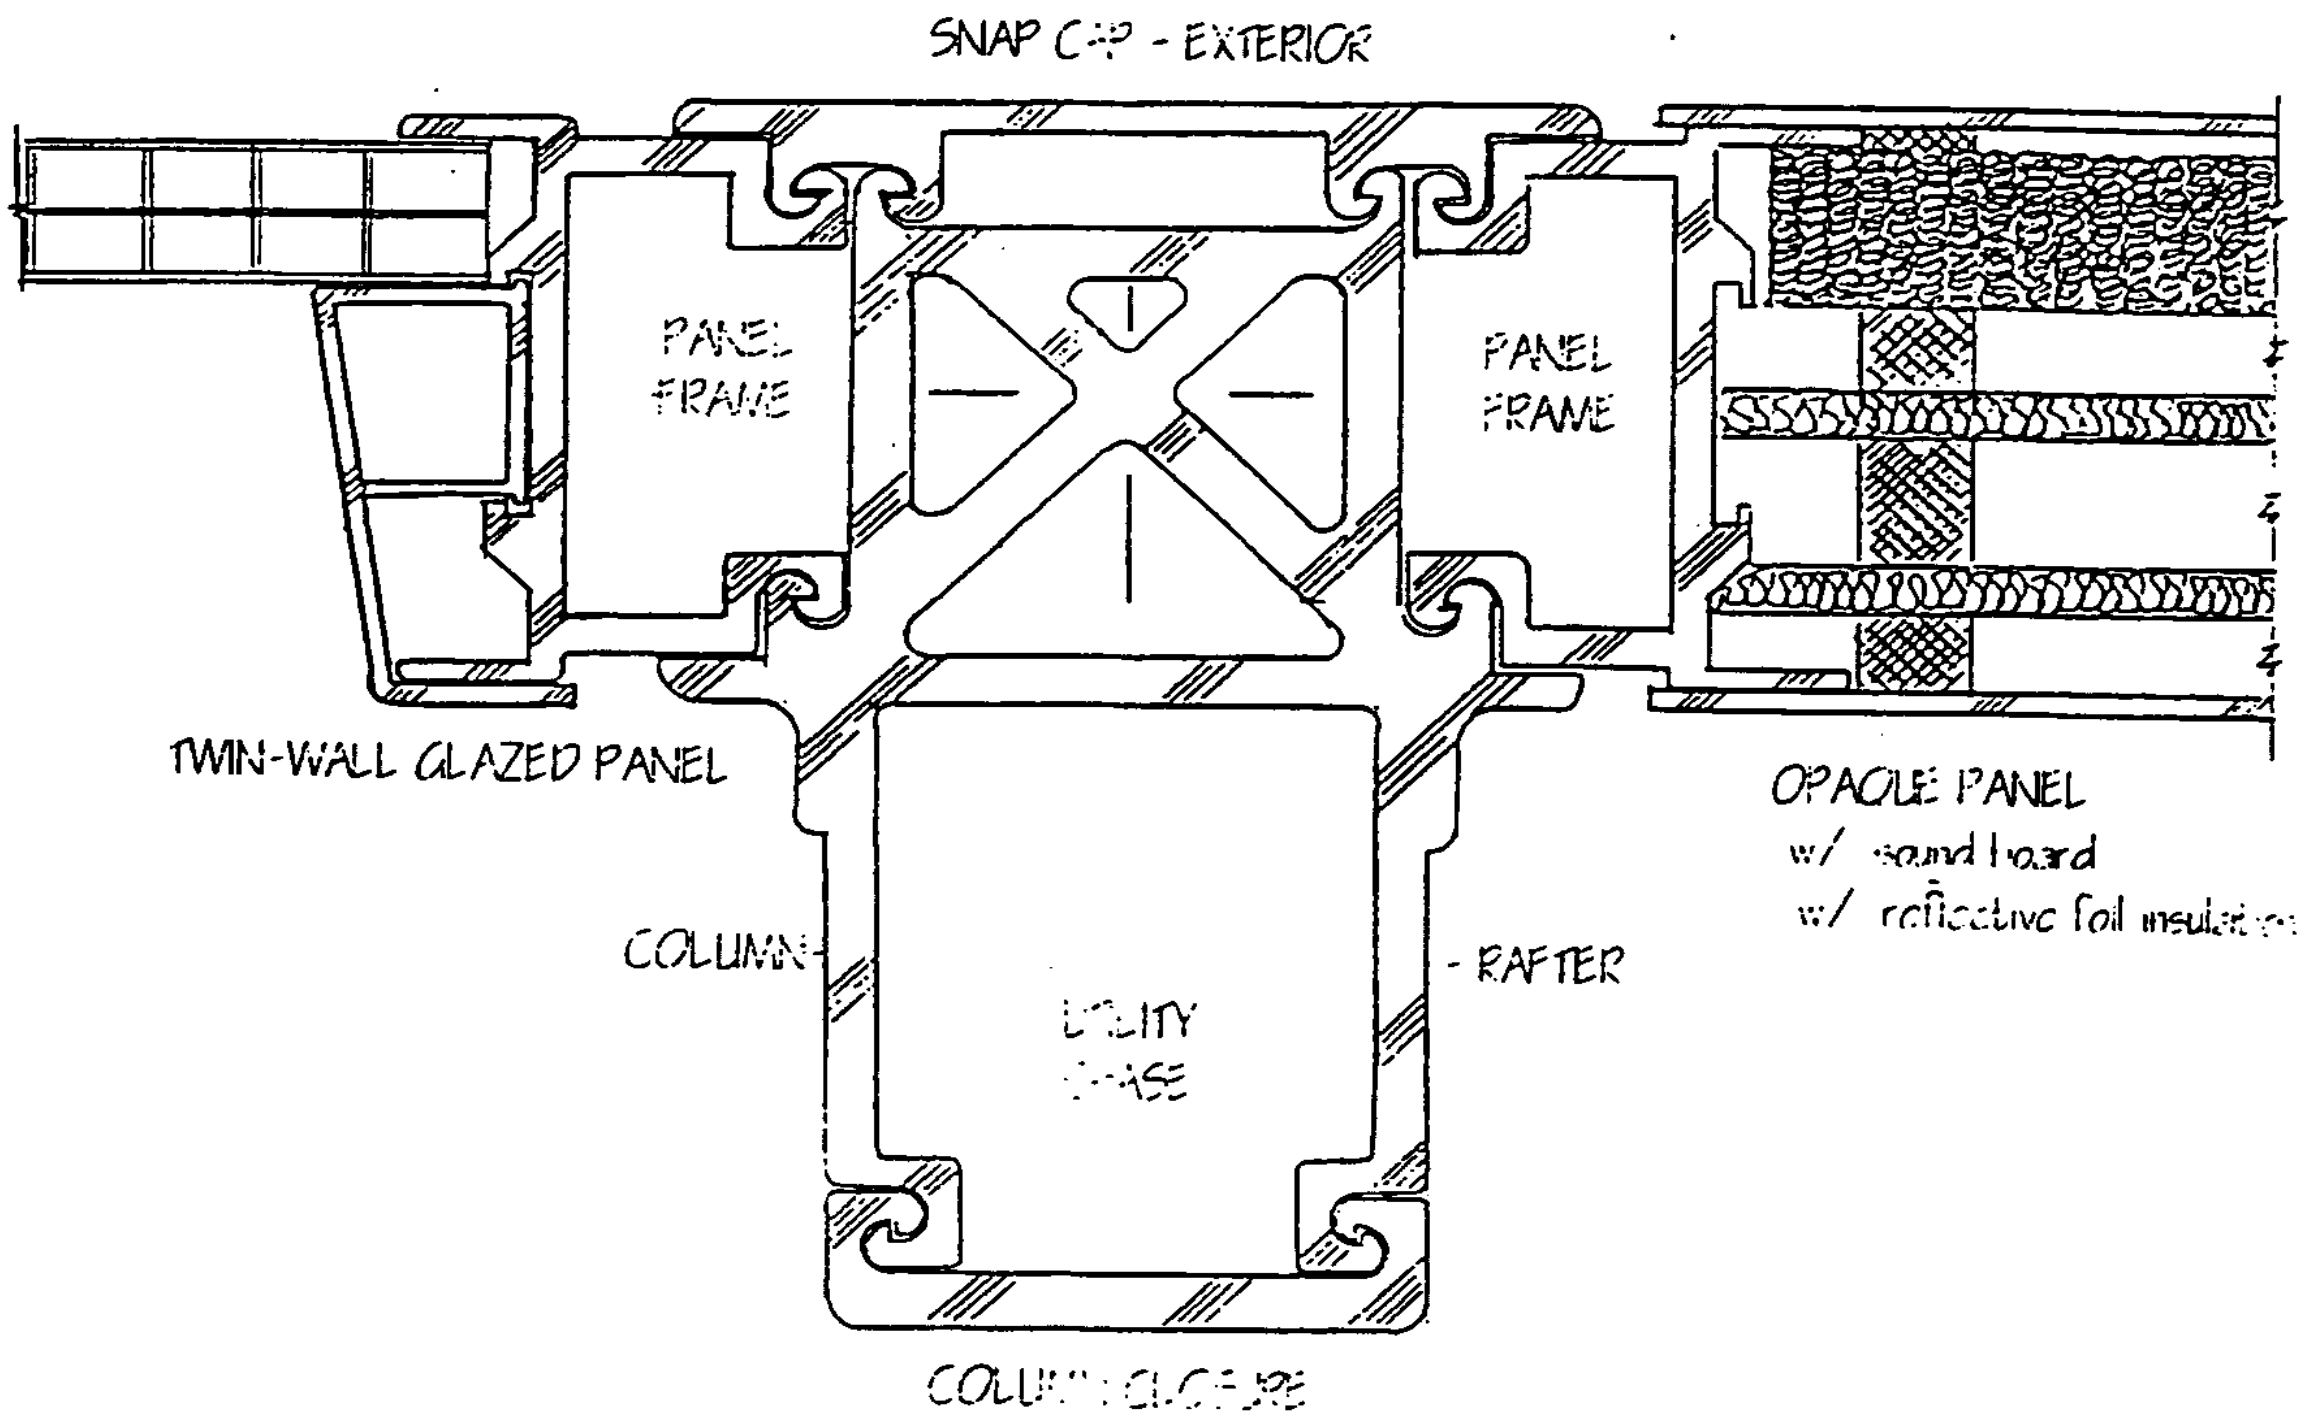
PANEL FRAME
PANEL FRAME
TWIN-WALL GLAZED PANEL
OPAQUE PANEL
w/ sound board
COLUMN
RAFTER

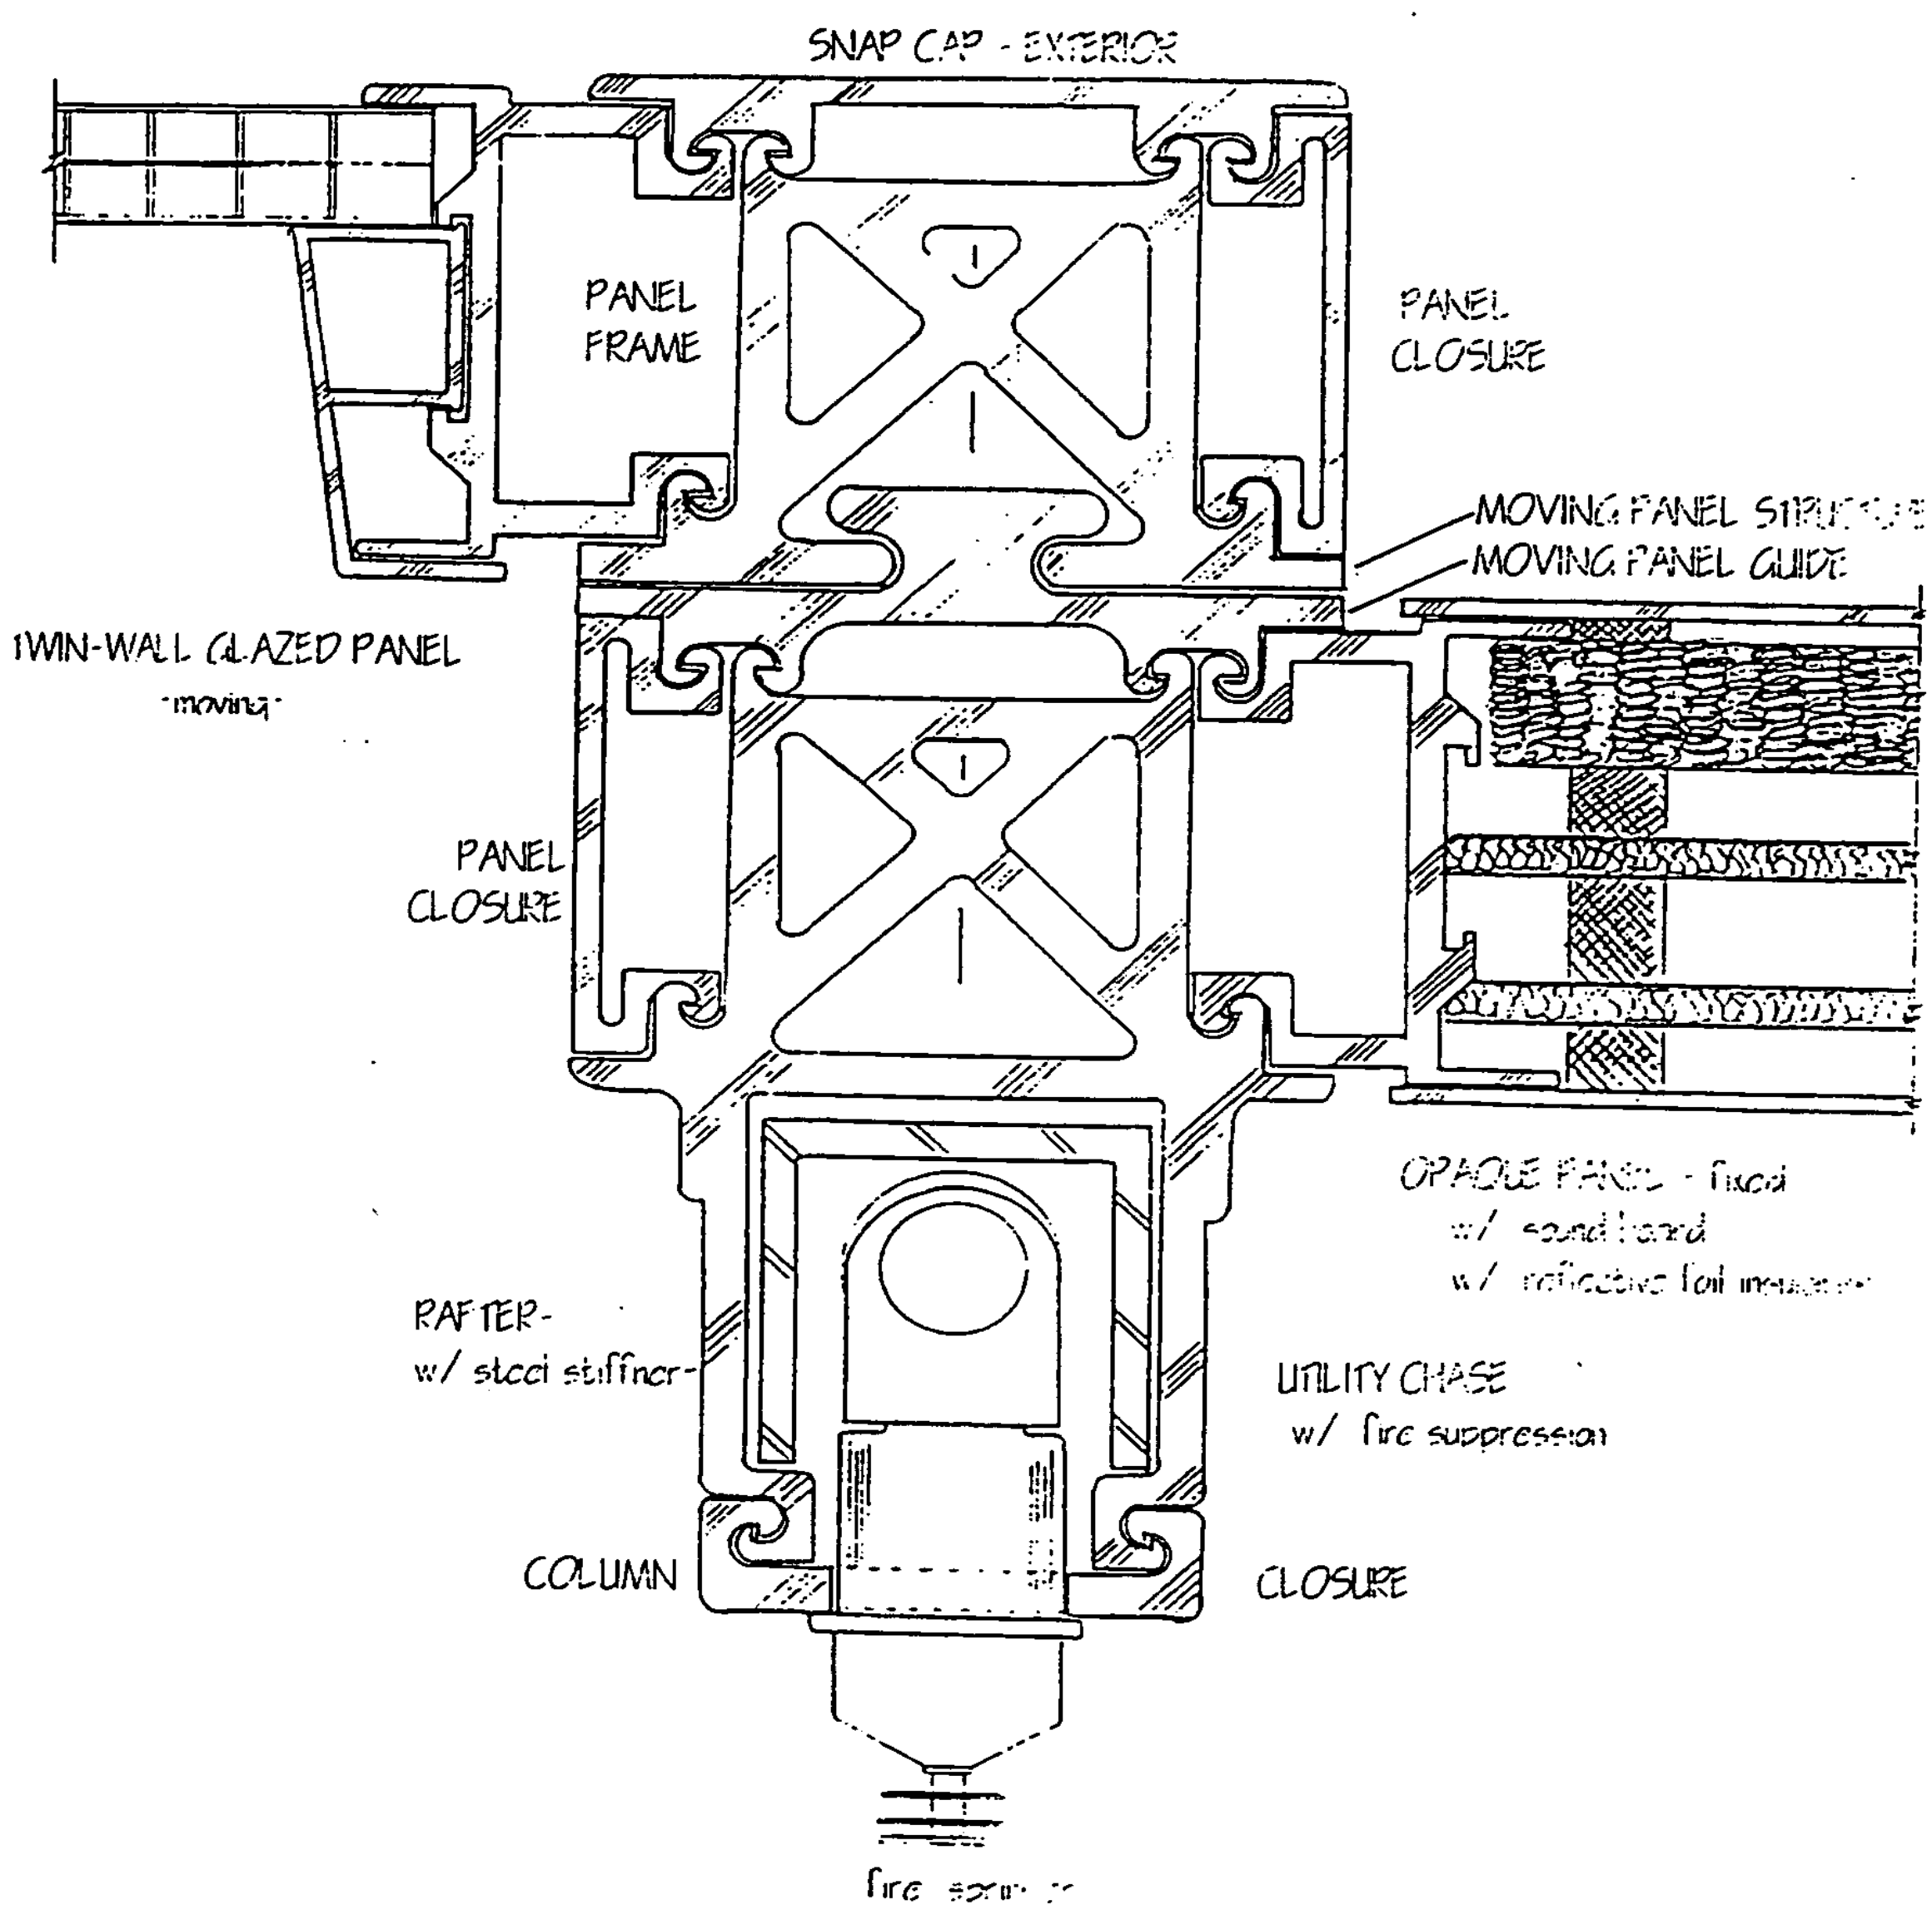
SNAP CAP - EXTERIOR
PANEL FRAME
PANEL CLOSURE
MOVING PANEL GUIDE
TWIN-WALL GLAZED PANEL
-moving-
PANEL CLOSURE
OPAQUE PANEL - fixed
w/ sound board
RAFTER-
w/ steel stiffner
UTILITY CHASE
w/ fire suppression
COLUMN
CLOSURE

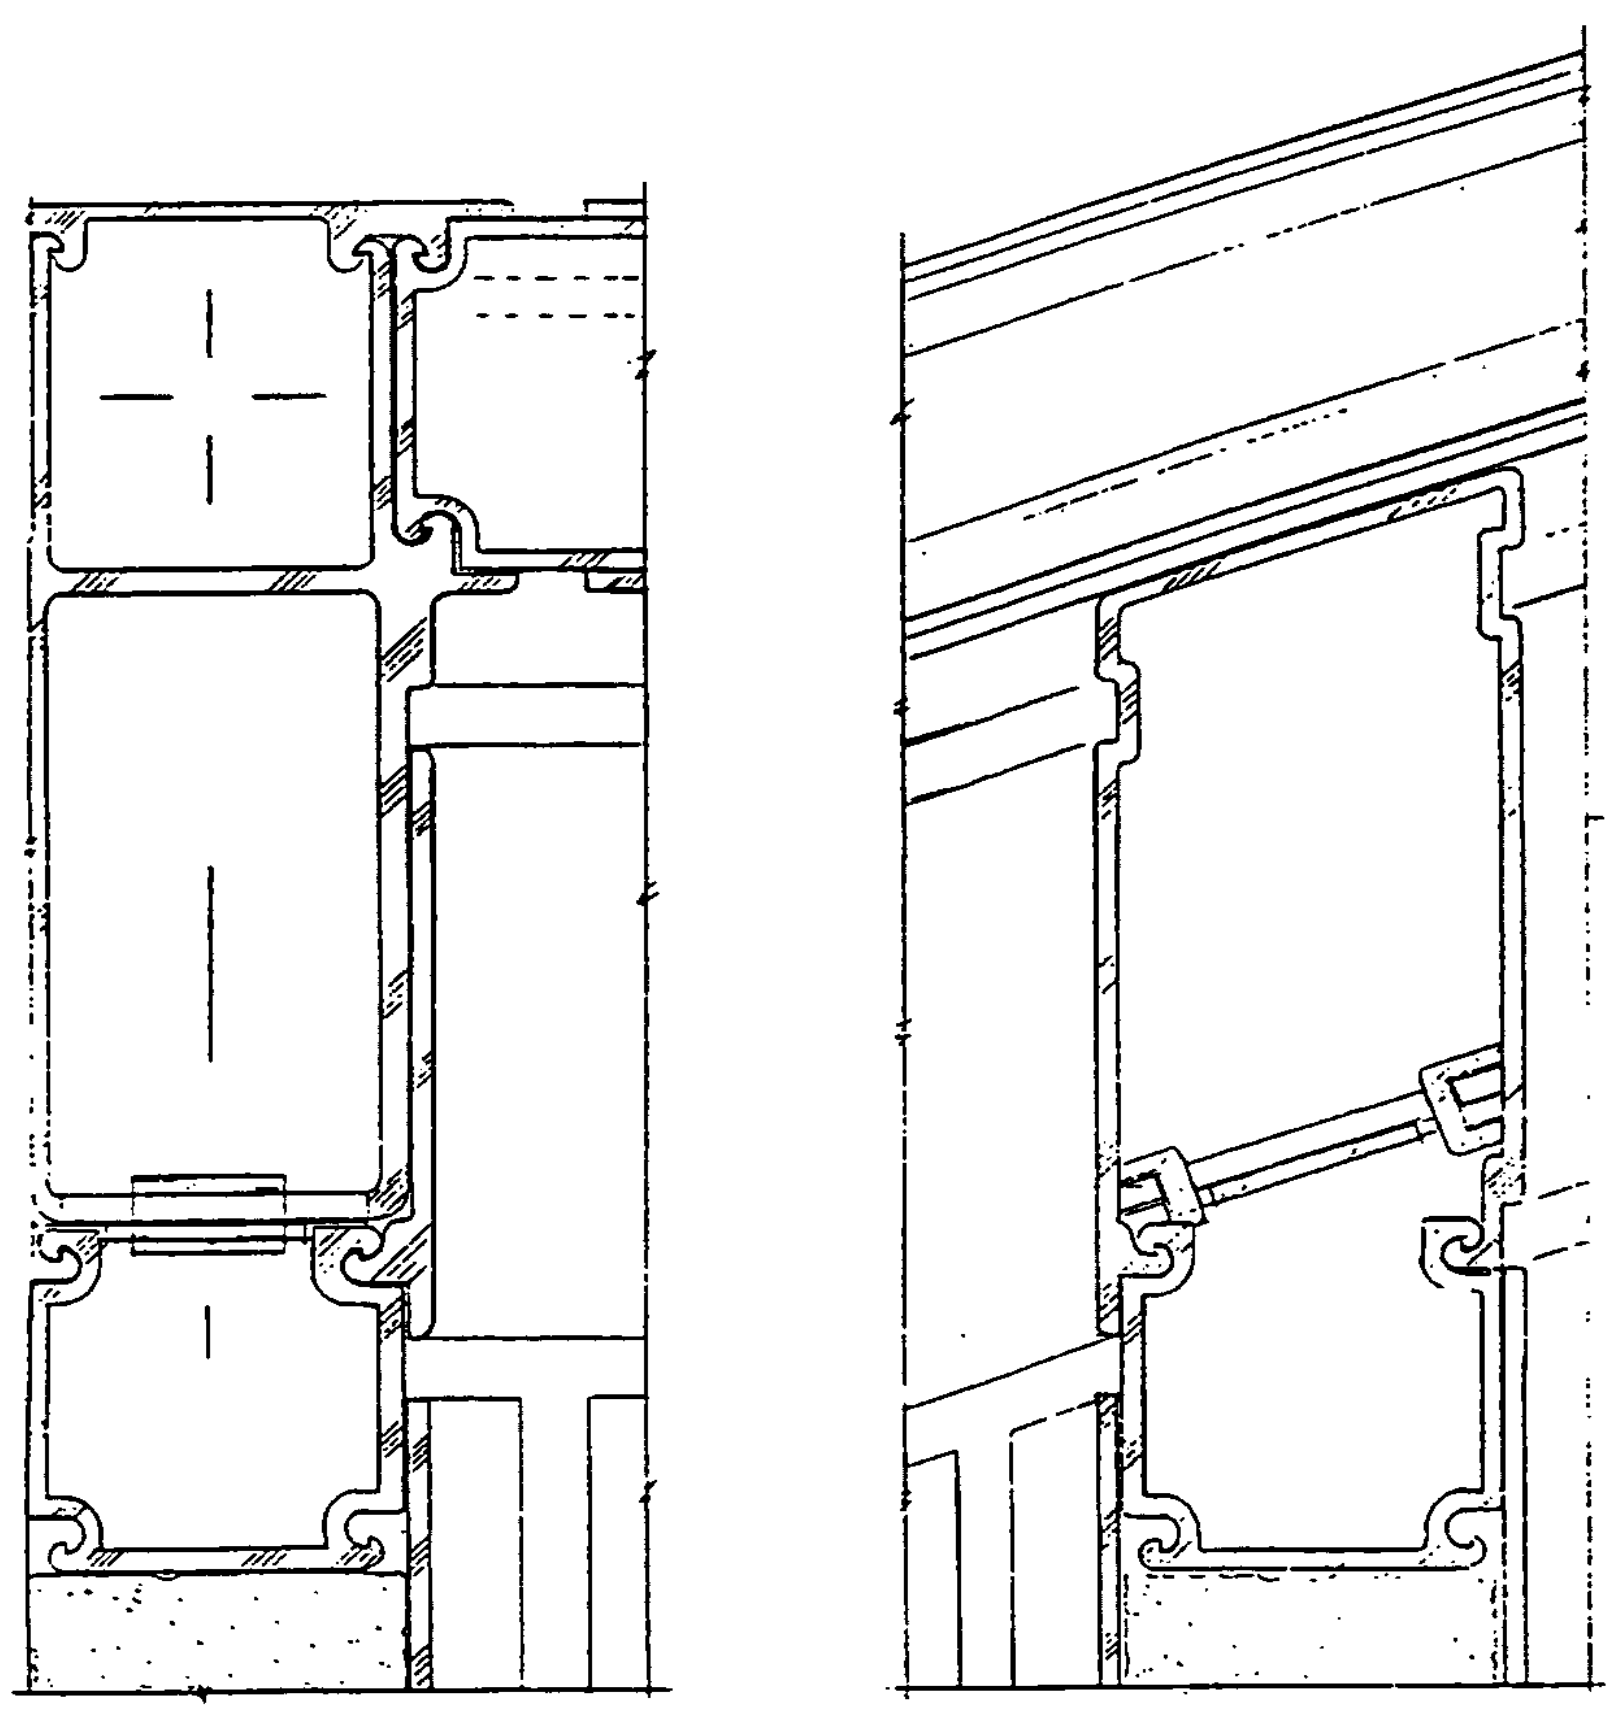

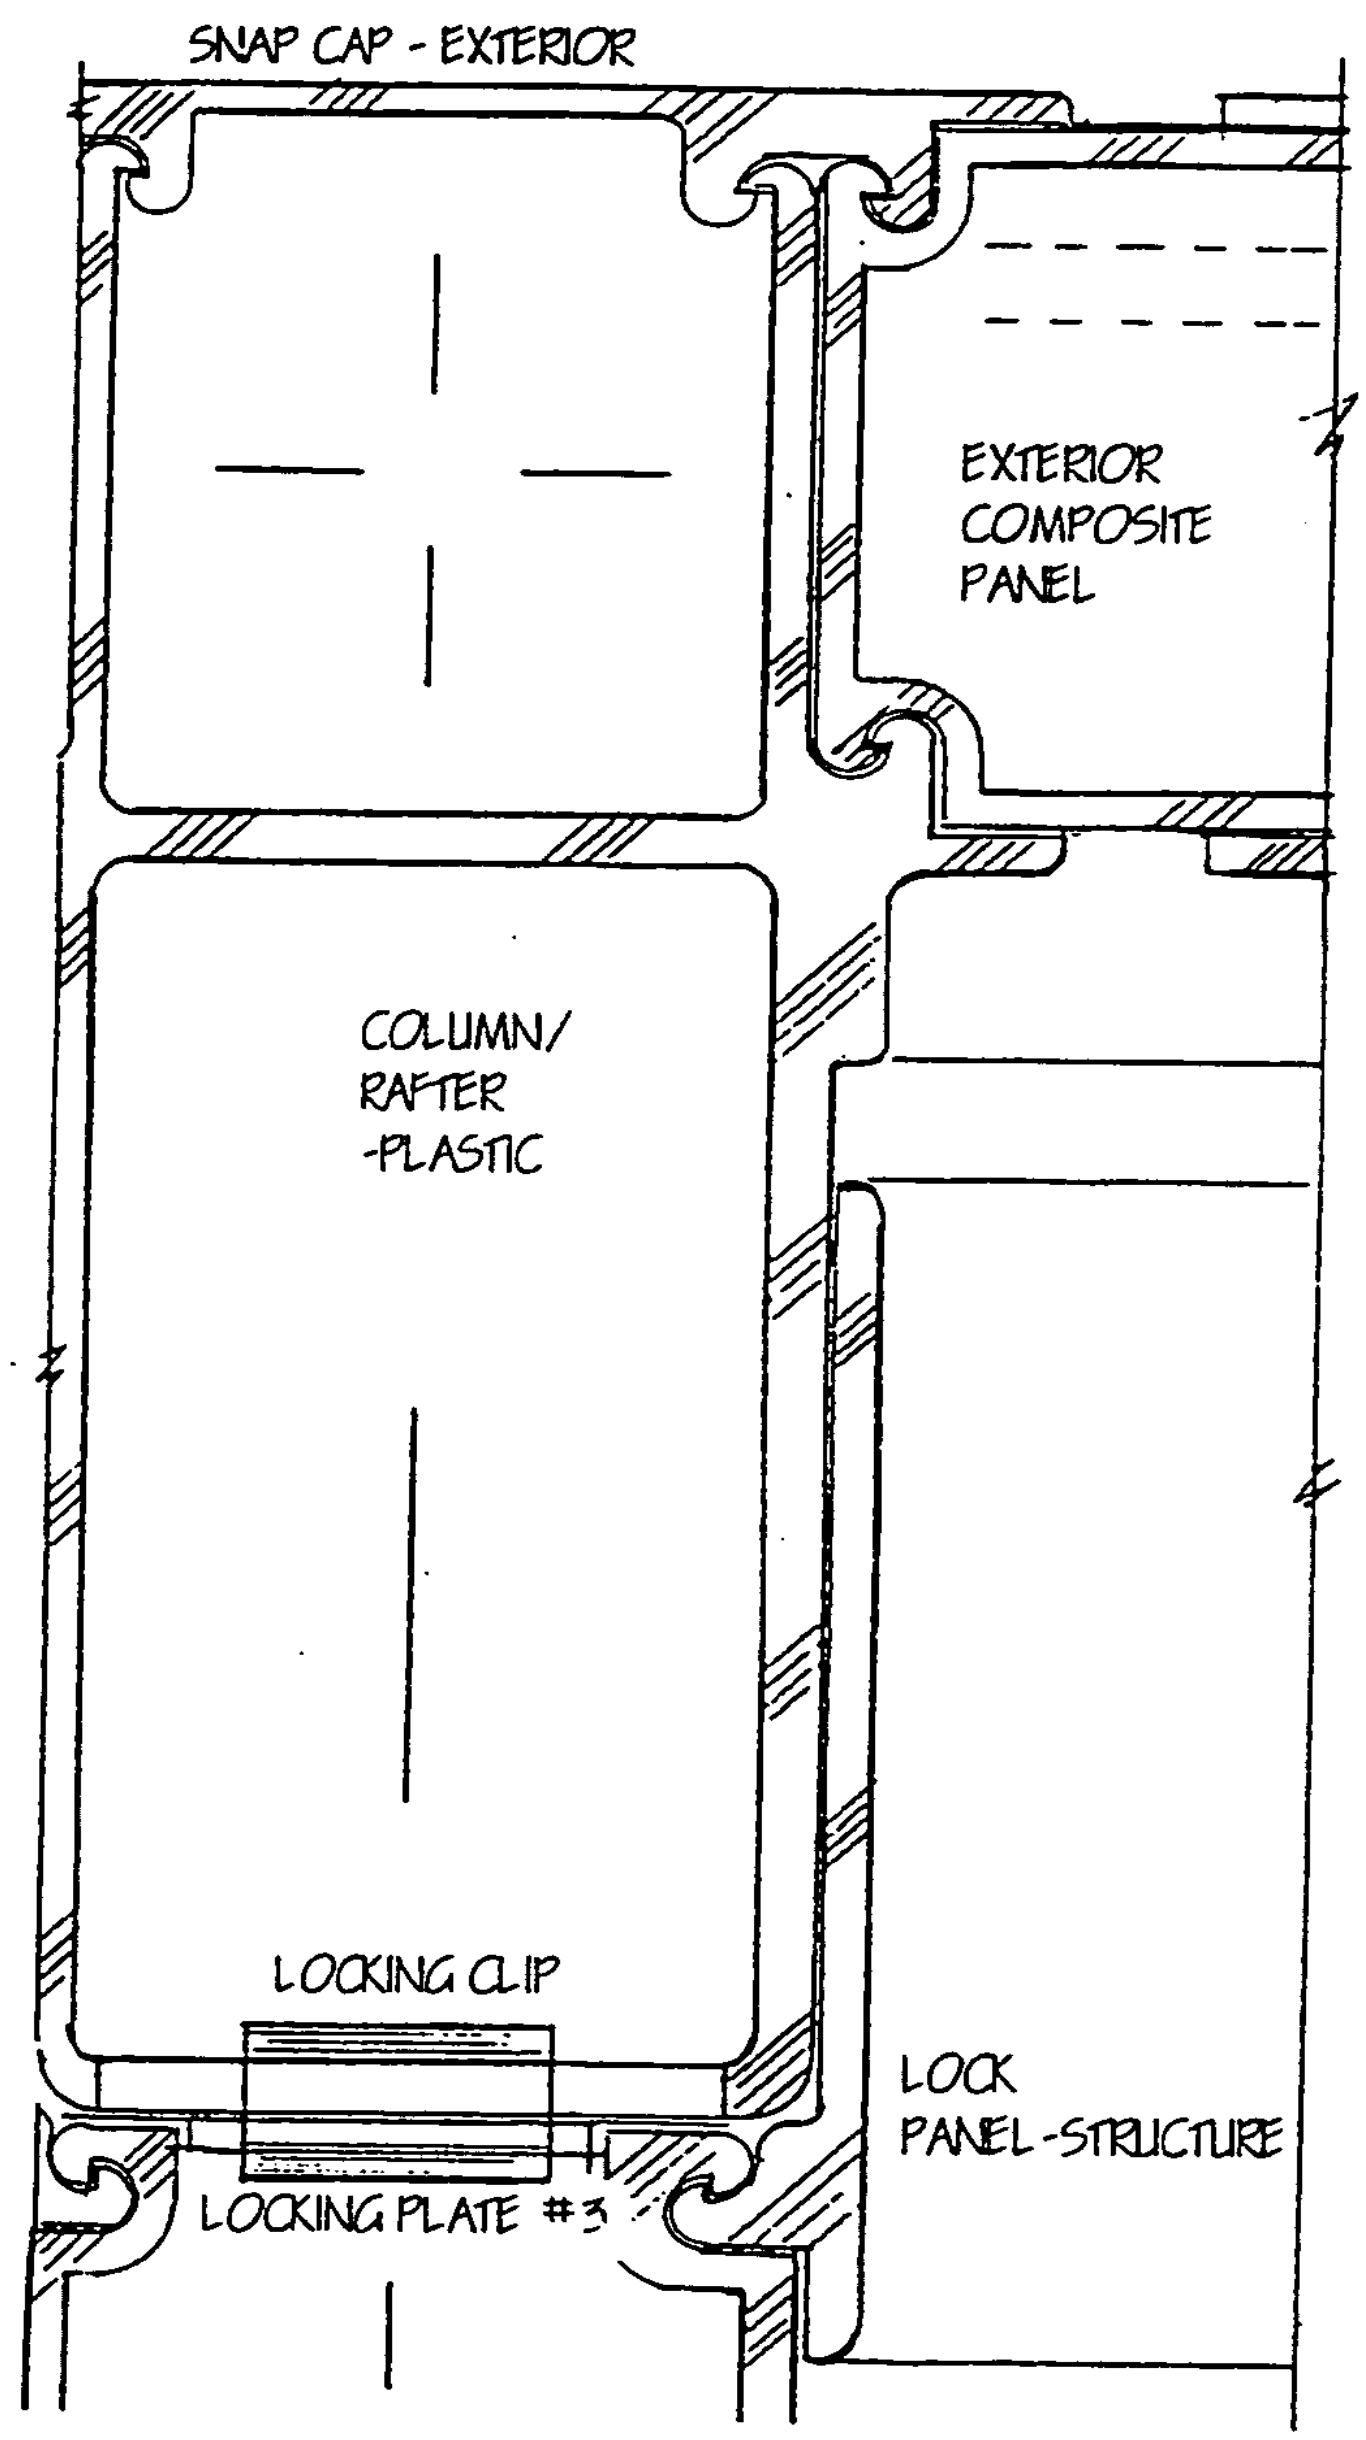
SNAP CAP - EXTERIOR
EXTERIOR COMPOSITE PANEL
COLUMN/ RAFTER -PLASTIC
LOCKING CLIP
LOCK PANEL-STRUCTURE
LOCKING PLATE #3

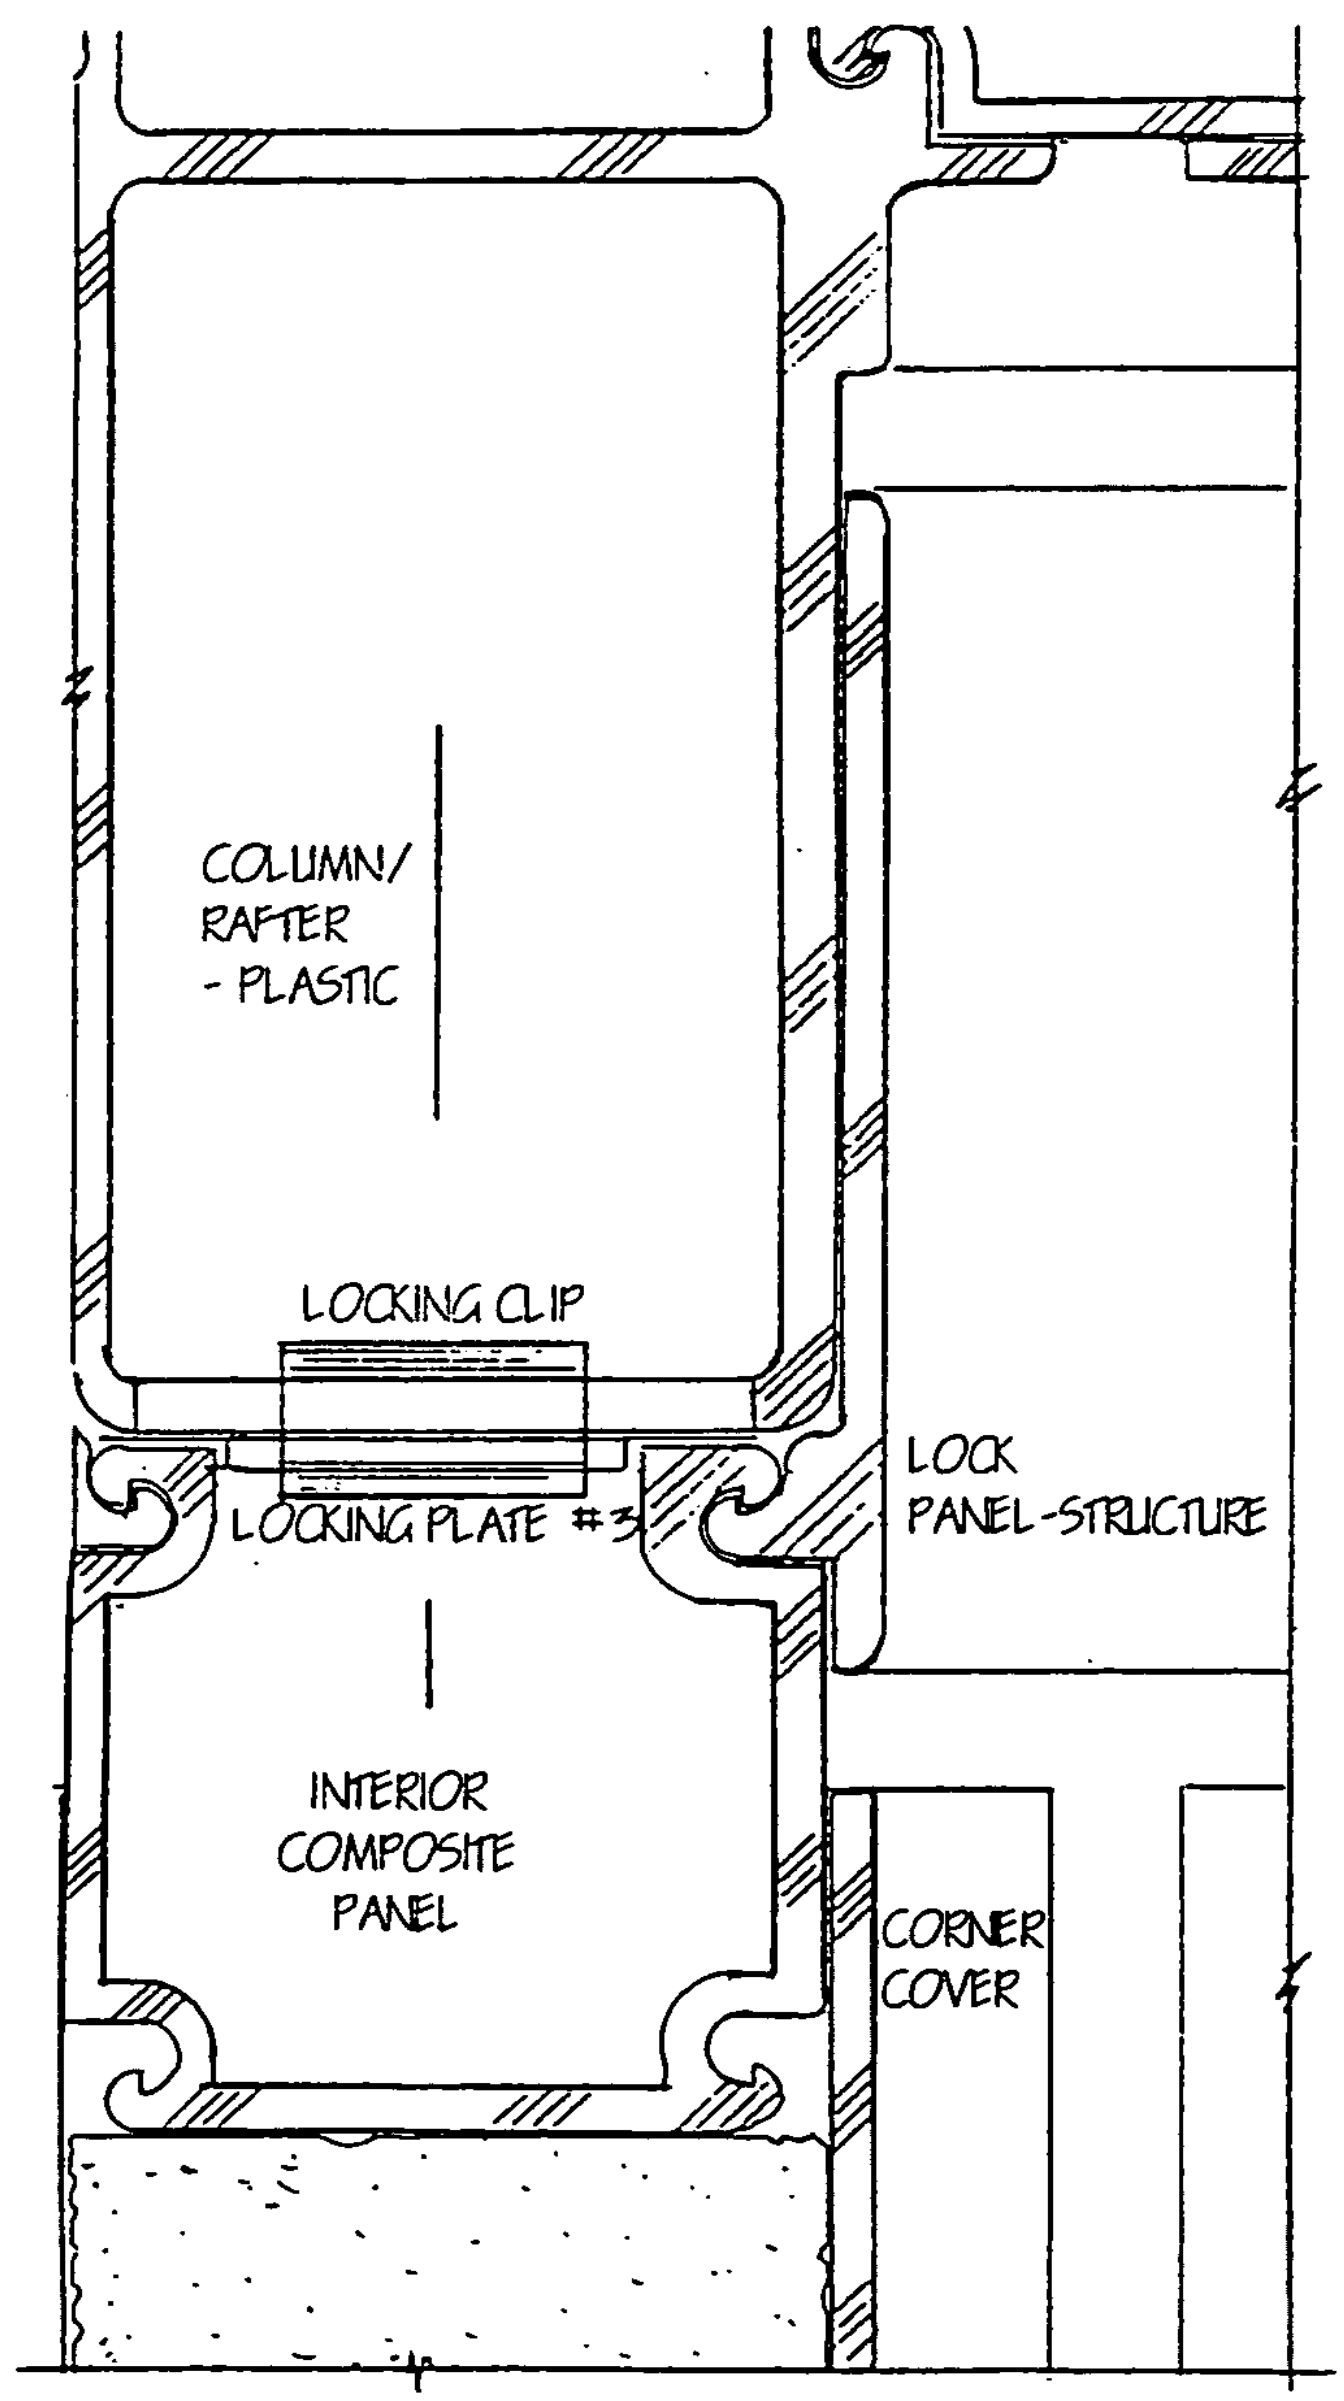
COLUMN/
RAFTER
- PLASTIC
LOCKING CLIP
LOCKING PLATE #3
LOCK
PANEL-STRUCTURE
INTERIOR
COMPOSITE
PANEL
CORNER
COVER

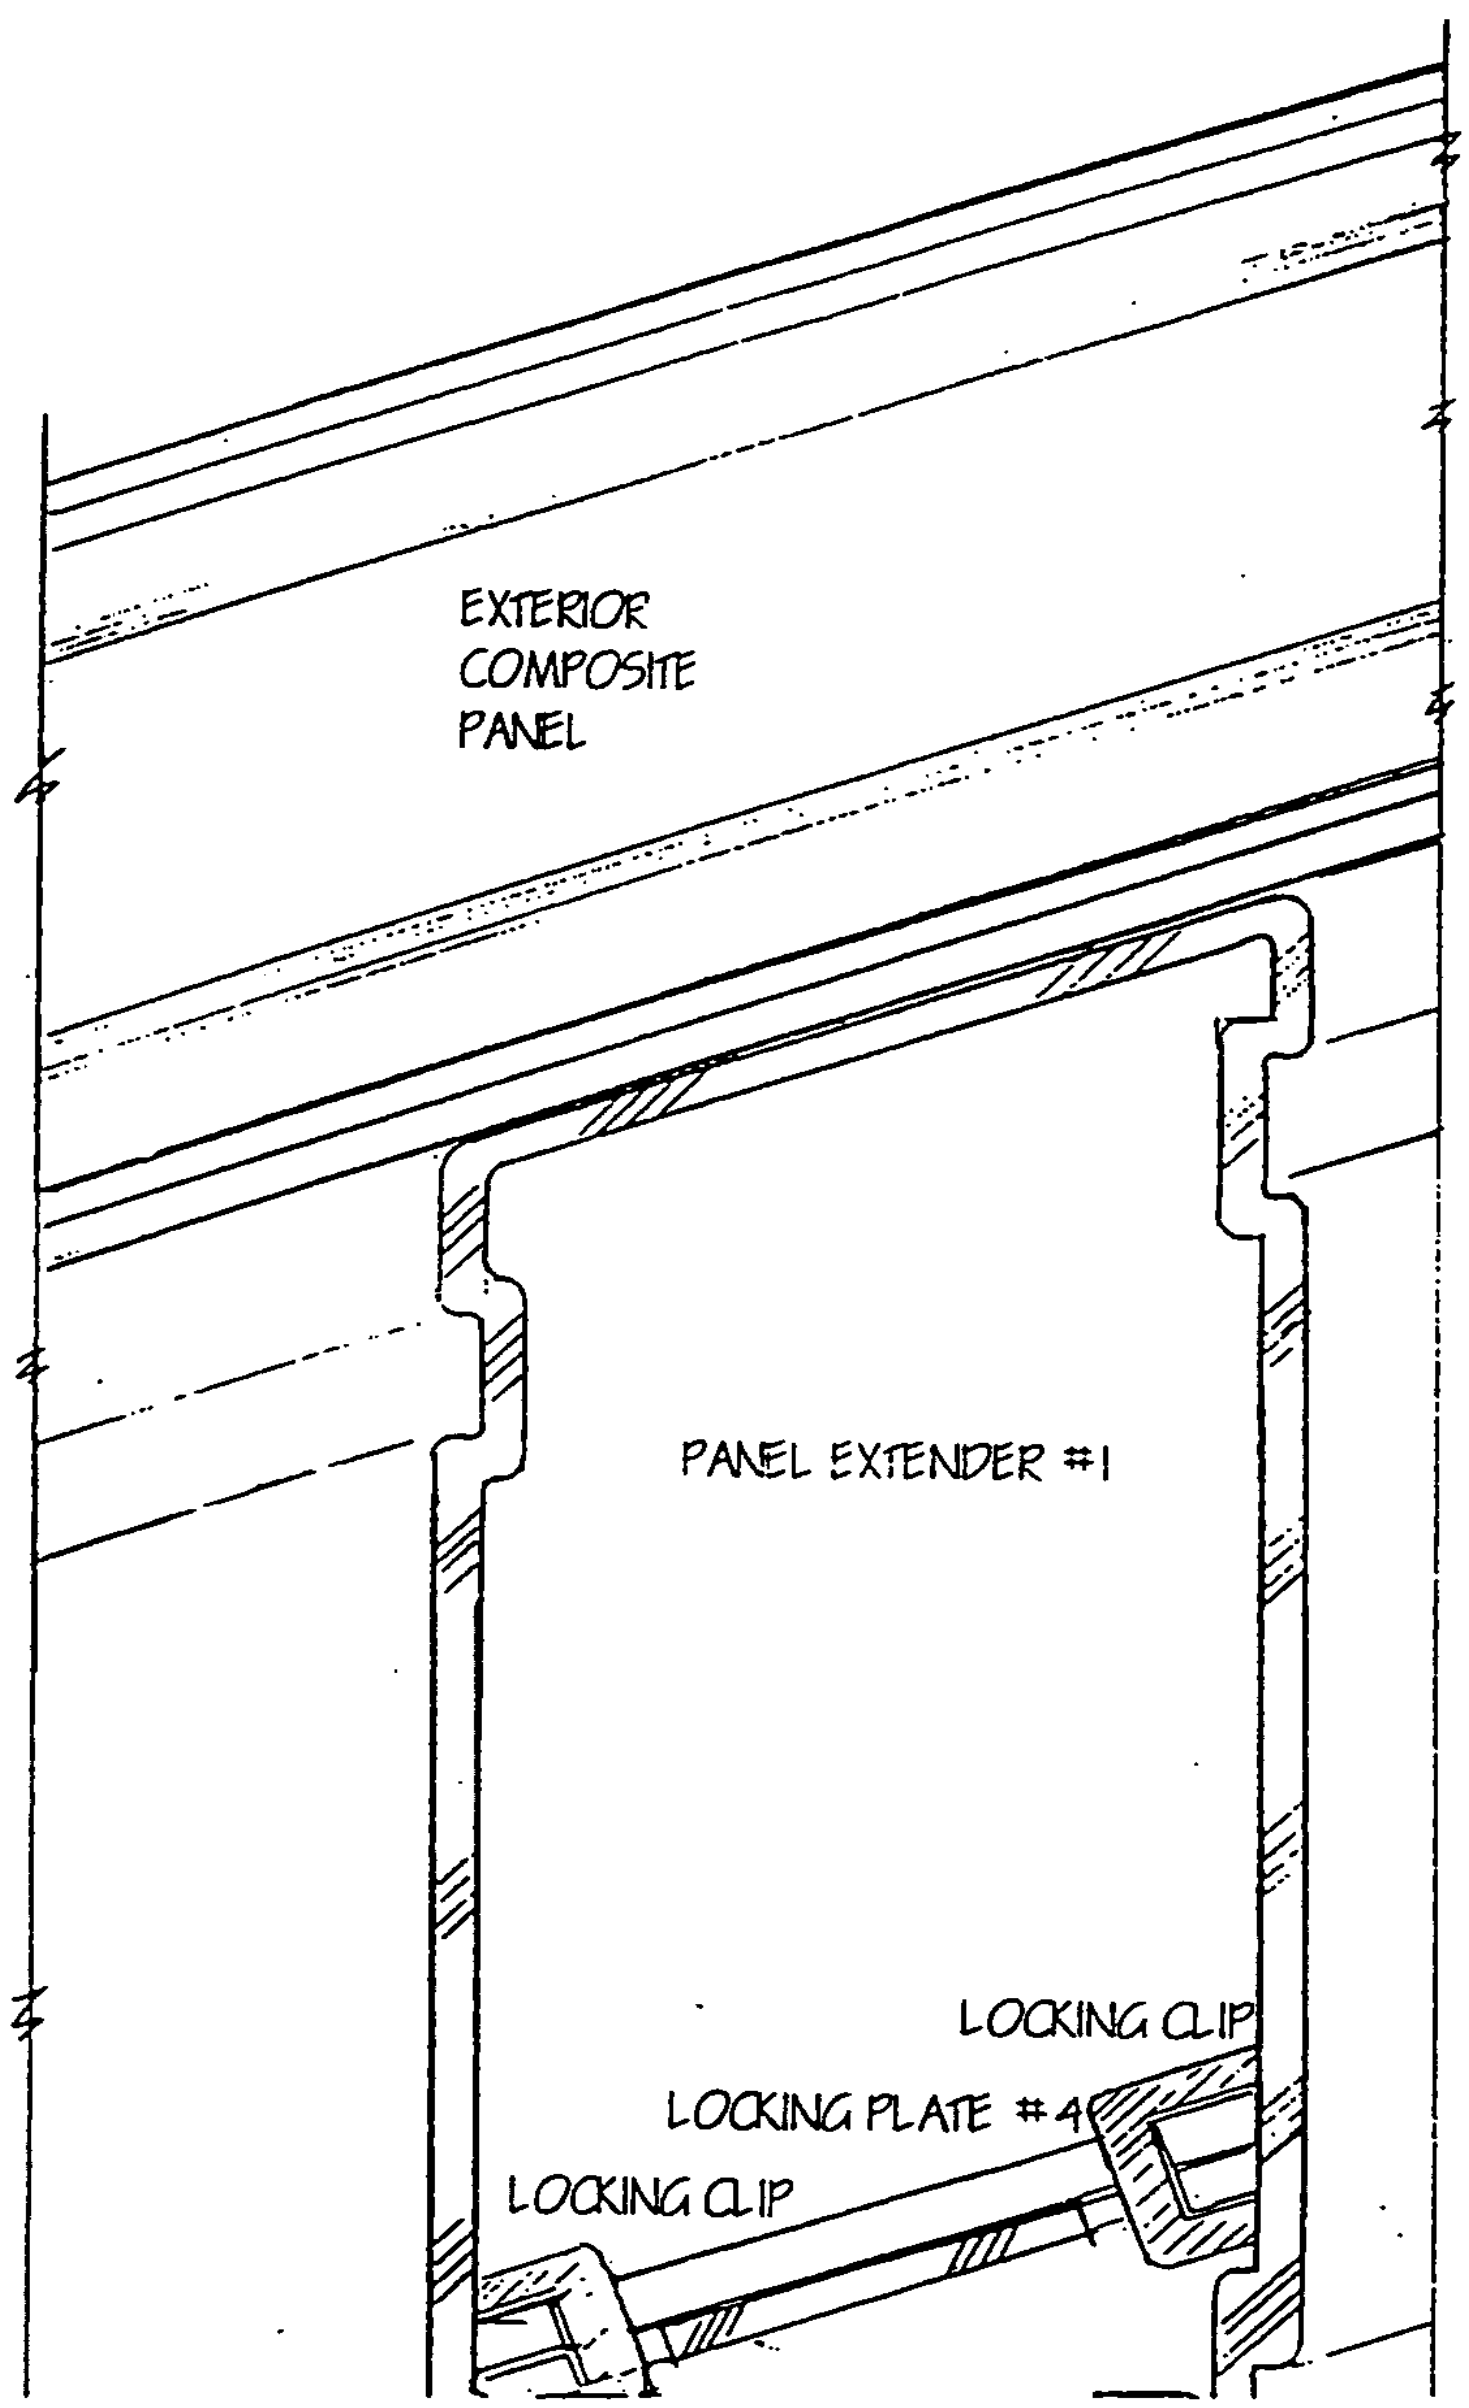
EXTERIOR
COMPOSITE
PANEL
PANEL EXTENDER #1
LOCKING CLIP
LOCKING PLATE #4
LOCKING CLIP

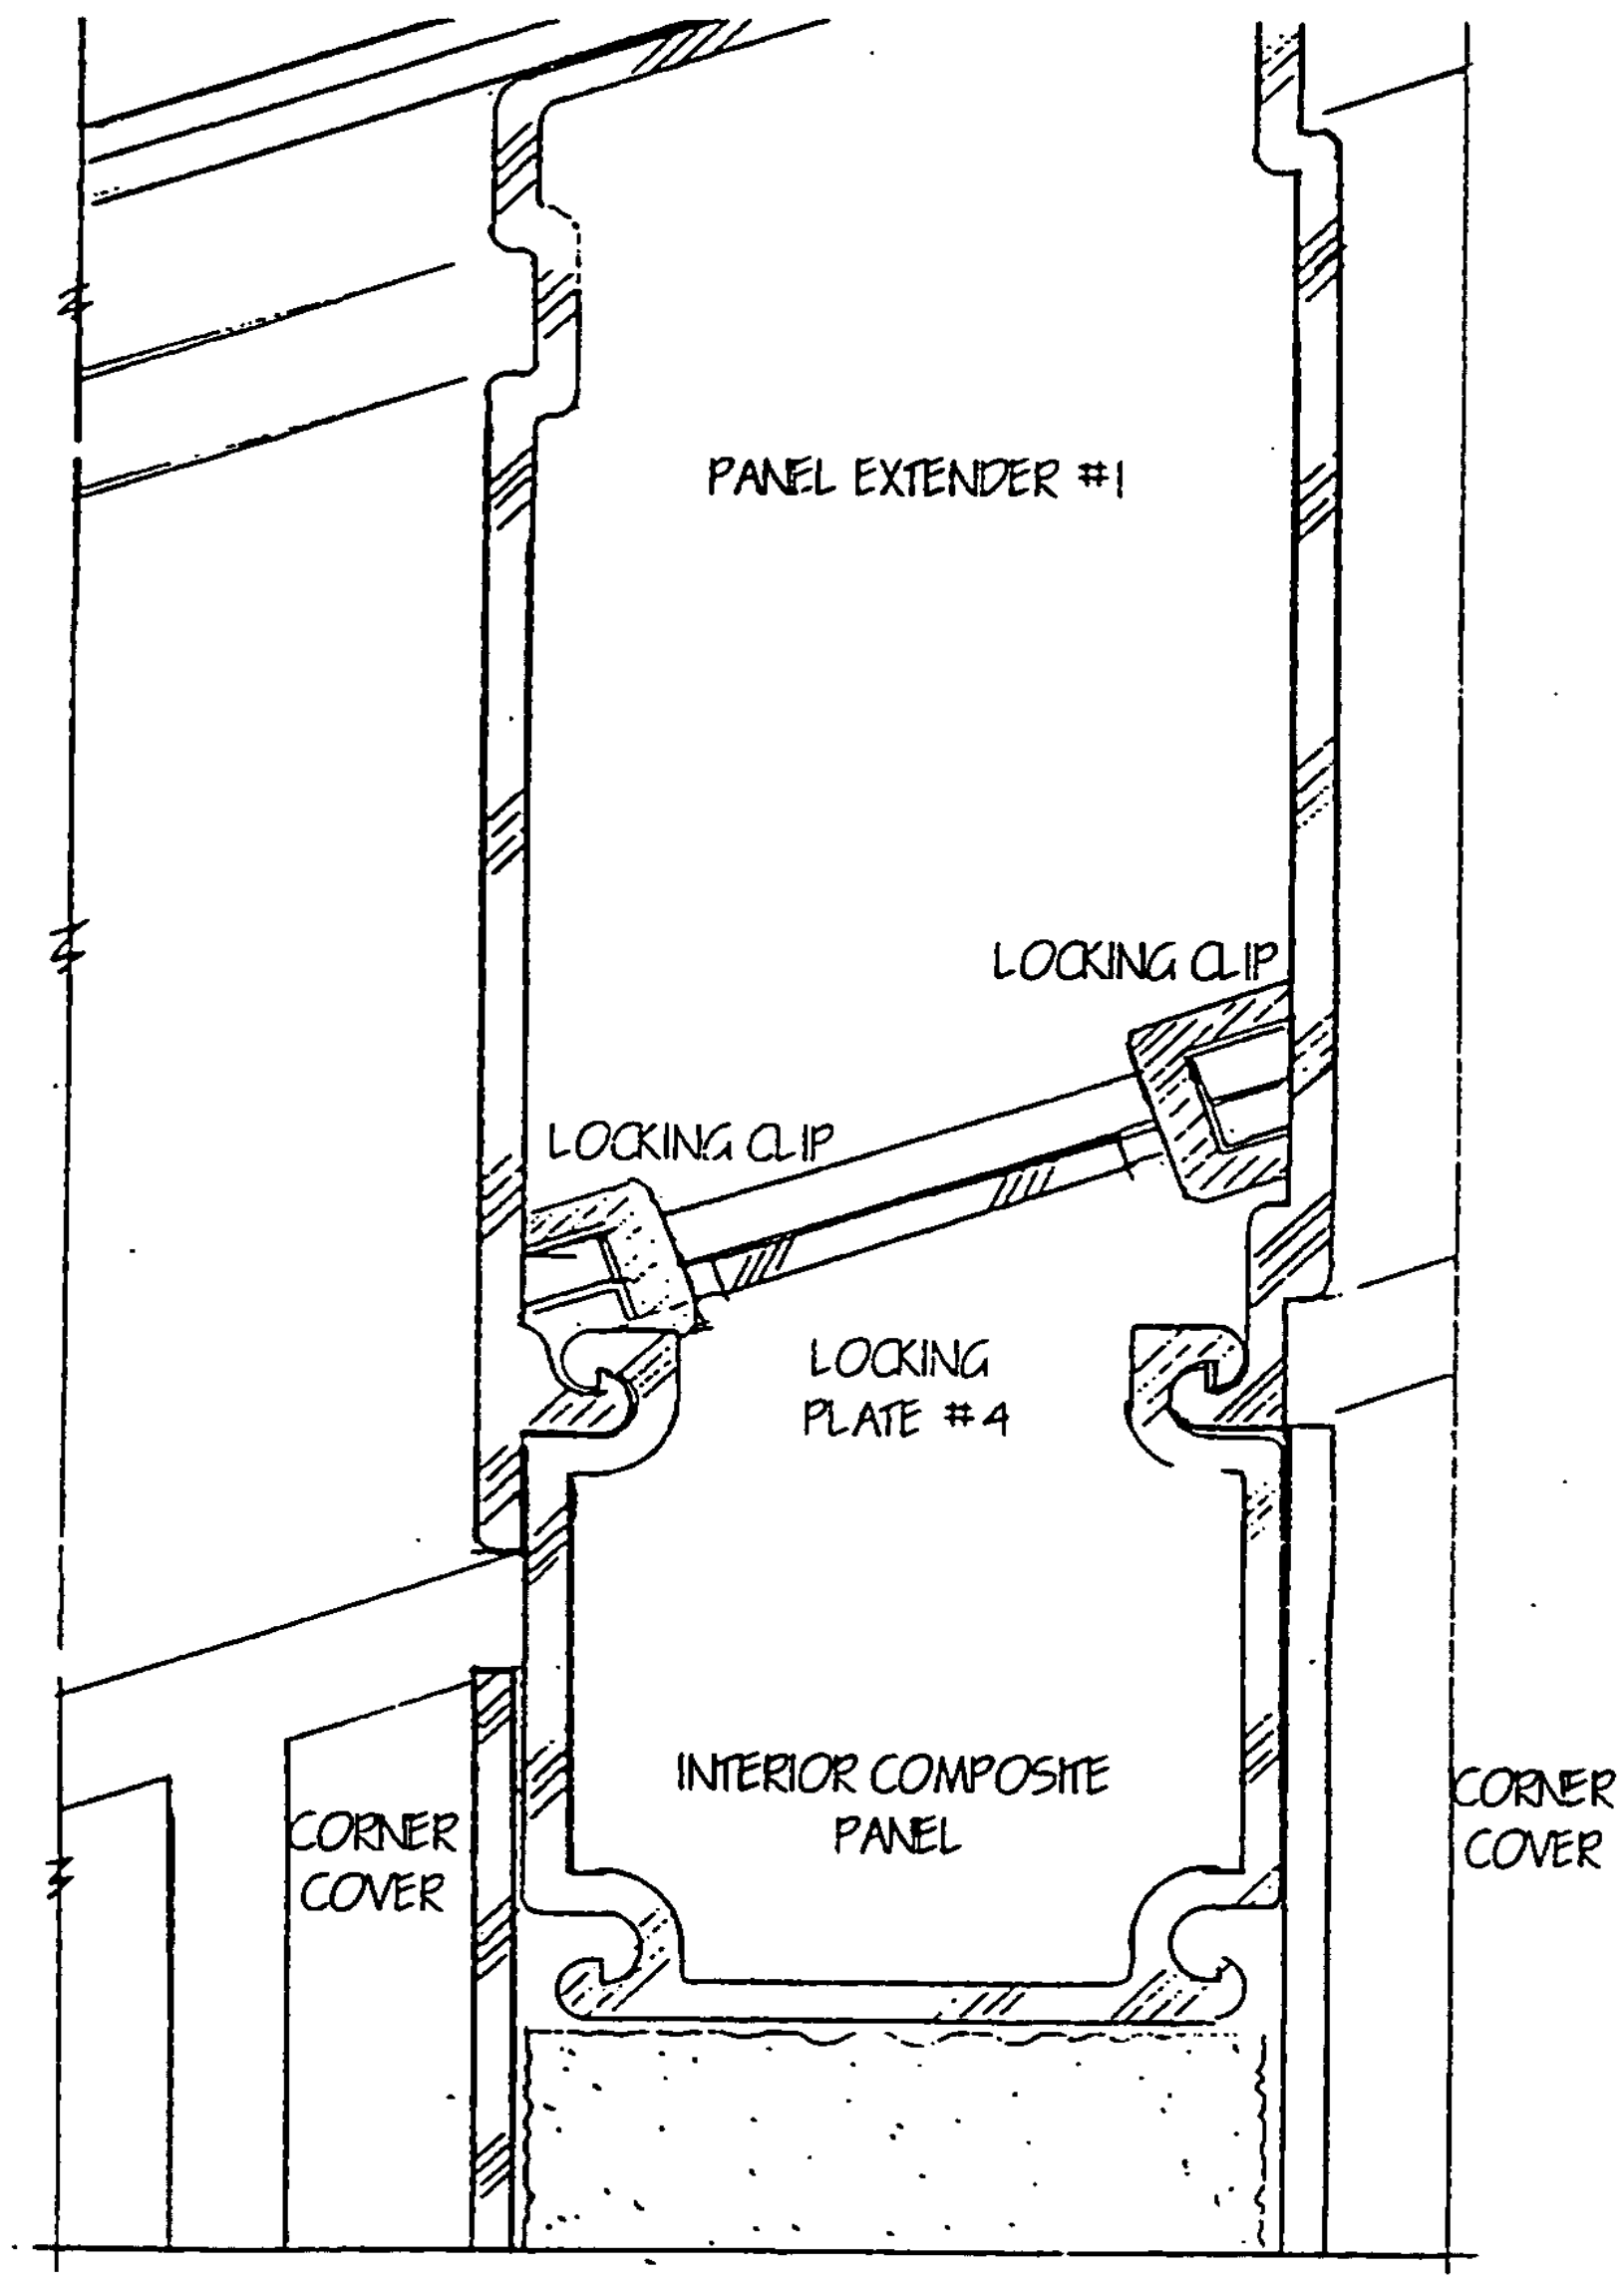
PANEL EXTENDER #1
LOCKING CLIP
LOCKING CLIP
LOCKING PLATE #4
INTERIOR COMPOSITE PANEL
CORNER COVER
CORNER COVER

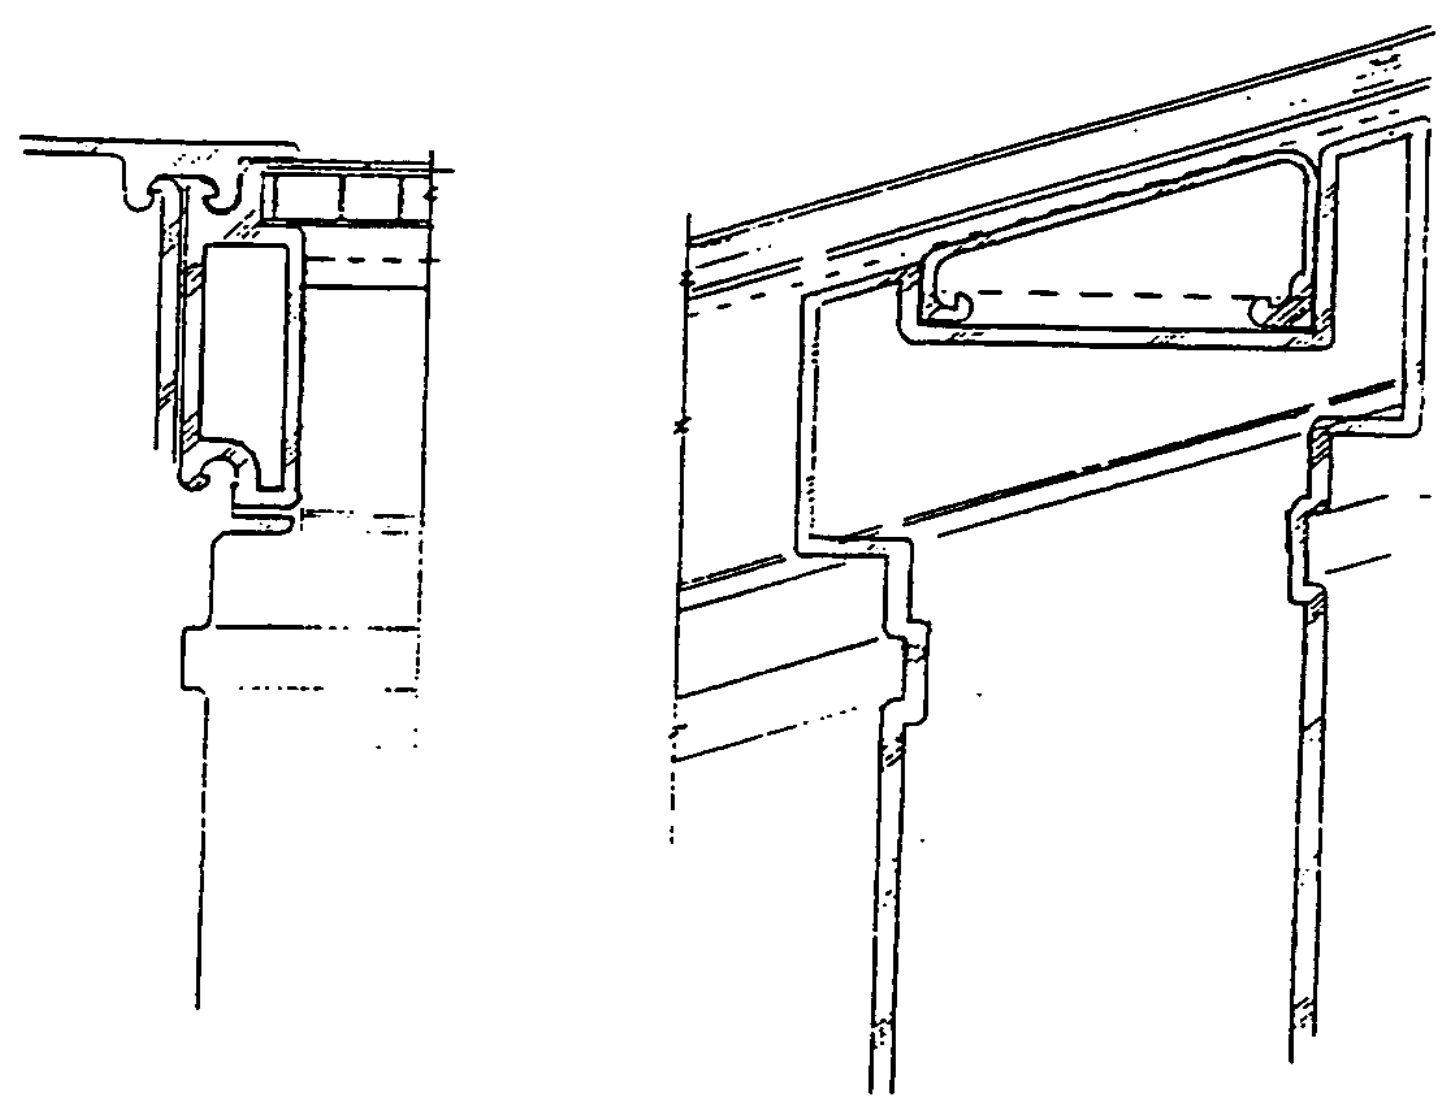

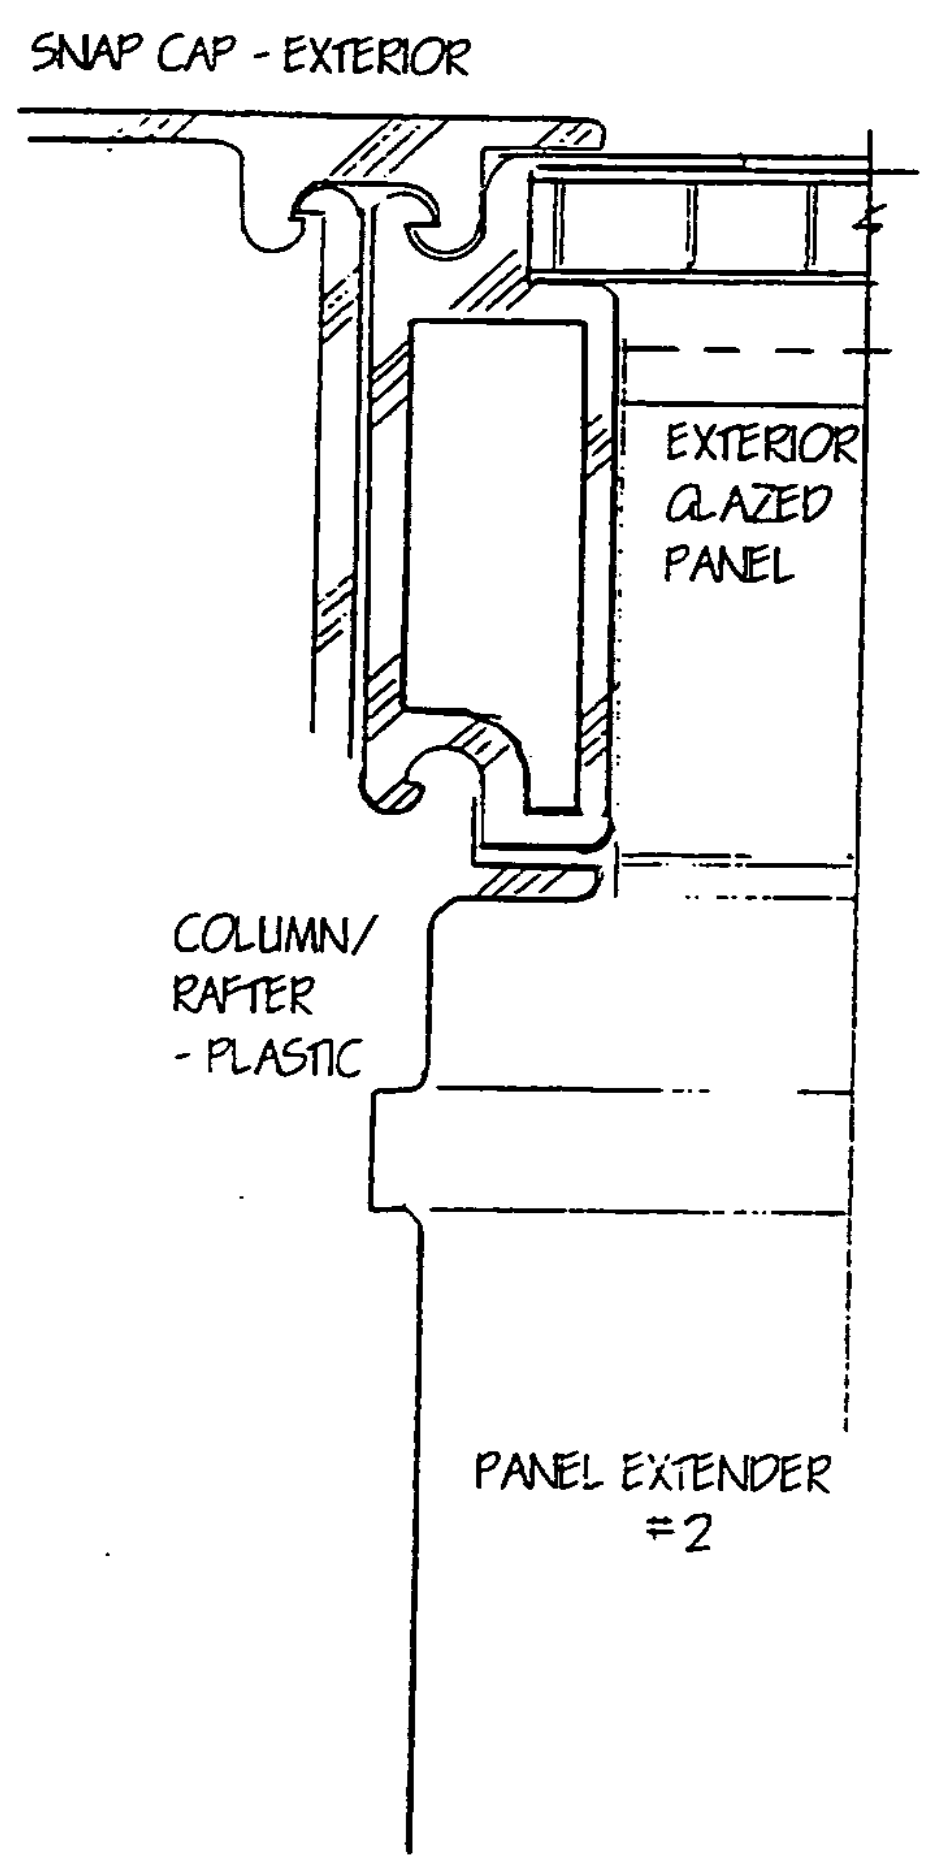
SNAP CAP - EXTERIOR
EXTERIOR GLAZED PANEL
COLUMN/ RAFTER - PLASTIC
PANEL EXTENDER #2

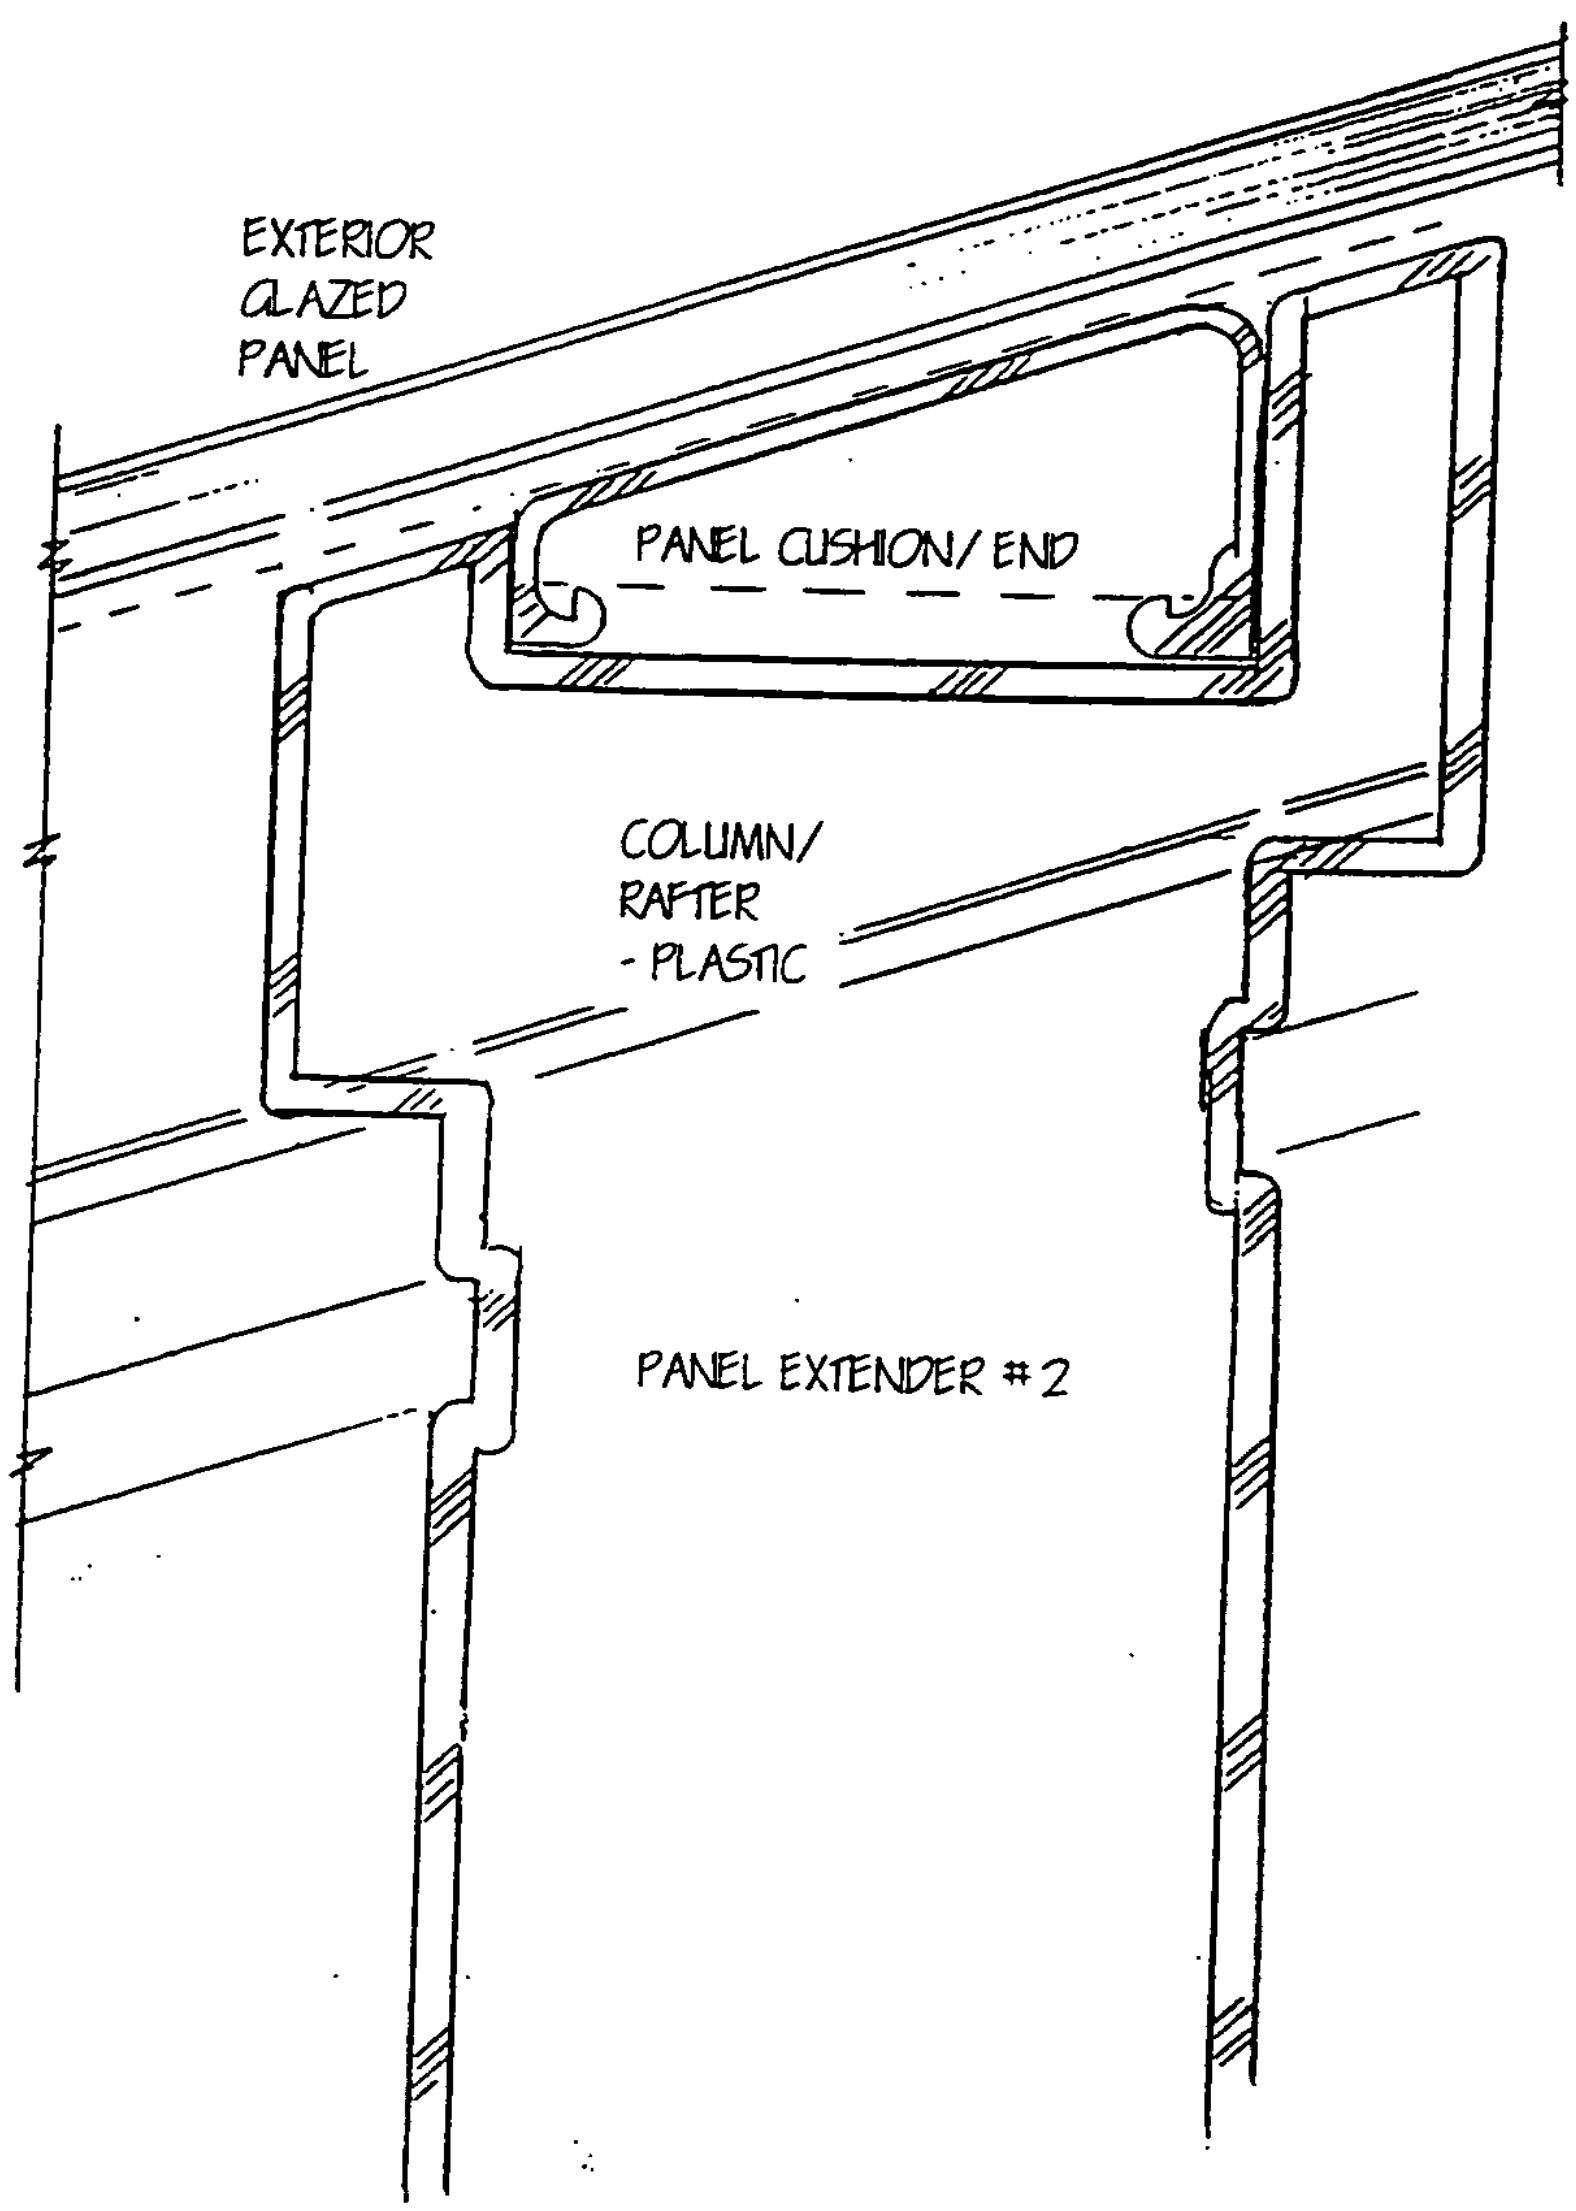
EXTERIOR
GLAZED
PANEL
PANEL CUSHION/ END
COLUMN/
RAFTER
- PLASTIC
PANEL EXTENDER # 2

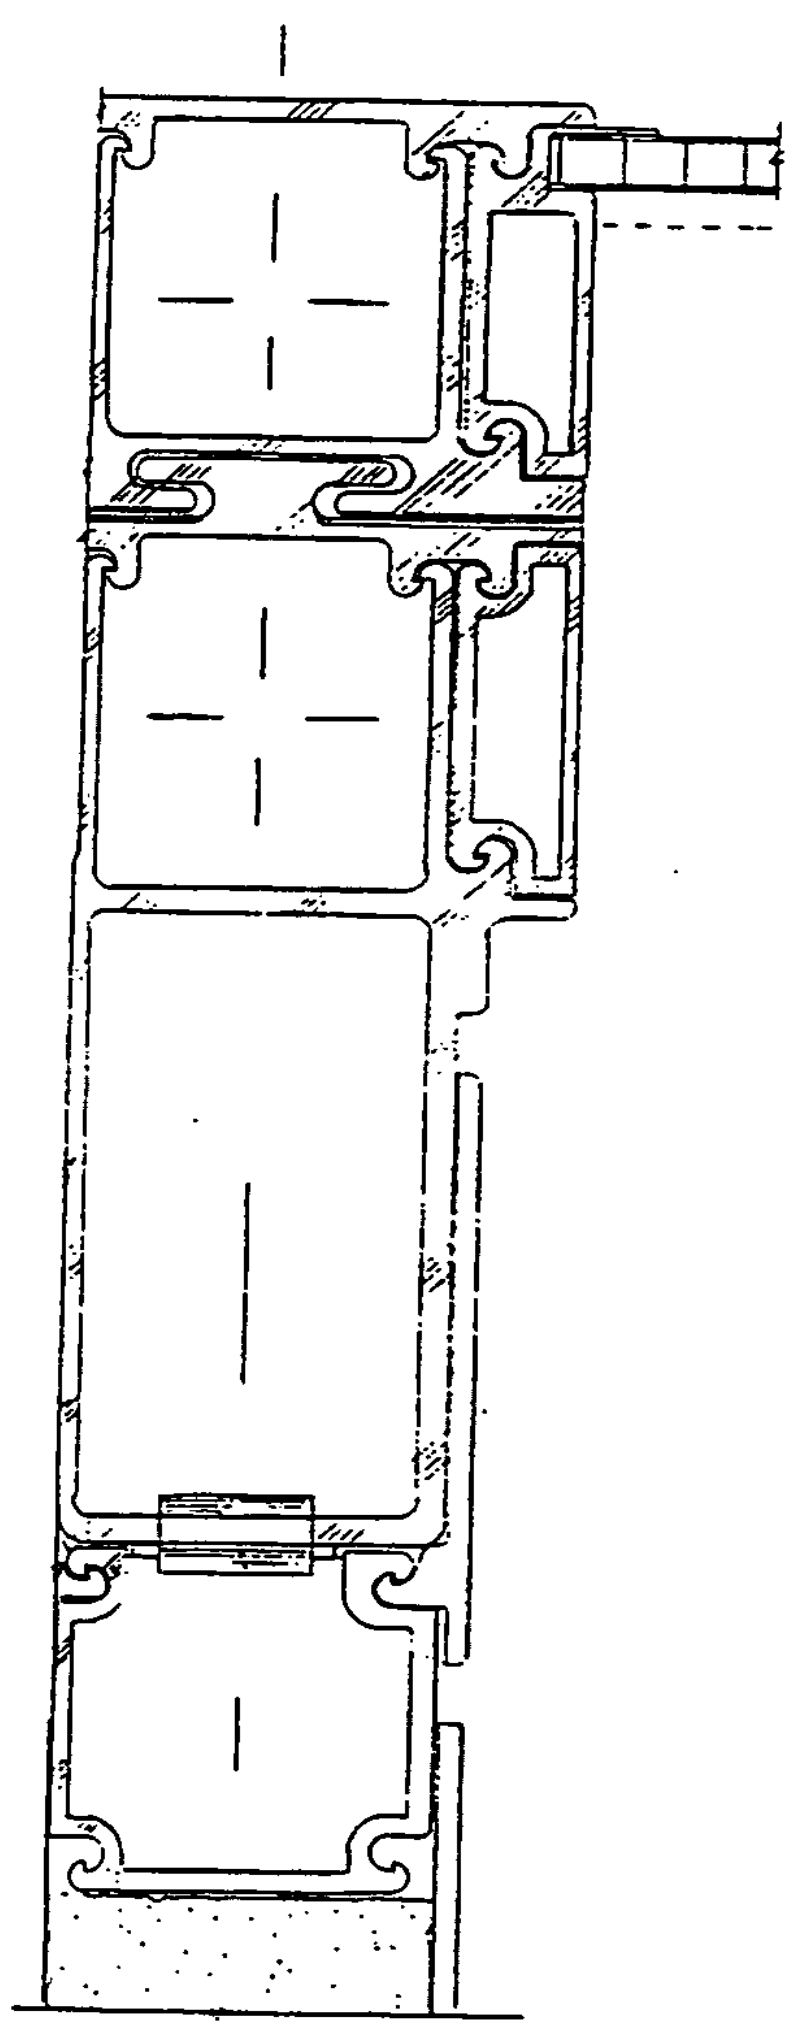

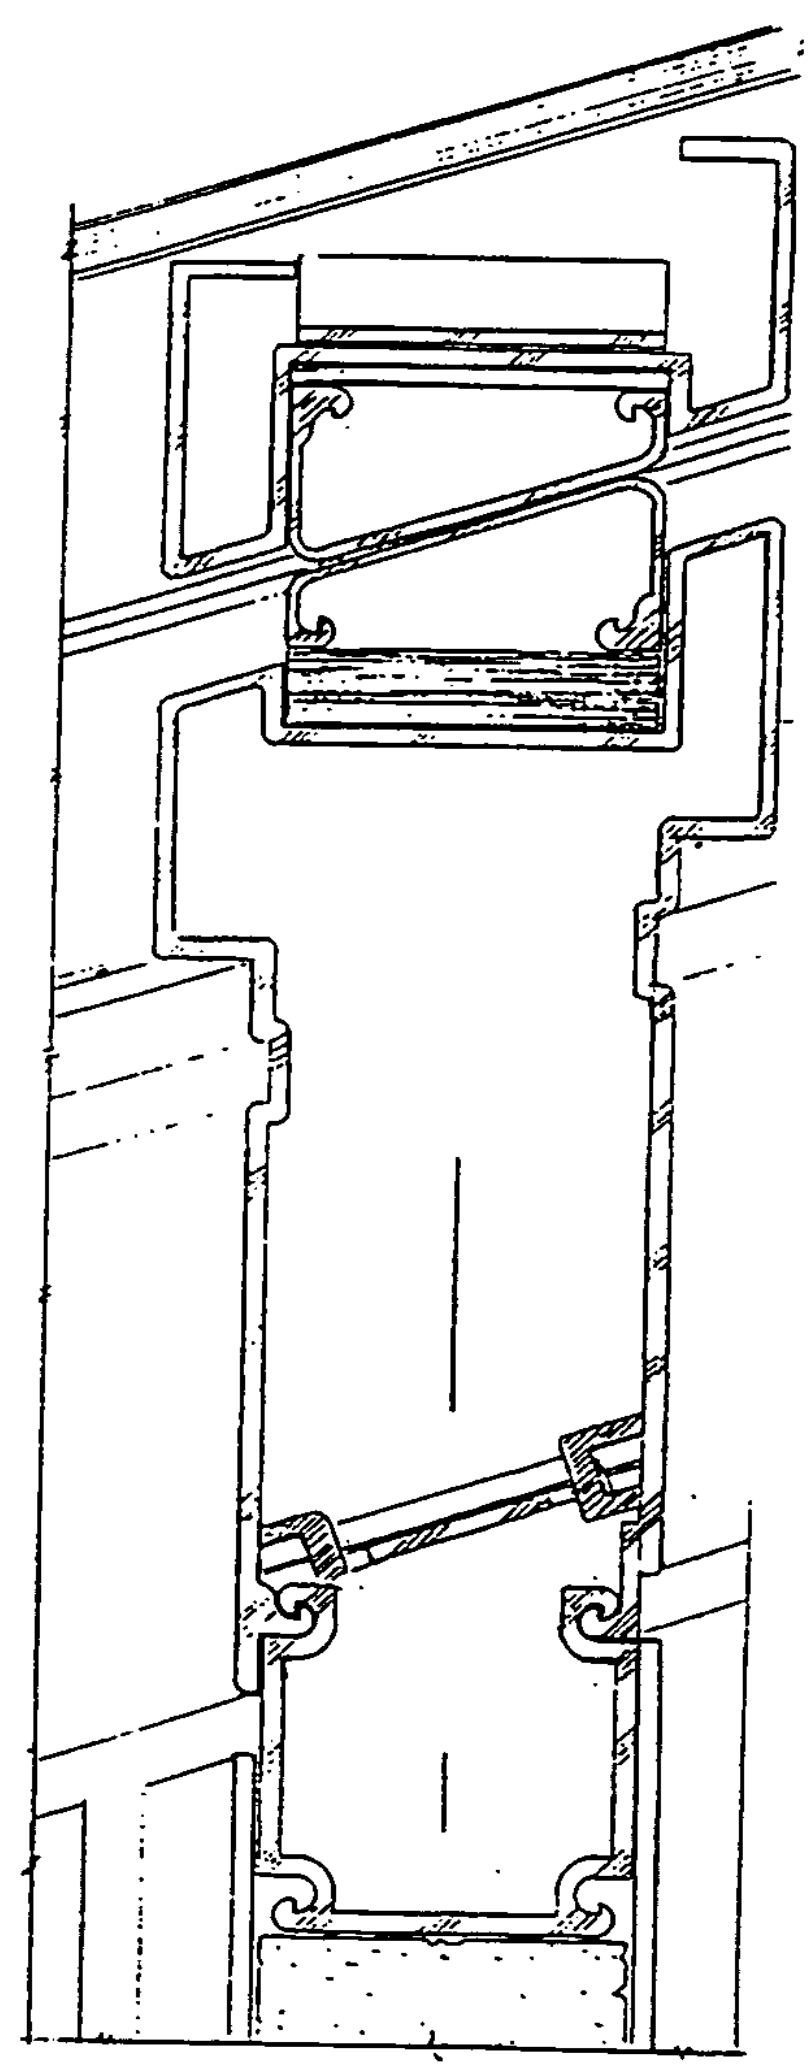

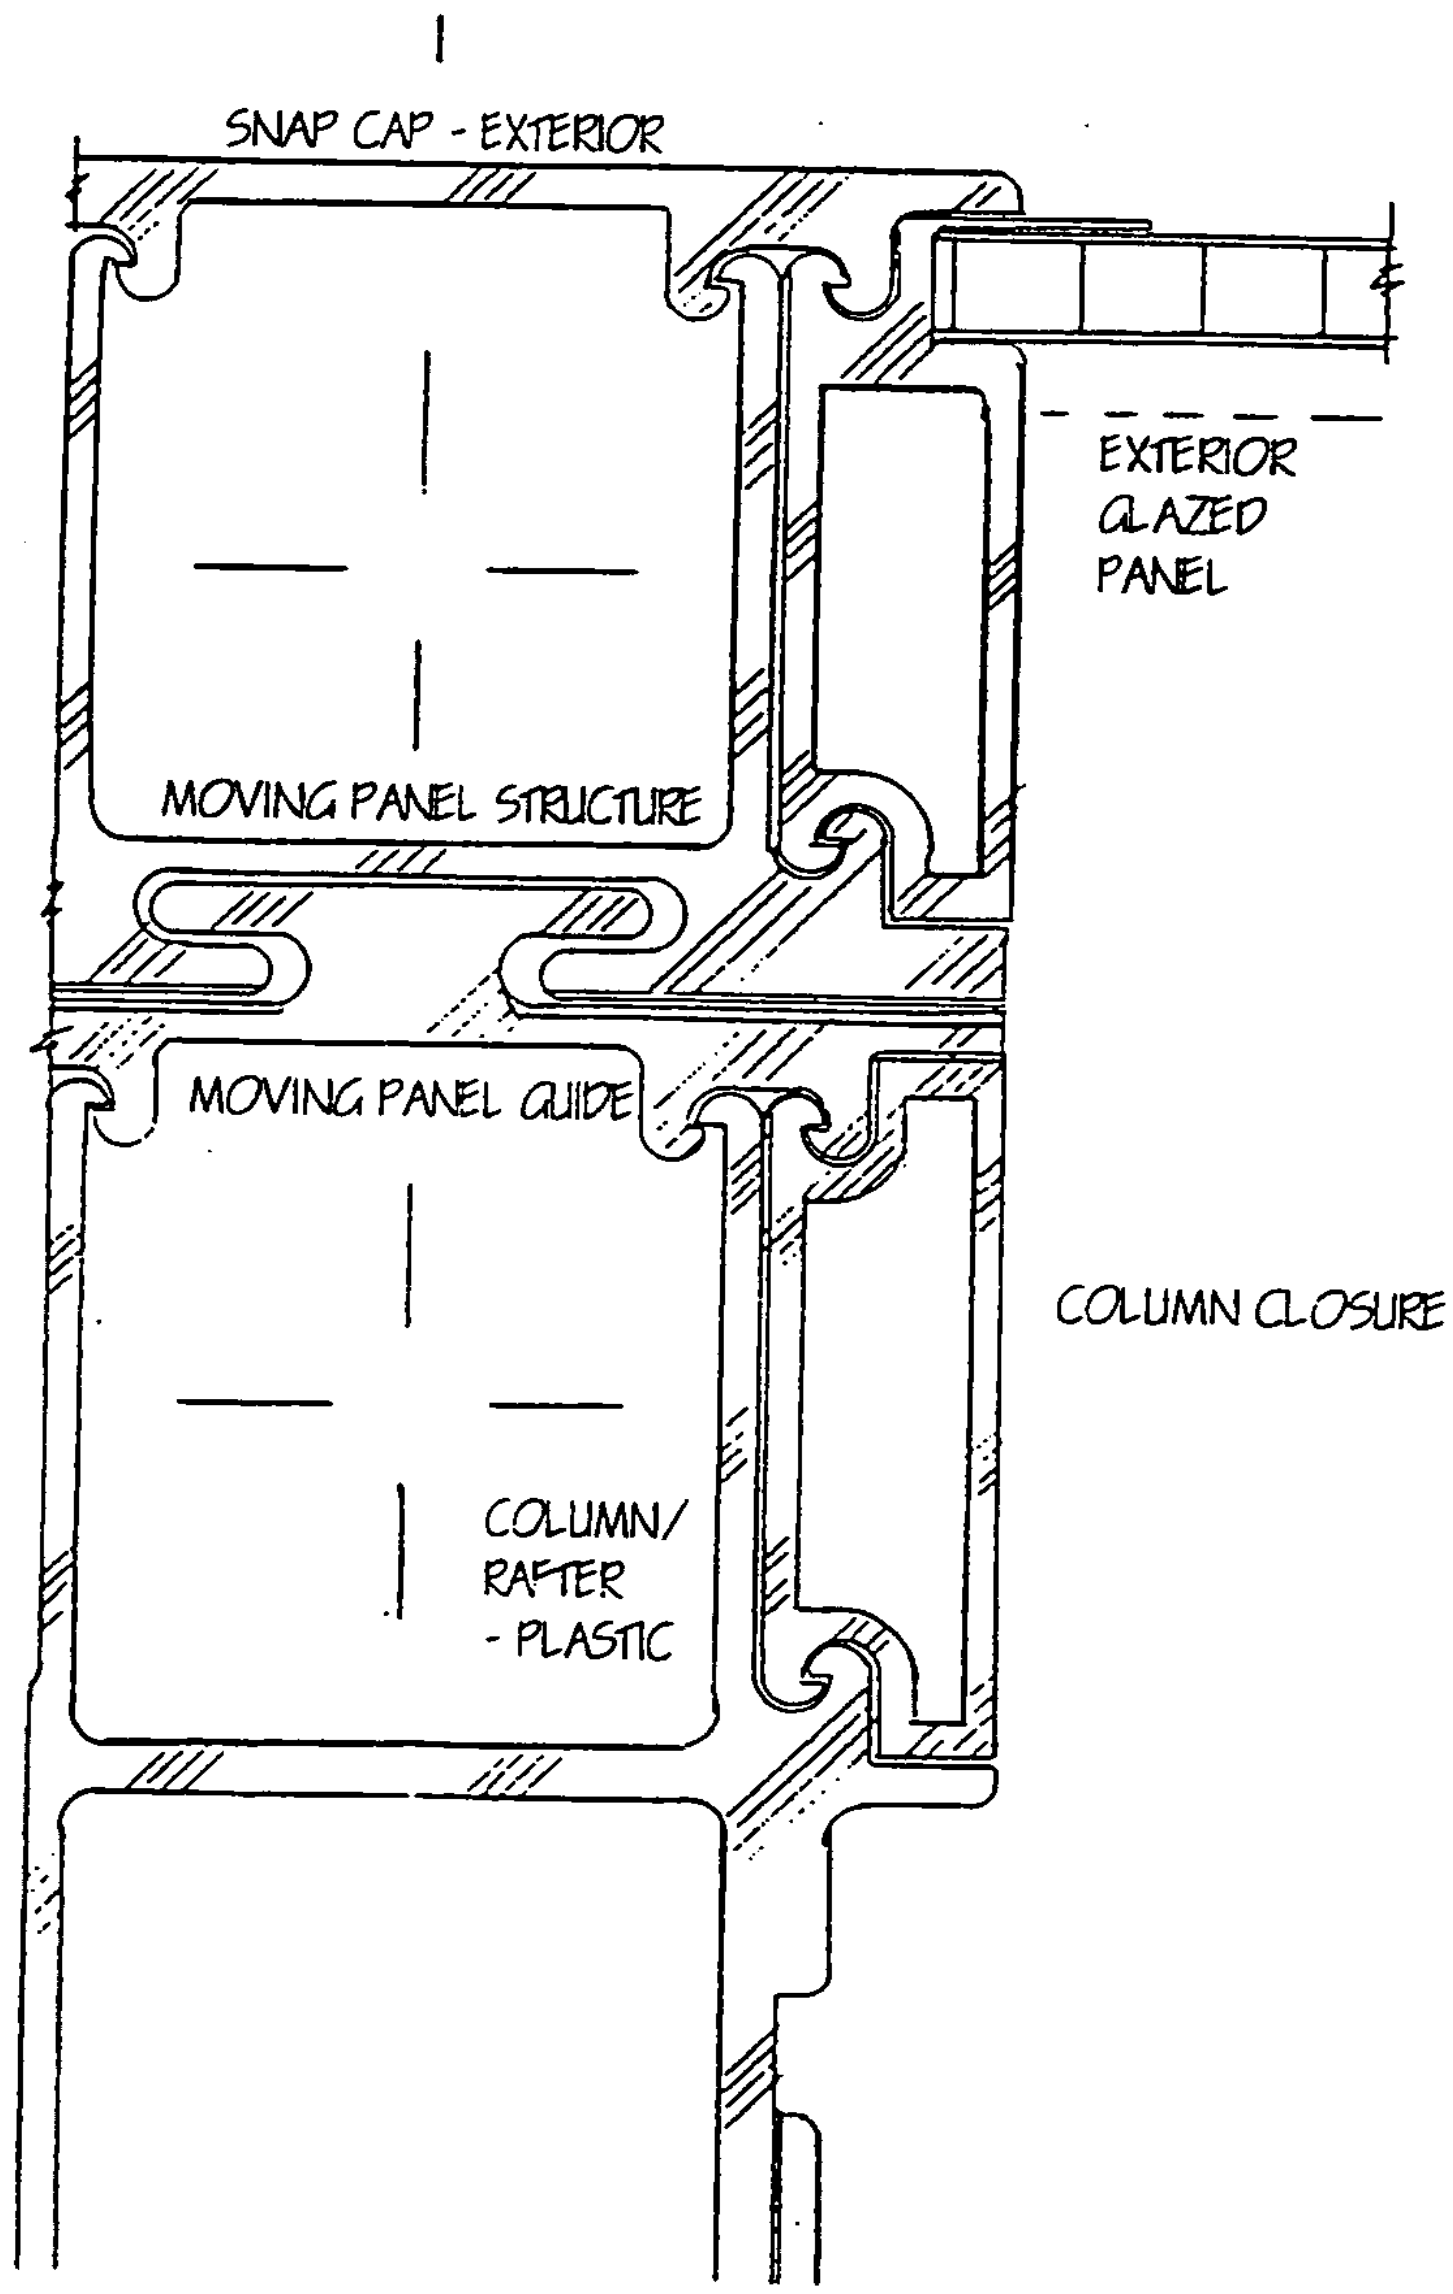
SNAP CAP - EXTERIOR
EXTERIOR
GLAZED
PANEL
MOVING PANEL STRUCTURE
MOVING PANEL GUIDE
COLUMN CLOSURE
COLUMN/
RAFTER
- PLASTIC

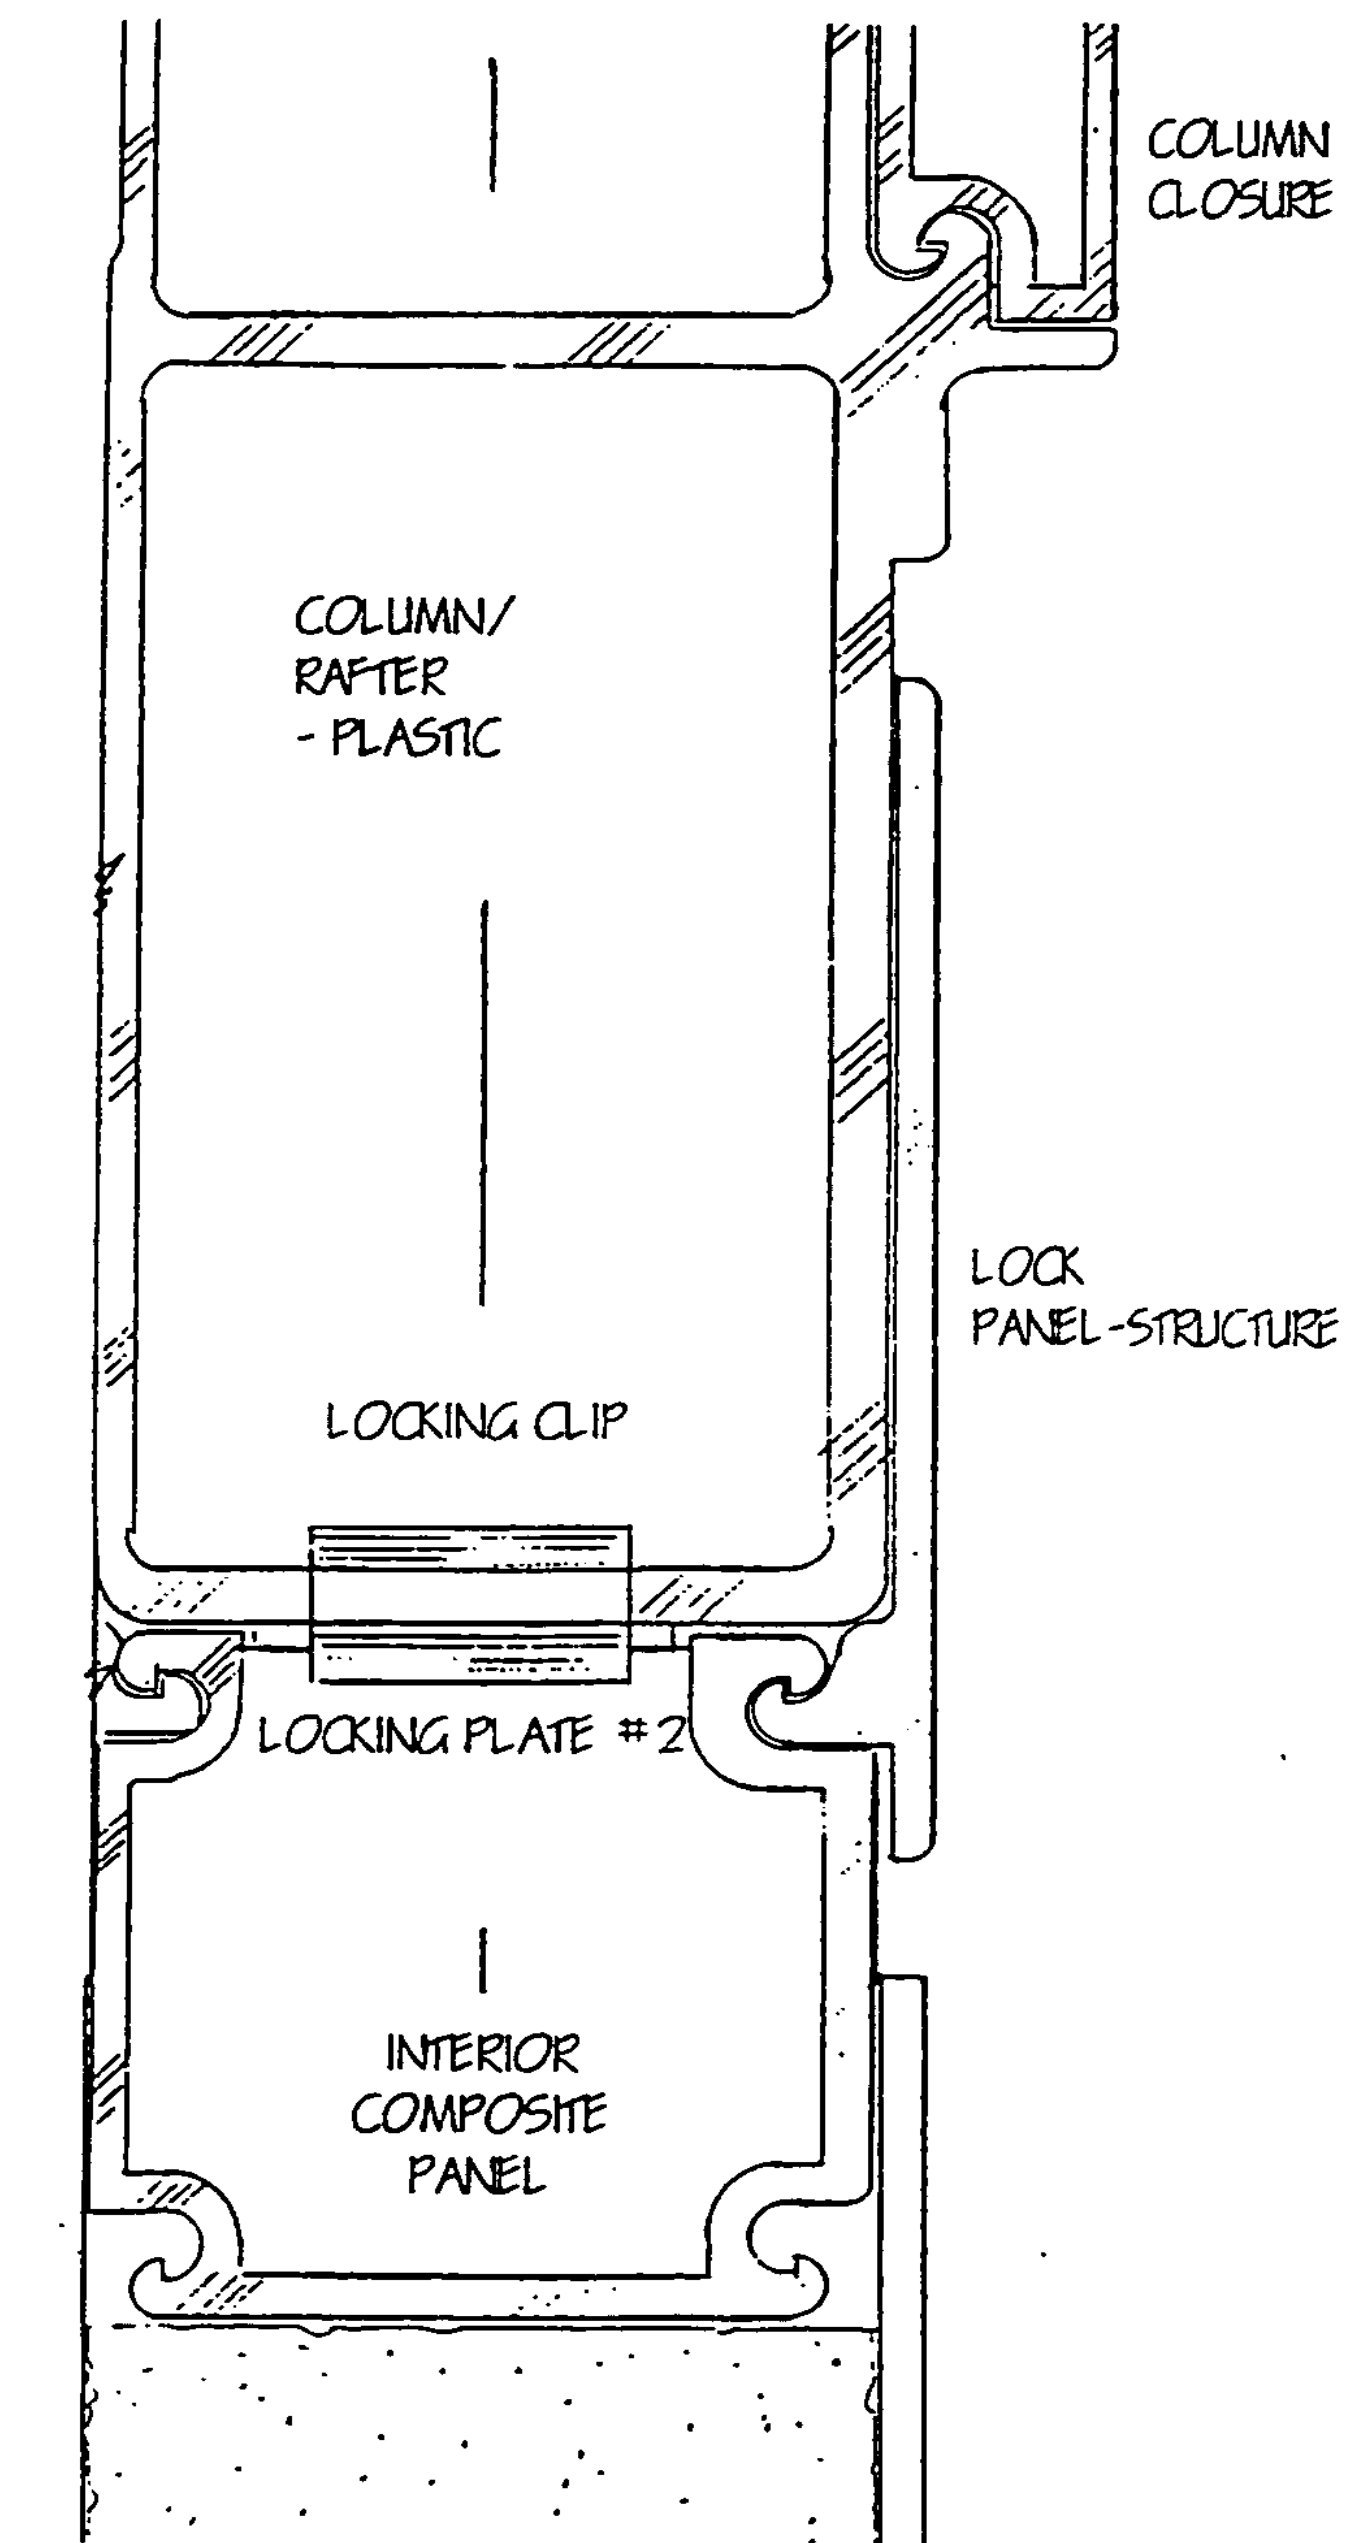
COLUMN
CLOSURE
COLUMN/
RAFTER
- PLASTIC
LOCK
PANEL-STRUCTURE
LOCKING CLIP
LOCKING PLATE #2
INTERIOR
COMPOSITE
PANEL

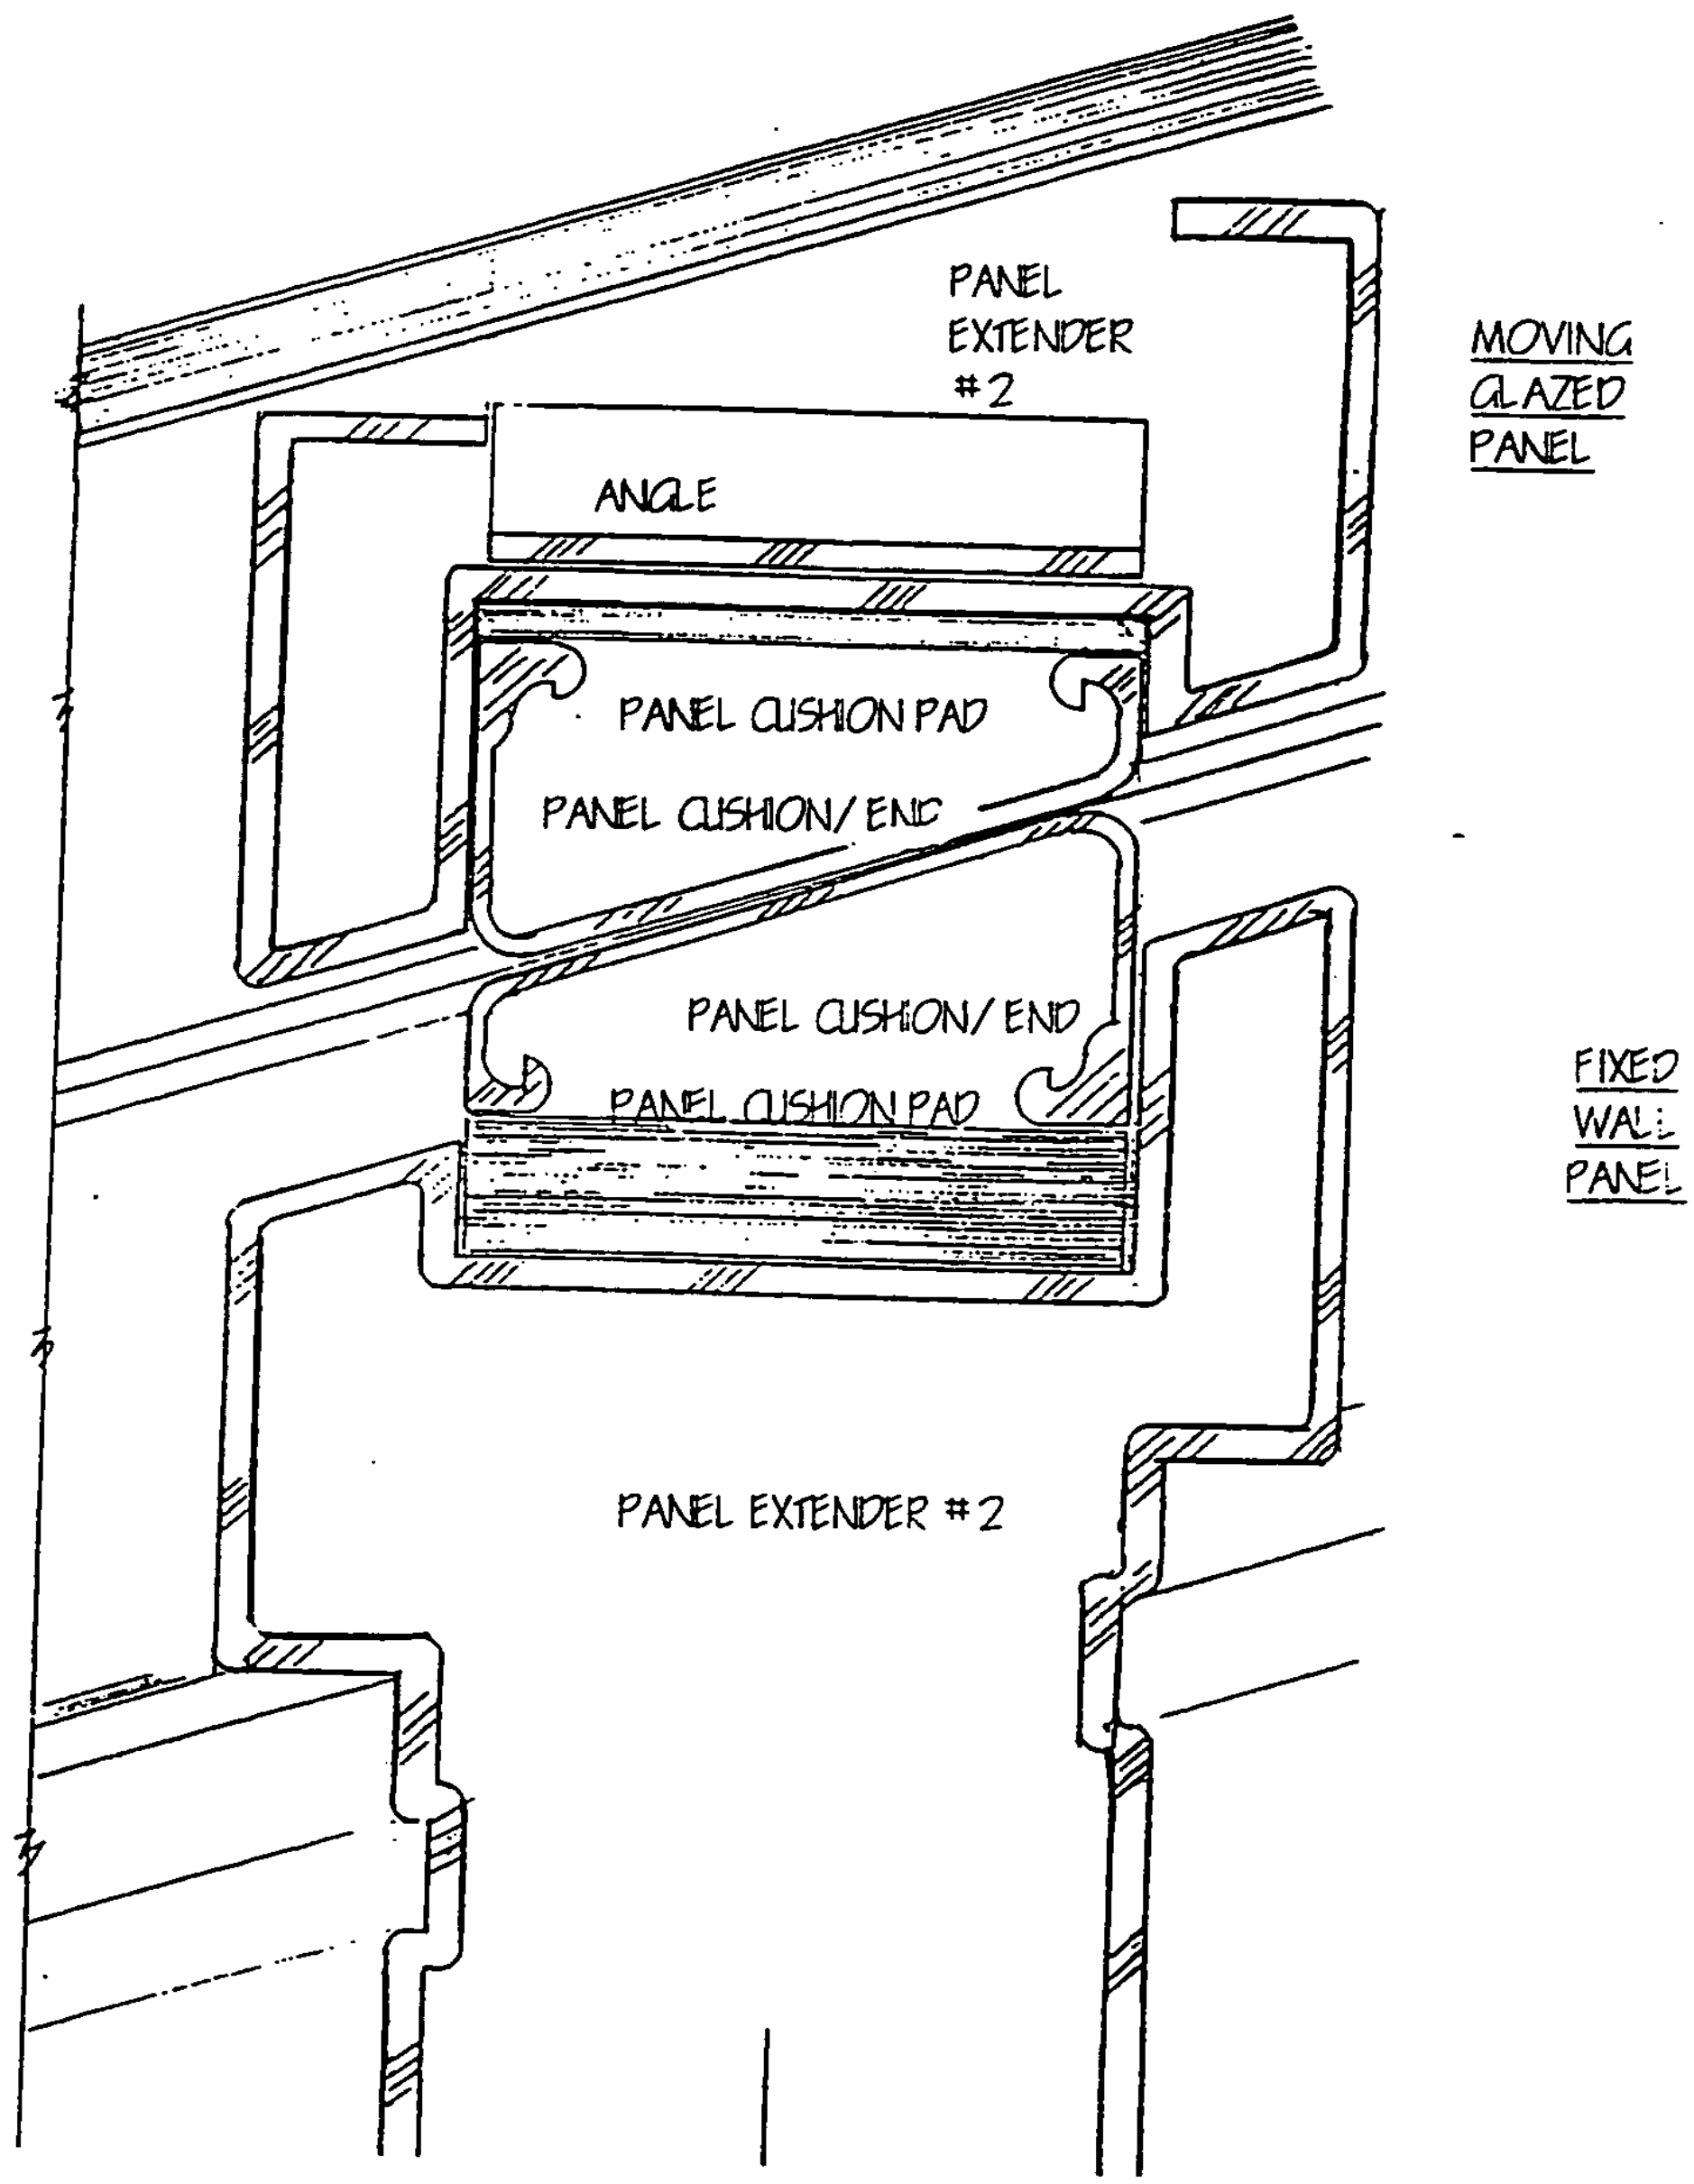
PANEL EXTENDER #2
MOVING GLAZED PANEL
ANGLE
PANEL CUSHION PAD
PANEL CUSHION/ END
PANEL CUSHION/ END
PANEL CUSHION PAD
FIXED WALL PANEL
PANEL EXTENDER #2

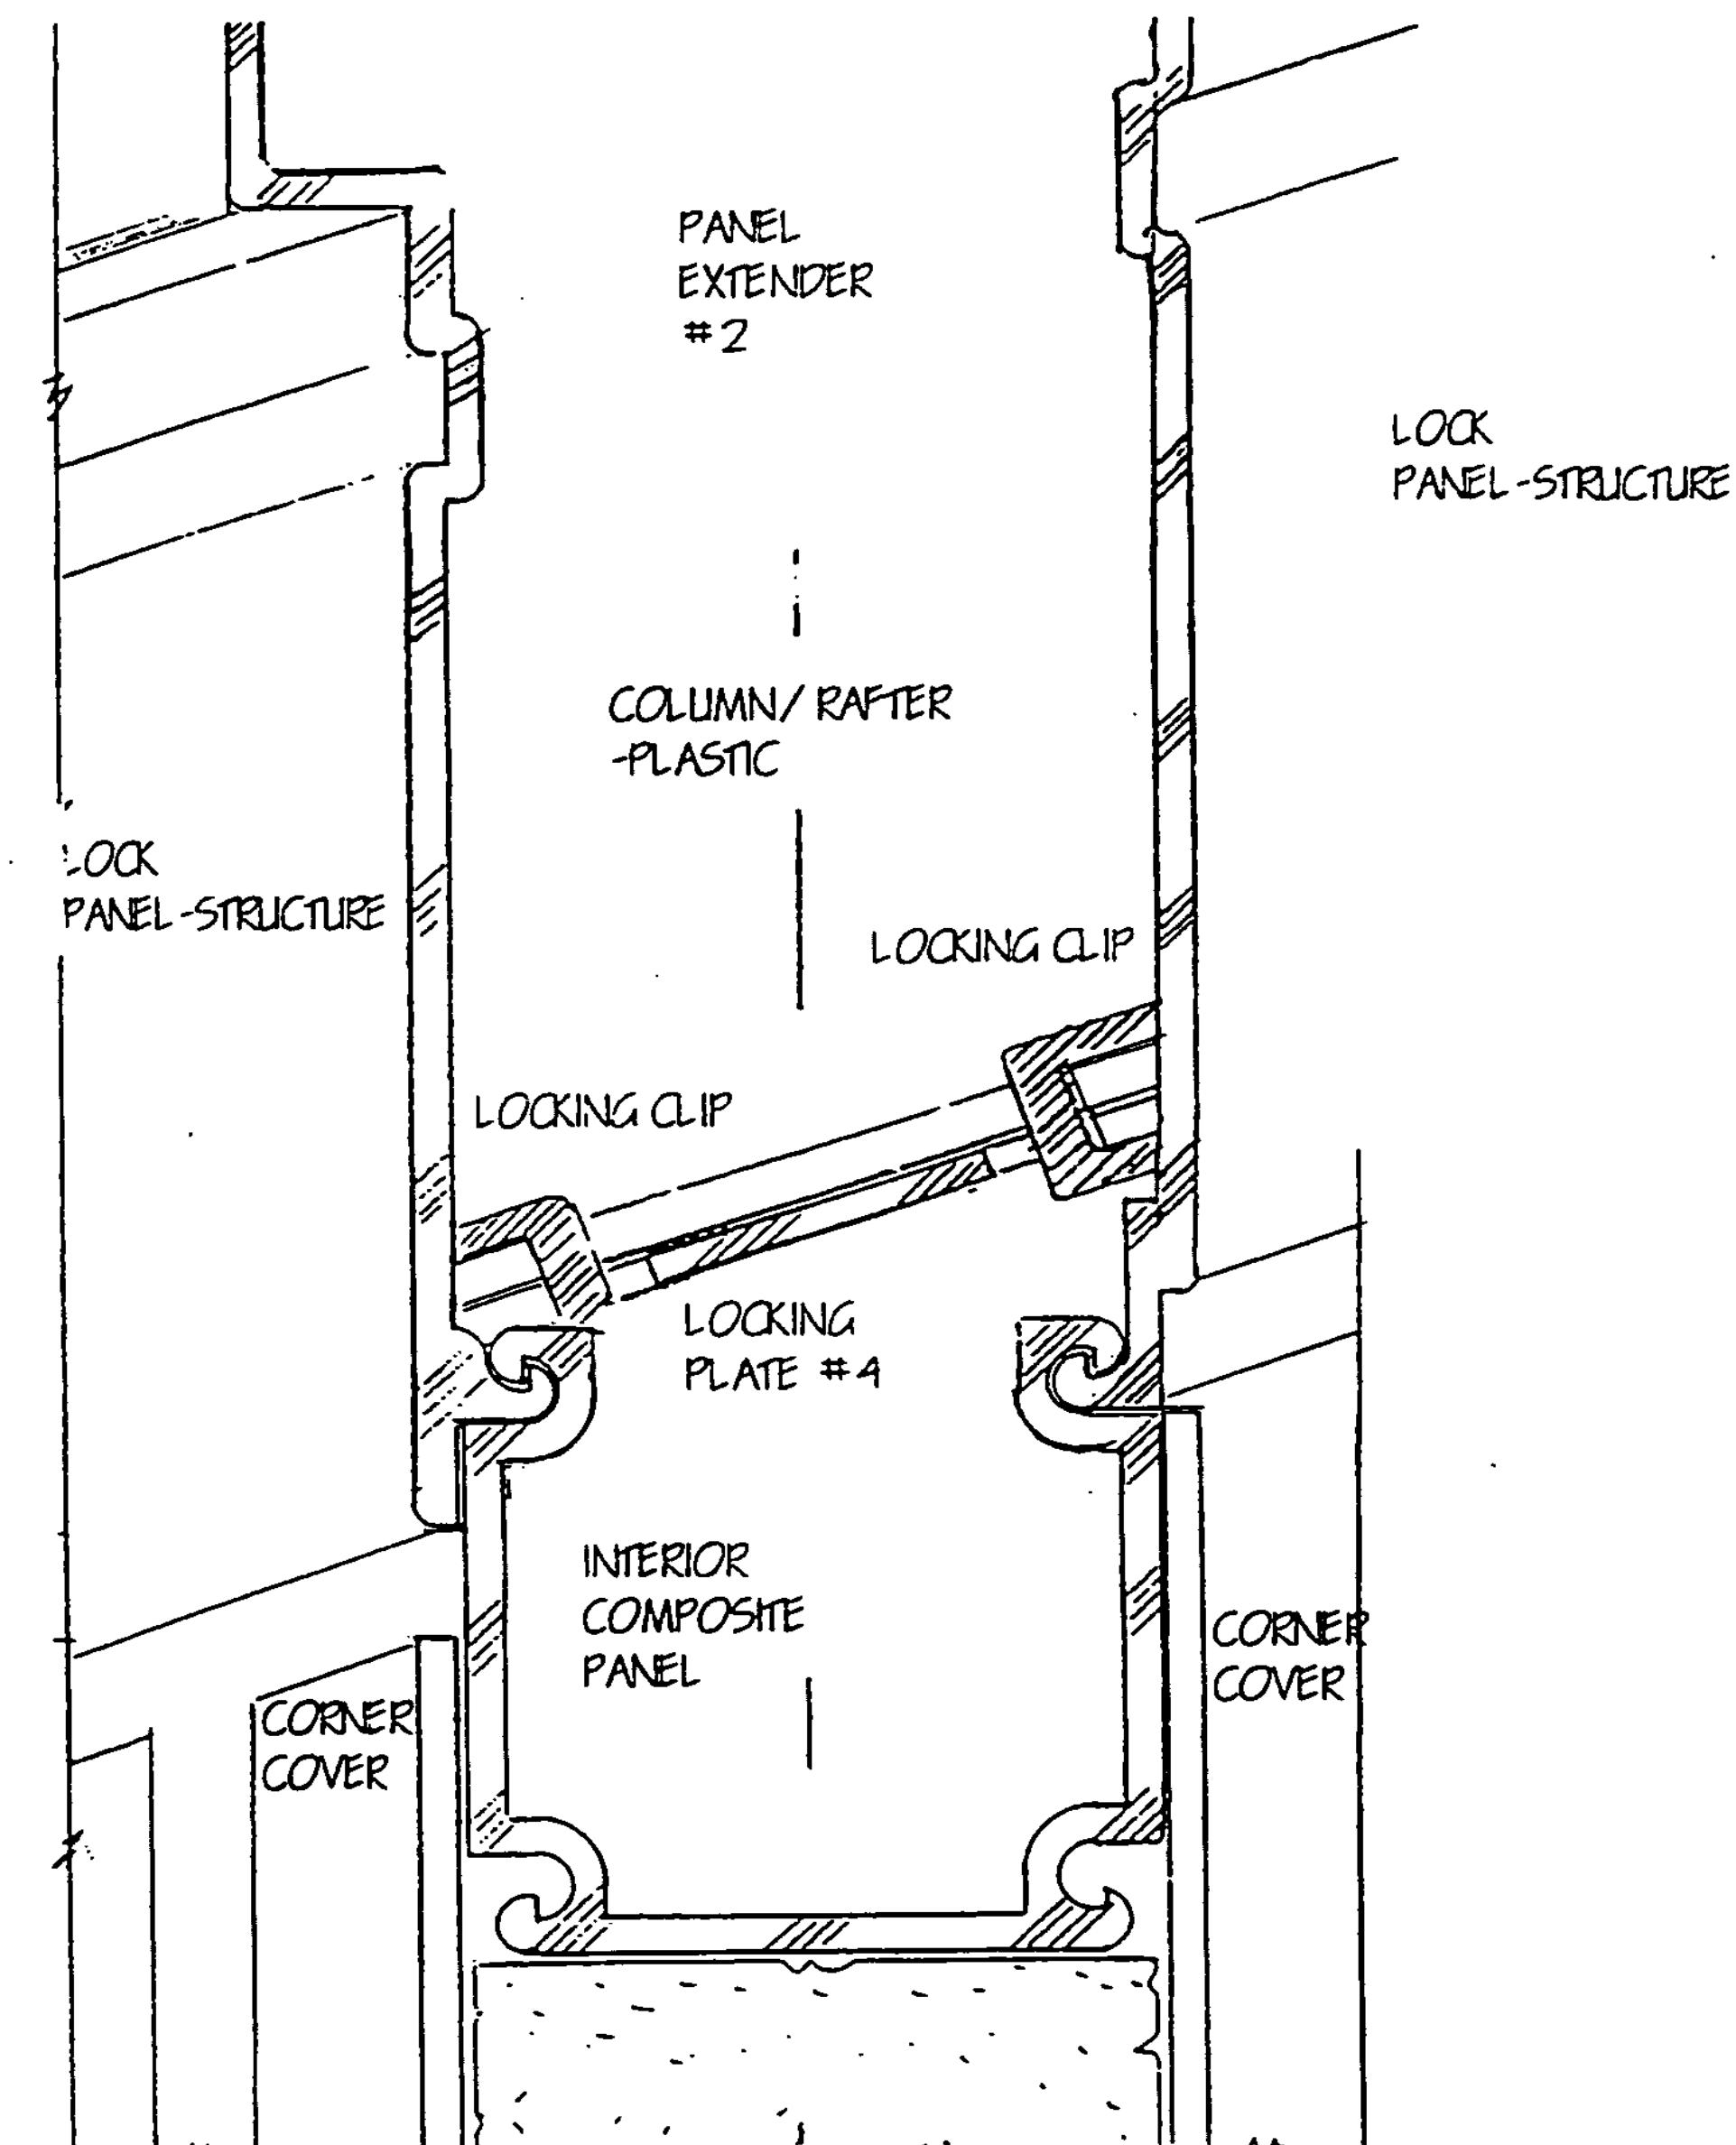
PANEL
EXTENDER
#2
LOCK
PANEL-STRUCTURE
COLUMN/ RAFTER
-PLASTIC
LOCK
PANEL-STRUCTURE
LOCKING CLIP
LOCKING CLIP
LOCKING
PLATE #4
INTERIOR
COMPOSITE
PANEL
CORNER
COVER
CORNER
COVER

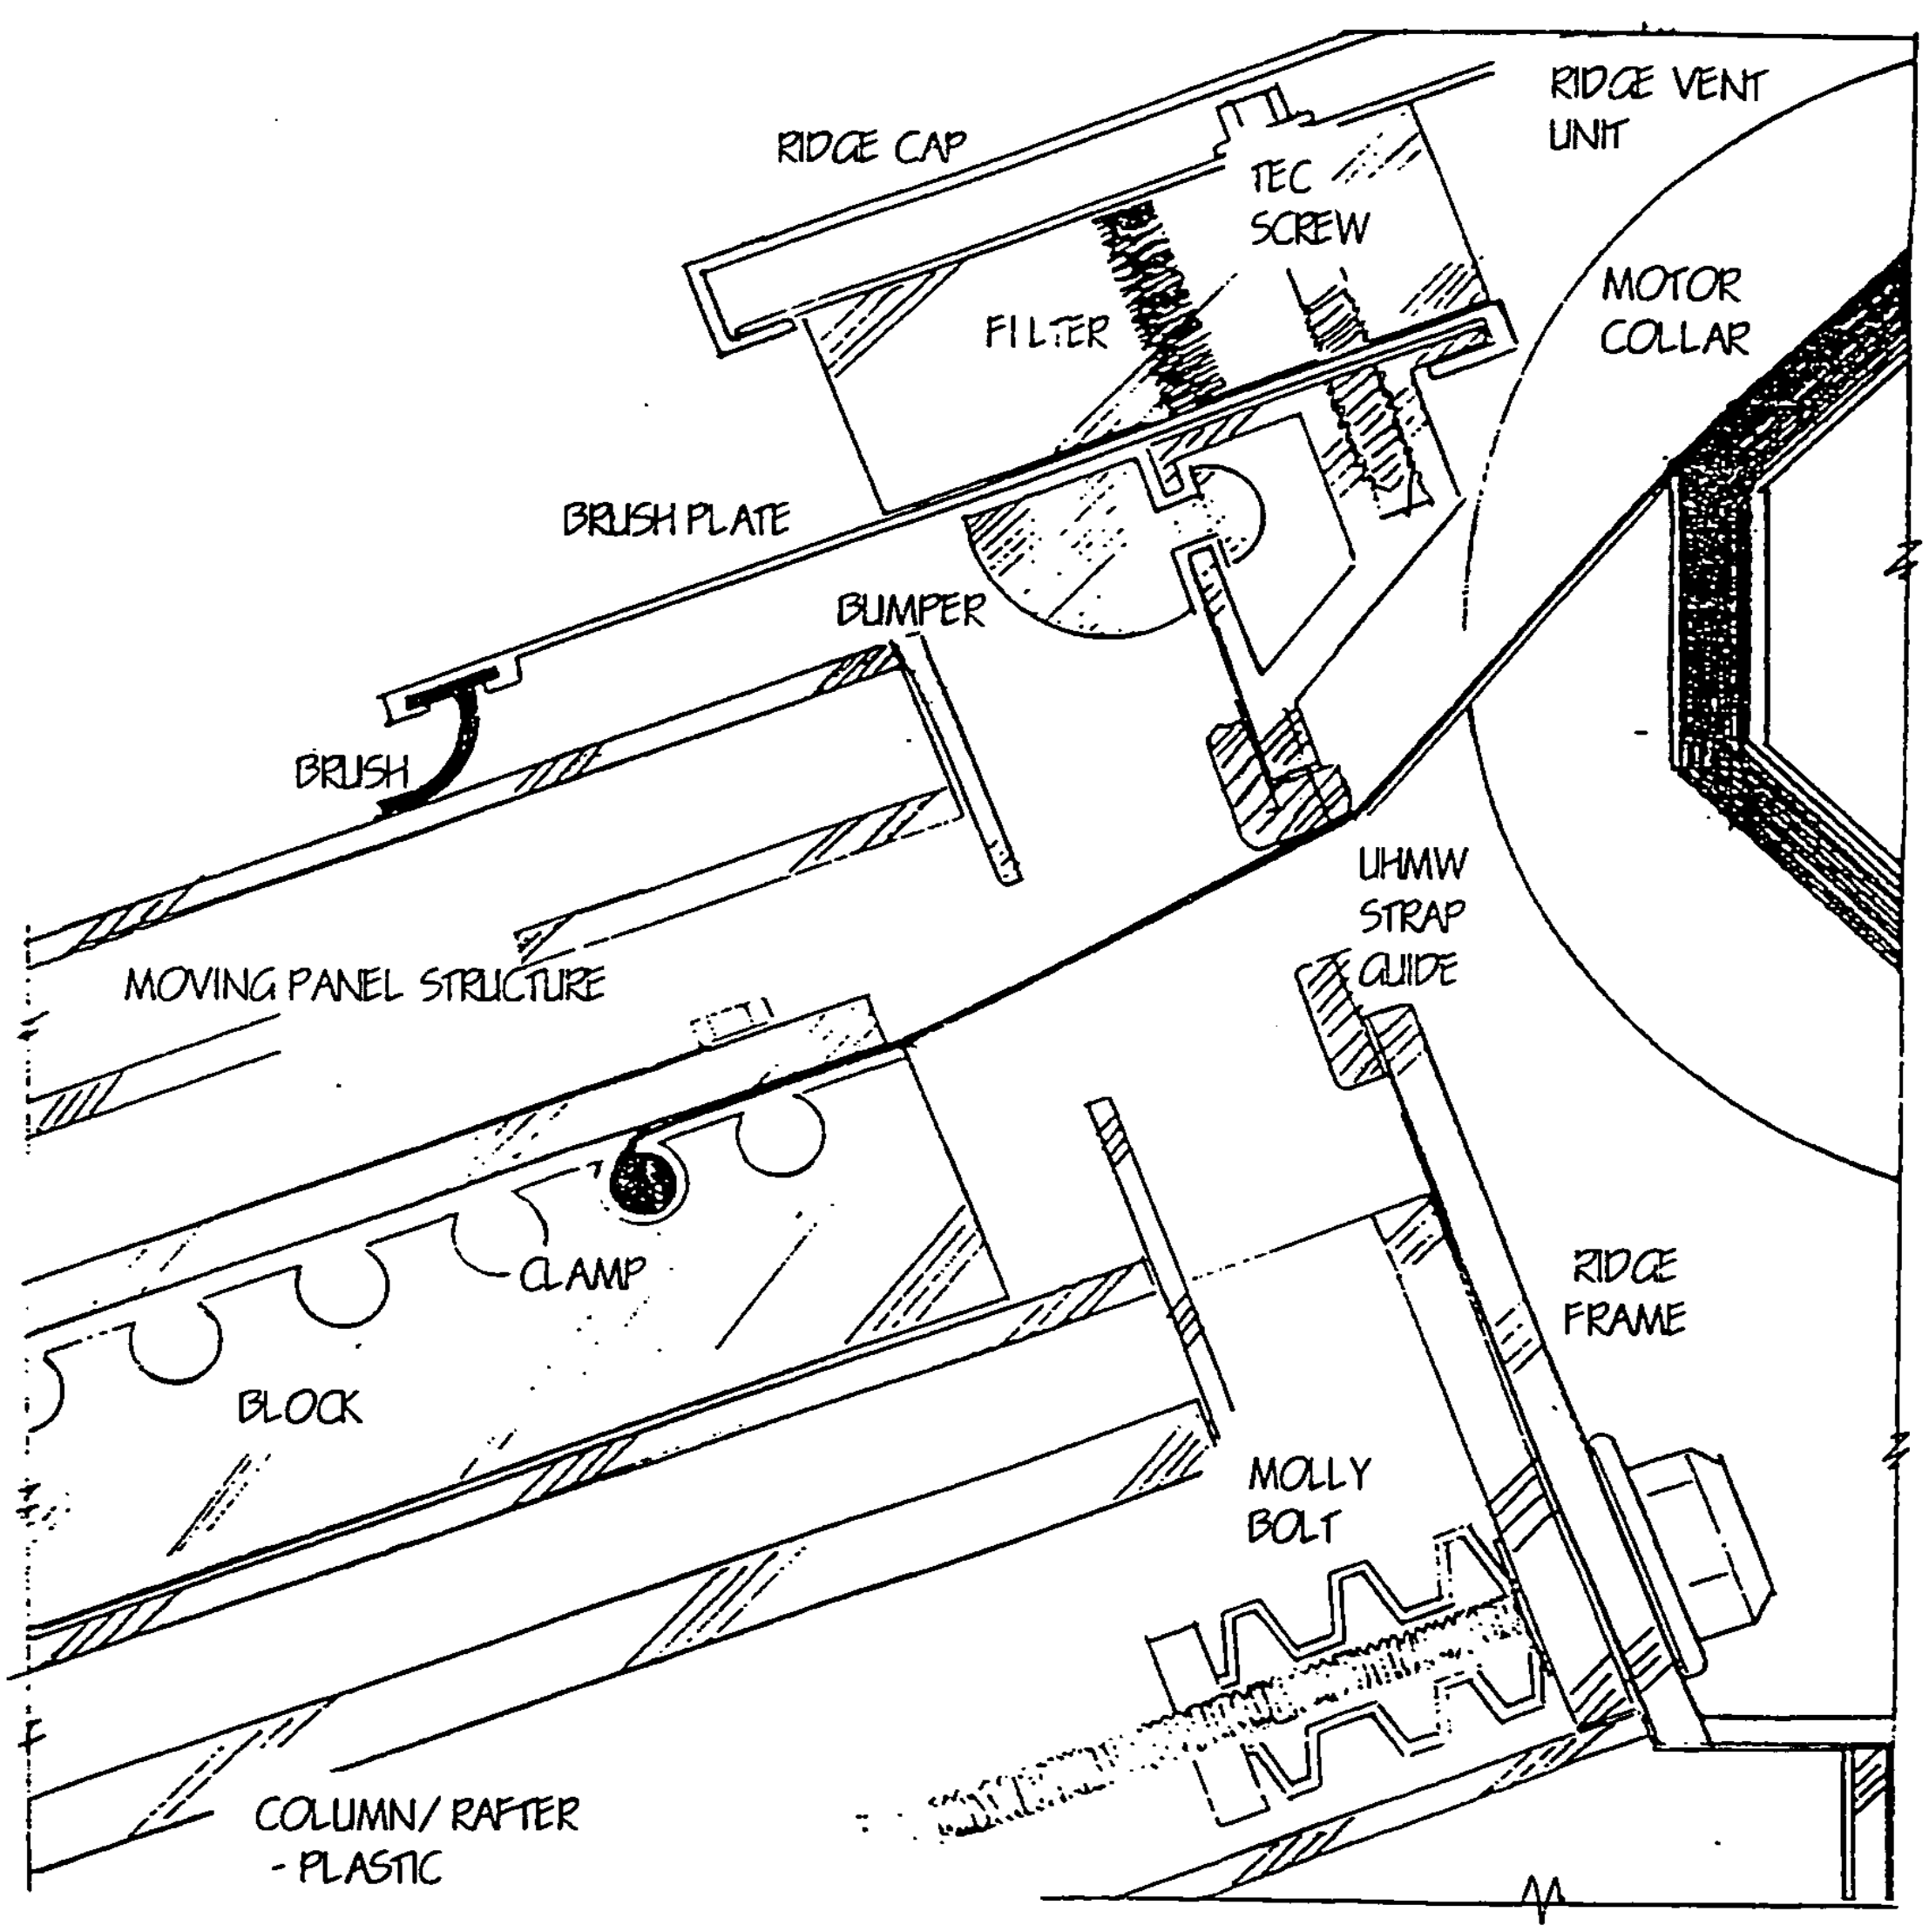
RIDGE CAP
RIDGE VENT UNIT
TEC SCREW
FILTER
MOTOR COLLAR
BRUSH PLATE
BUMPER
BRUSH
UHMW STRAP GUIDE
MOVING PANEL STRUCTURE
CLAMP
RIDGE FRAME
BLOCK
MOLLY BOLT
COLUMN/ RAFTER - PLASTIC

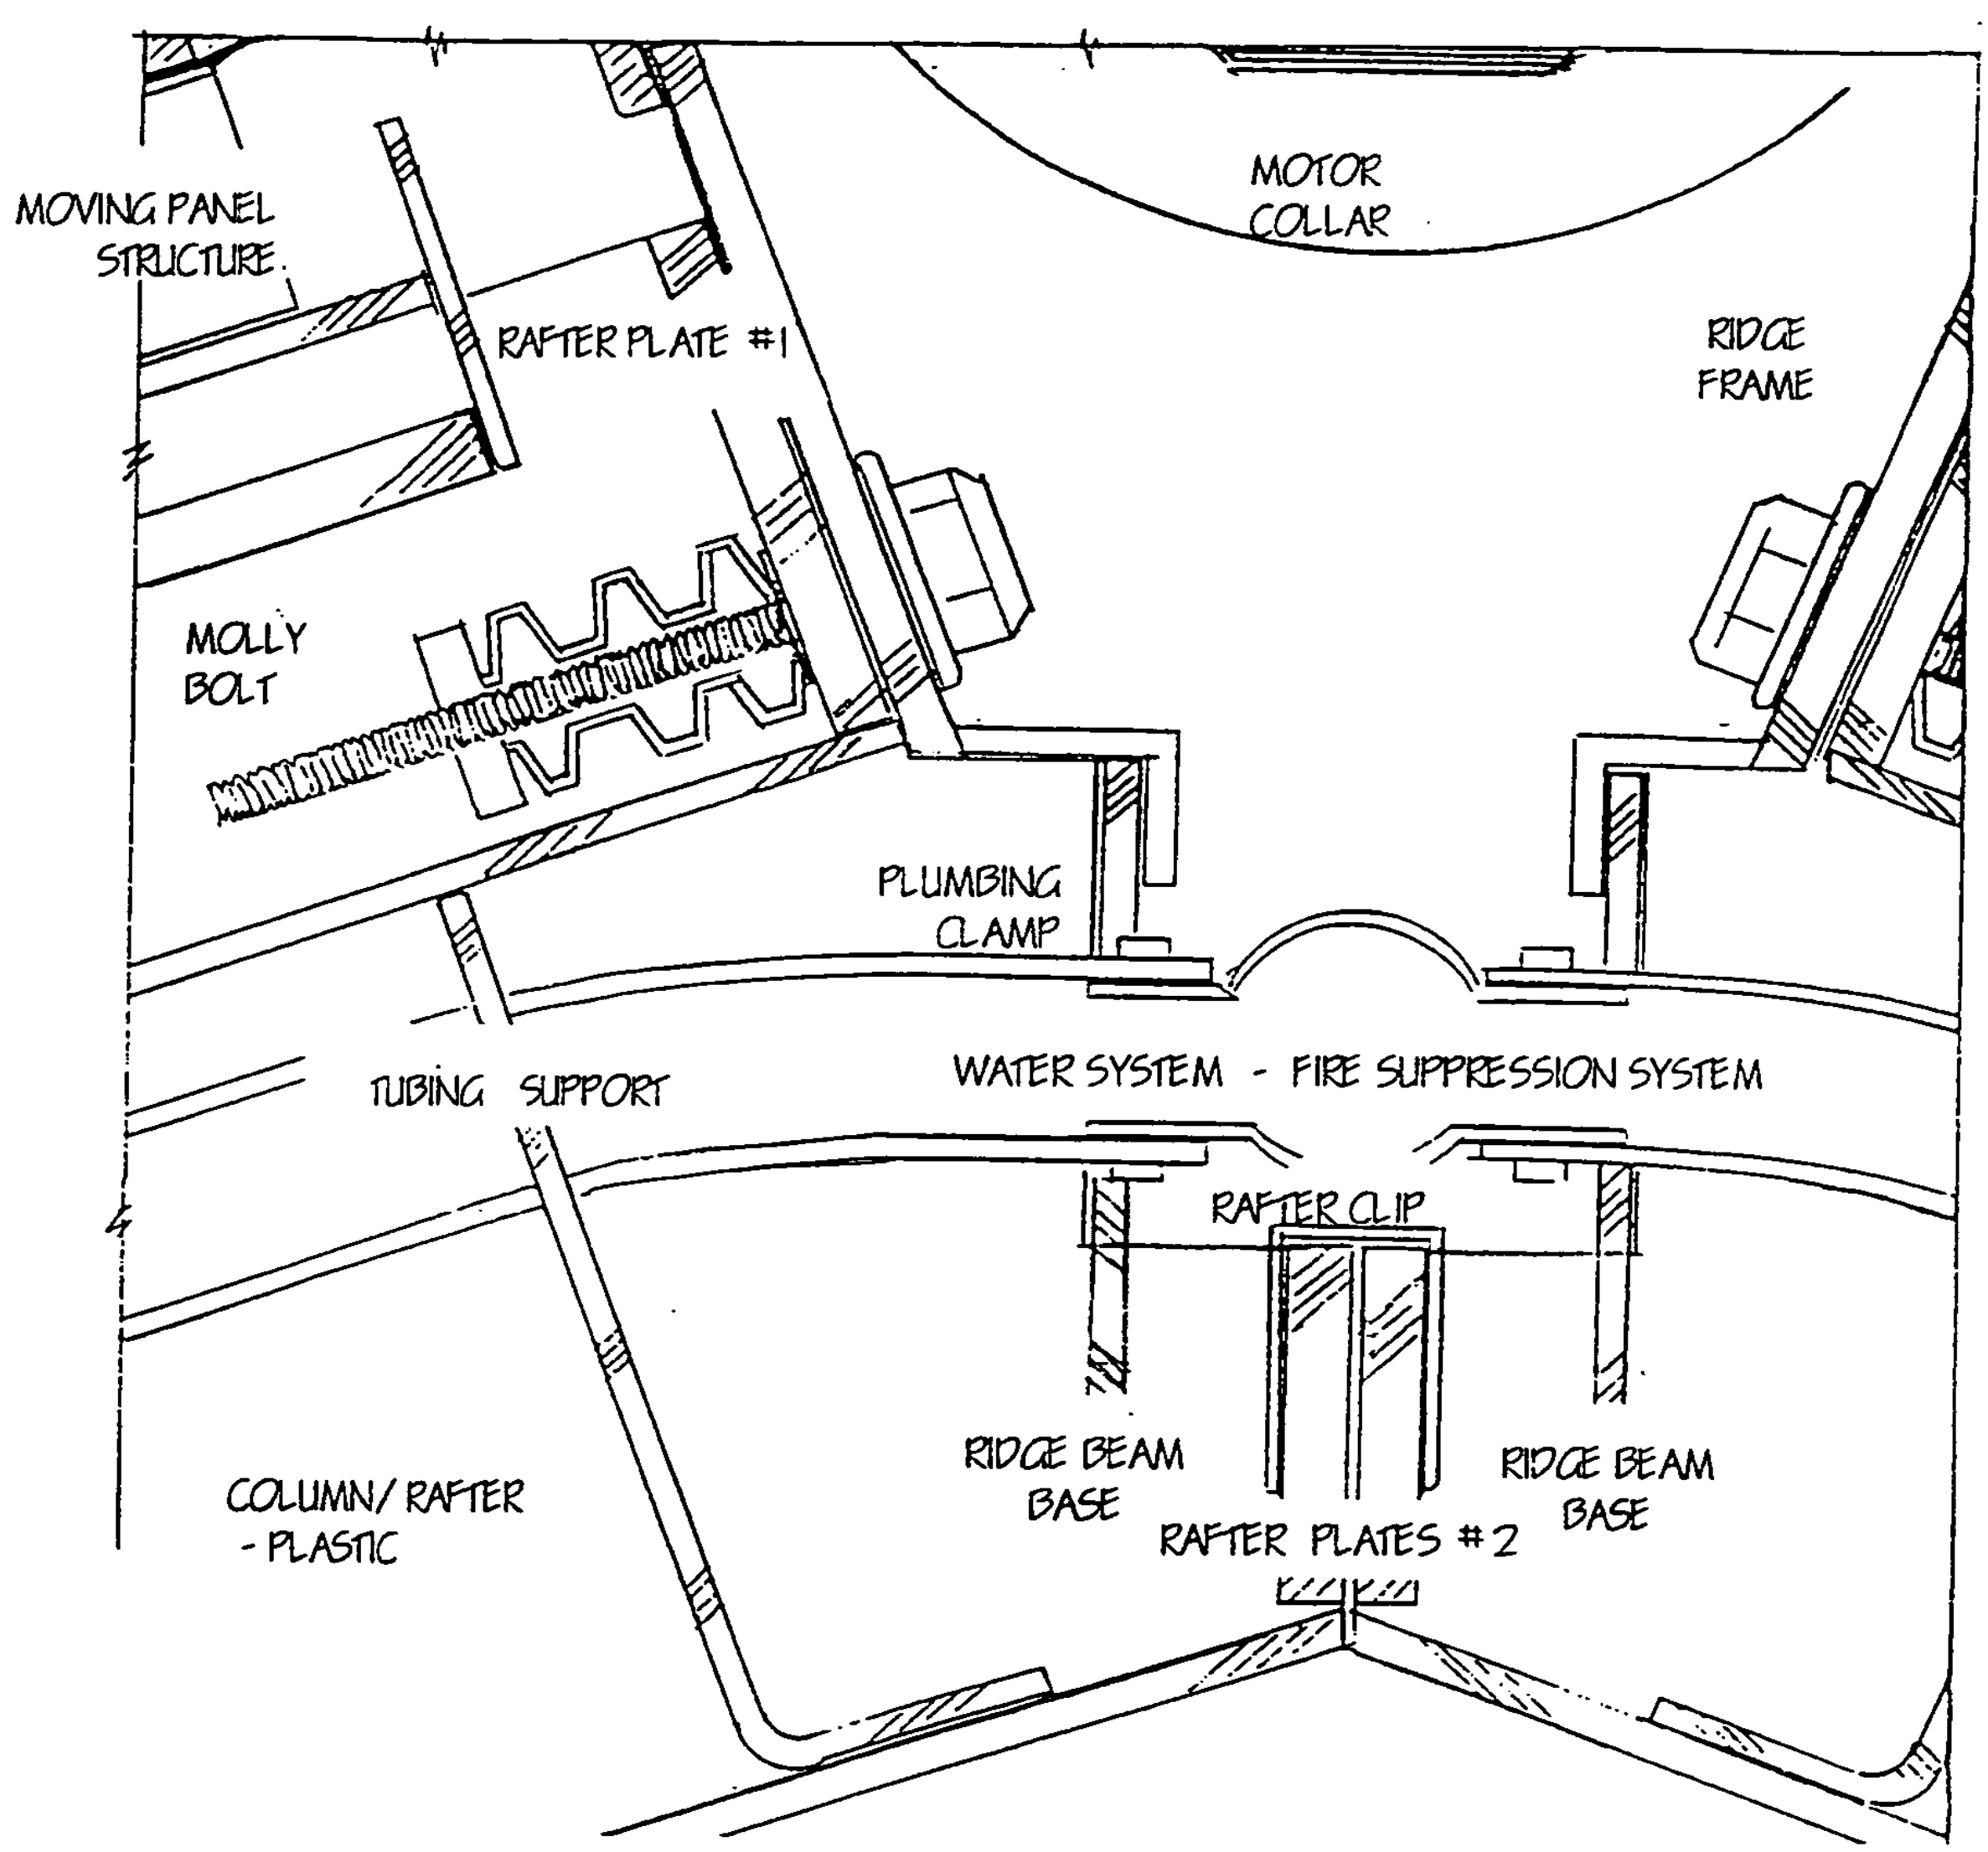
MOVING PANEL STRUCTURE
RAFTER PLATE #1
MOTOR COLLAR
RIDGE FRAME
MOLLY BOLT
PLUMBING CLAMP
TUBING SUPPORT
WATER SYSTEM - FIRE SUPPRESSION SYSTEM
RAFTER CLIP
RIDGE BEAM BASE
RIDGE BEAM BASE
COLUMN/ RAFTER - PLASTIC
RAFTER PLATES #2

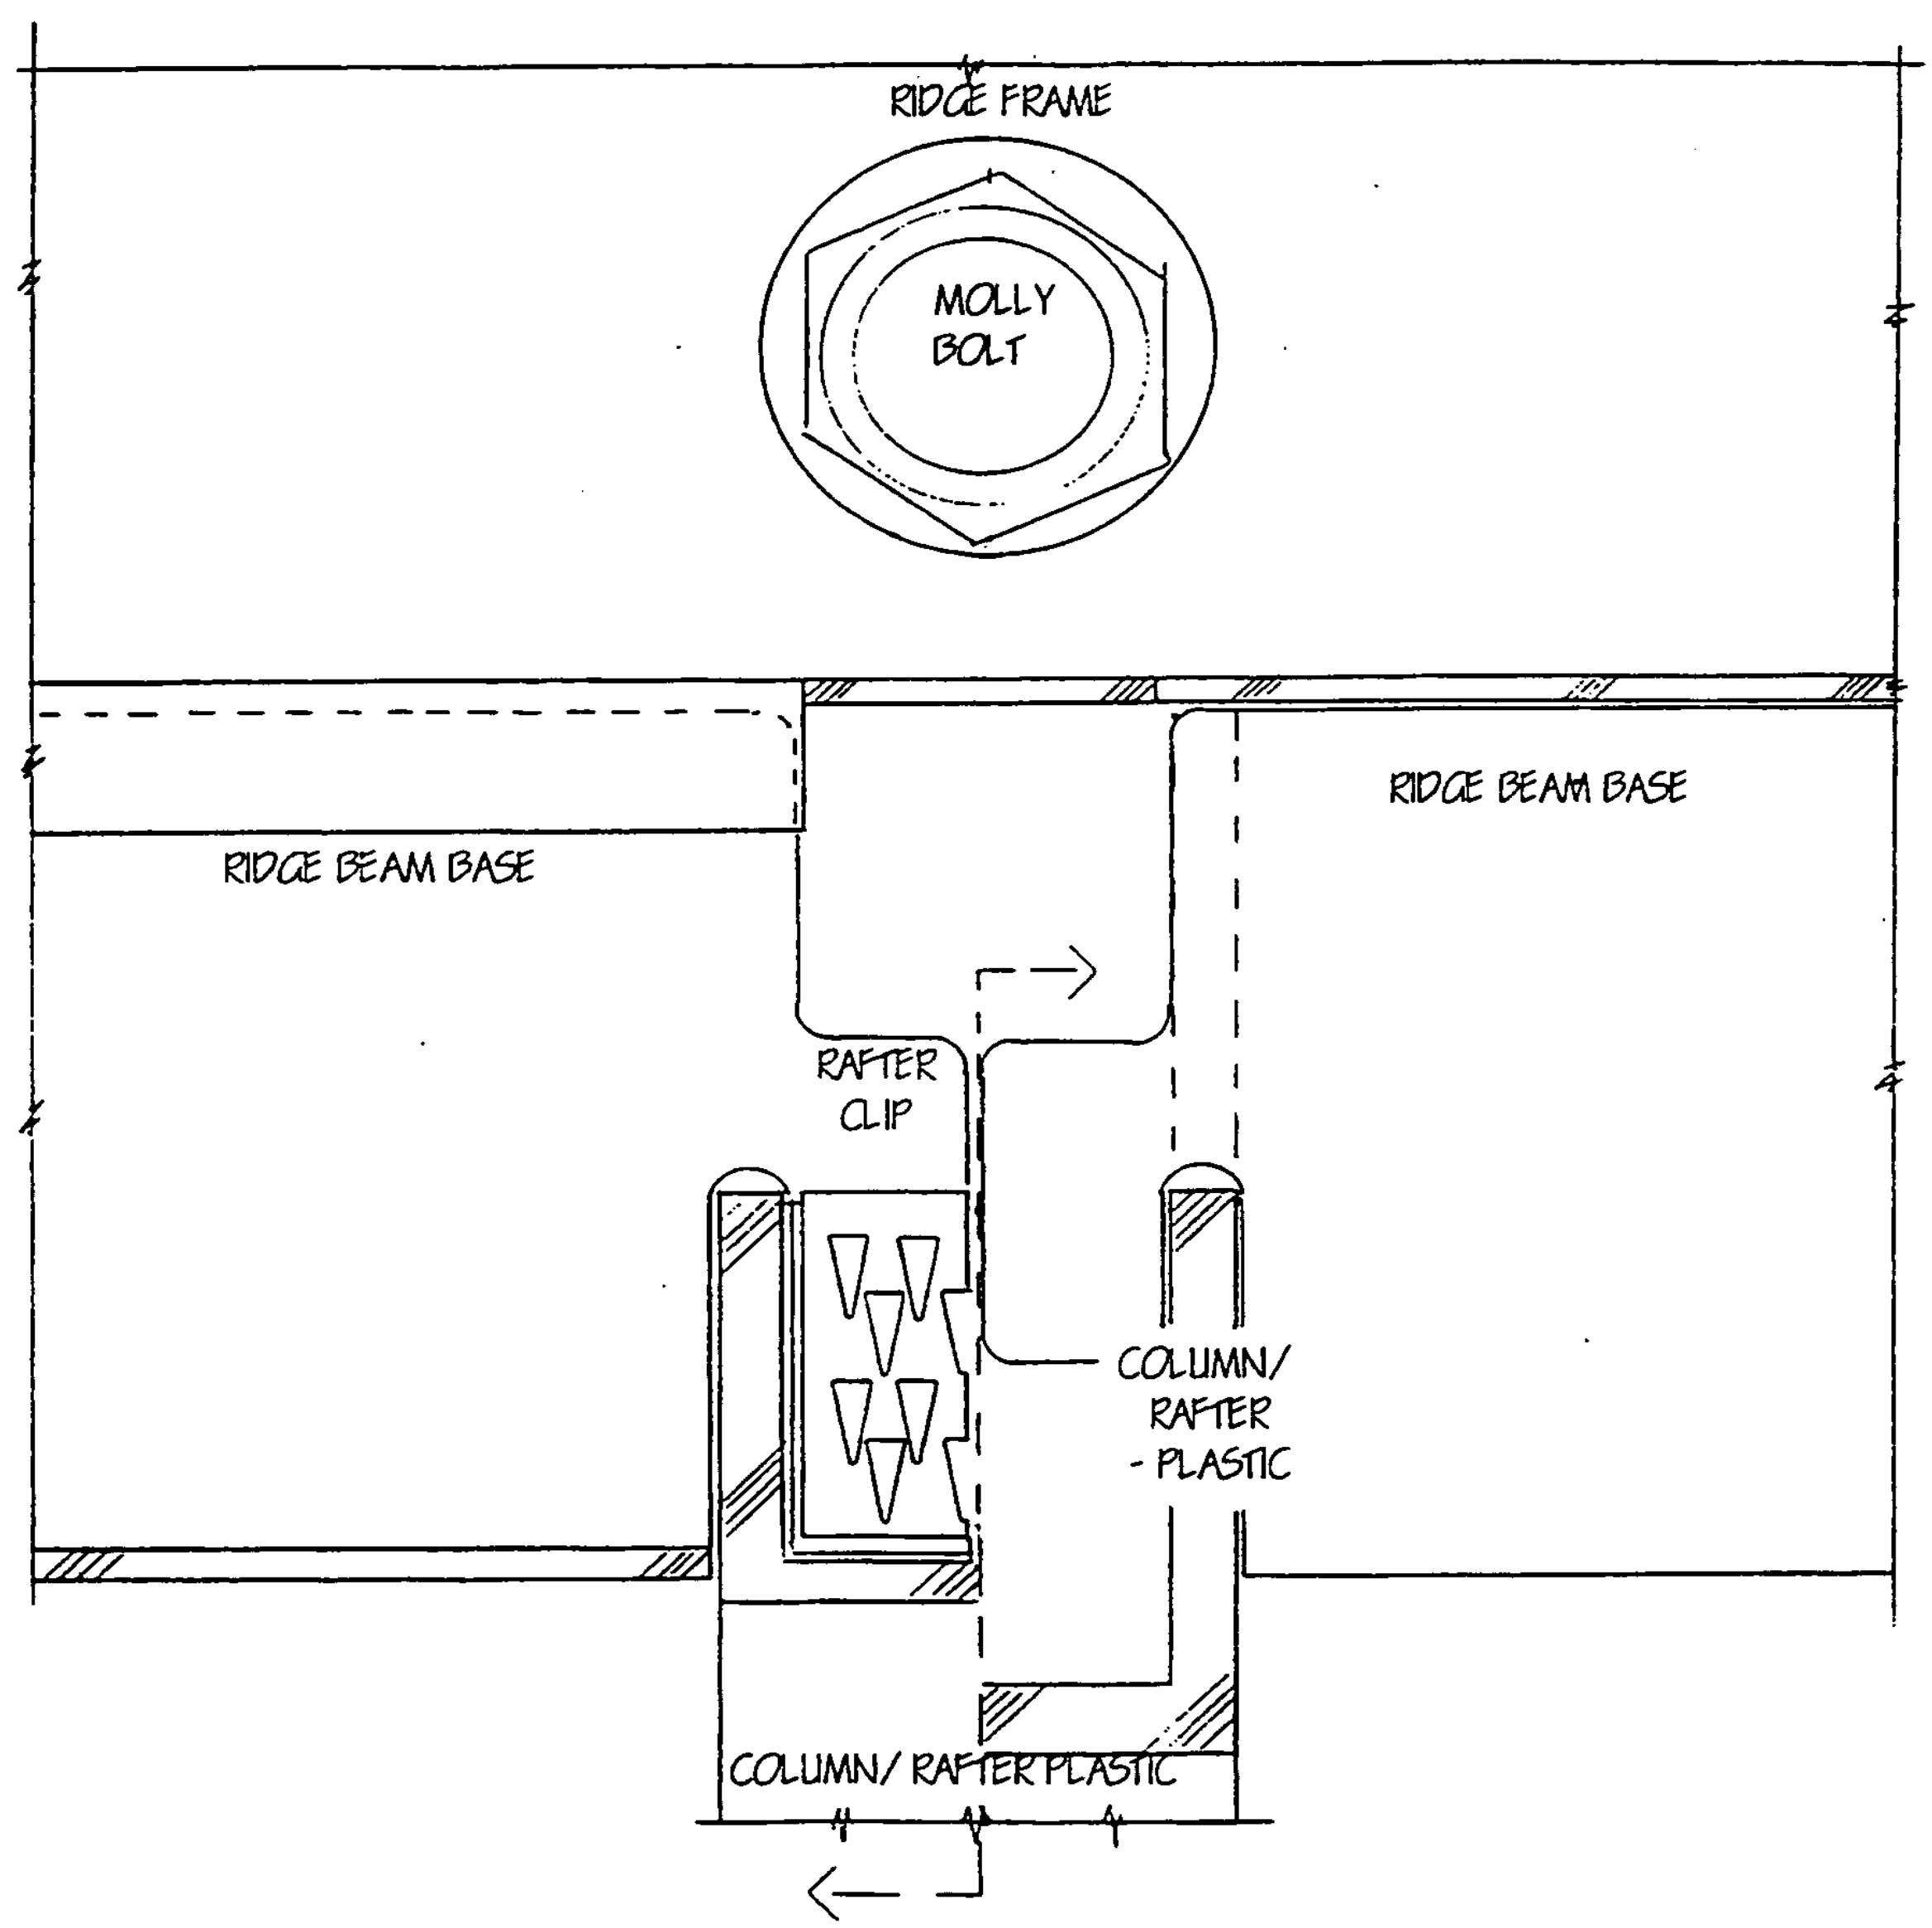
RIDGE FRAME
MOLLY BOLT
RIDGE BEAM BASE
RIDGE BEAM BASE
RAFTER CLIP
COLUMN/ RAFTER - PLASTIC
COLUMN/ RAFTER PLASTIC

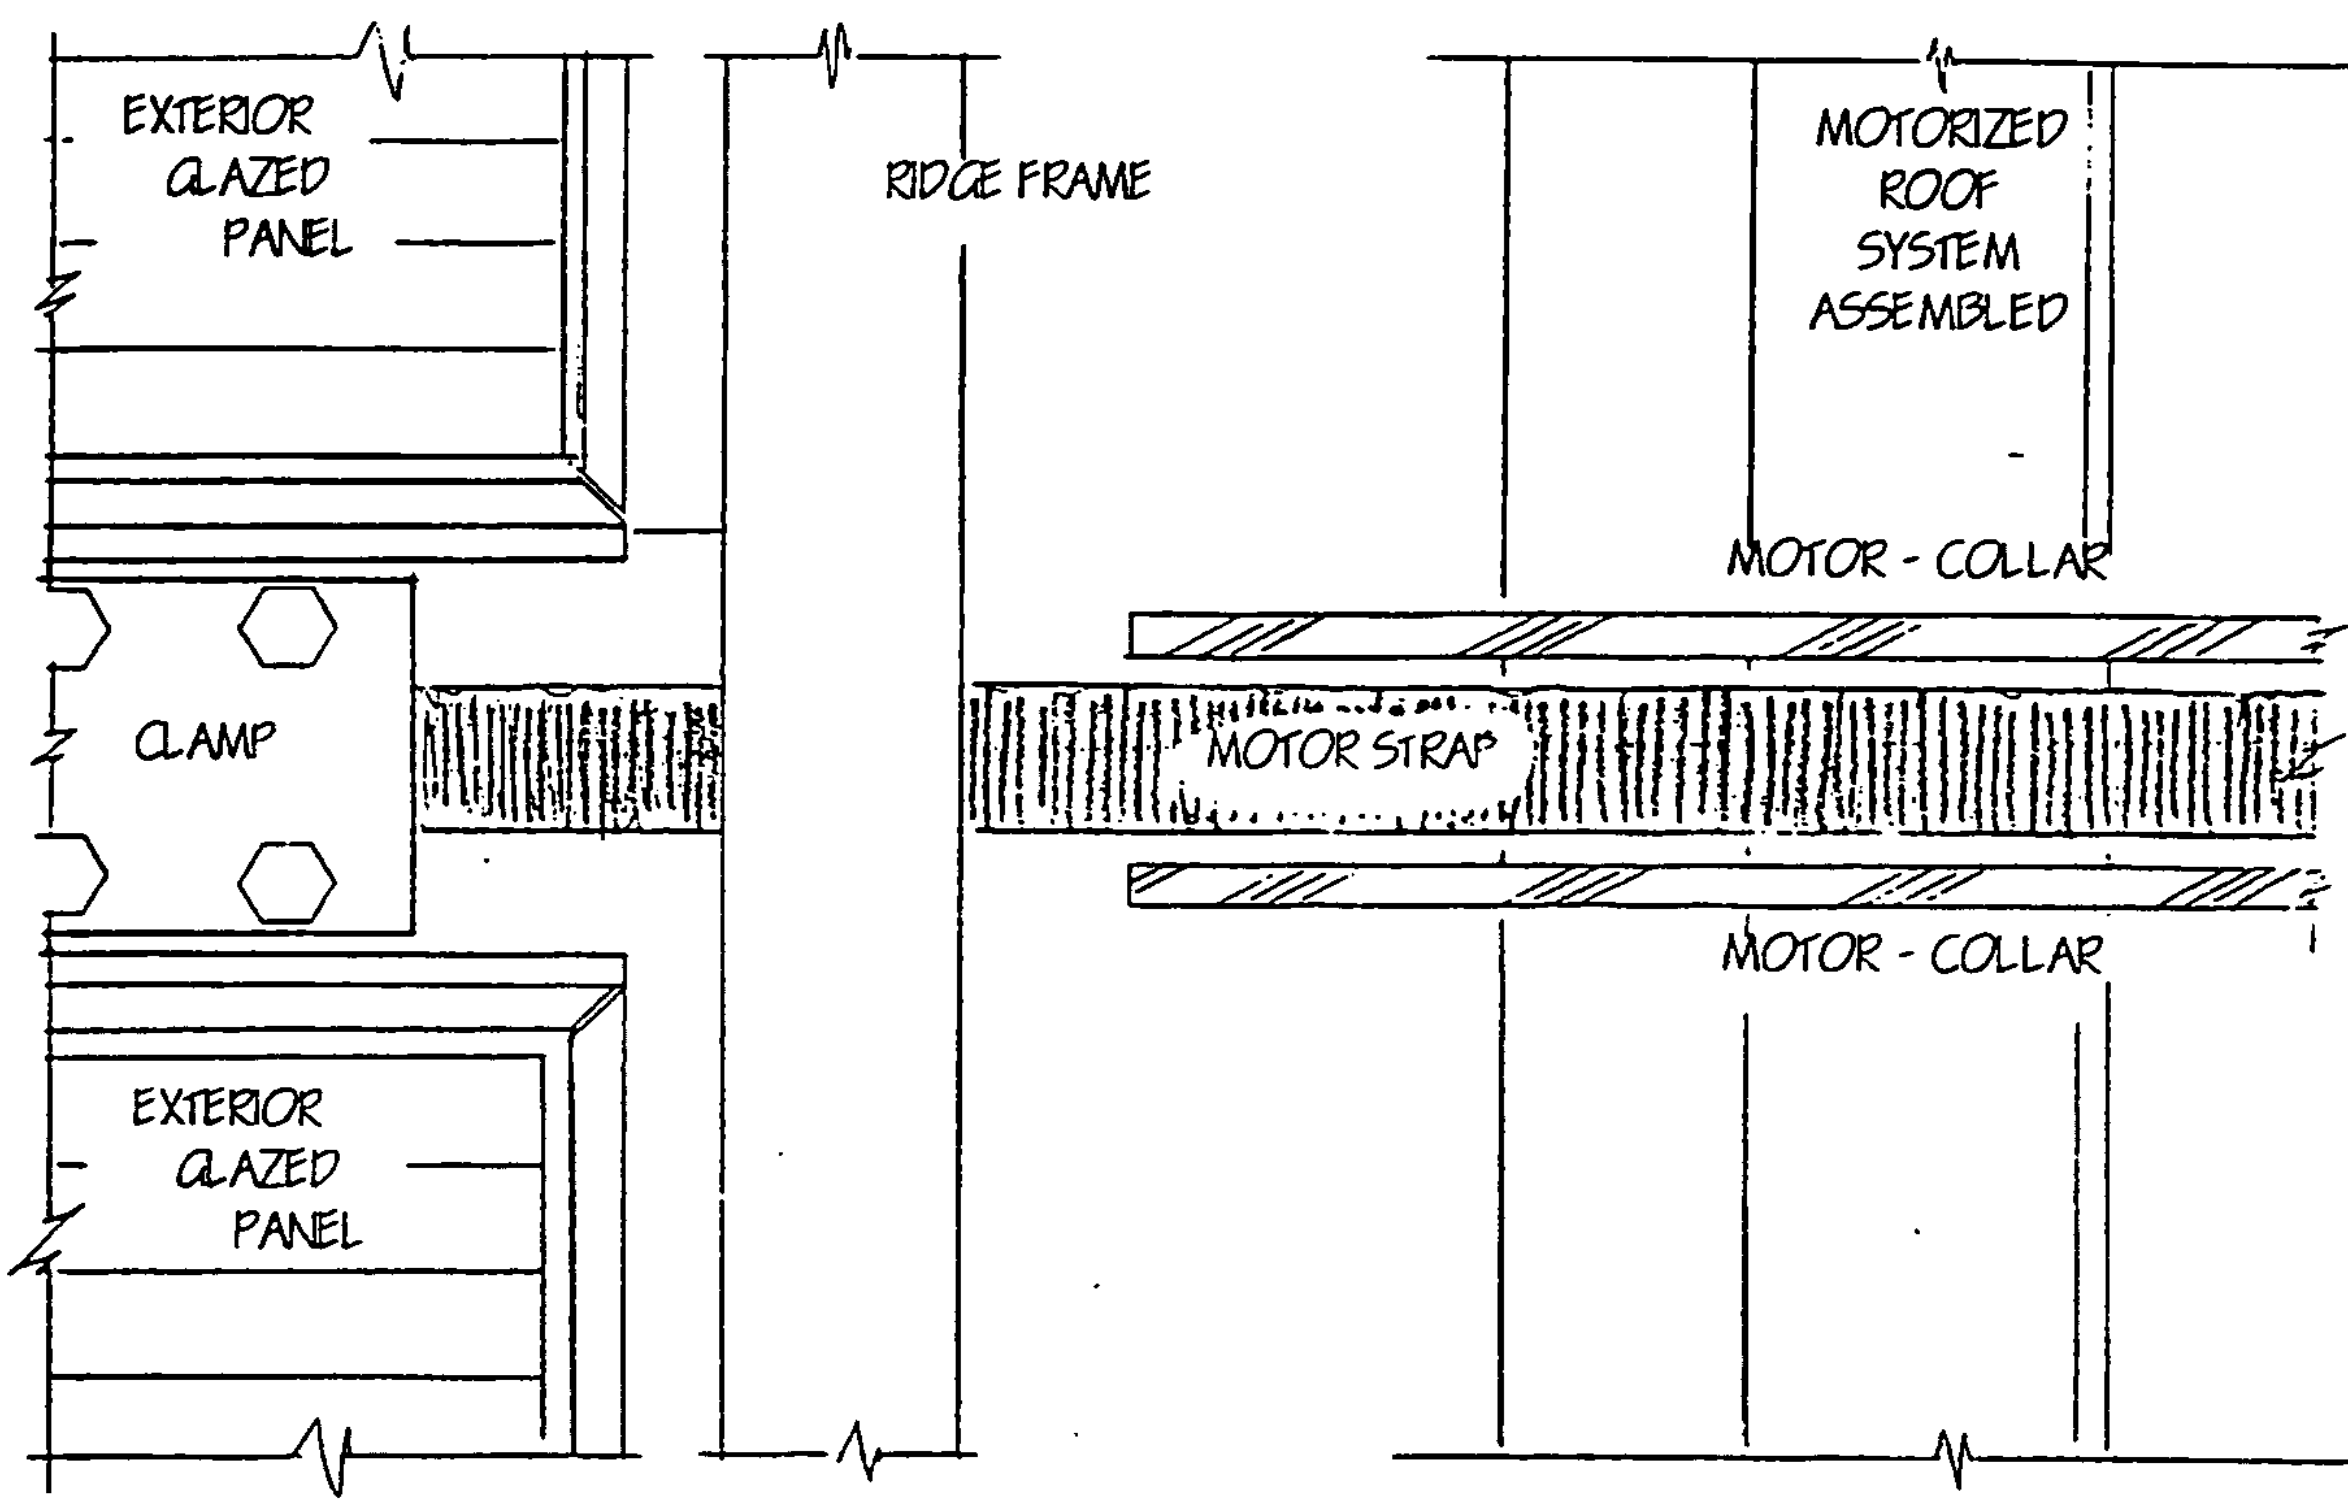
EXTERIOR
GLAZED
PANEL
RIDGE FRAME
MOTORIZED
ROOF
SYSTEM
ASSEMBLED
MOTOR - COLLAR
CLAMP
MOTOR STRAP
MOTOR - COLLAR
EXTERIOR
GLAZED
PANEL

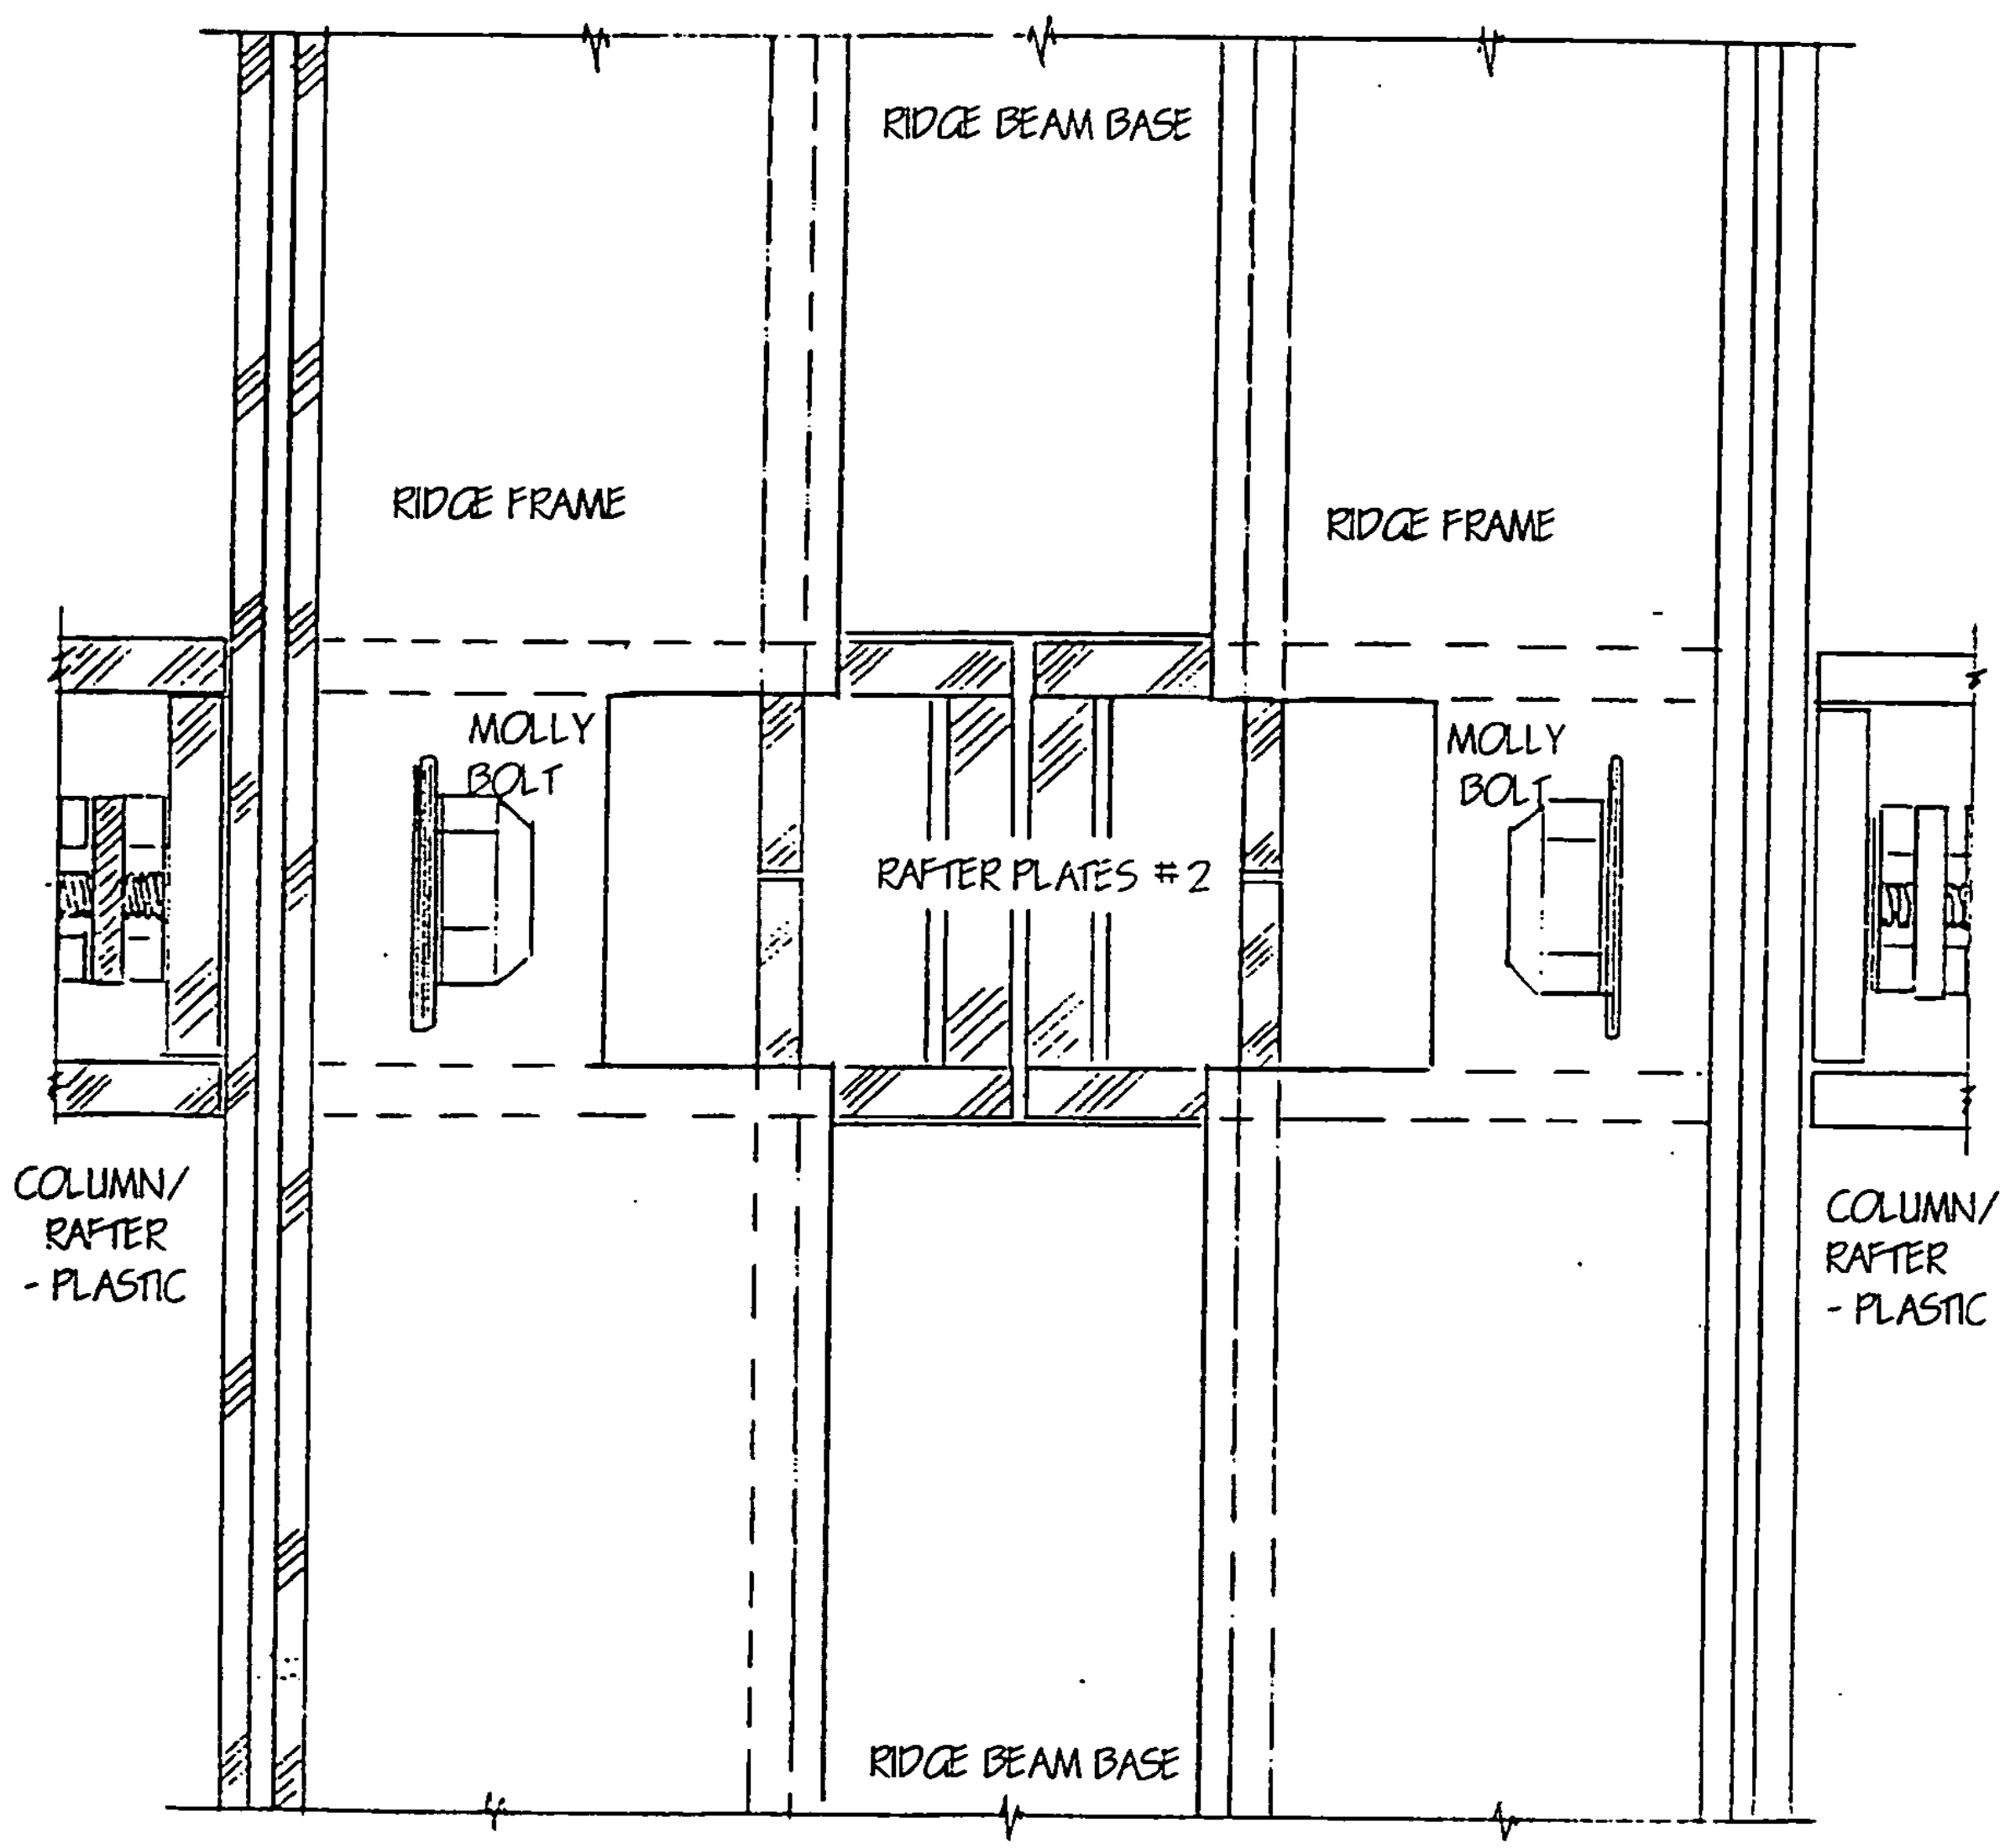
RIDGE BEAM BASE
RIDGE FRAME
RIDGE FRAME
MOLLY BOLT
MOLLY BOLT
RAFTER PLATES #2
COLUMN/ RAFTER - PLASTIC
COLUMN/ RAFTER - PLASTIC
RIDGE BEAM BASE

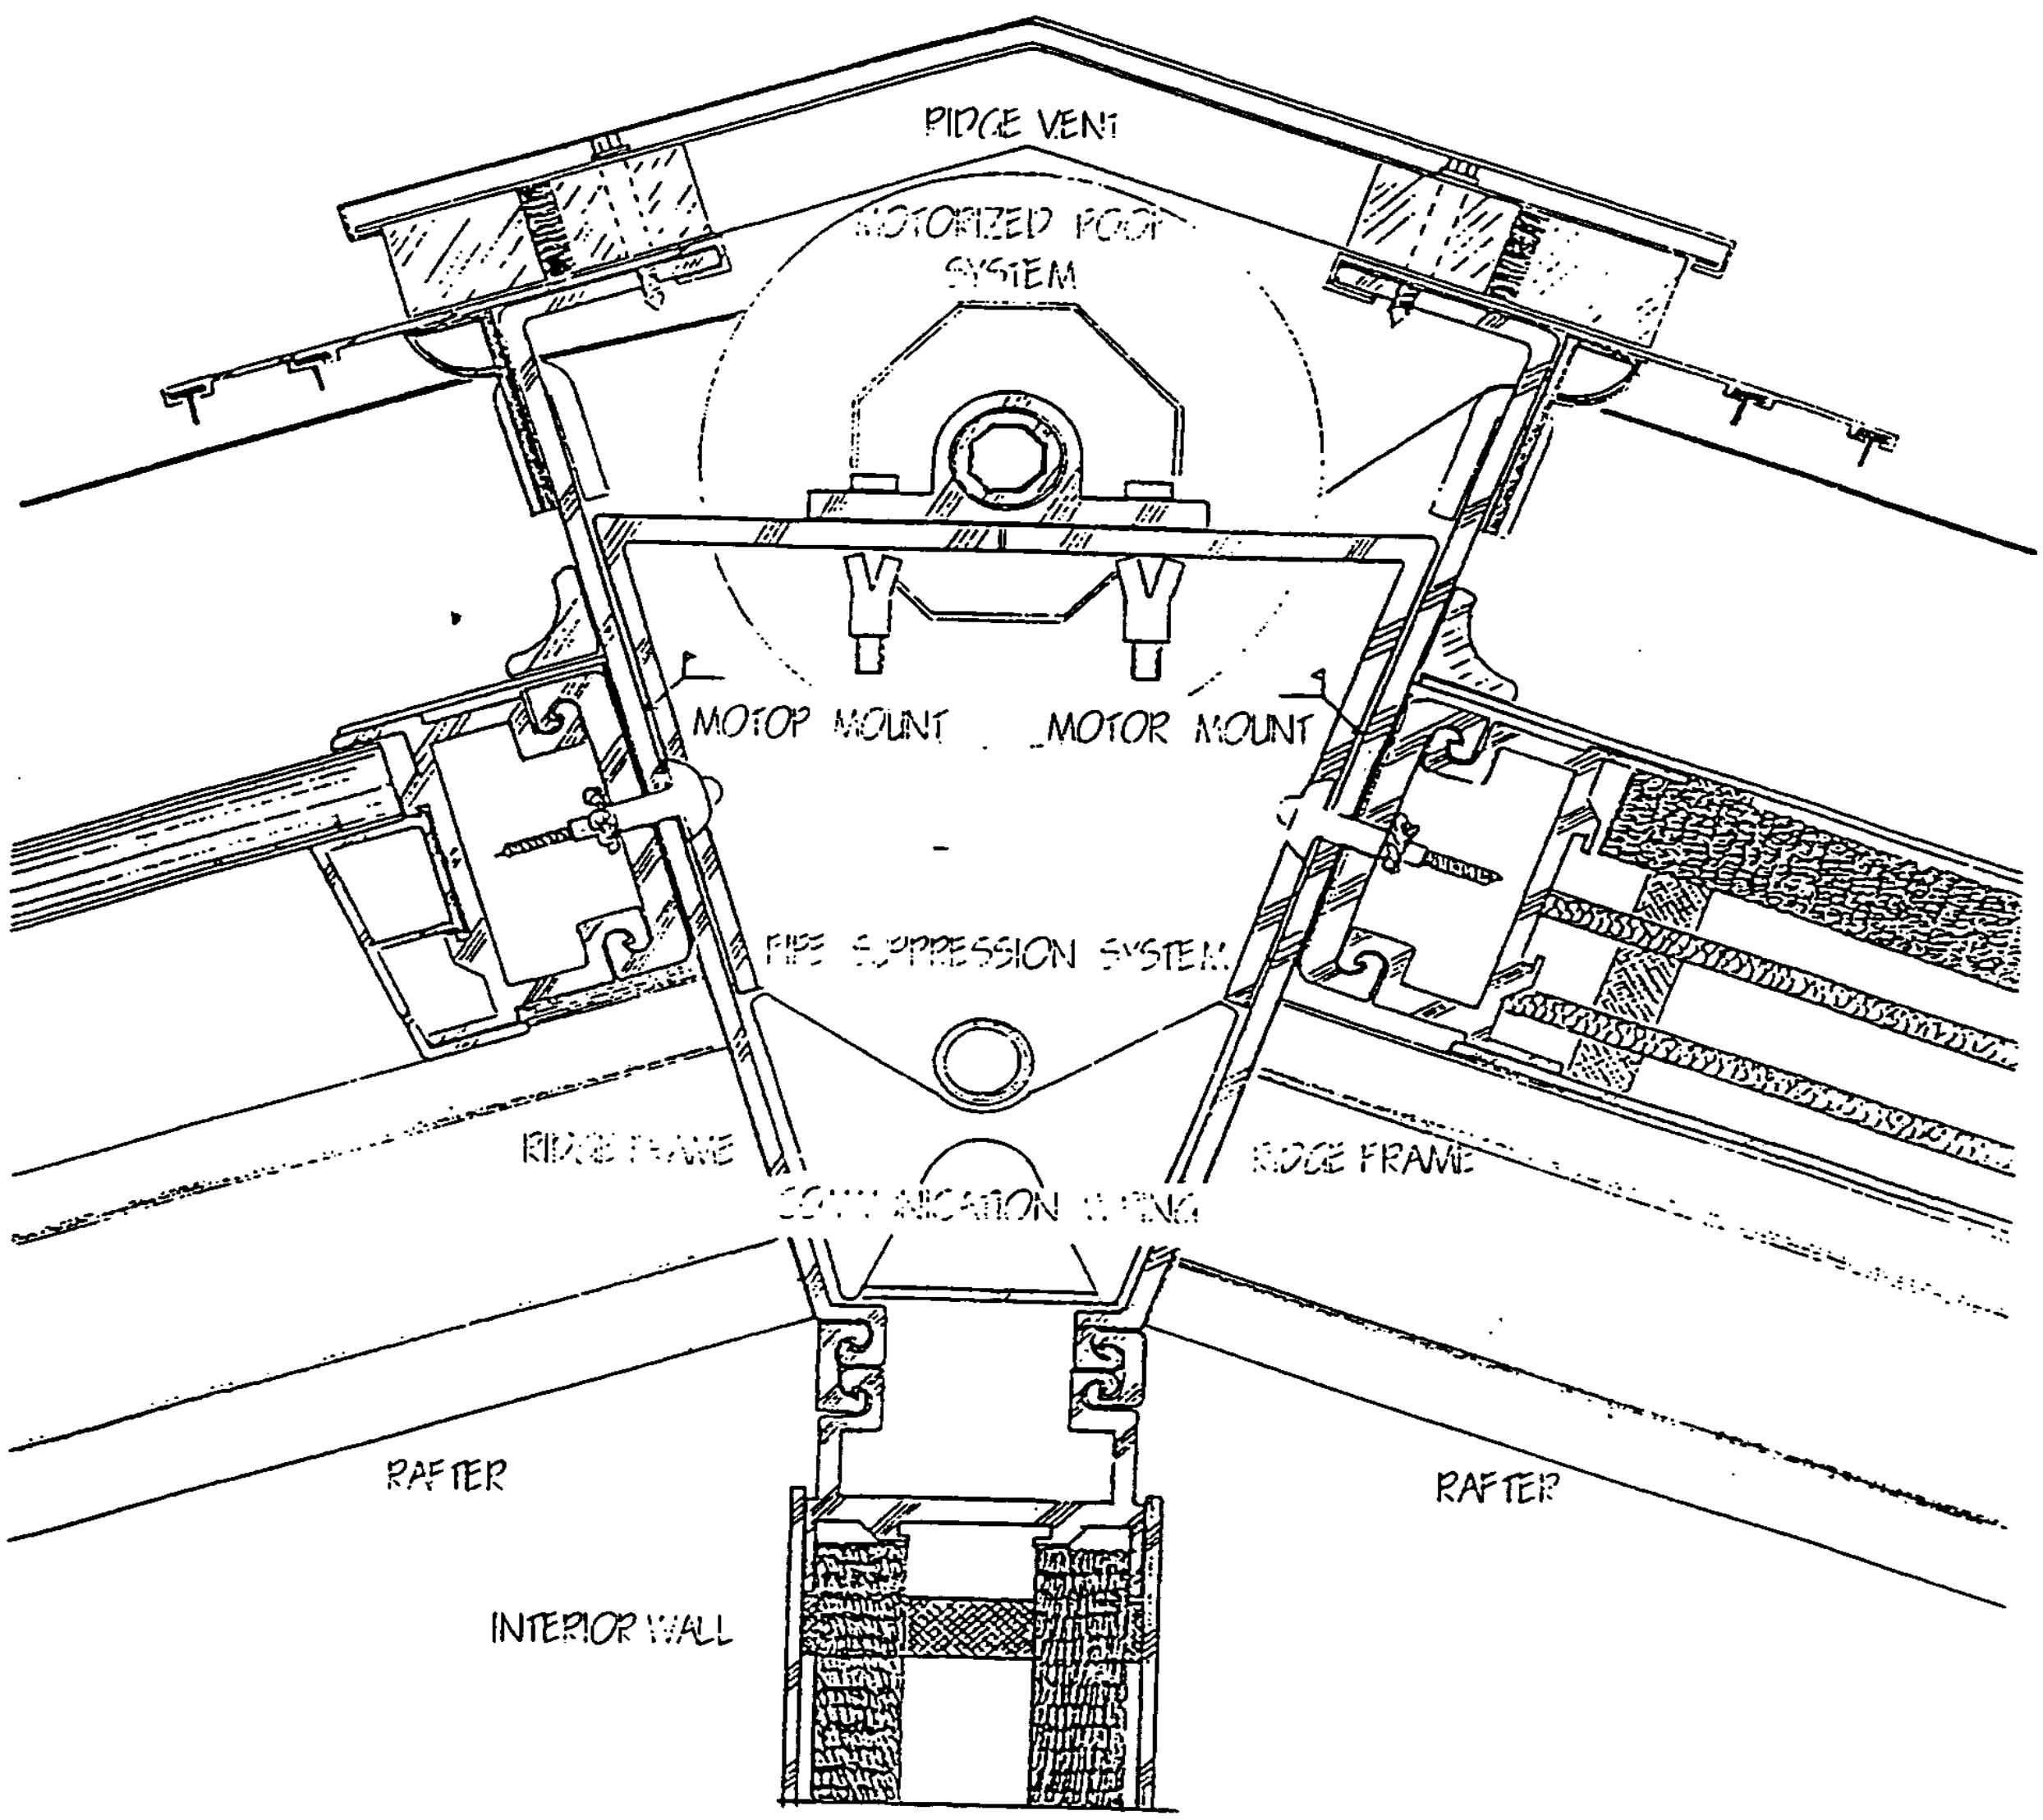
RIDGE VENT
MOTORIZED ROOF SYSTEM
MOTOR MOUNT
MOTOR MOUNT
FIRE SUPPRESSION SYSTEM
RIDGE FRAME
RIDGE FRAME
COMMUNICATION WIRING
RAFTER
RAFTER
INTERIOR WALL

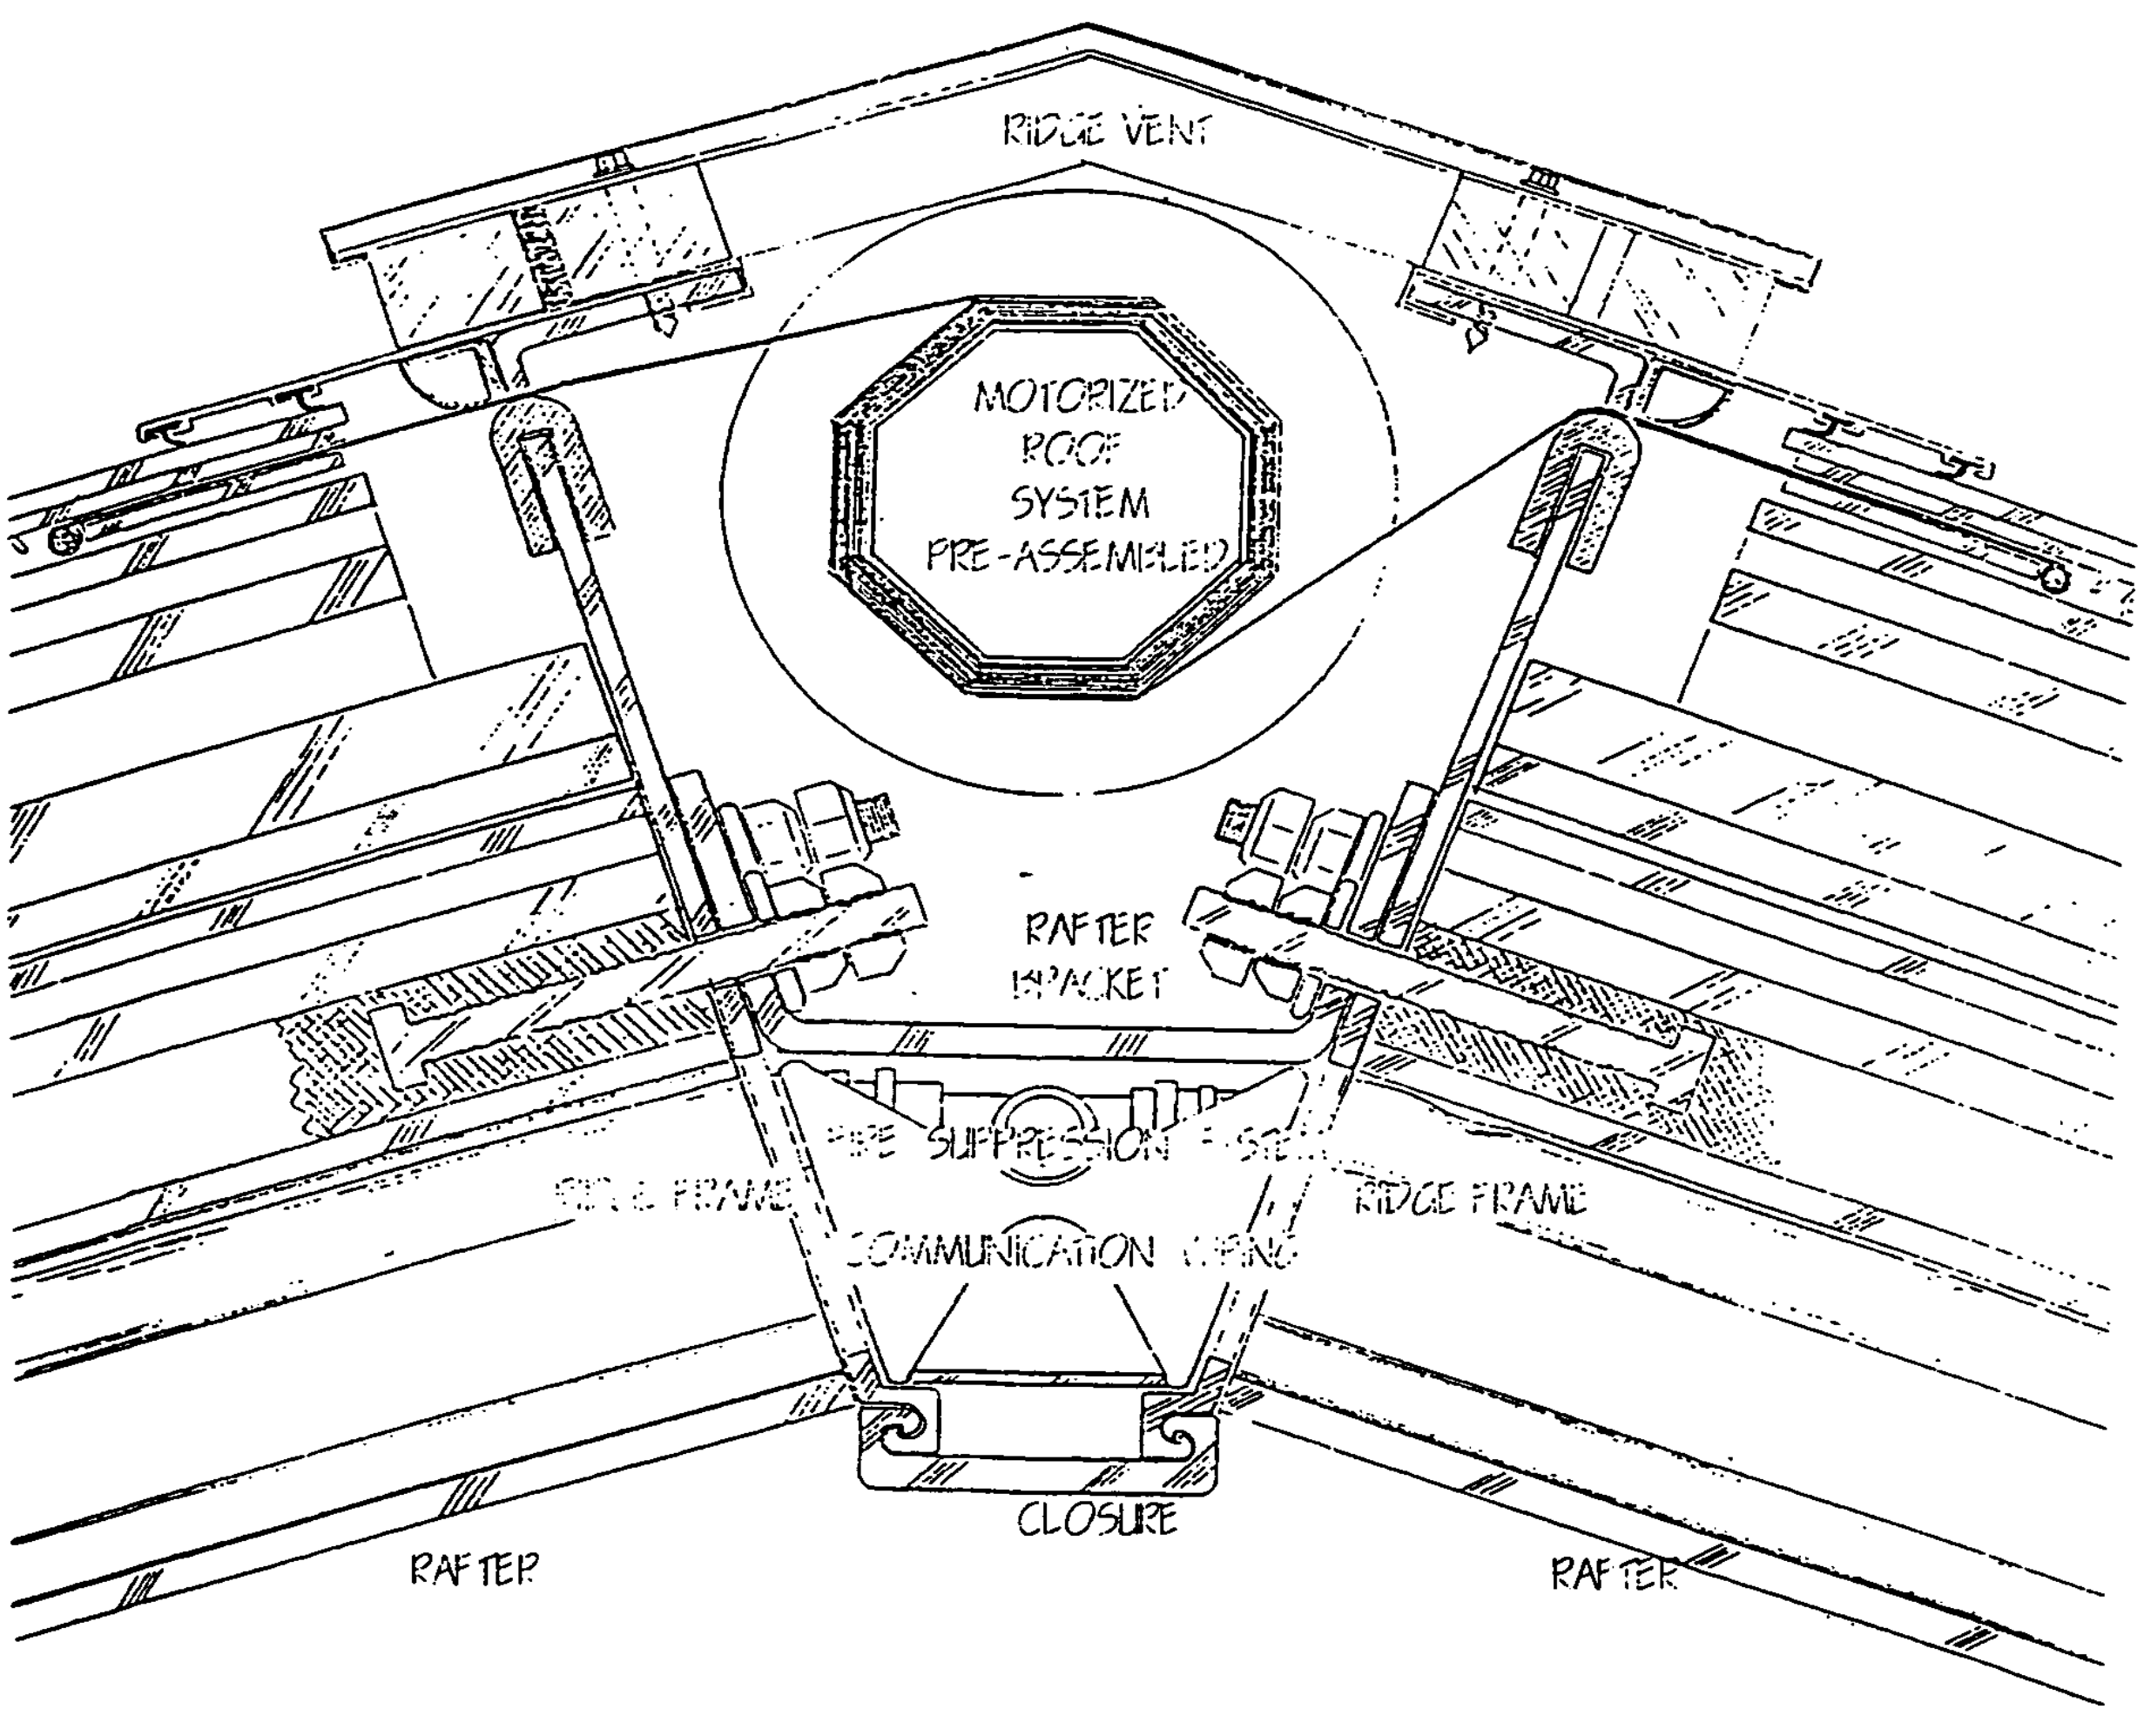
RIDGE VENT
MOTORIZED
ROOF
SYSTEM
PRE-ASSEMBLED
RAFTER
BRACKET
SUPPRESSION
RIDGE FRAME
COMMUNICATION
CLOSURE
RAFTER
RAFTER

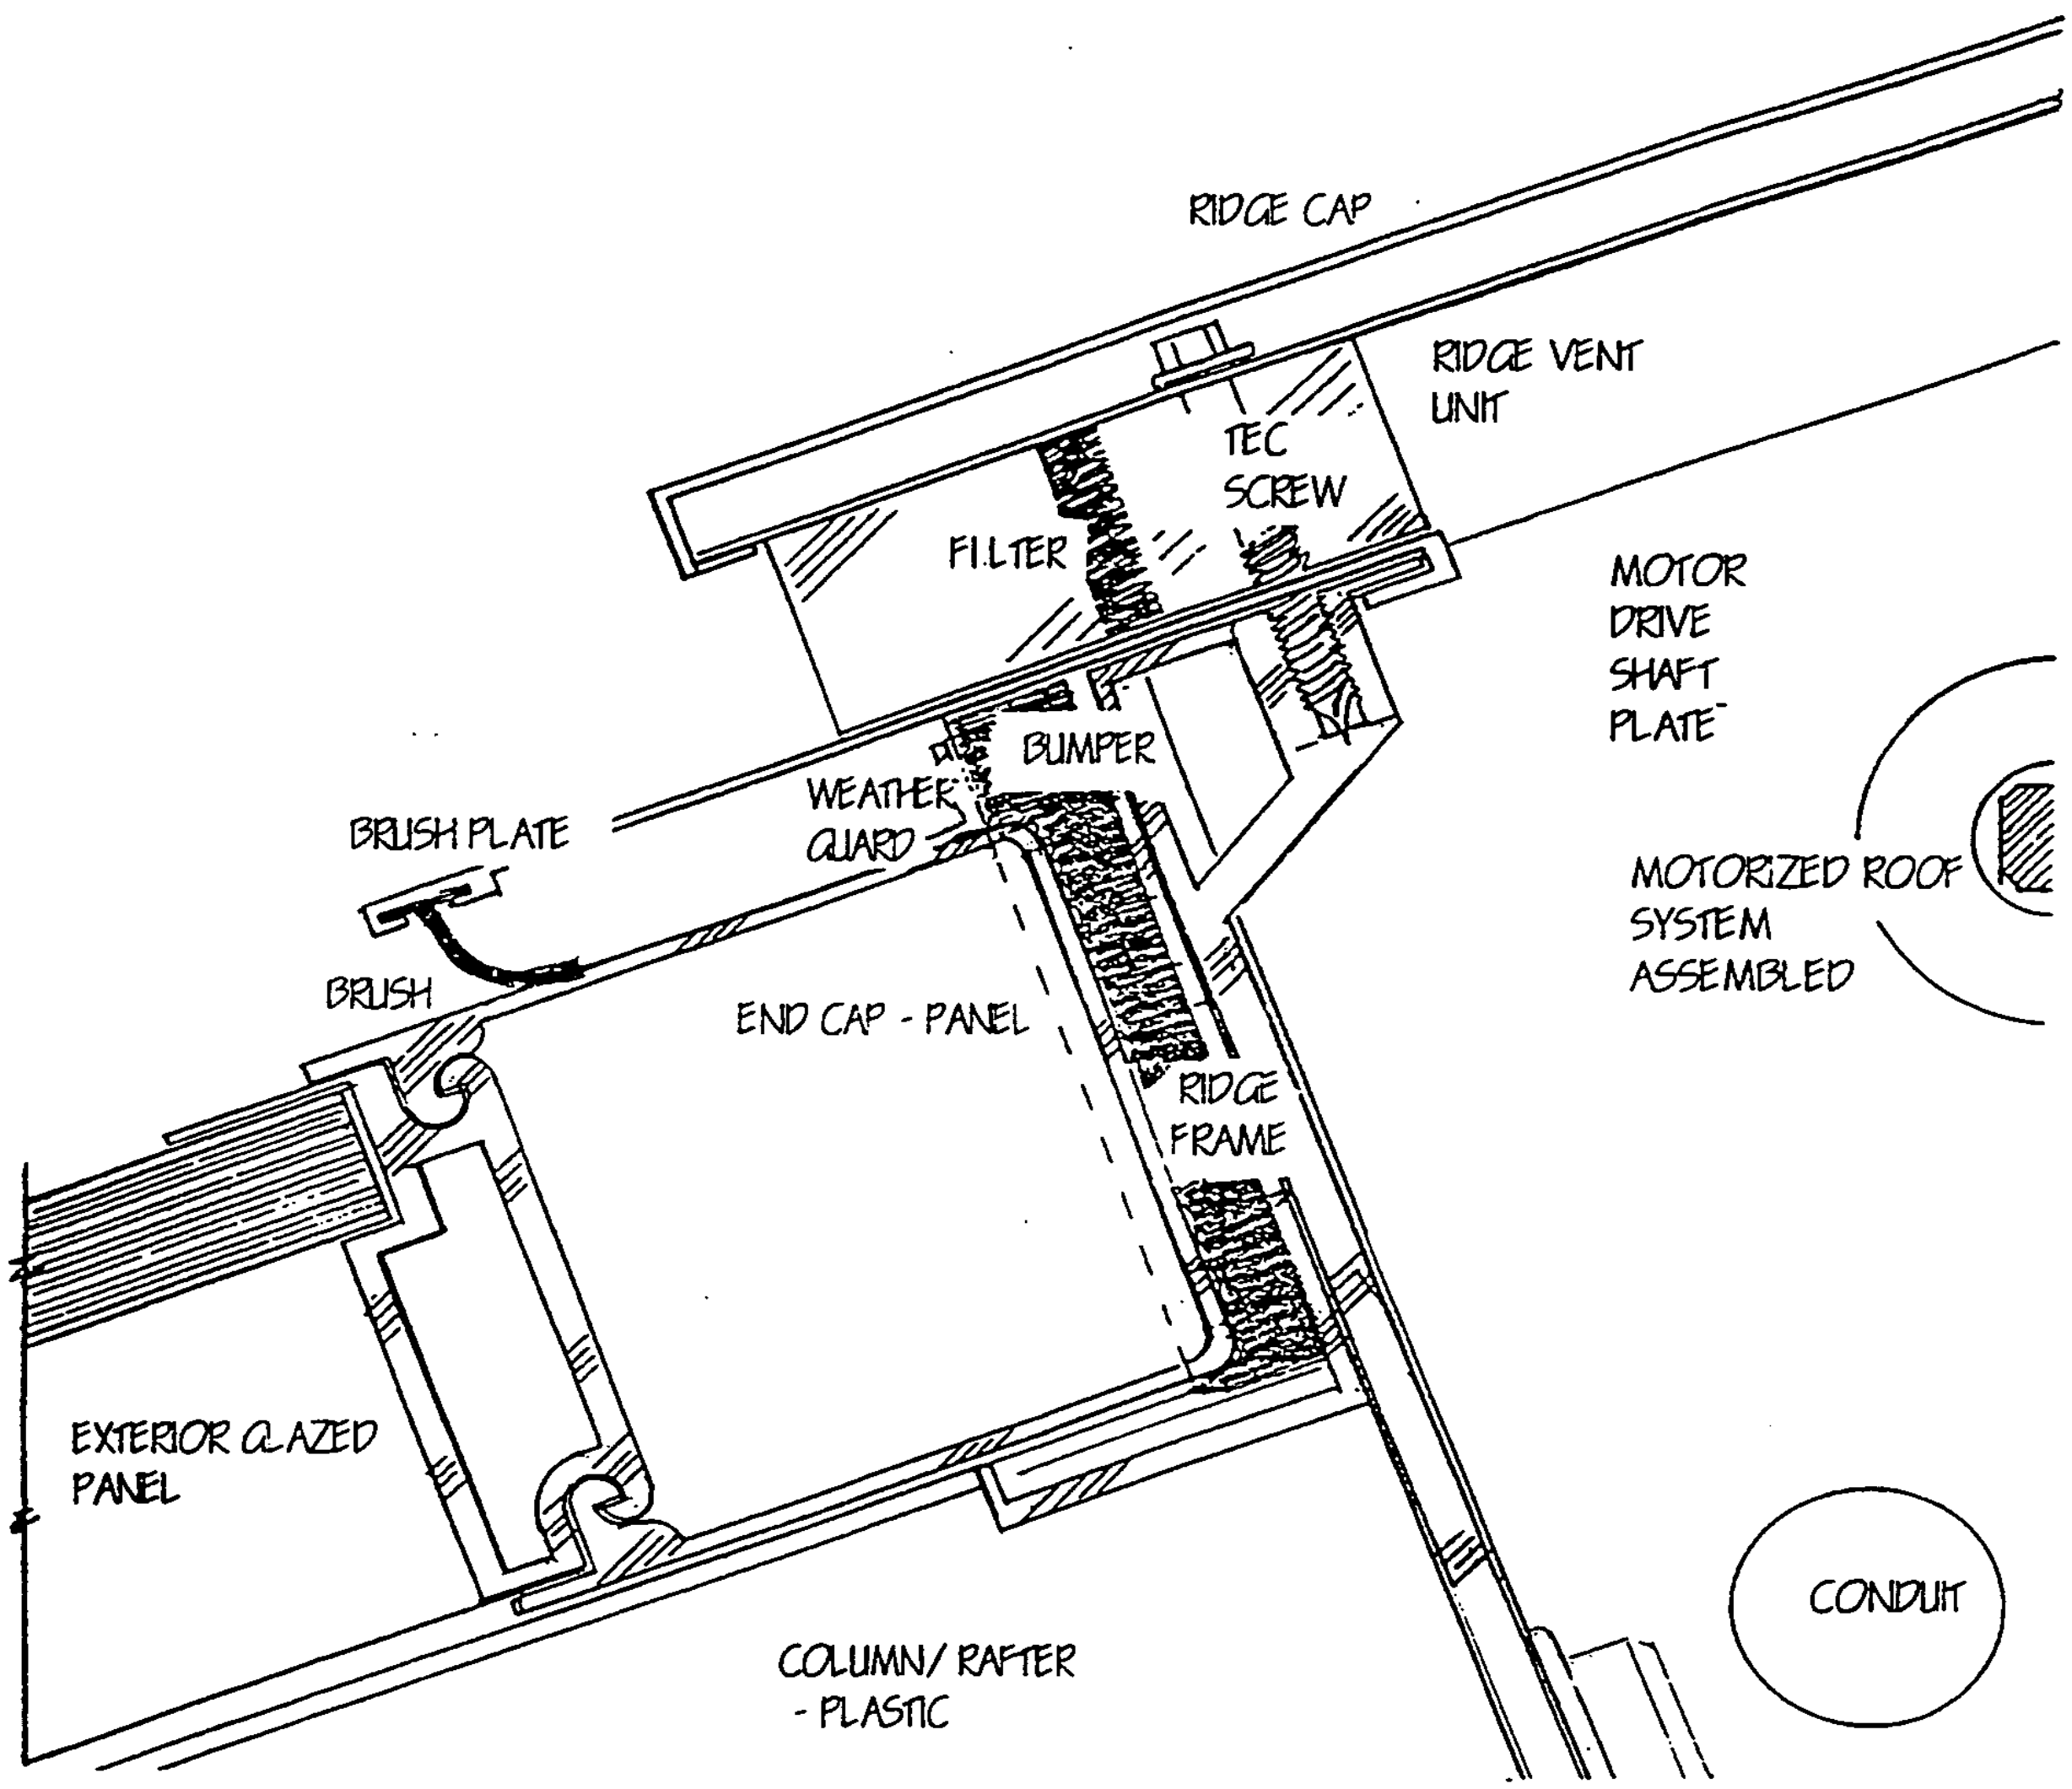
RIDGE CAP
RIDGE VENT UNIT
TEC SCREW
FILTER
MOTOR DRIVE SHAFT PLATE
BUMPER
WEATHER GUARD
BRUSH PLATE
MOTORIZED ROOF SYSTEM ASSEMBLED
BRUSH
END CAP - PANEL
RIDGE FRAME
EXTERIOR GLAZED PANEL
CONDUIT
COLUMN/ RAFTER - PLASTIC

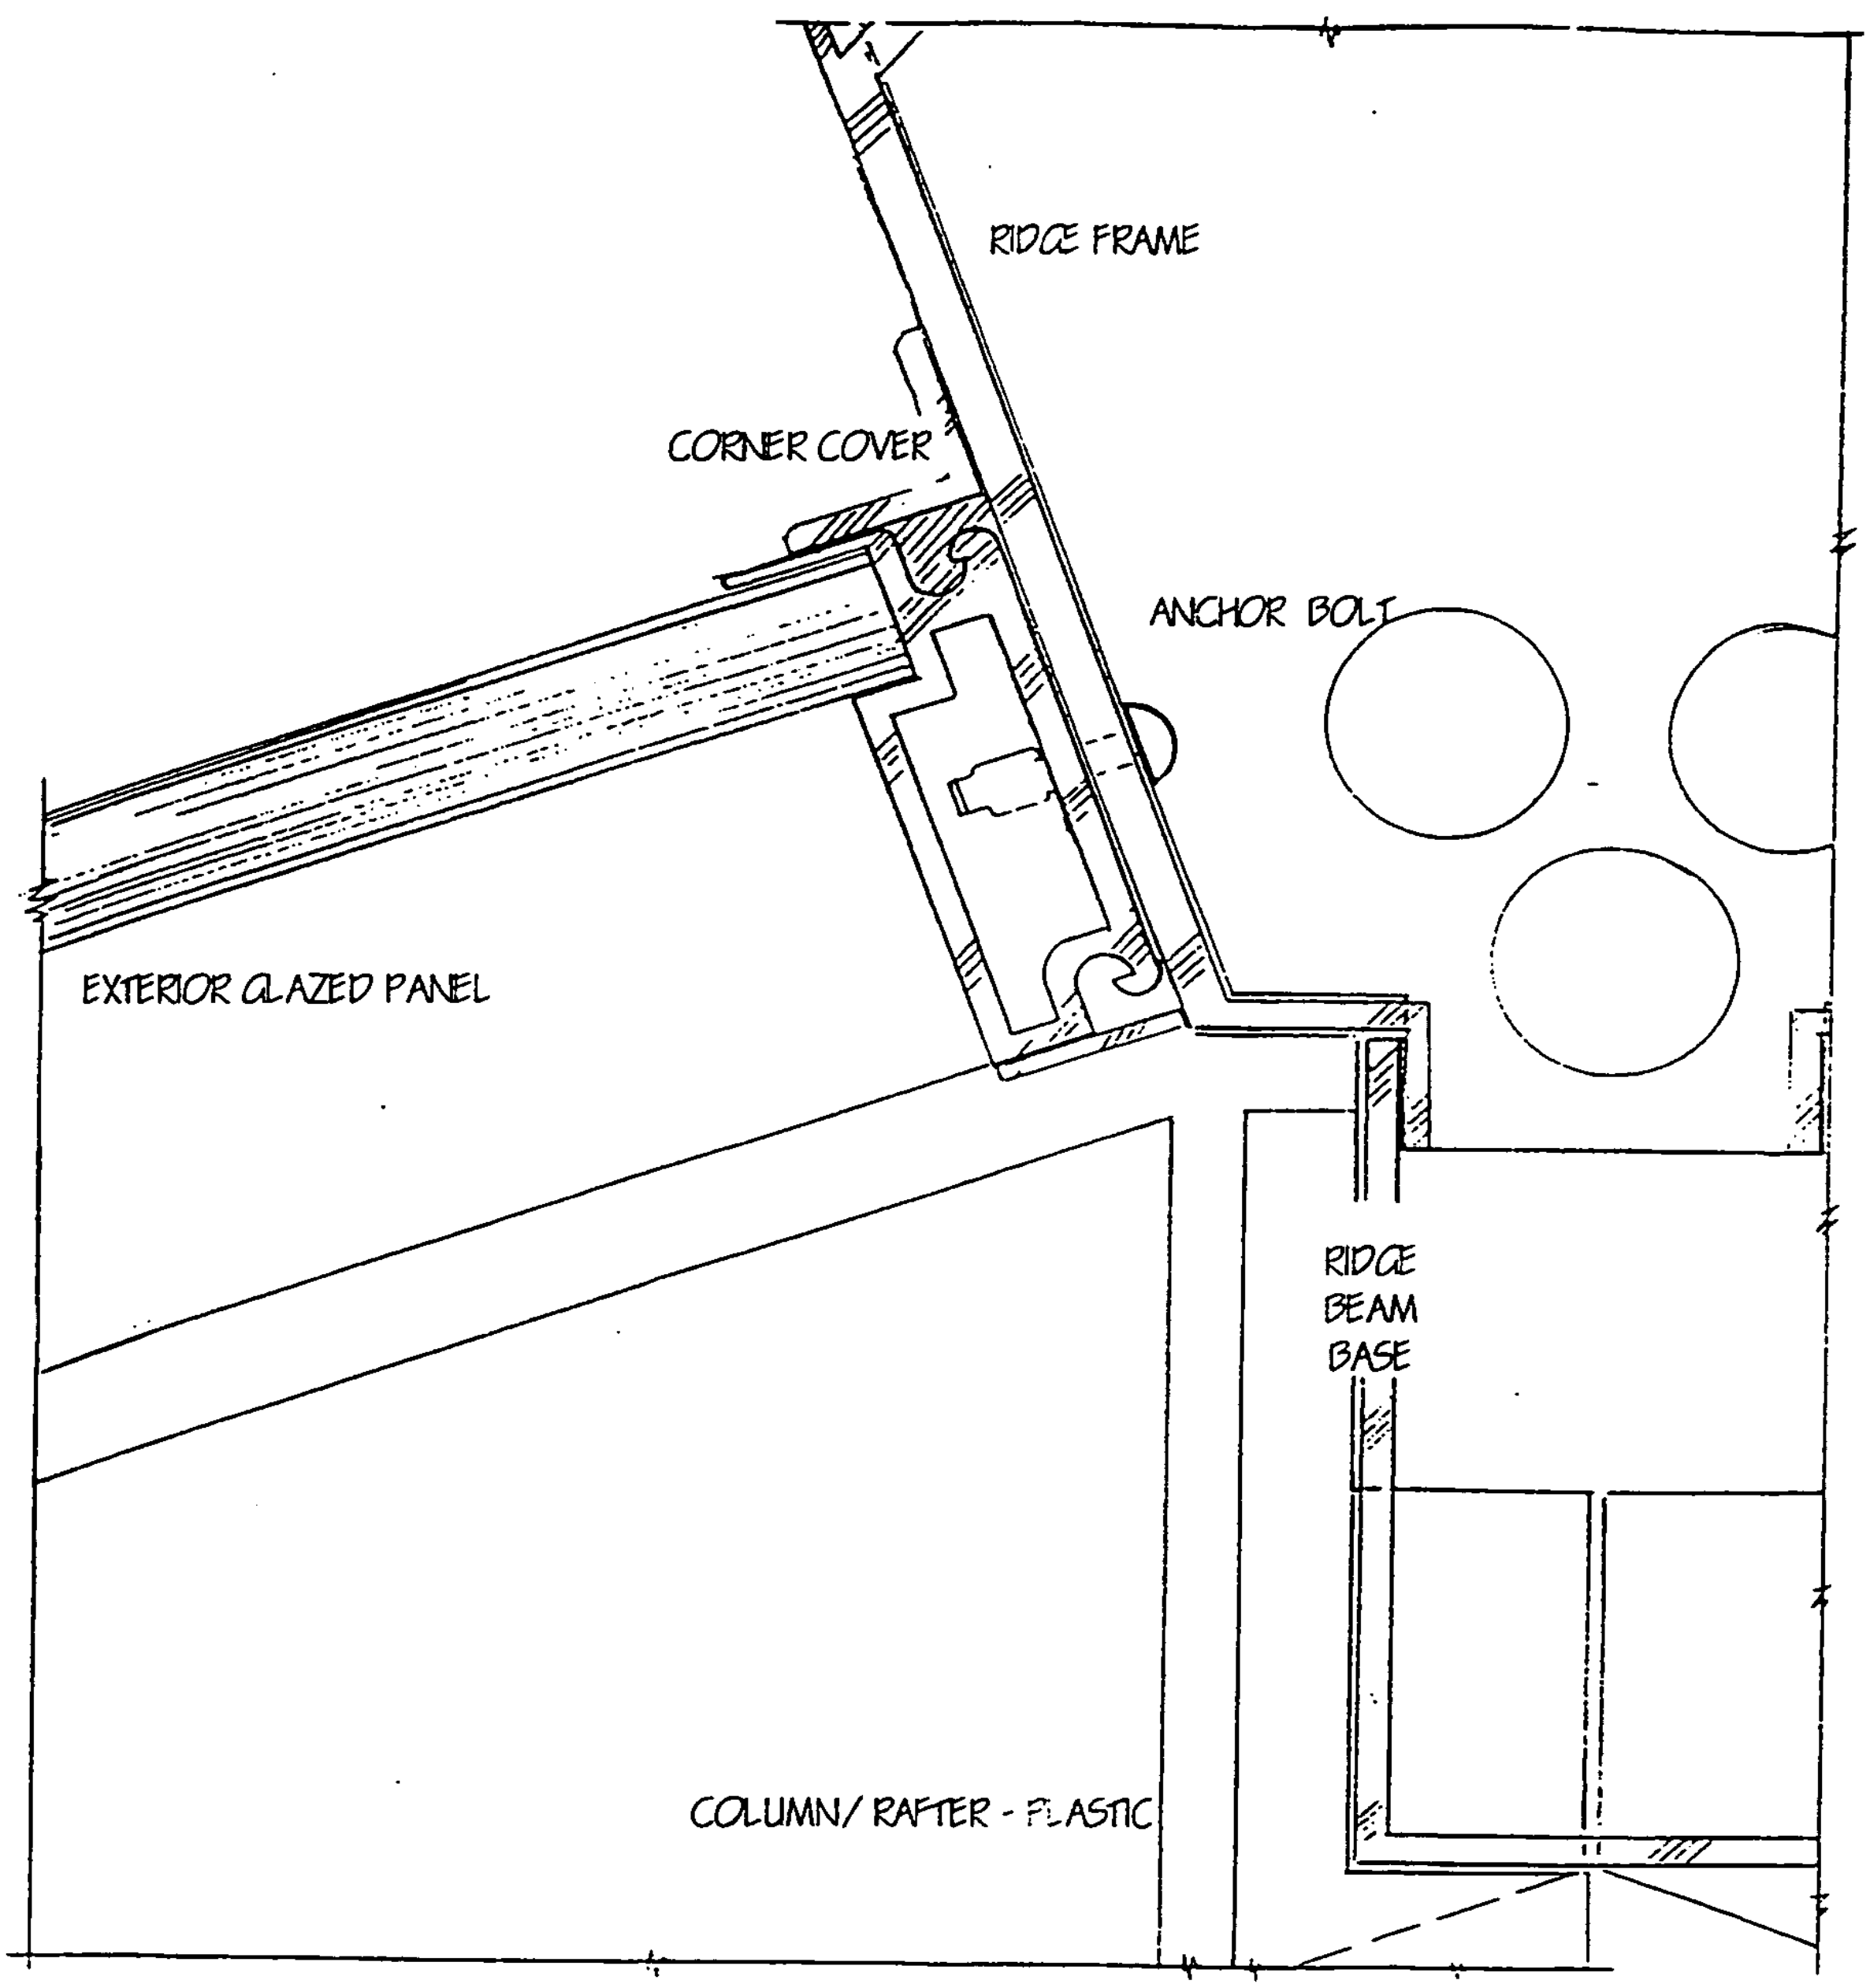
RIDGE FRAME
CORNER COVER
ANCHOR BOLT
EXTERIOR GLAZED PANEL
RIDGE
BEAM
BASE
COLUMN/ RAFTER - PLASTIC

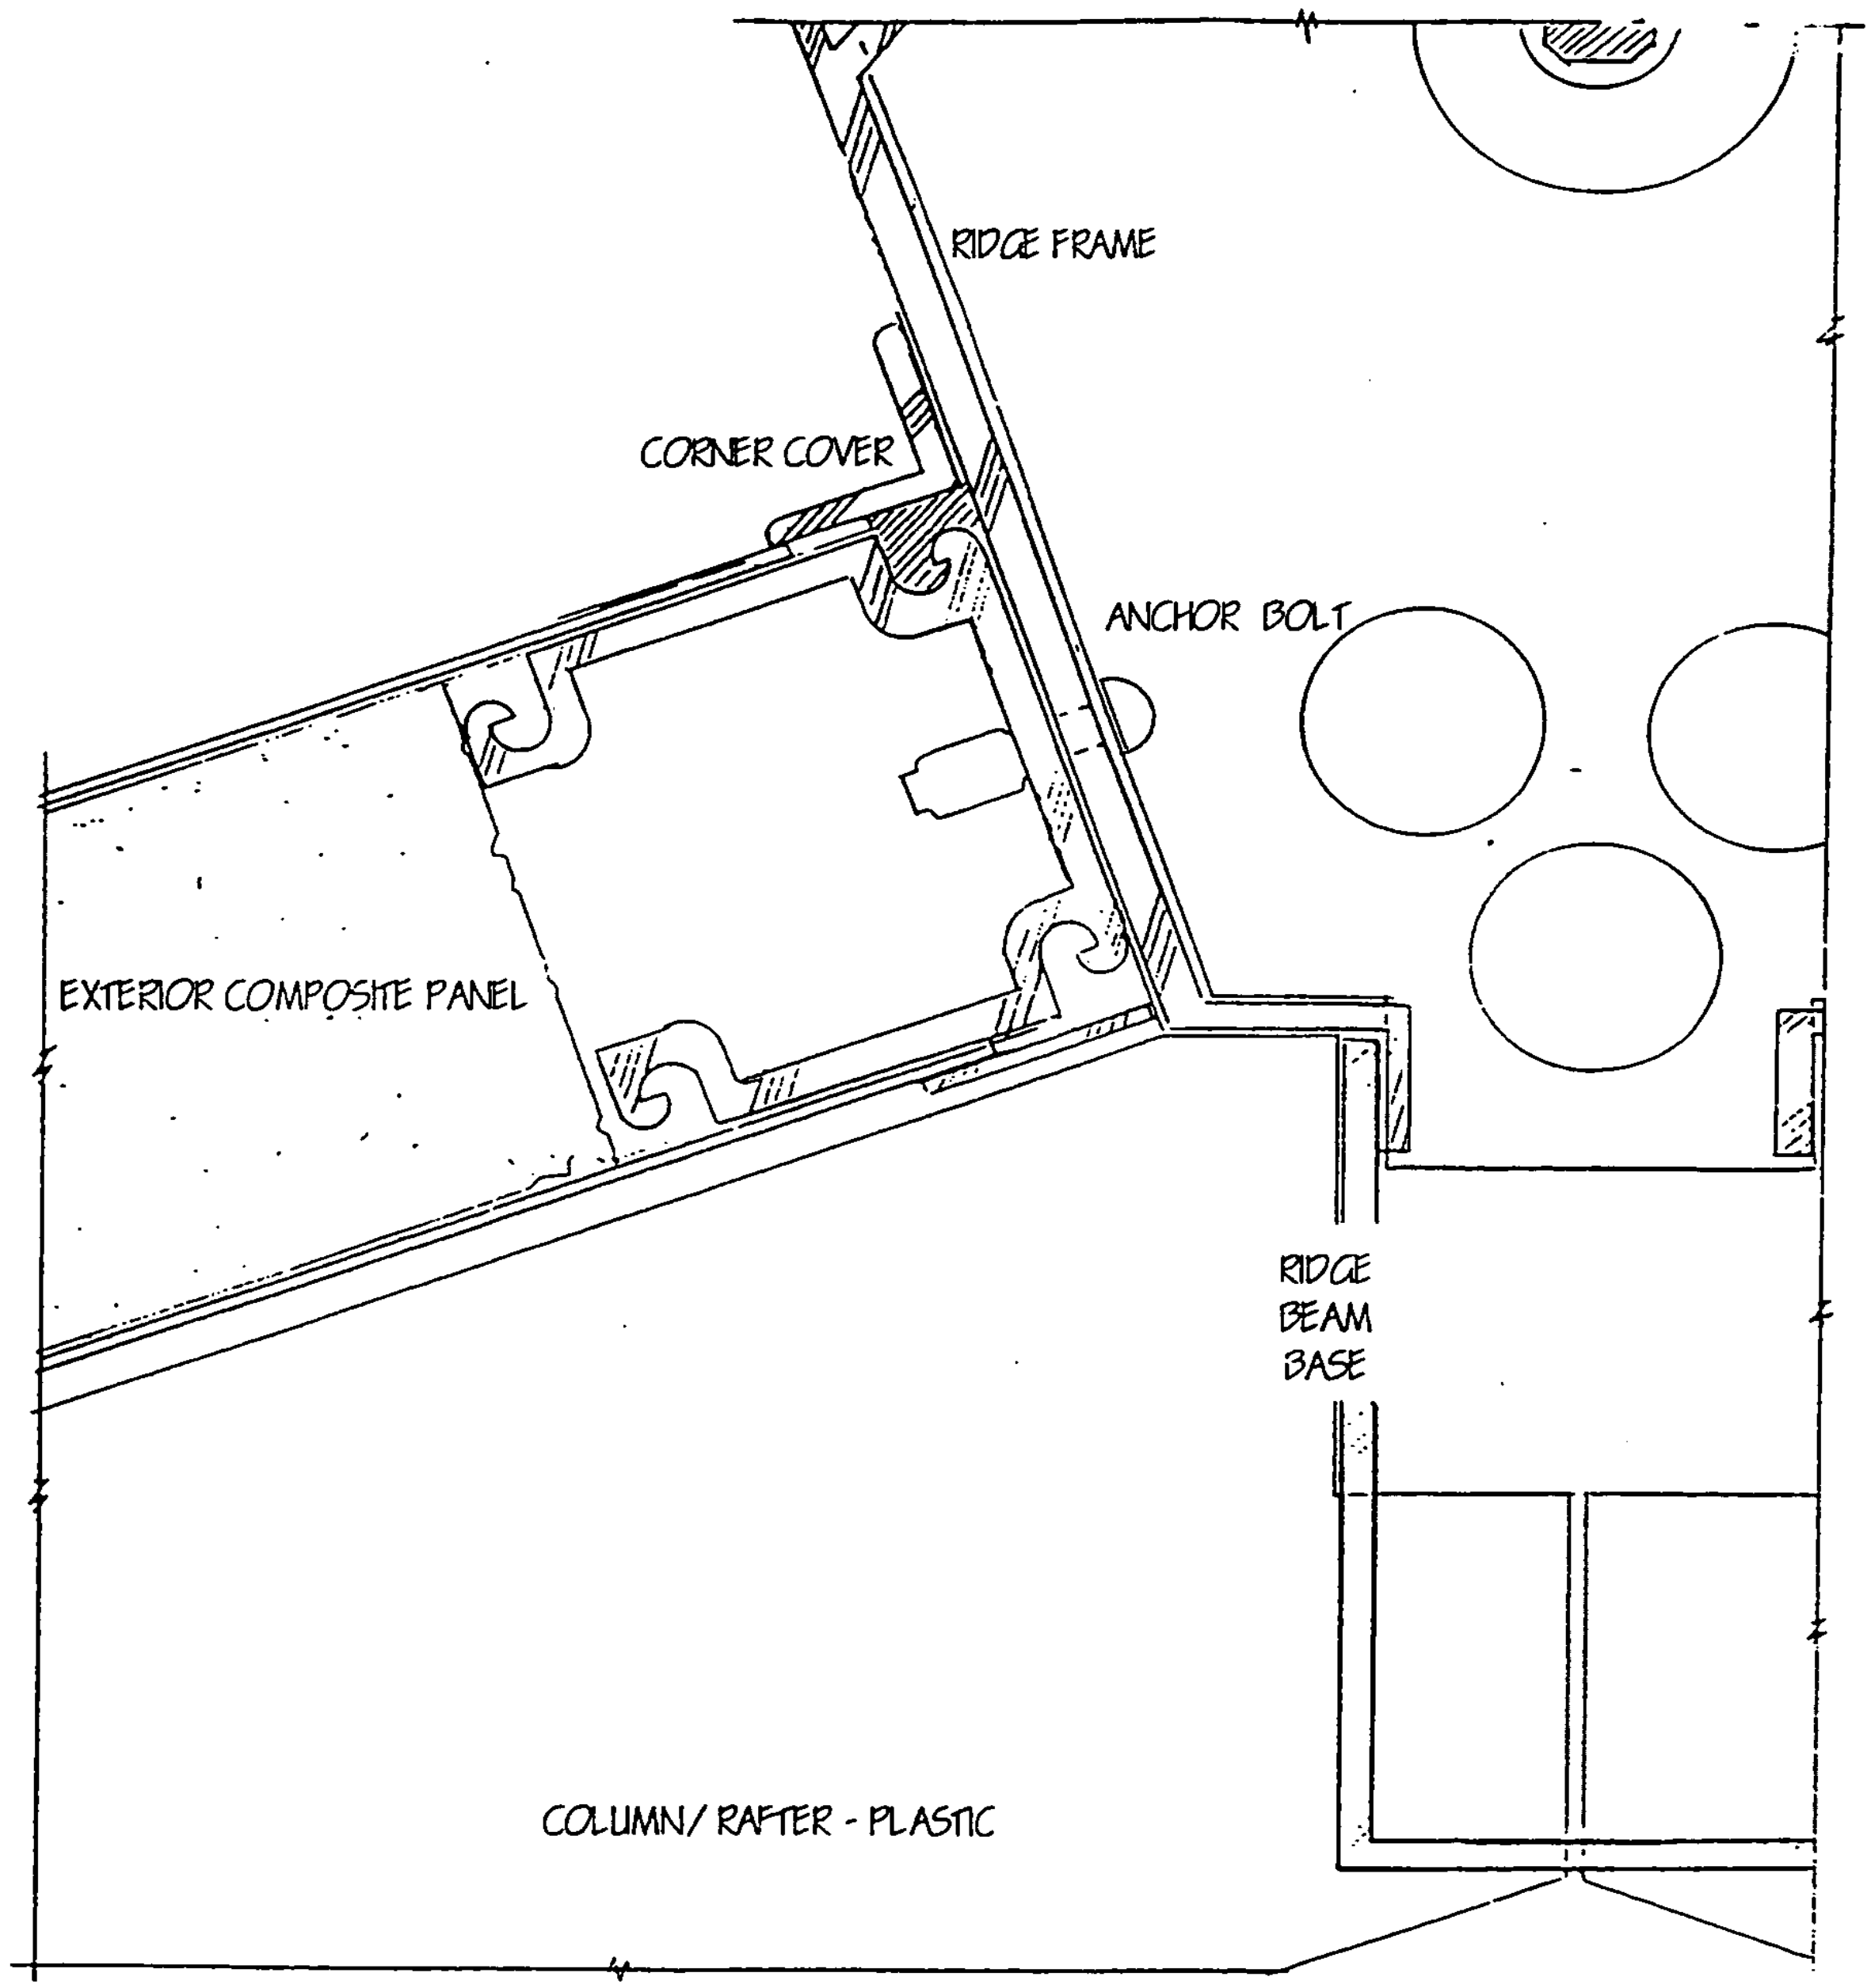
RIDGE FRAME
CORNER COVER
ANCHOR BOLT
EXTERIOR COMPOSITE PANEL
RIDGE
BEAM
BASE
COLUMN/ RAFTER - PLASTIC

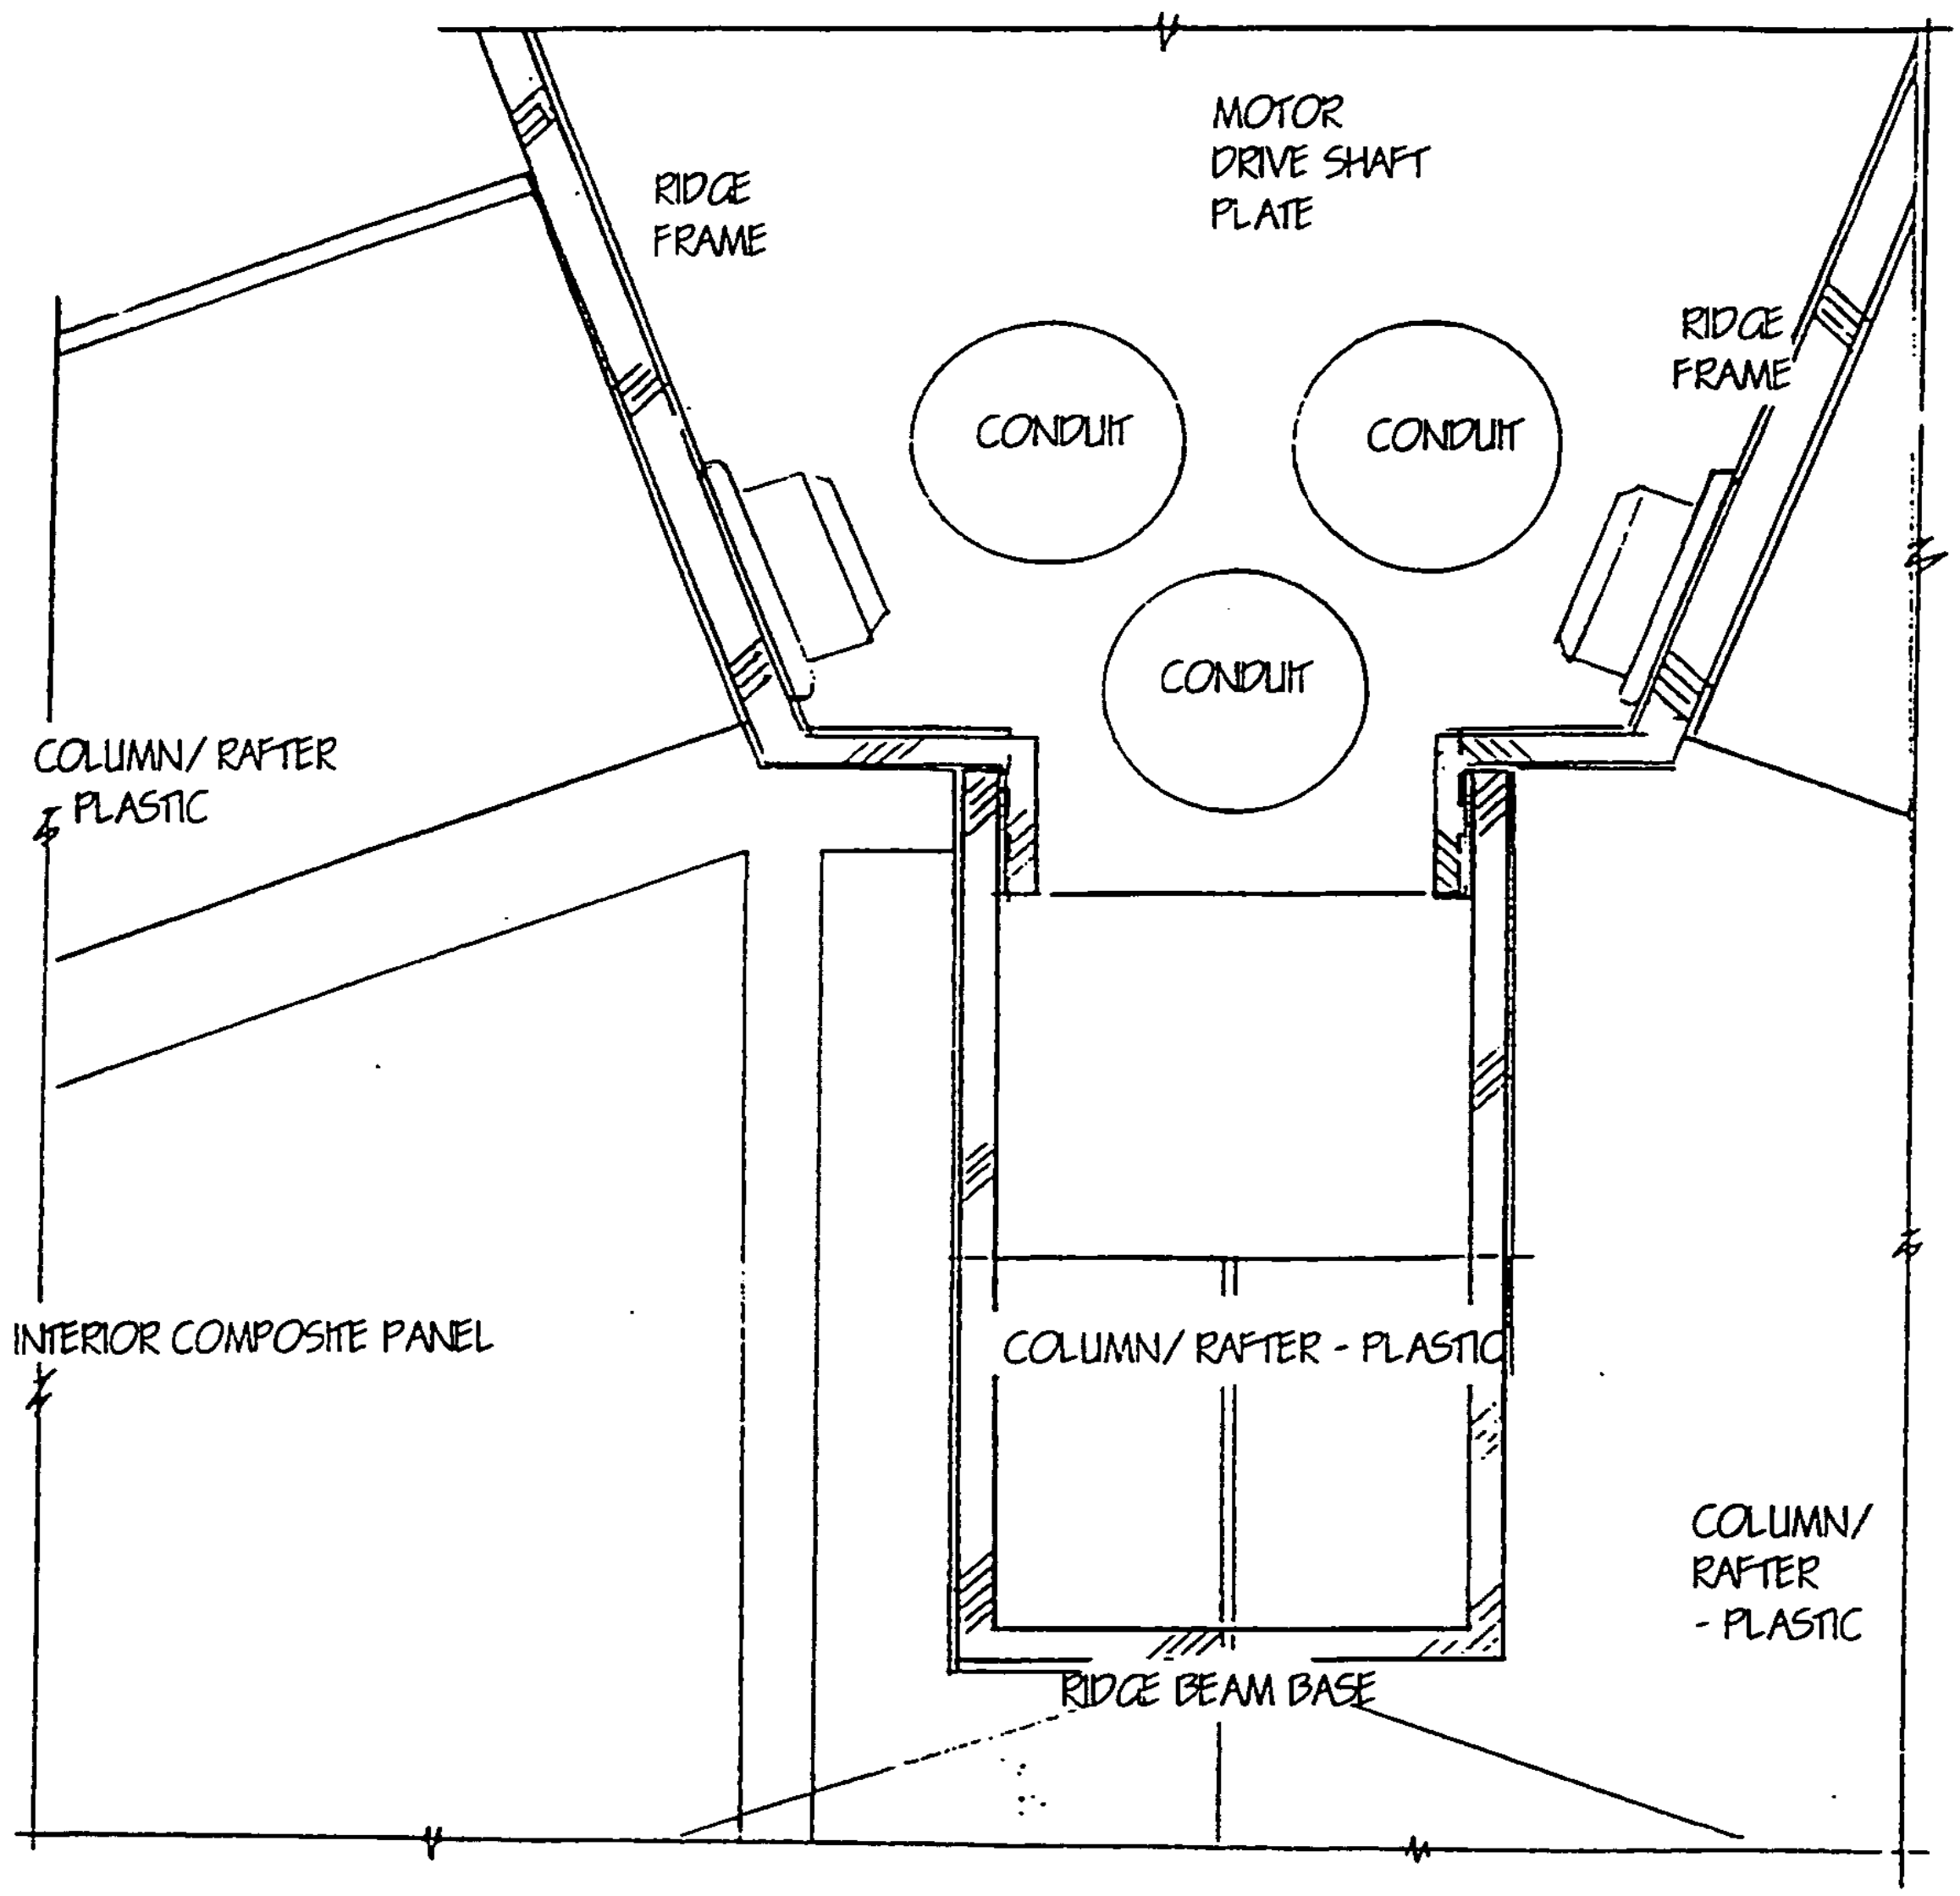
MOTOR
DRIVE SHAFT
PLATE
RIDGE
FRAME
RIDGE
FRAME
CONDUIT
CONDUIT
CONDUIT
COLUMN/ RAFTER
PLASTIC
INTERIOR COMPOSITE PANEL
COLUMN/ RAFTER - PLASTIC
COLUMN/
RAFTER
- PLASTIC
RIDGE BEAM BASE

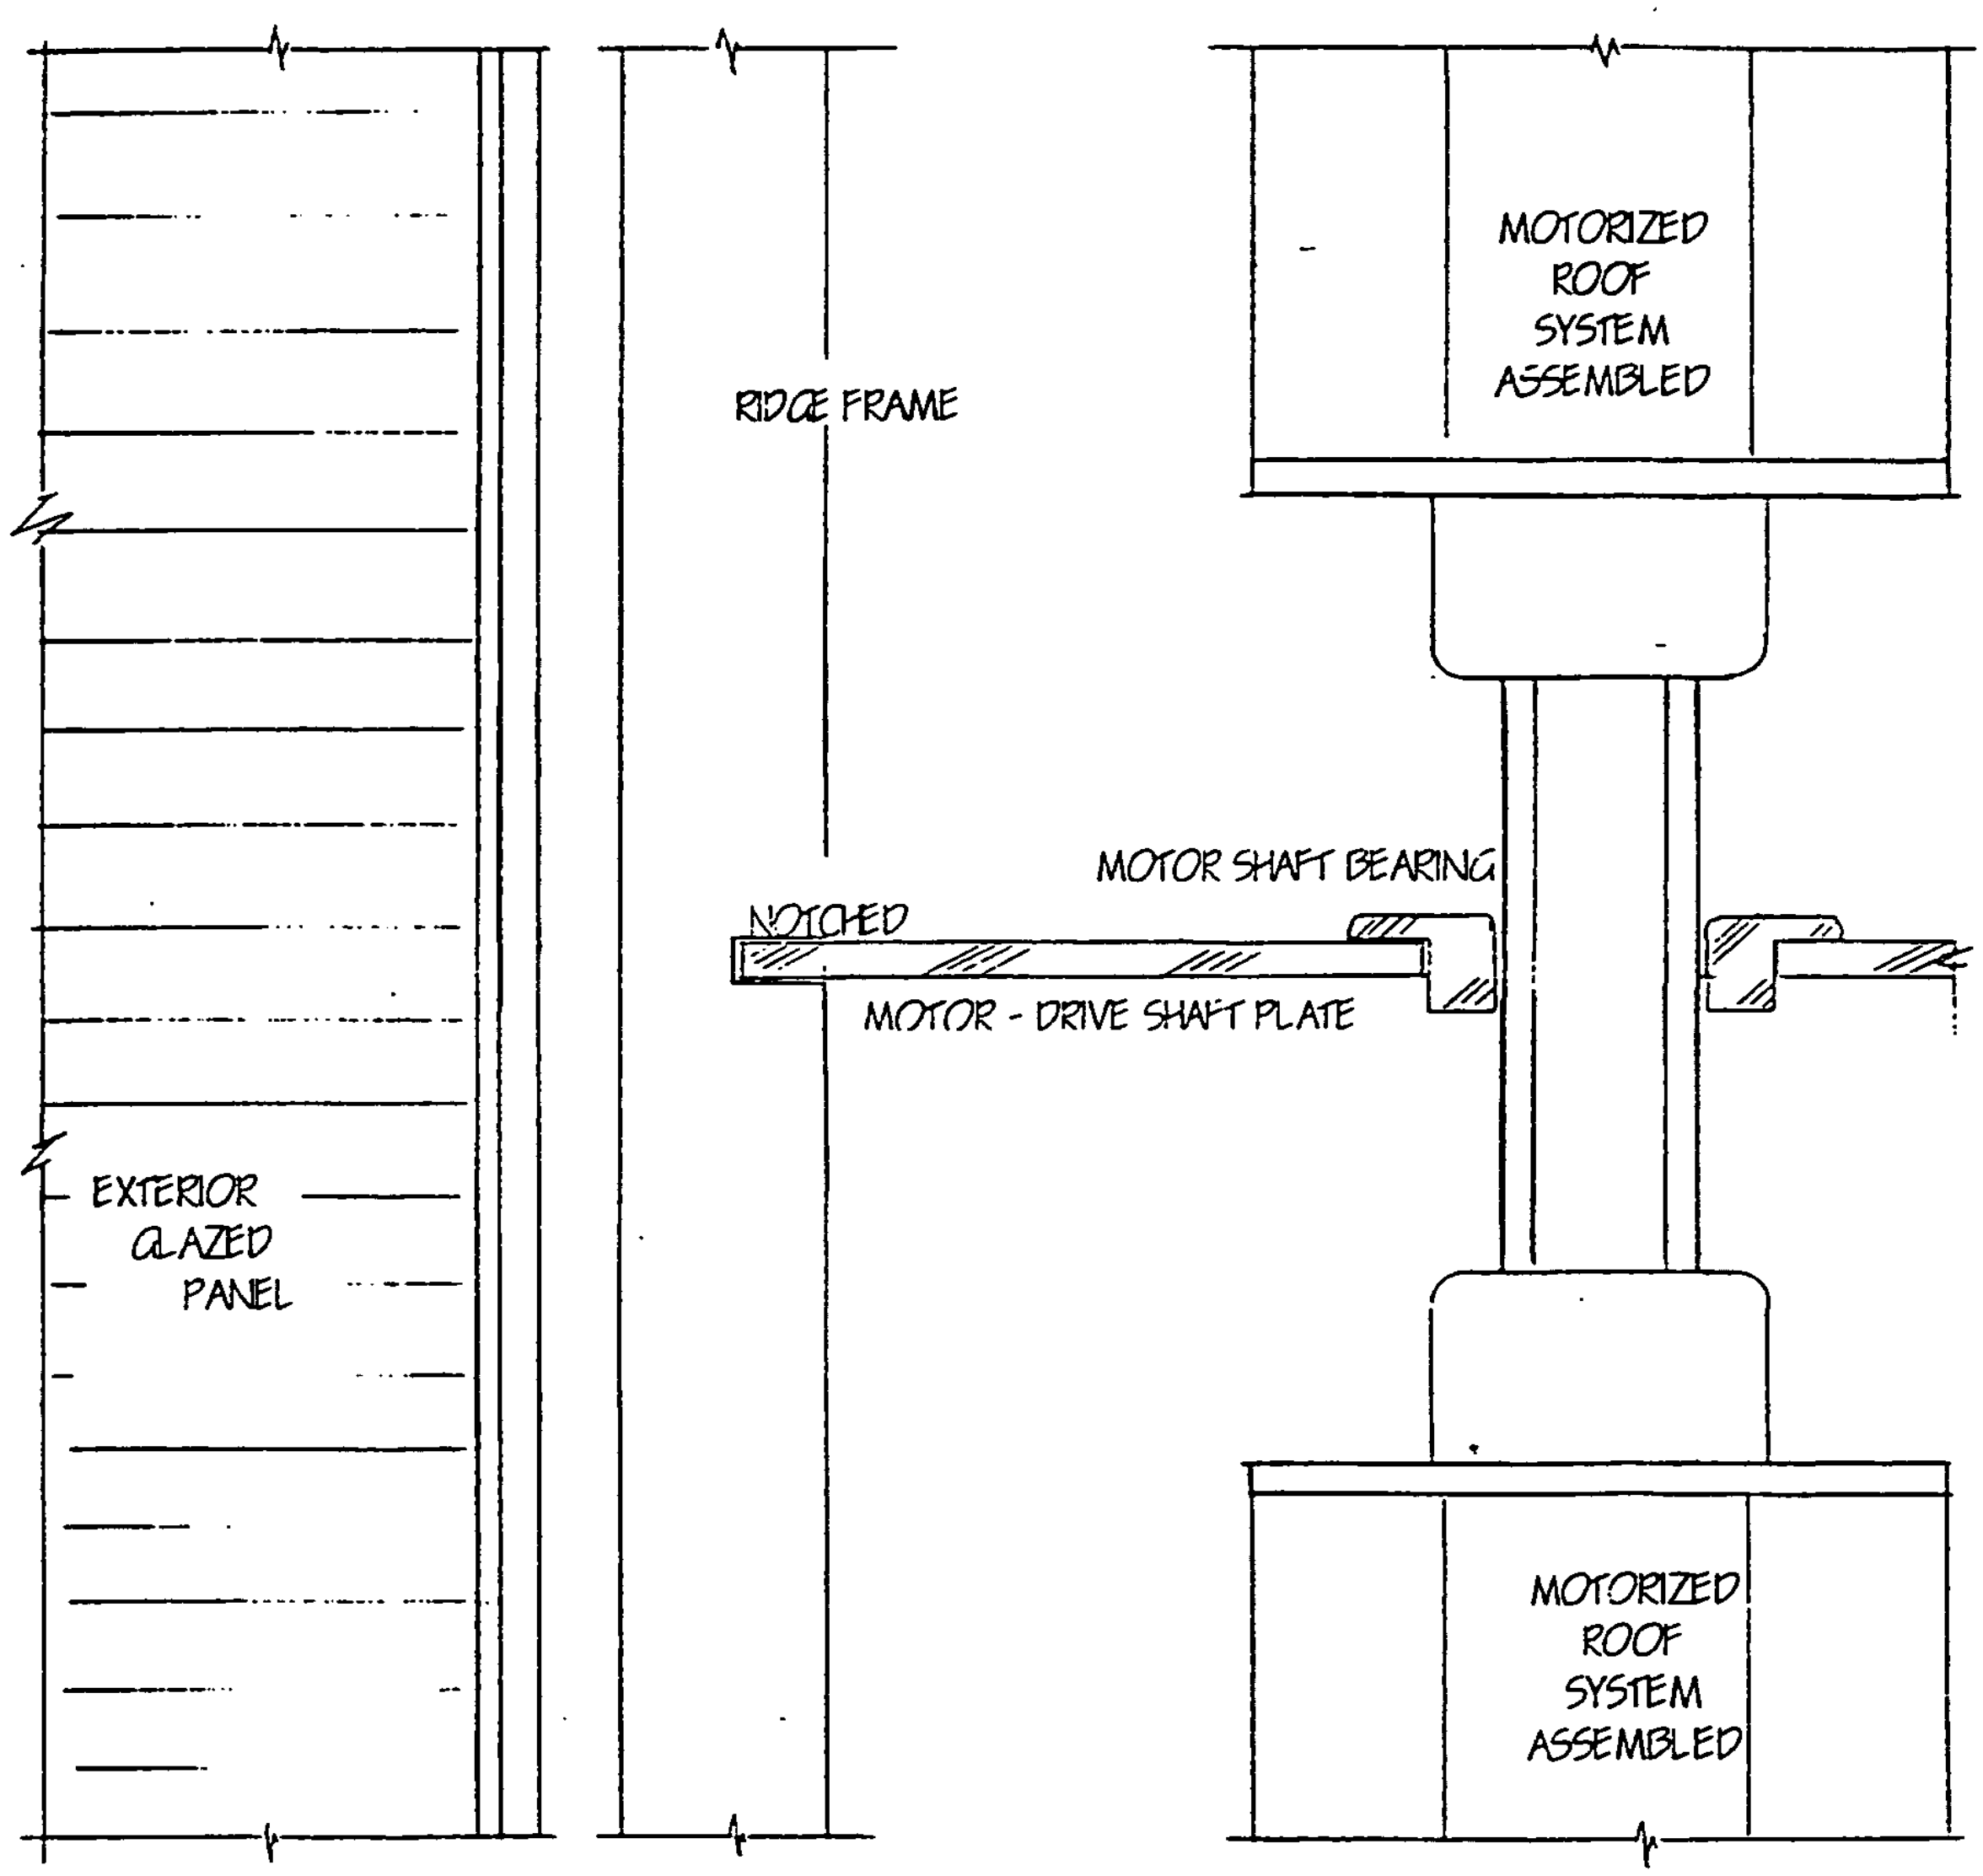
MOTORIZED ROOF SYSTEM ASSEMBLED
RIDGE FRAME
MOTOR SHAFT BEARING
NOTCHED
MOTOR - DRIVE SHAFT PLATE
EXTERIOR GLAZED PANEL
MOTORIZED ROOF SYSTEM ASSEMBLED

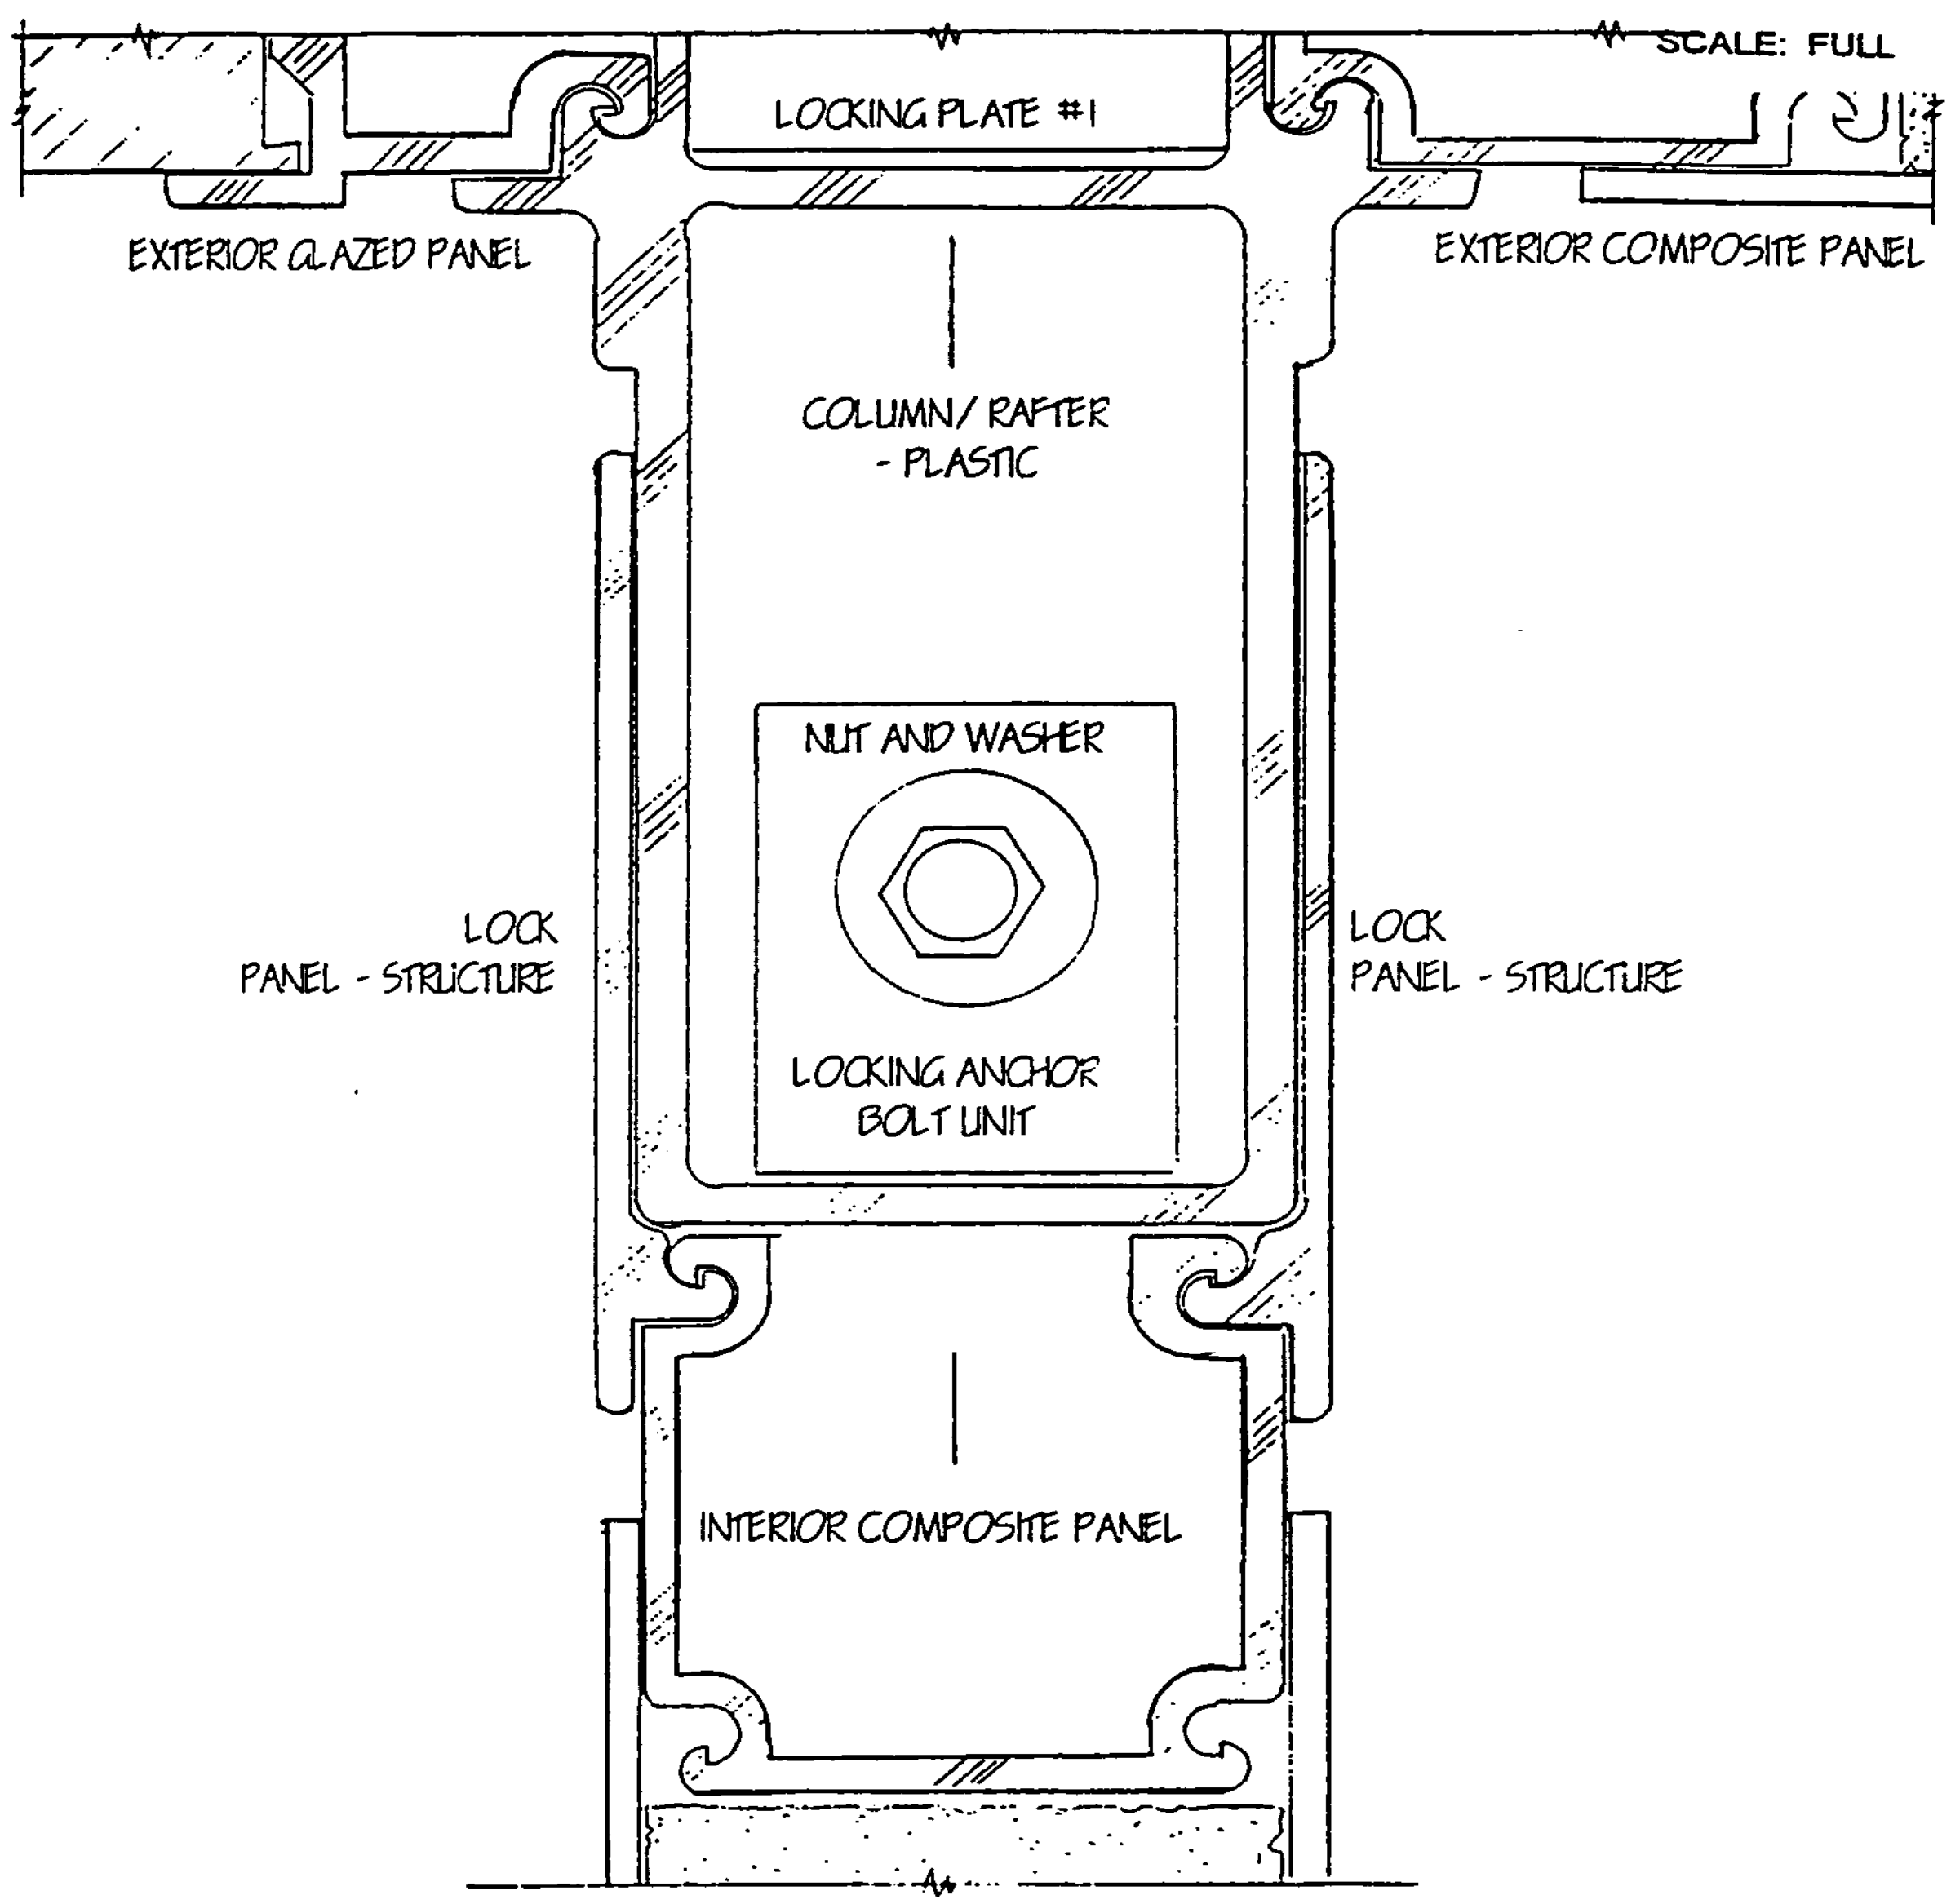
SCALE: FULL
LOCKING PLATE #1
EXTERIOR GLAZED PANEL
EXTERIOR COMPOSITE PANEL
COLUMN/ RAFTER - PLASTIC
NUT AND WASHER
LOCK PANEL - STRUCTURE
LOCK PANEL - STRUCTURE
LOCKING ANCHOR BOLT UNIT
INTERIOR COMPOSITE PANEL

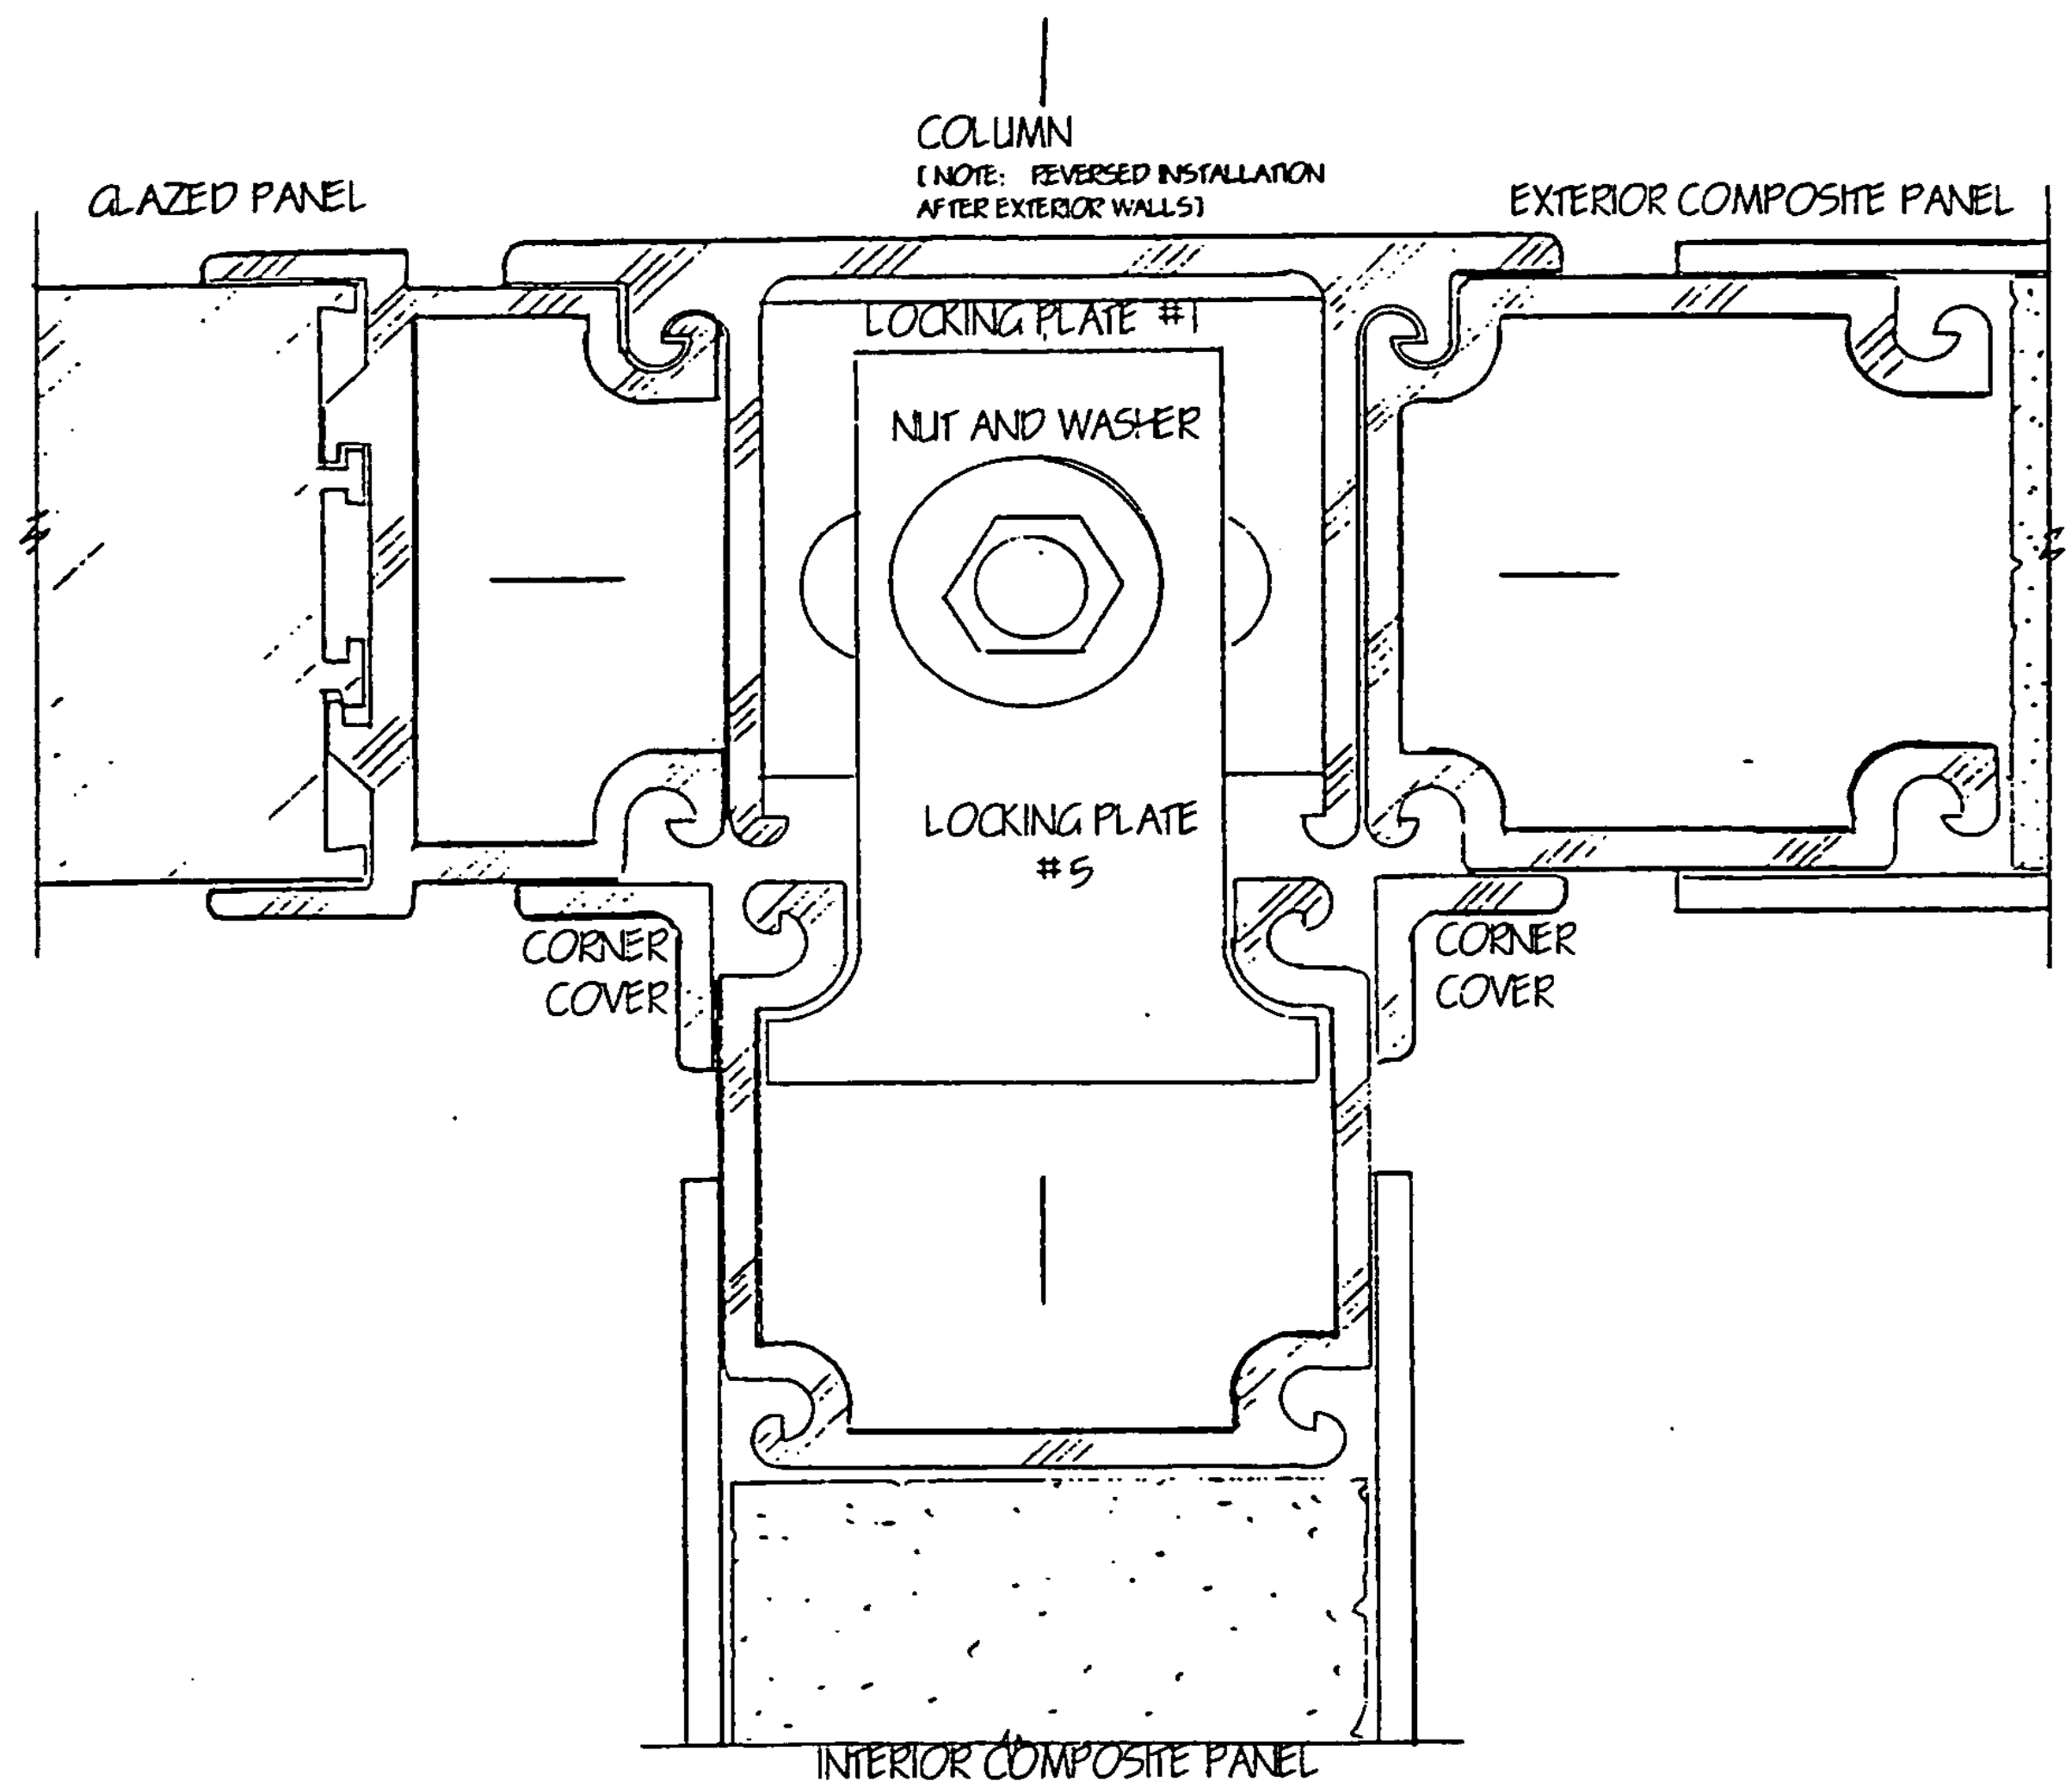
COLUMN
[NOTE: REVERSED INSTALLATION AFTER EXTERIOR WALLS]
GLAZED PANEL
EXTERIOR COMPOSITE PANEL
LOCKING PLATE #1
NUT AND WASHER
LOCKING PLATE #5
CORNER COVER
CORNER COVER
INTERIOR COMPOSITE PANEL

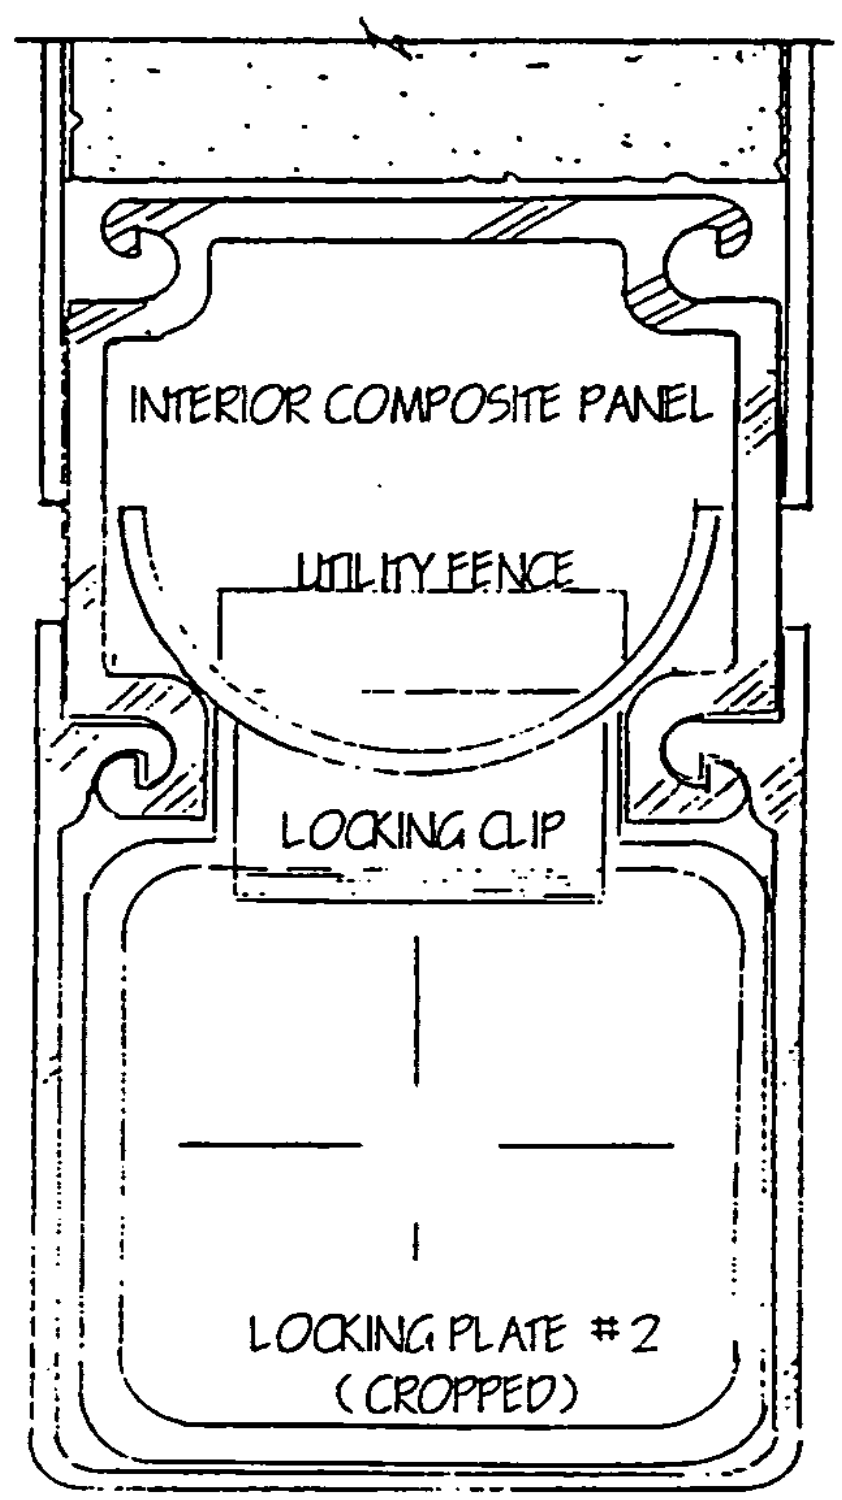

END CAP - PANEL

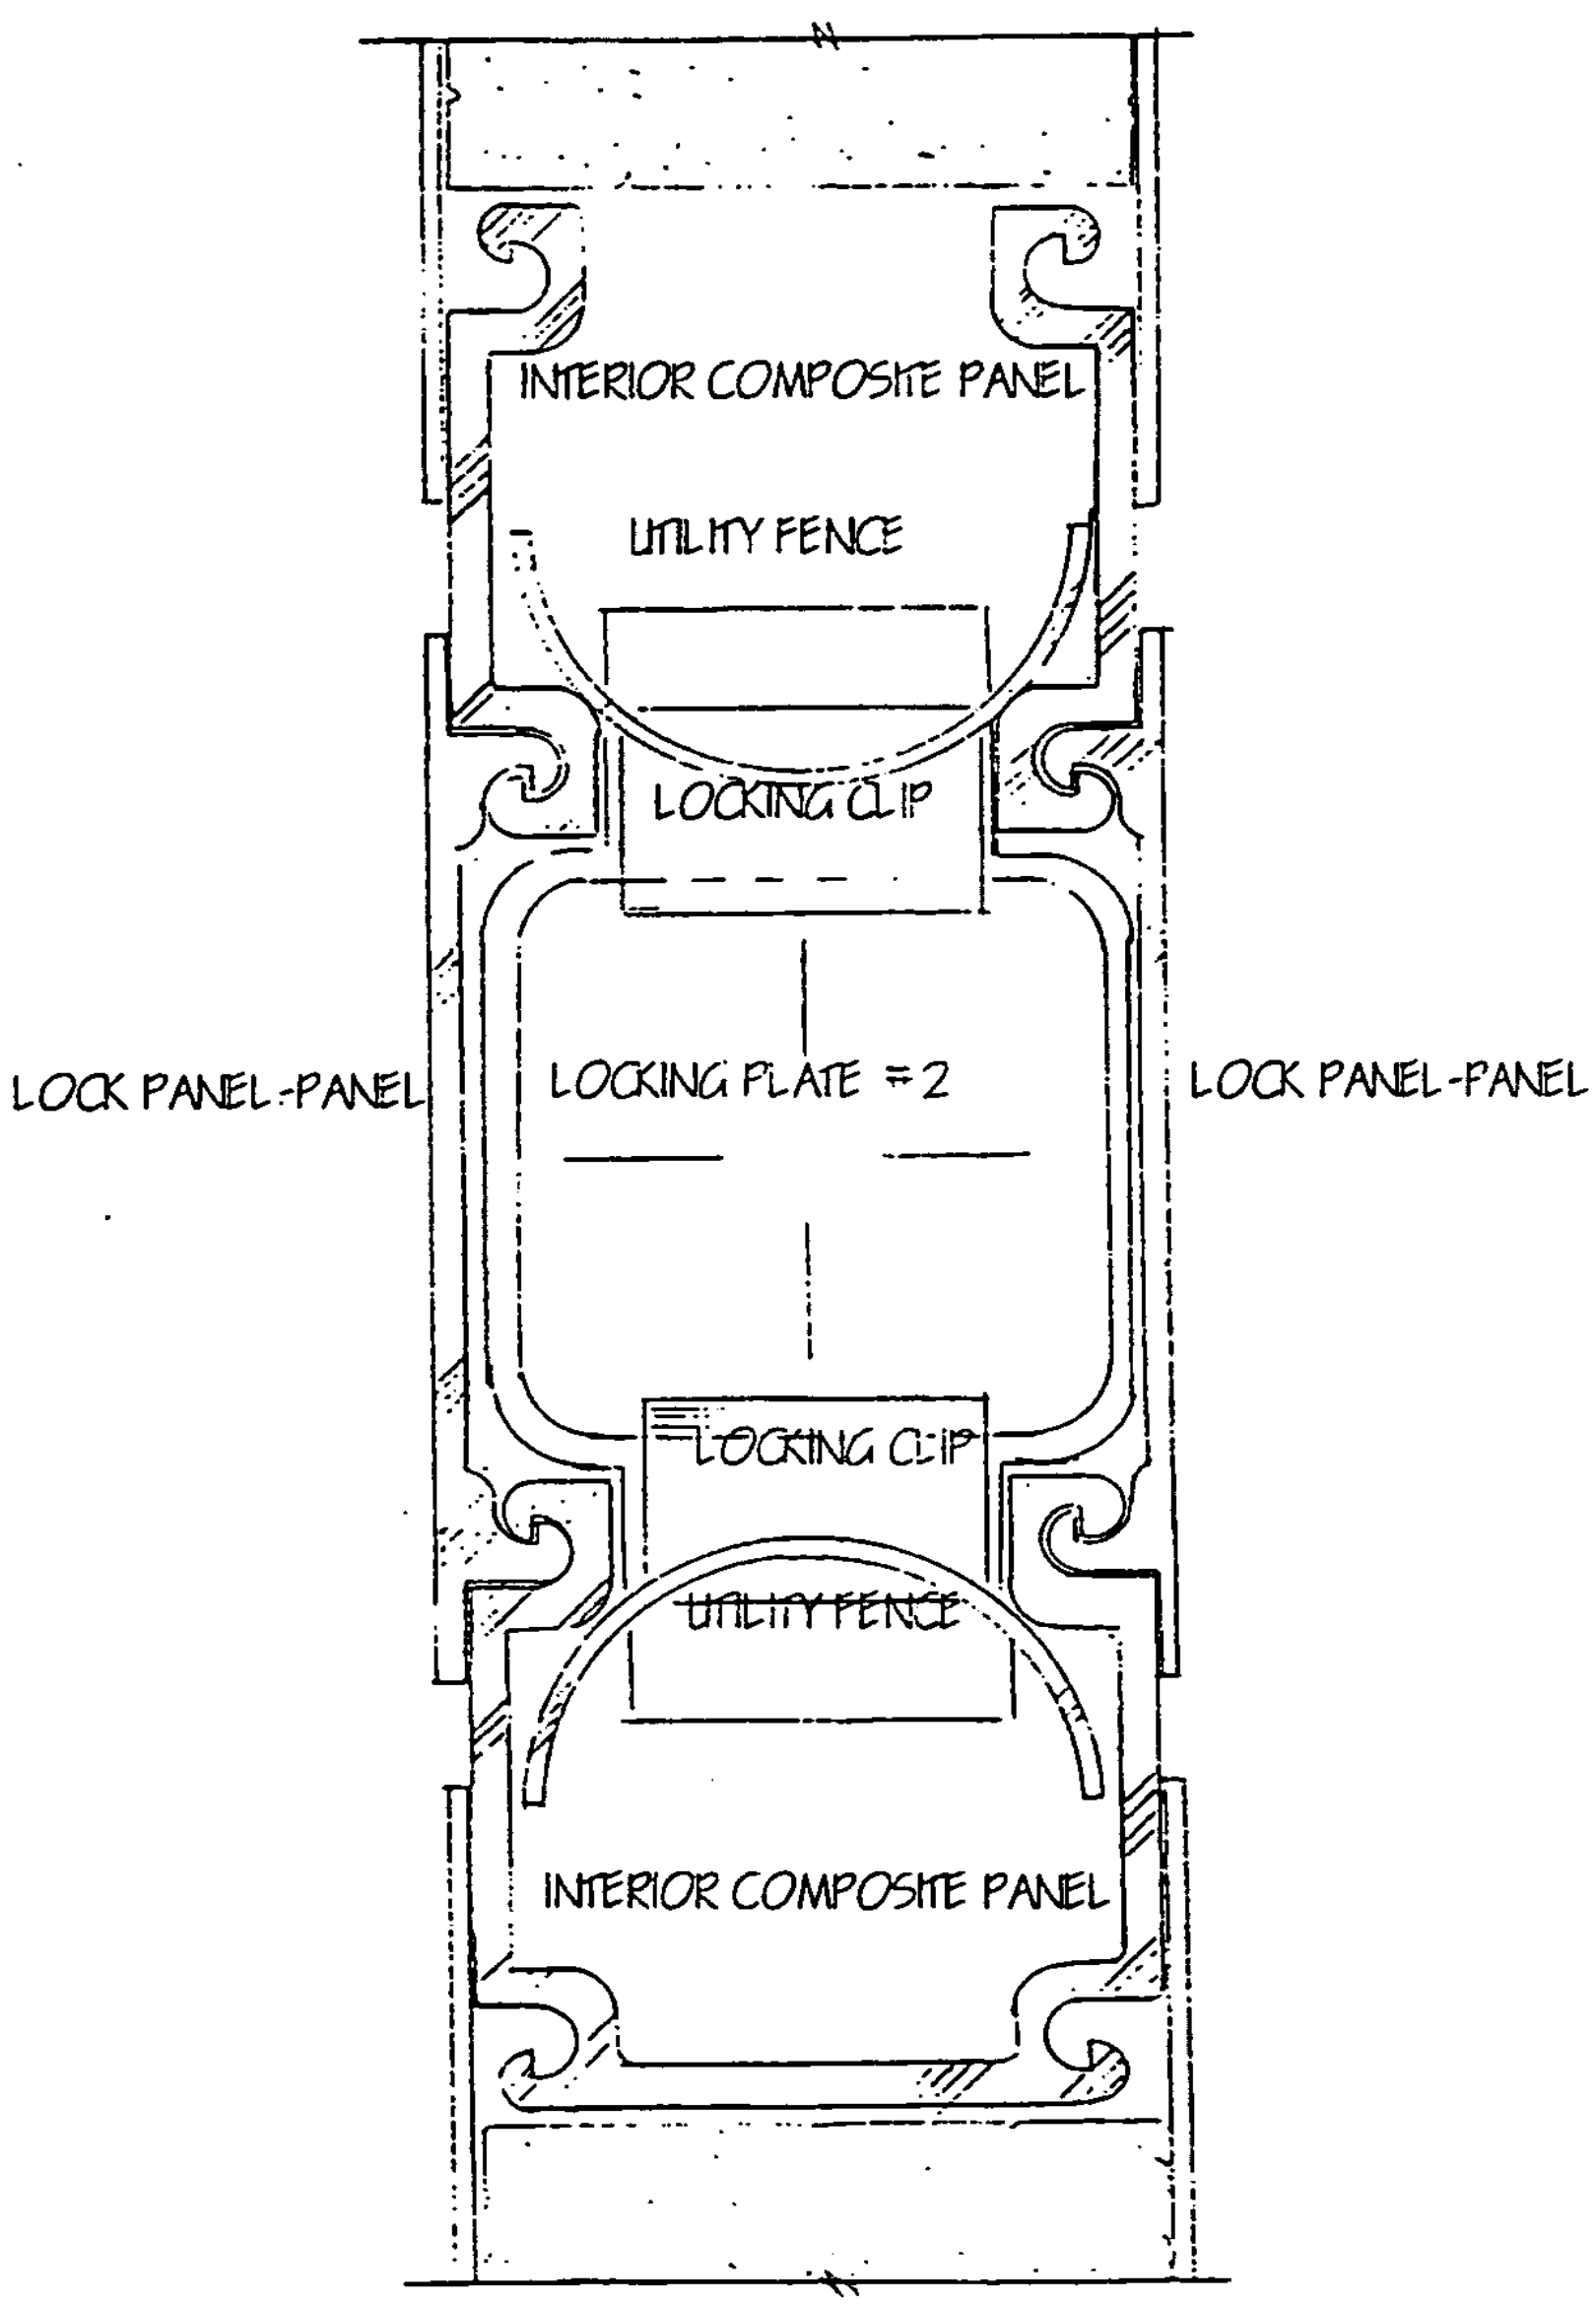
INTERIOR COMPOSITE PANEL
UTILITY FENCE
LOCKING CLIP
LOCK PANEL-PANEL
LOCKING PLATE #2
LOCK PANEL-PANEL
LOCKING CLIP
UTILITY FENCE
INTERIOR COMPOSITE PANEL

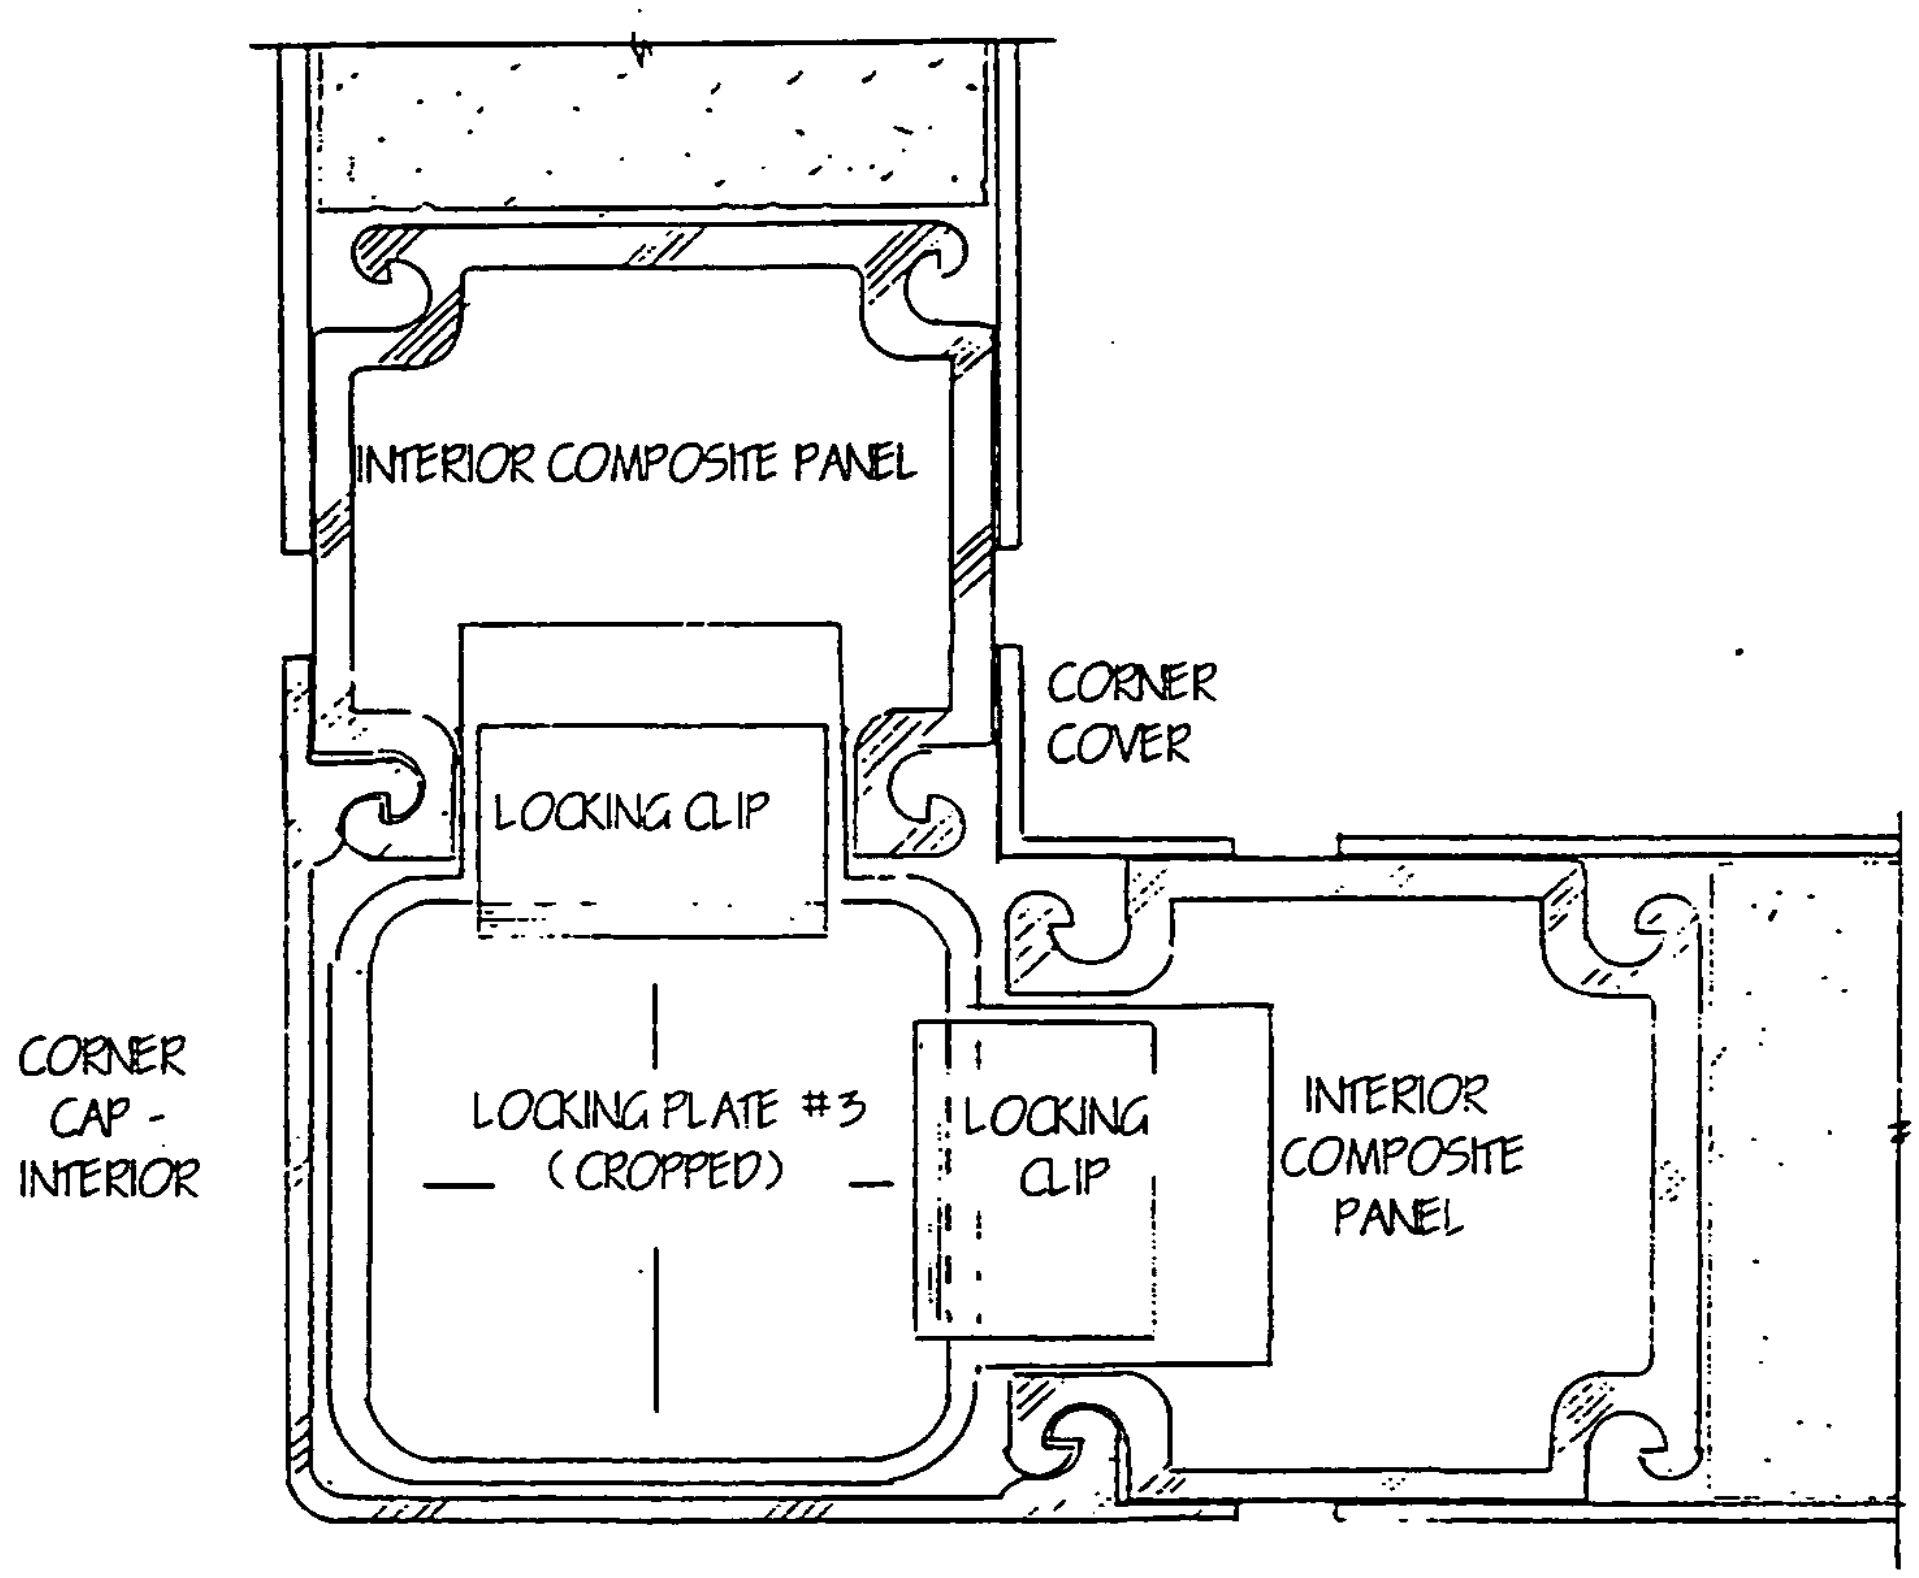
INTERIOR COMPOSITE PANEL
CORNER COVER
LOCKING CLIP
CORNER CAP - INTERIOR
LOCKING PLATE #3 (CROPPED)
LOCKING CLIP
INTERIOR COMPOSITE PANEL

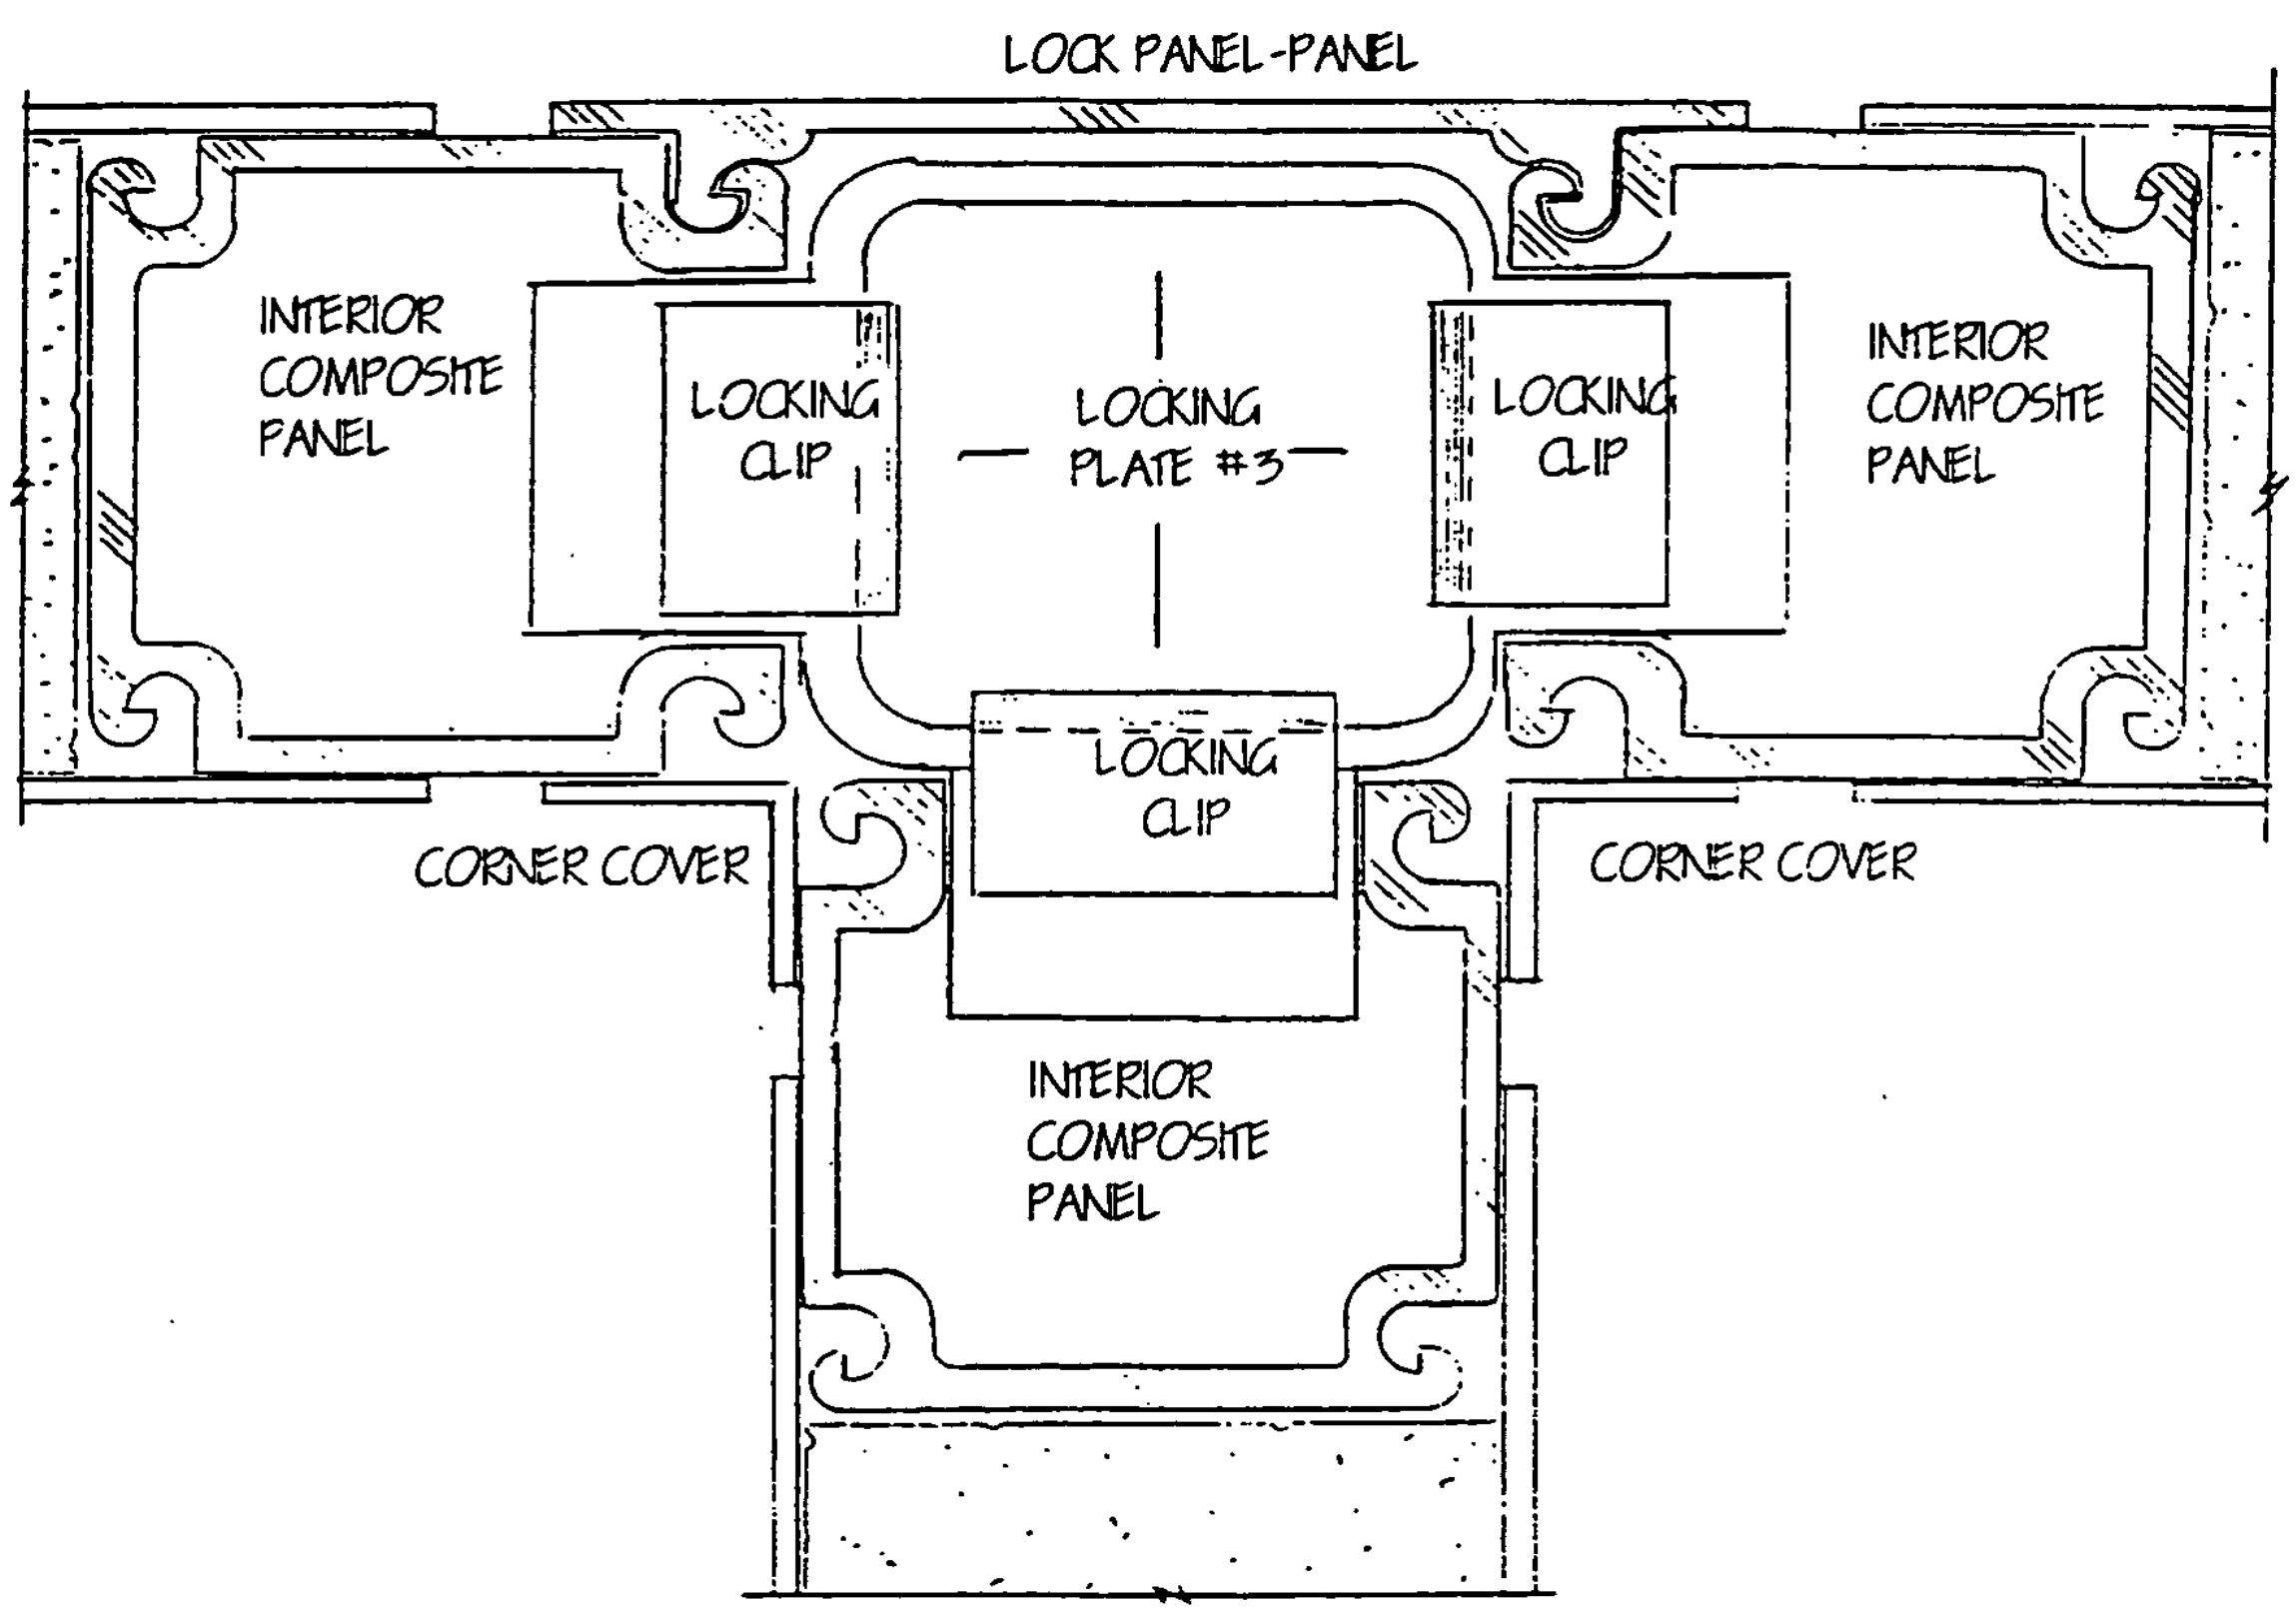
LOCK PANEL-PANEL
INTERIOR COMPOSITE PANEL
LOCKING CLIP
LOCKING PLATE #3
LOCKING CLIP
INTERIOR COMPOSITE PANEL
LOCKING CLIP
CORNER COVER
CORNER COVER
INTERIOR COMPOSITE PANEL

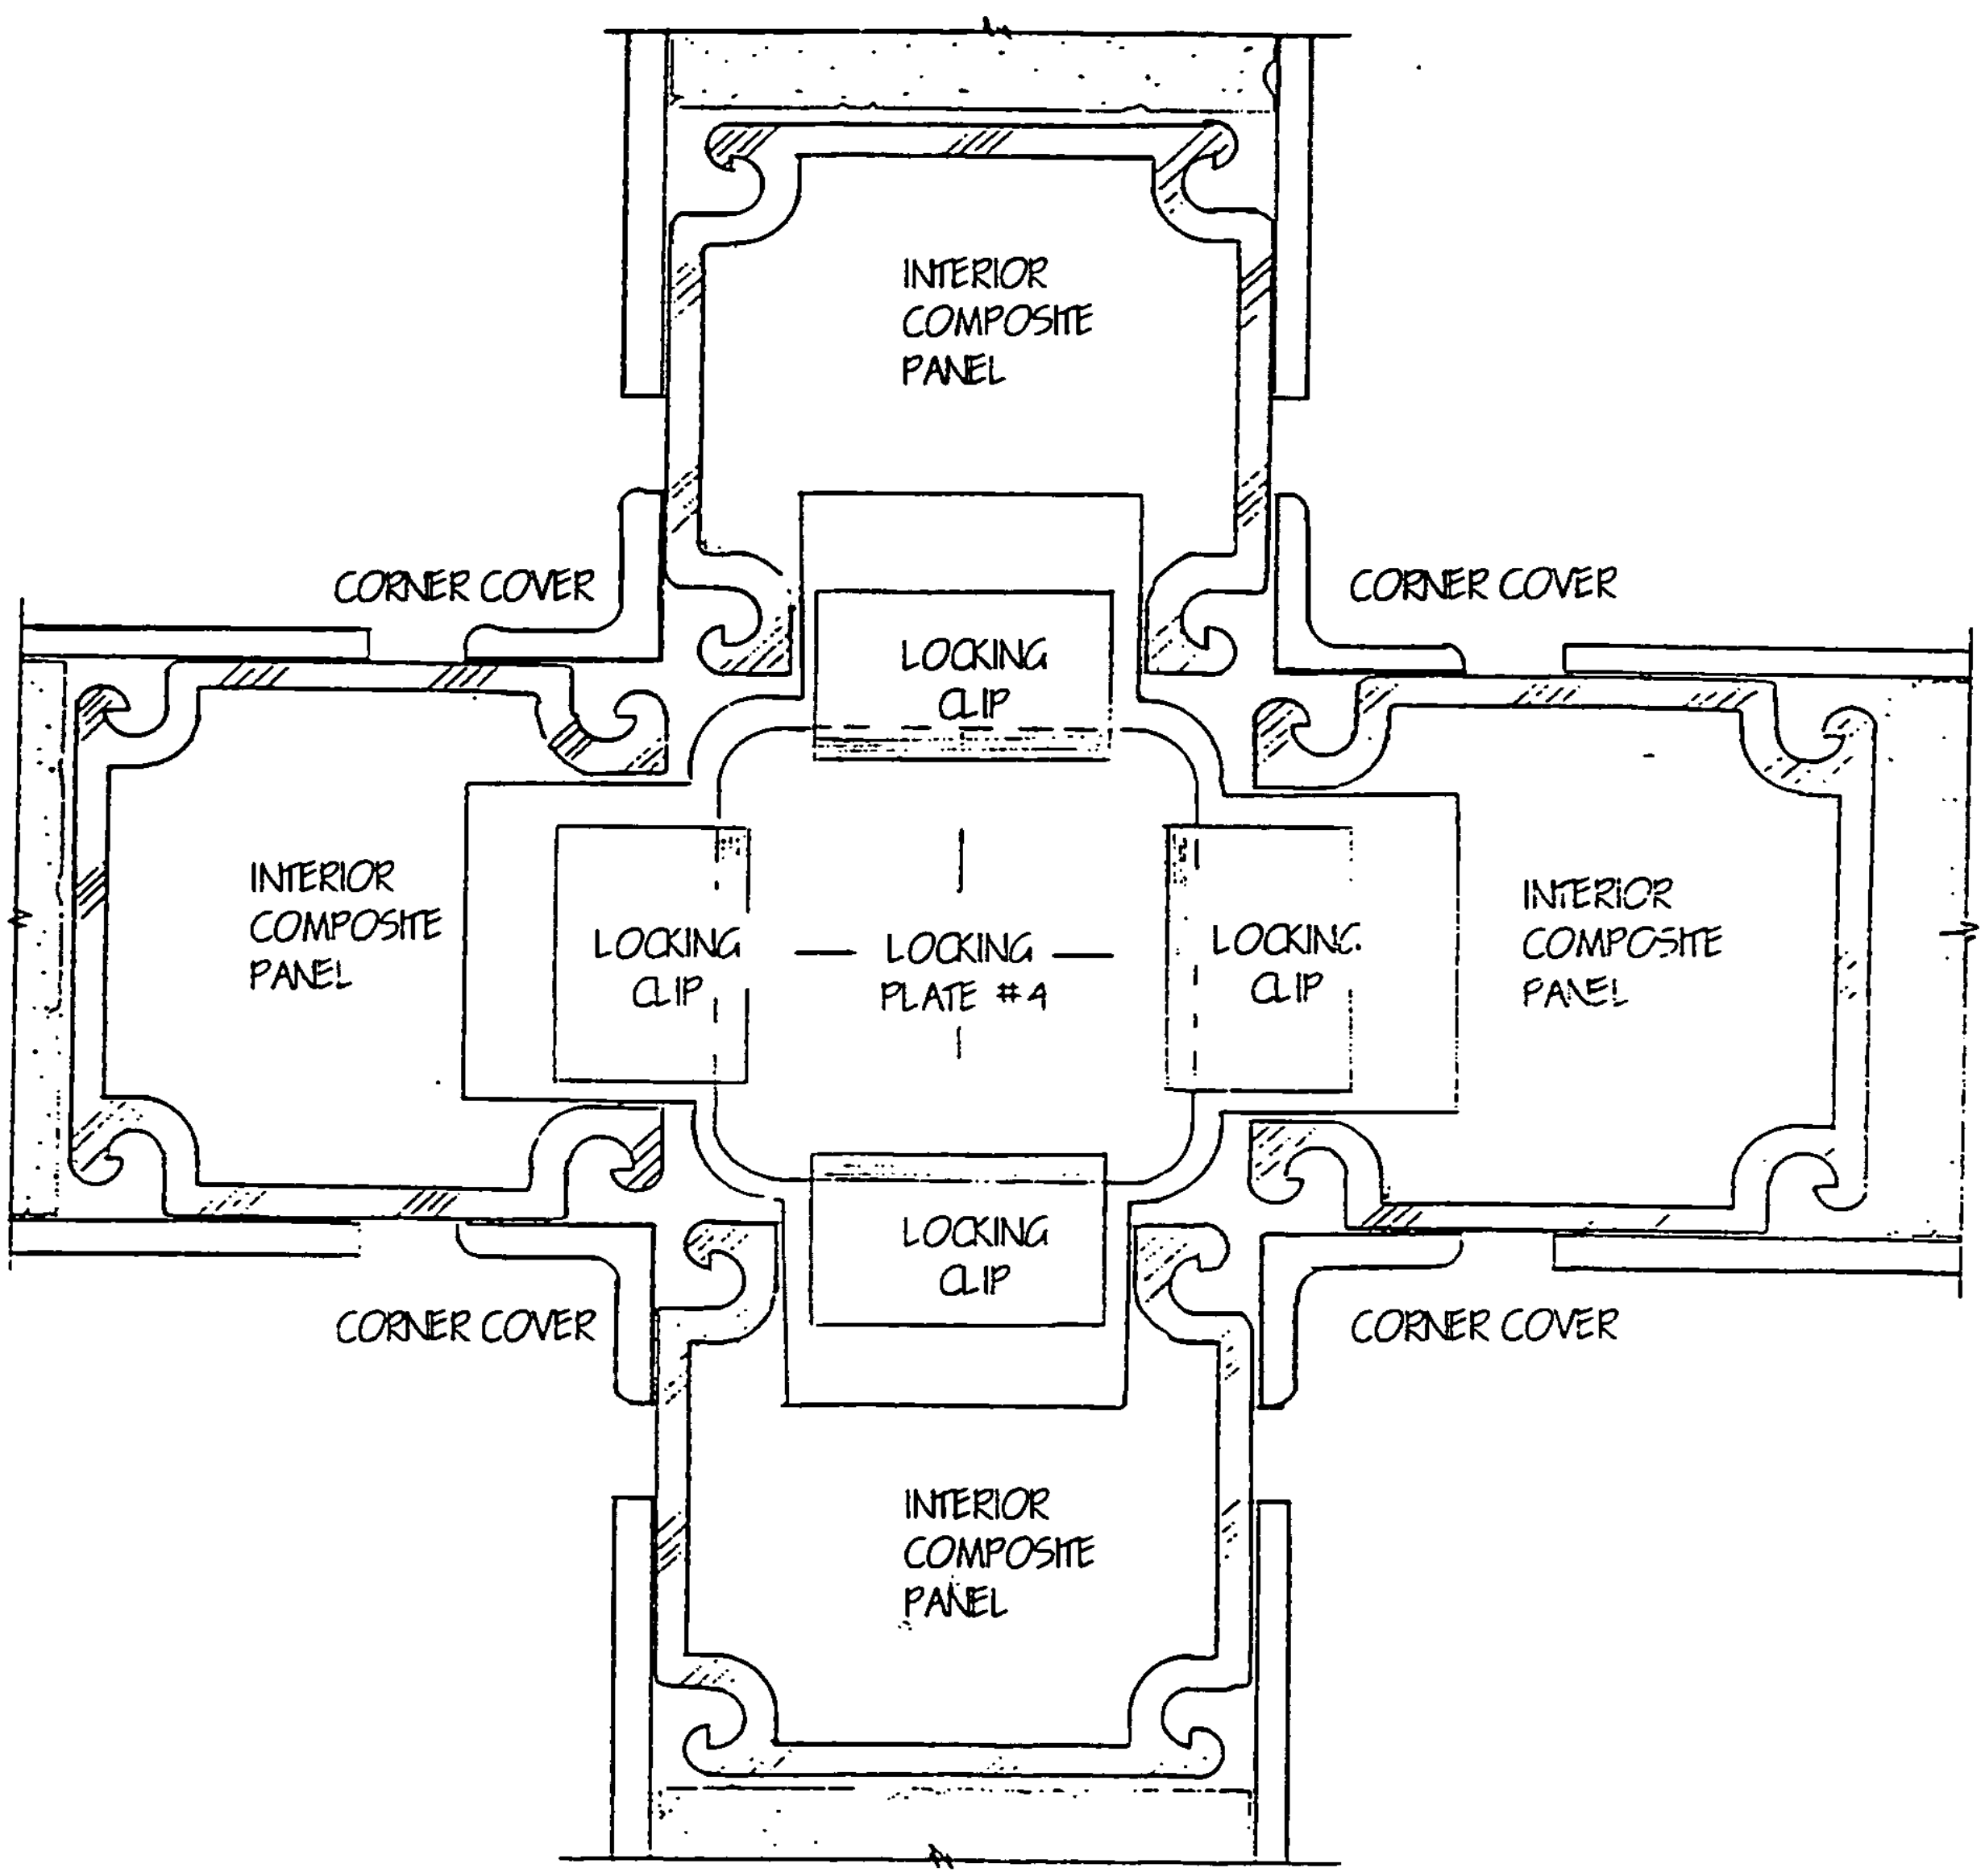
INTERIOR
COMPOSITE
PANEL
CORNER COVER
CORNER COVER
LOCKING
CLIP
INTERIOR
COMPOSITE
PANEL
LOCKING
CLIP
LOCKING
PLATE #4
LOCKING
CLIP
INTERIOR
COMPOSITE
PANEL
LOCKING
CLIP
CORNER COVER
CORNER COVER
INTERIOR
COMPOSITE
PANEL

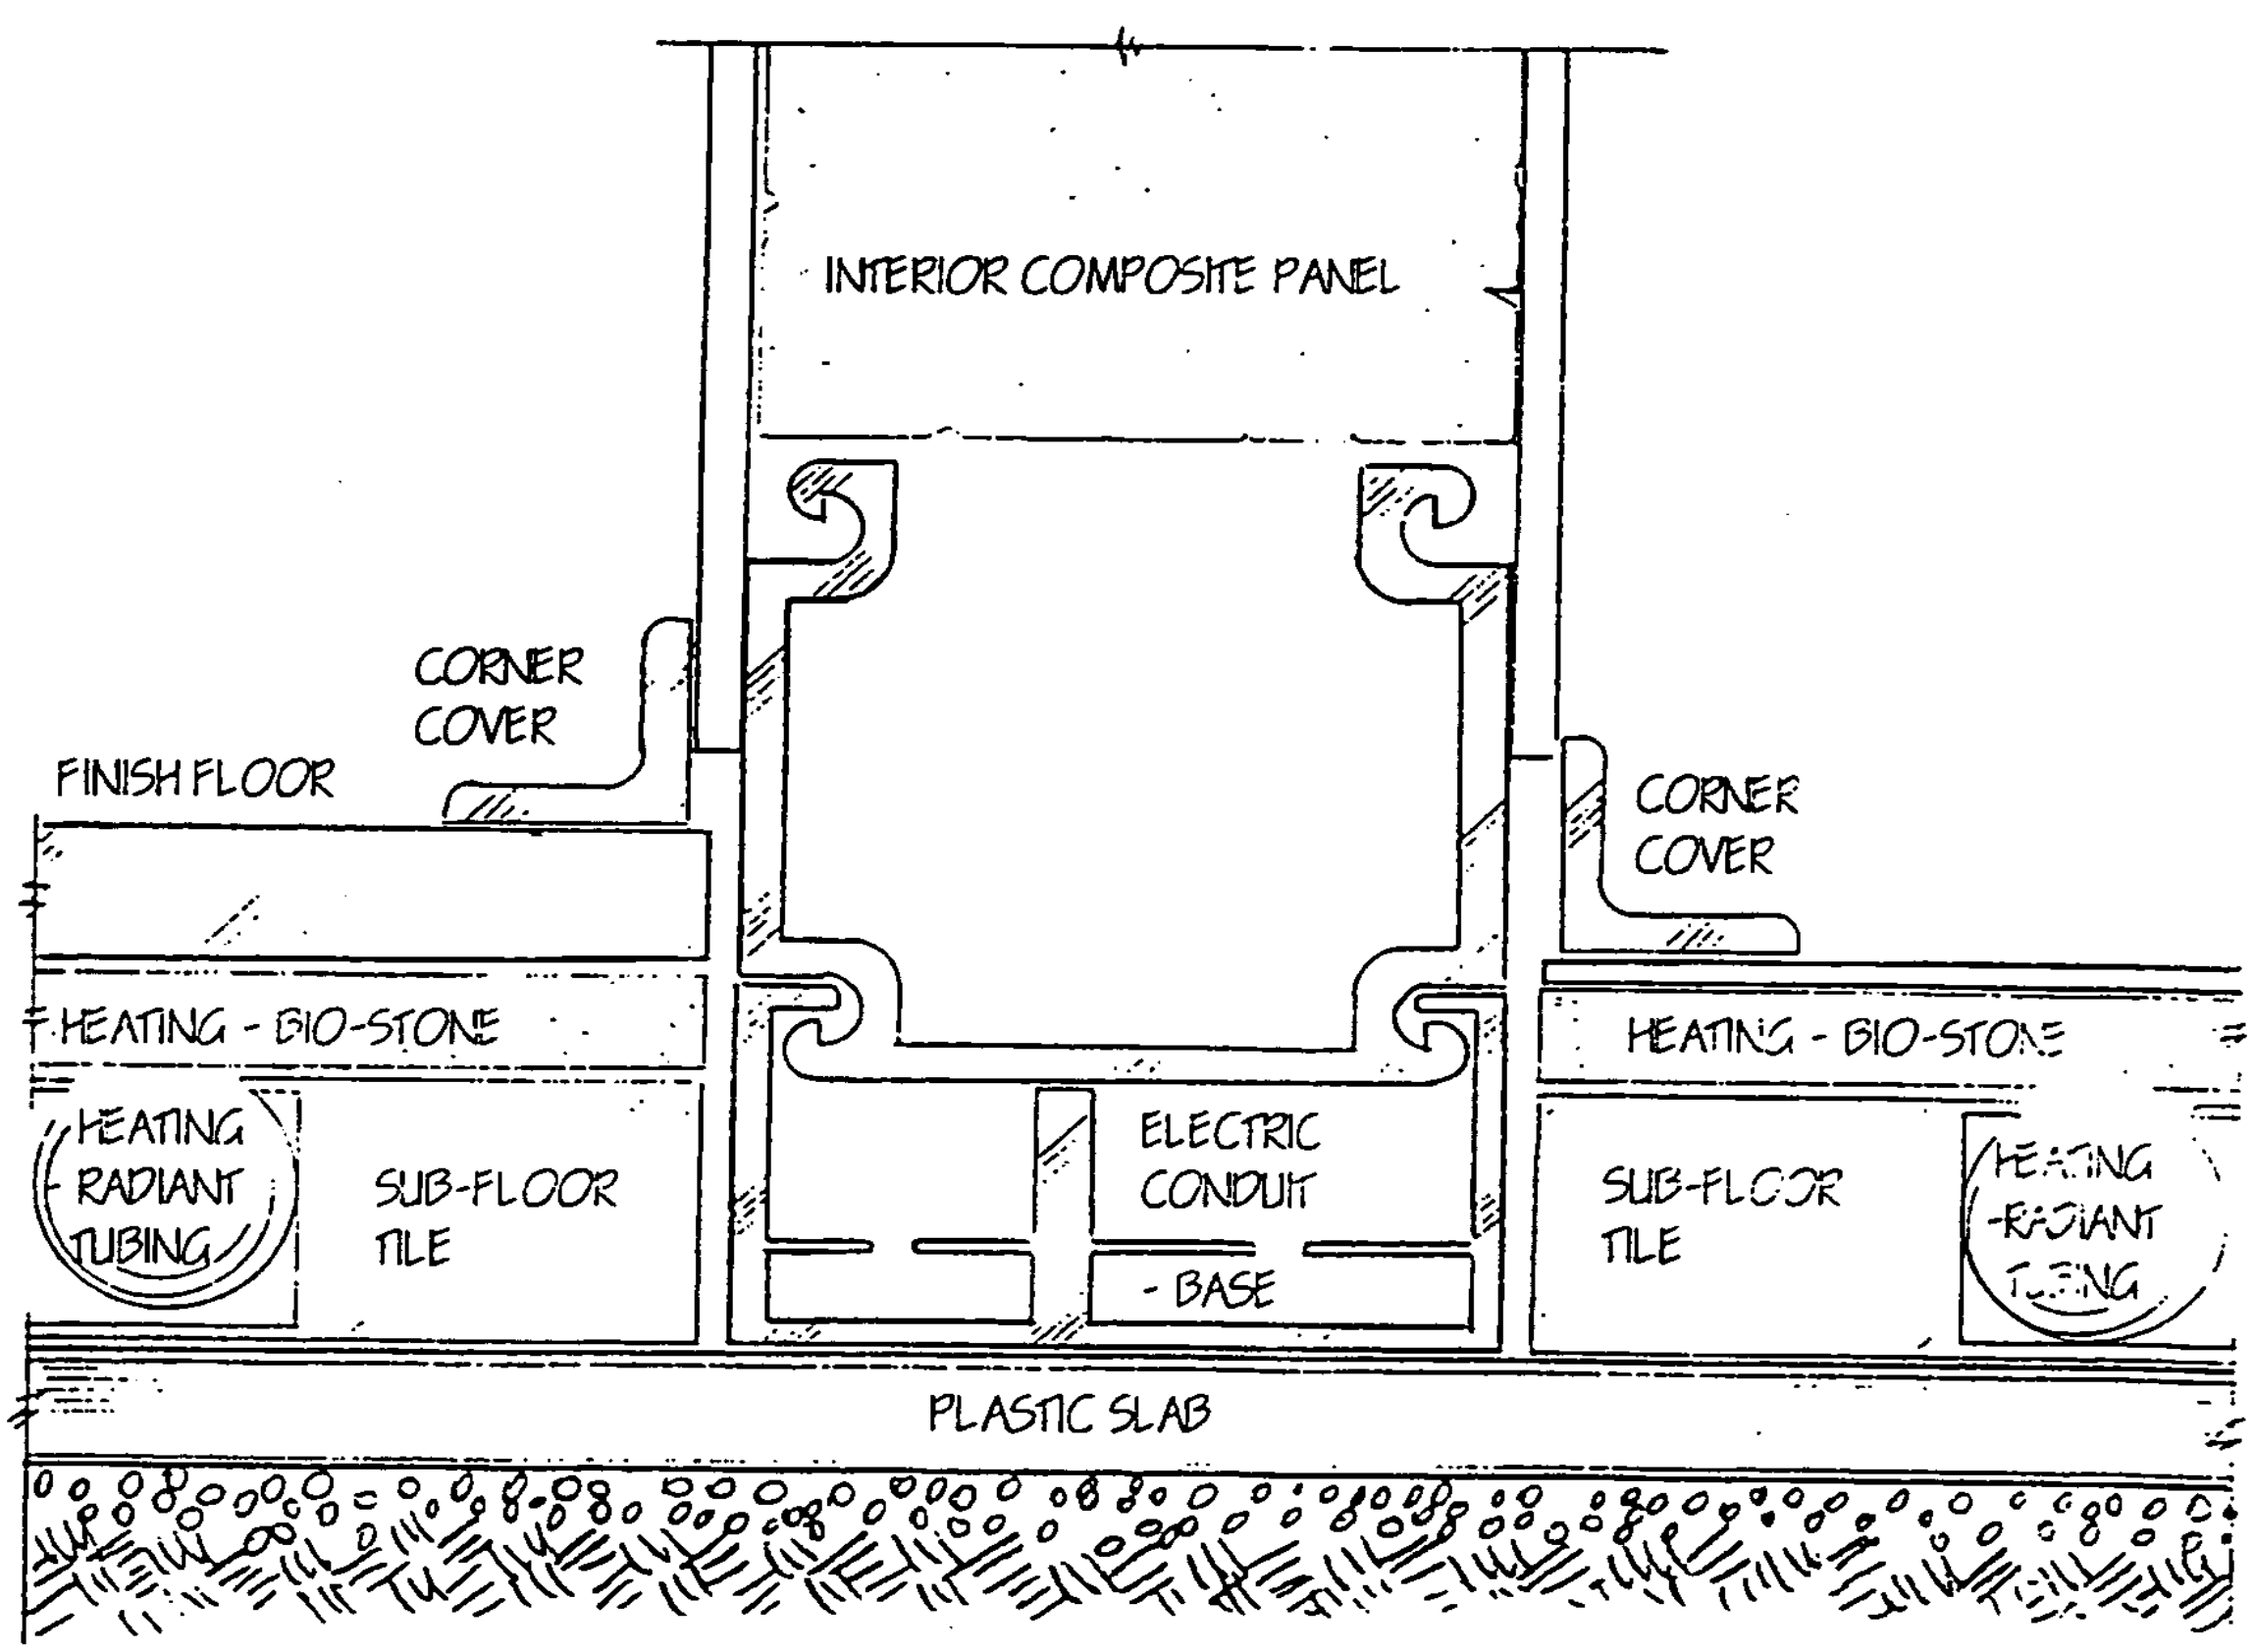
INTERIOR COMPOSITE PANEL
CORNER COVER
FINISH FLOOR
CORNER COVER
HEATING - BIO-STONE
HEATING - BIO-STONE
HEATING RADIANT TUBING
SUB-FLOOR TILE
ELECTRIC CONDUIT
- BASE
SUB-FLOOR TILE
PLASTIC SLAB

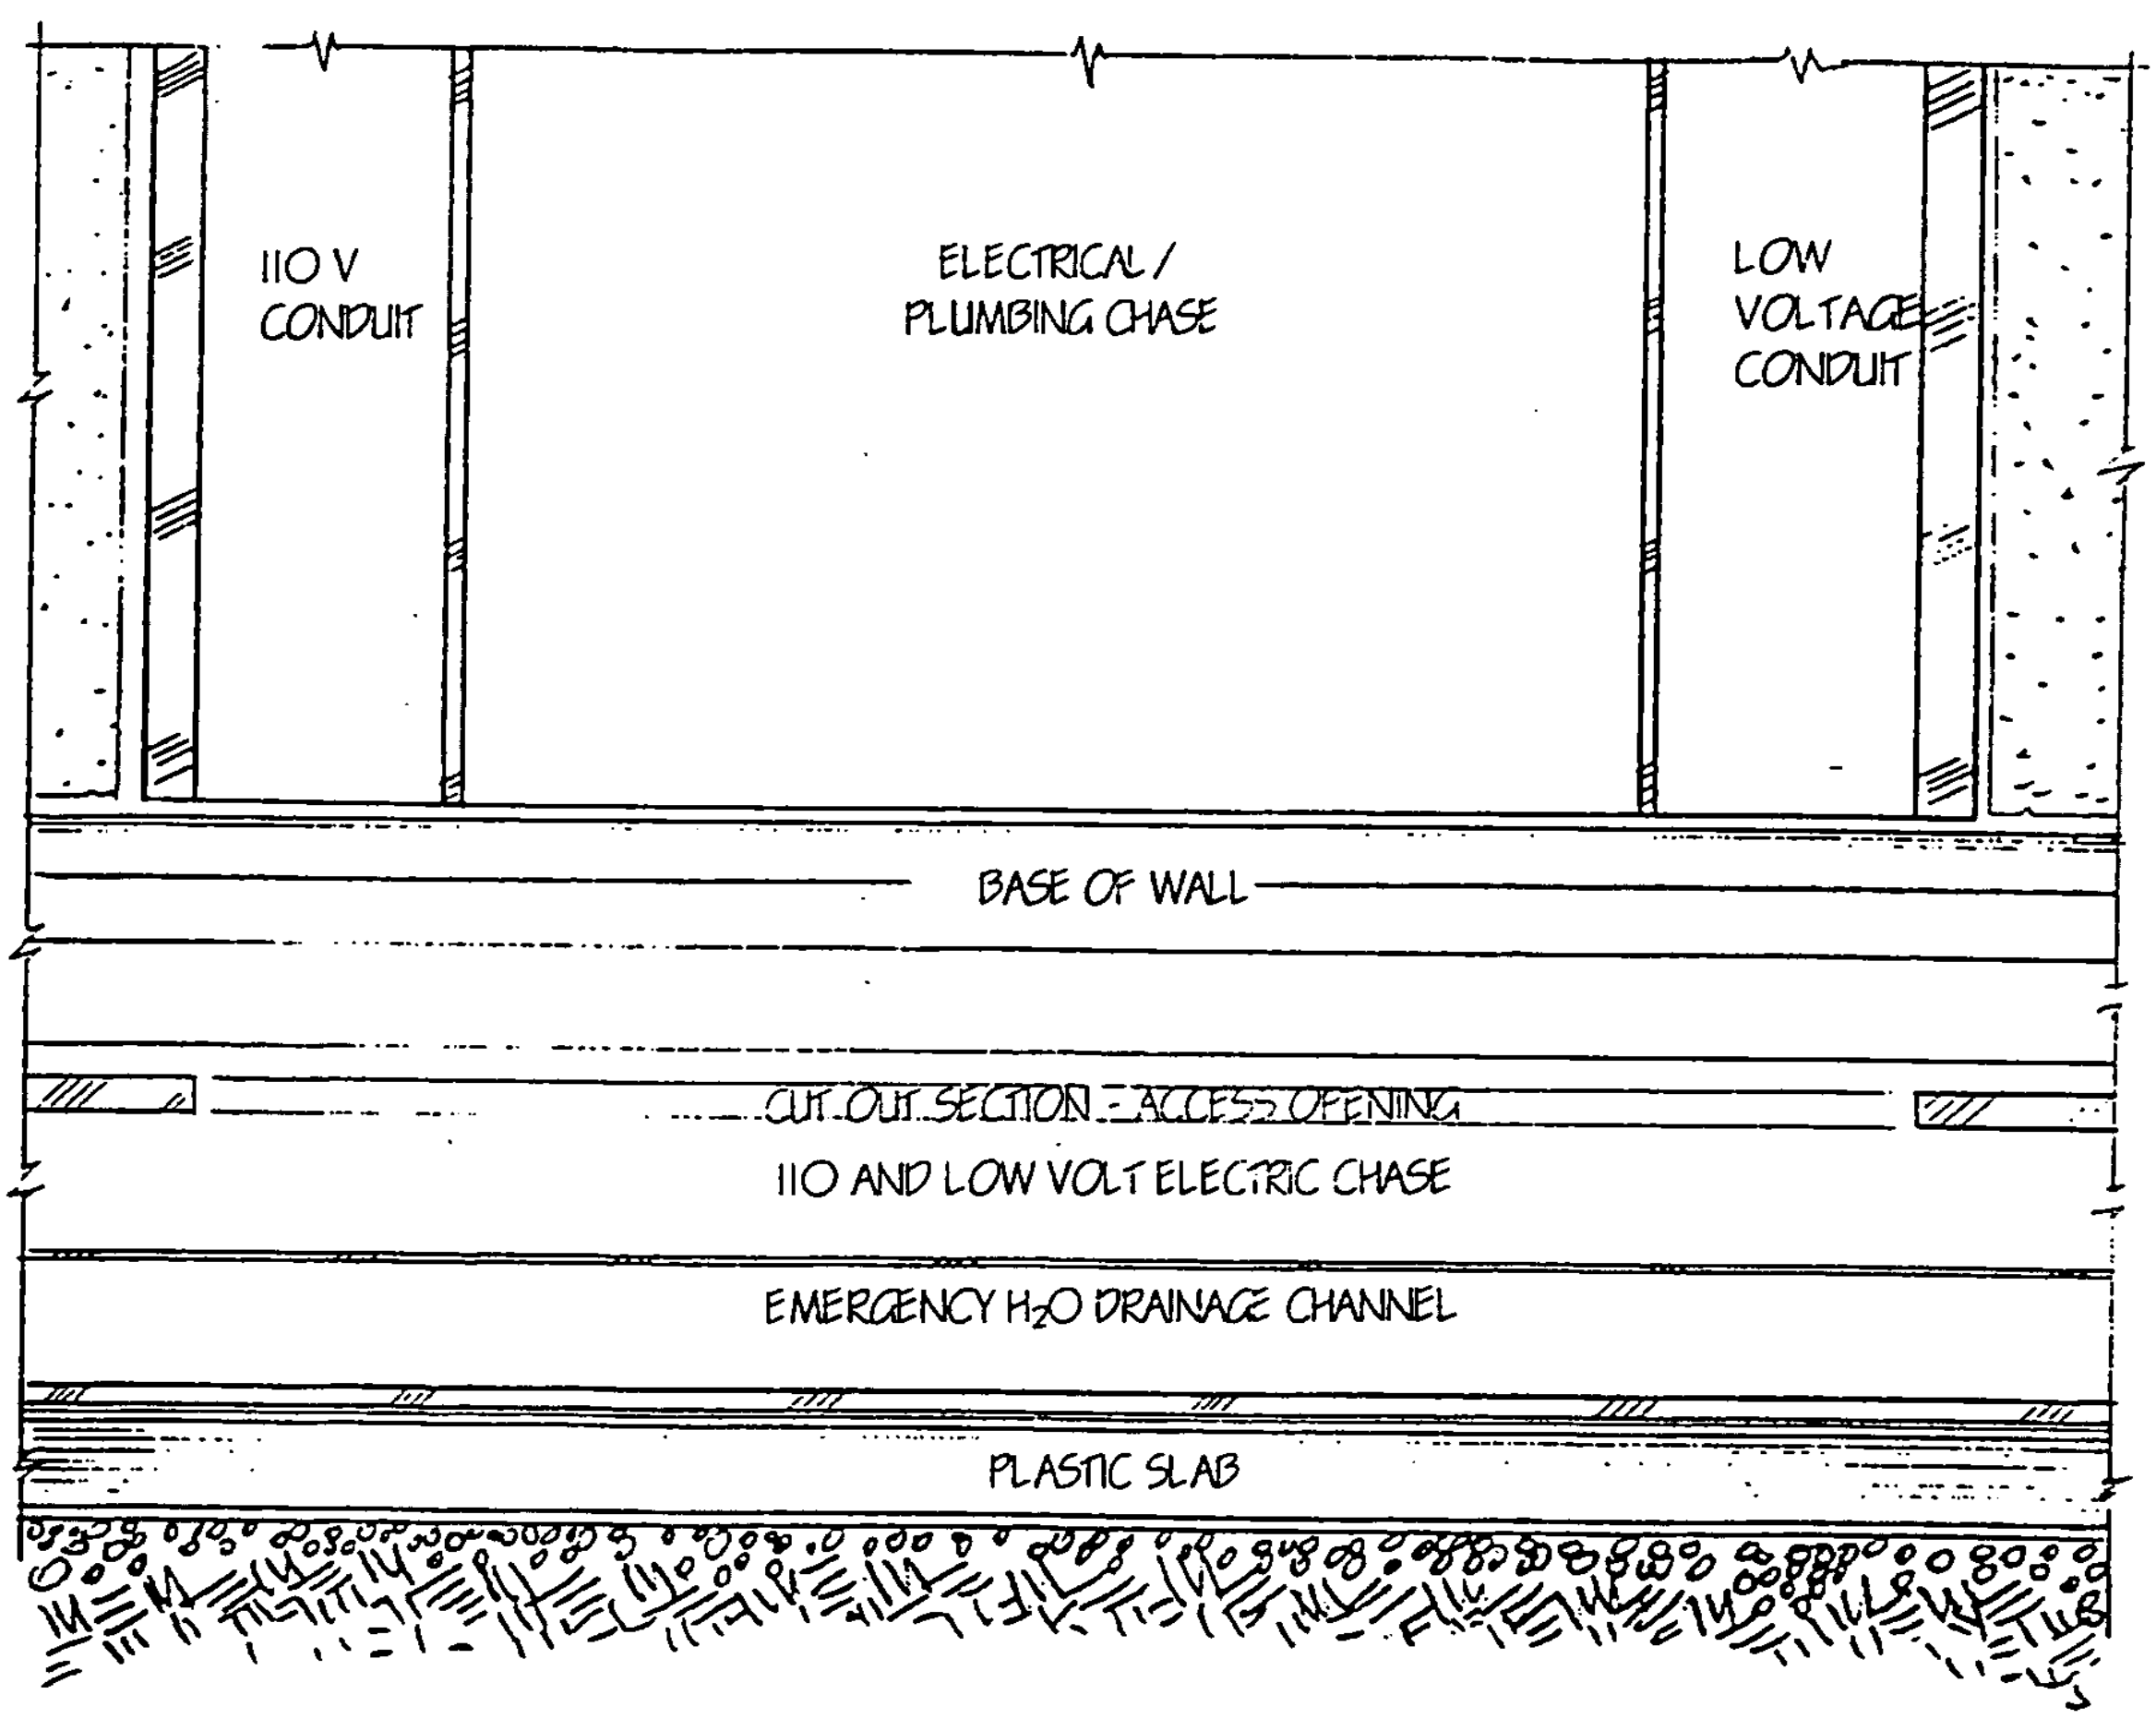
110 V CONDUIT
ELECTRICAL / PLUMBING CHASE
LOW VOLTAGE CONDUIT
BASE OF WALL
CUT OUT SECTION - ACCESS OPENING
110 AND LOW VOLT ELECTRIC CHASE
EMERGENCY H2O DRAINAGE CHANNEL
PLASTIC SLAB

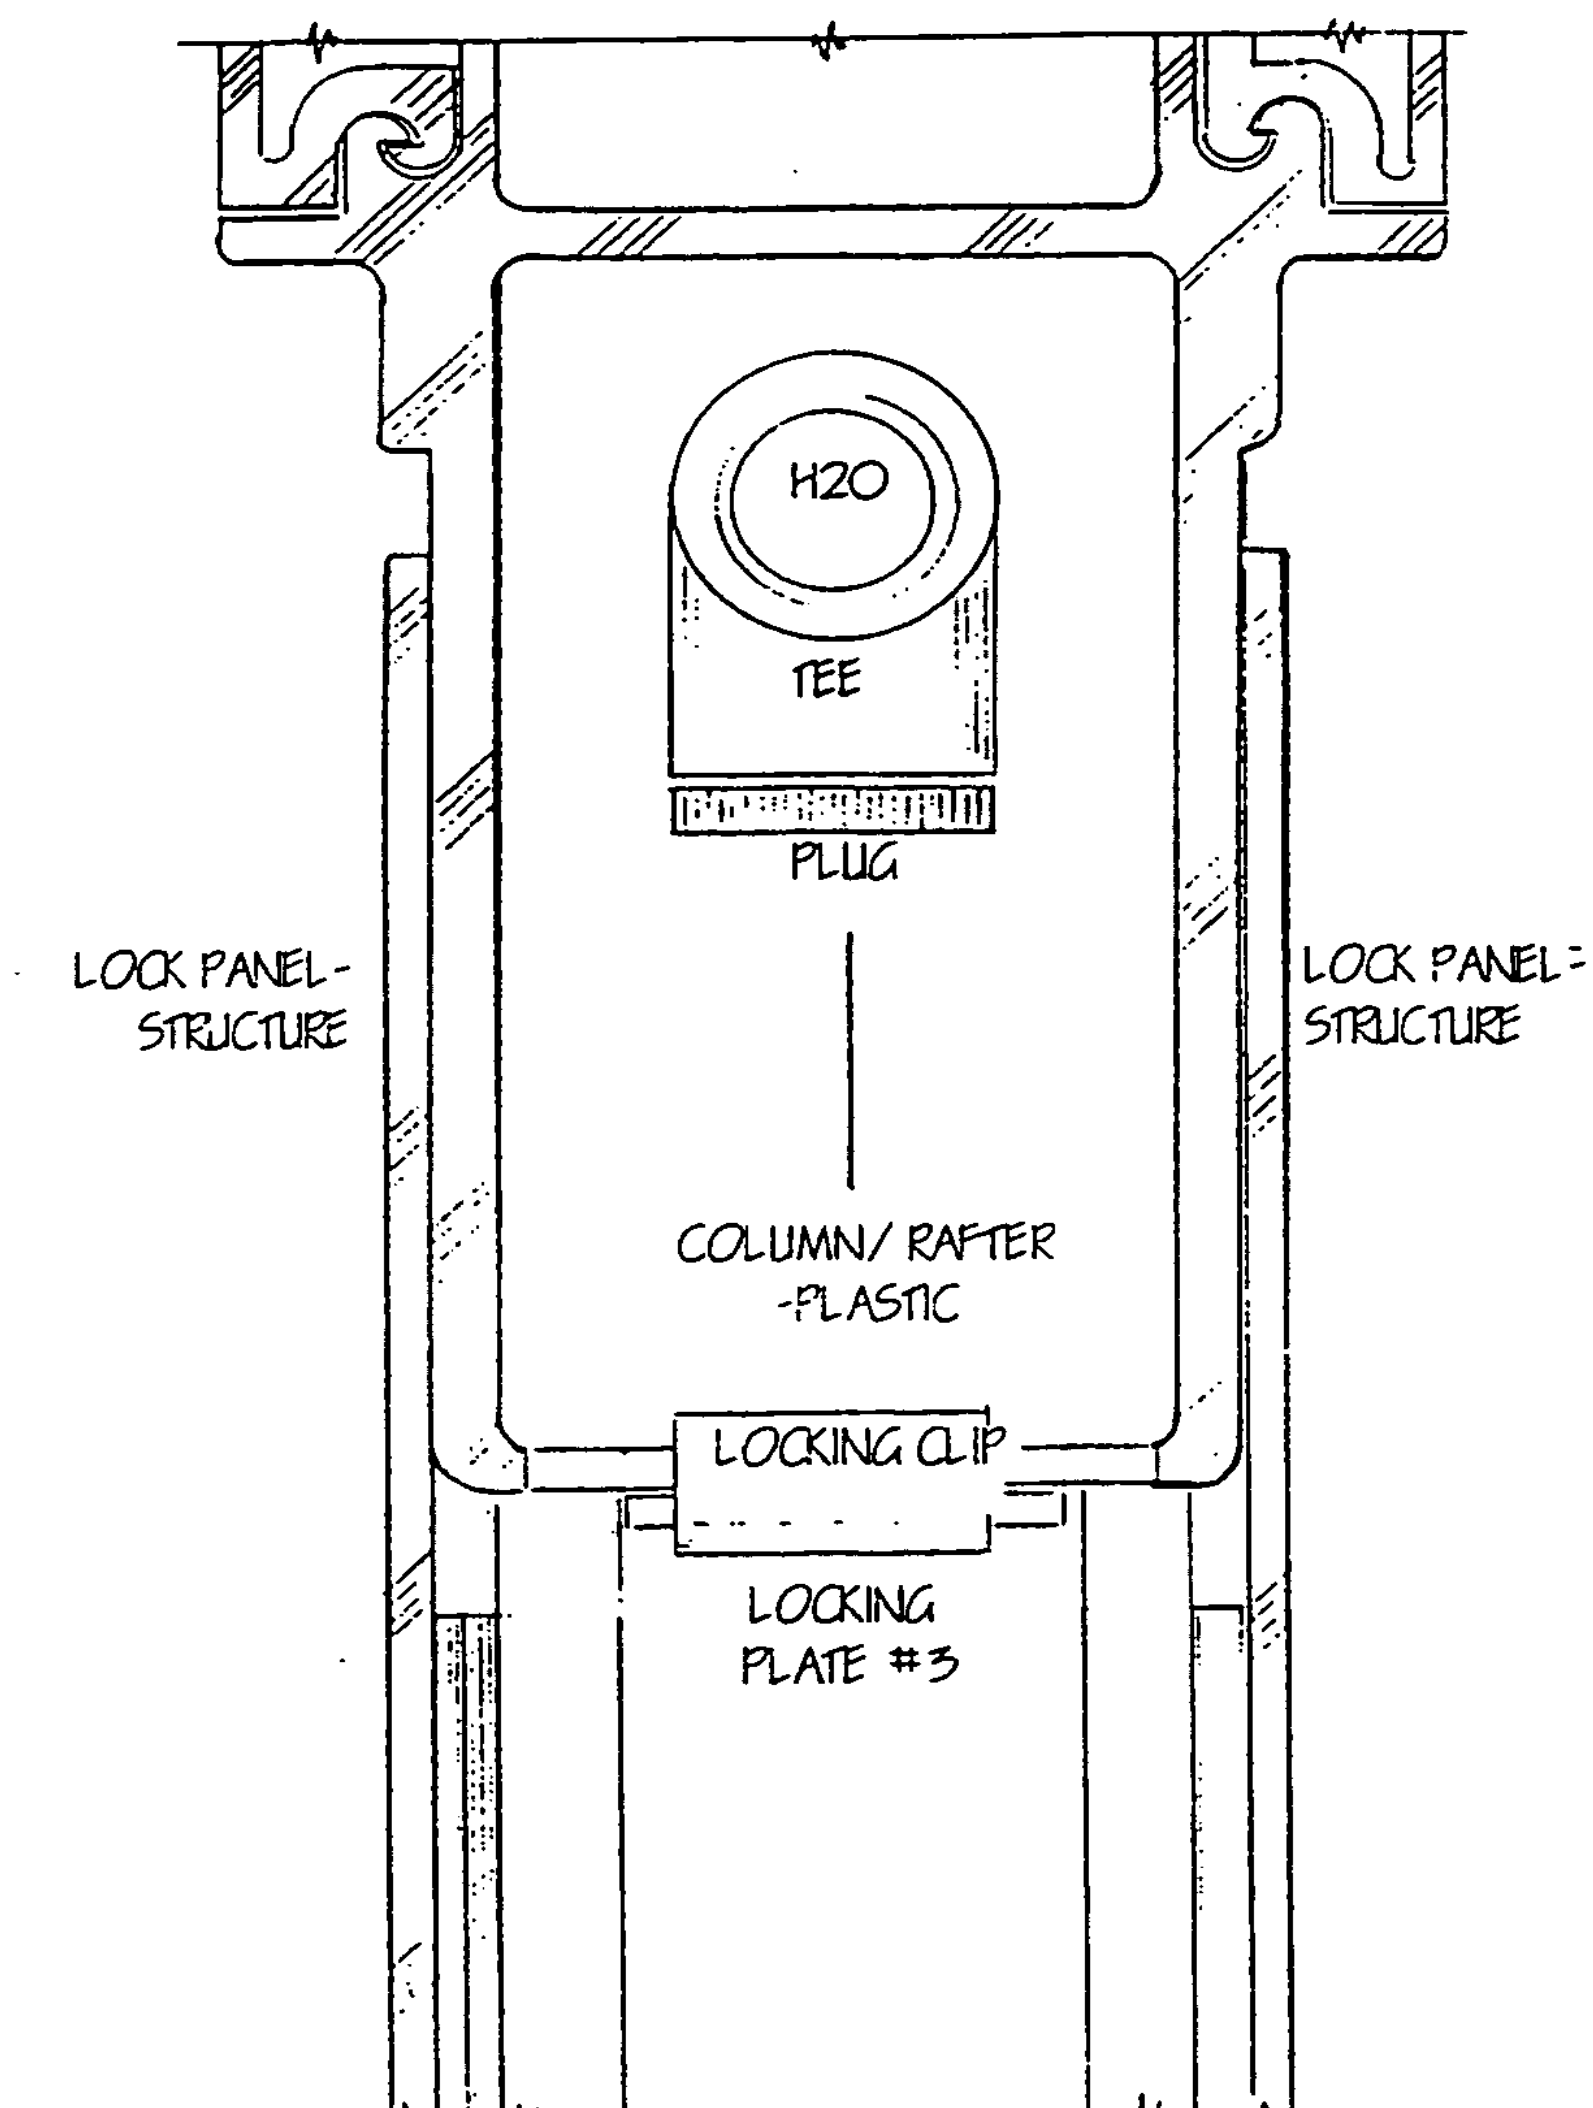
H2O
TEE
PLUG
LOCK PANEL-STRUCTURE
LOCK PANEL-STRUCTURE
COLUMN/ RAFTER -PLASTIC
LOCKING CLIP
LOCKING PLATE #3

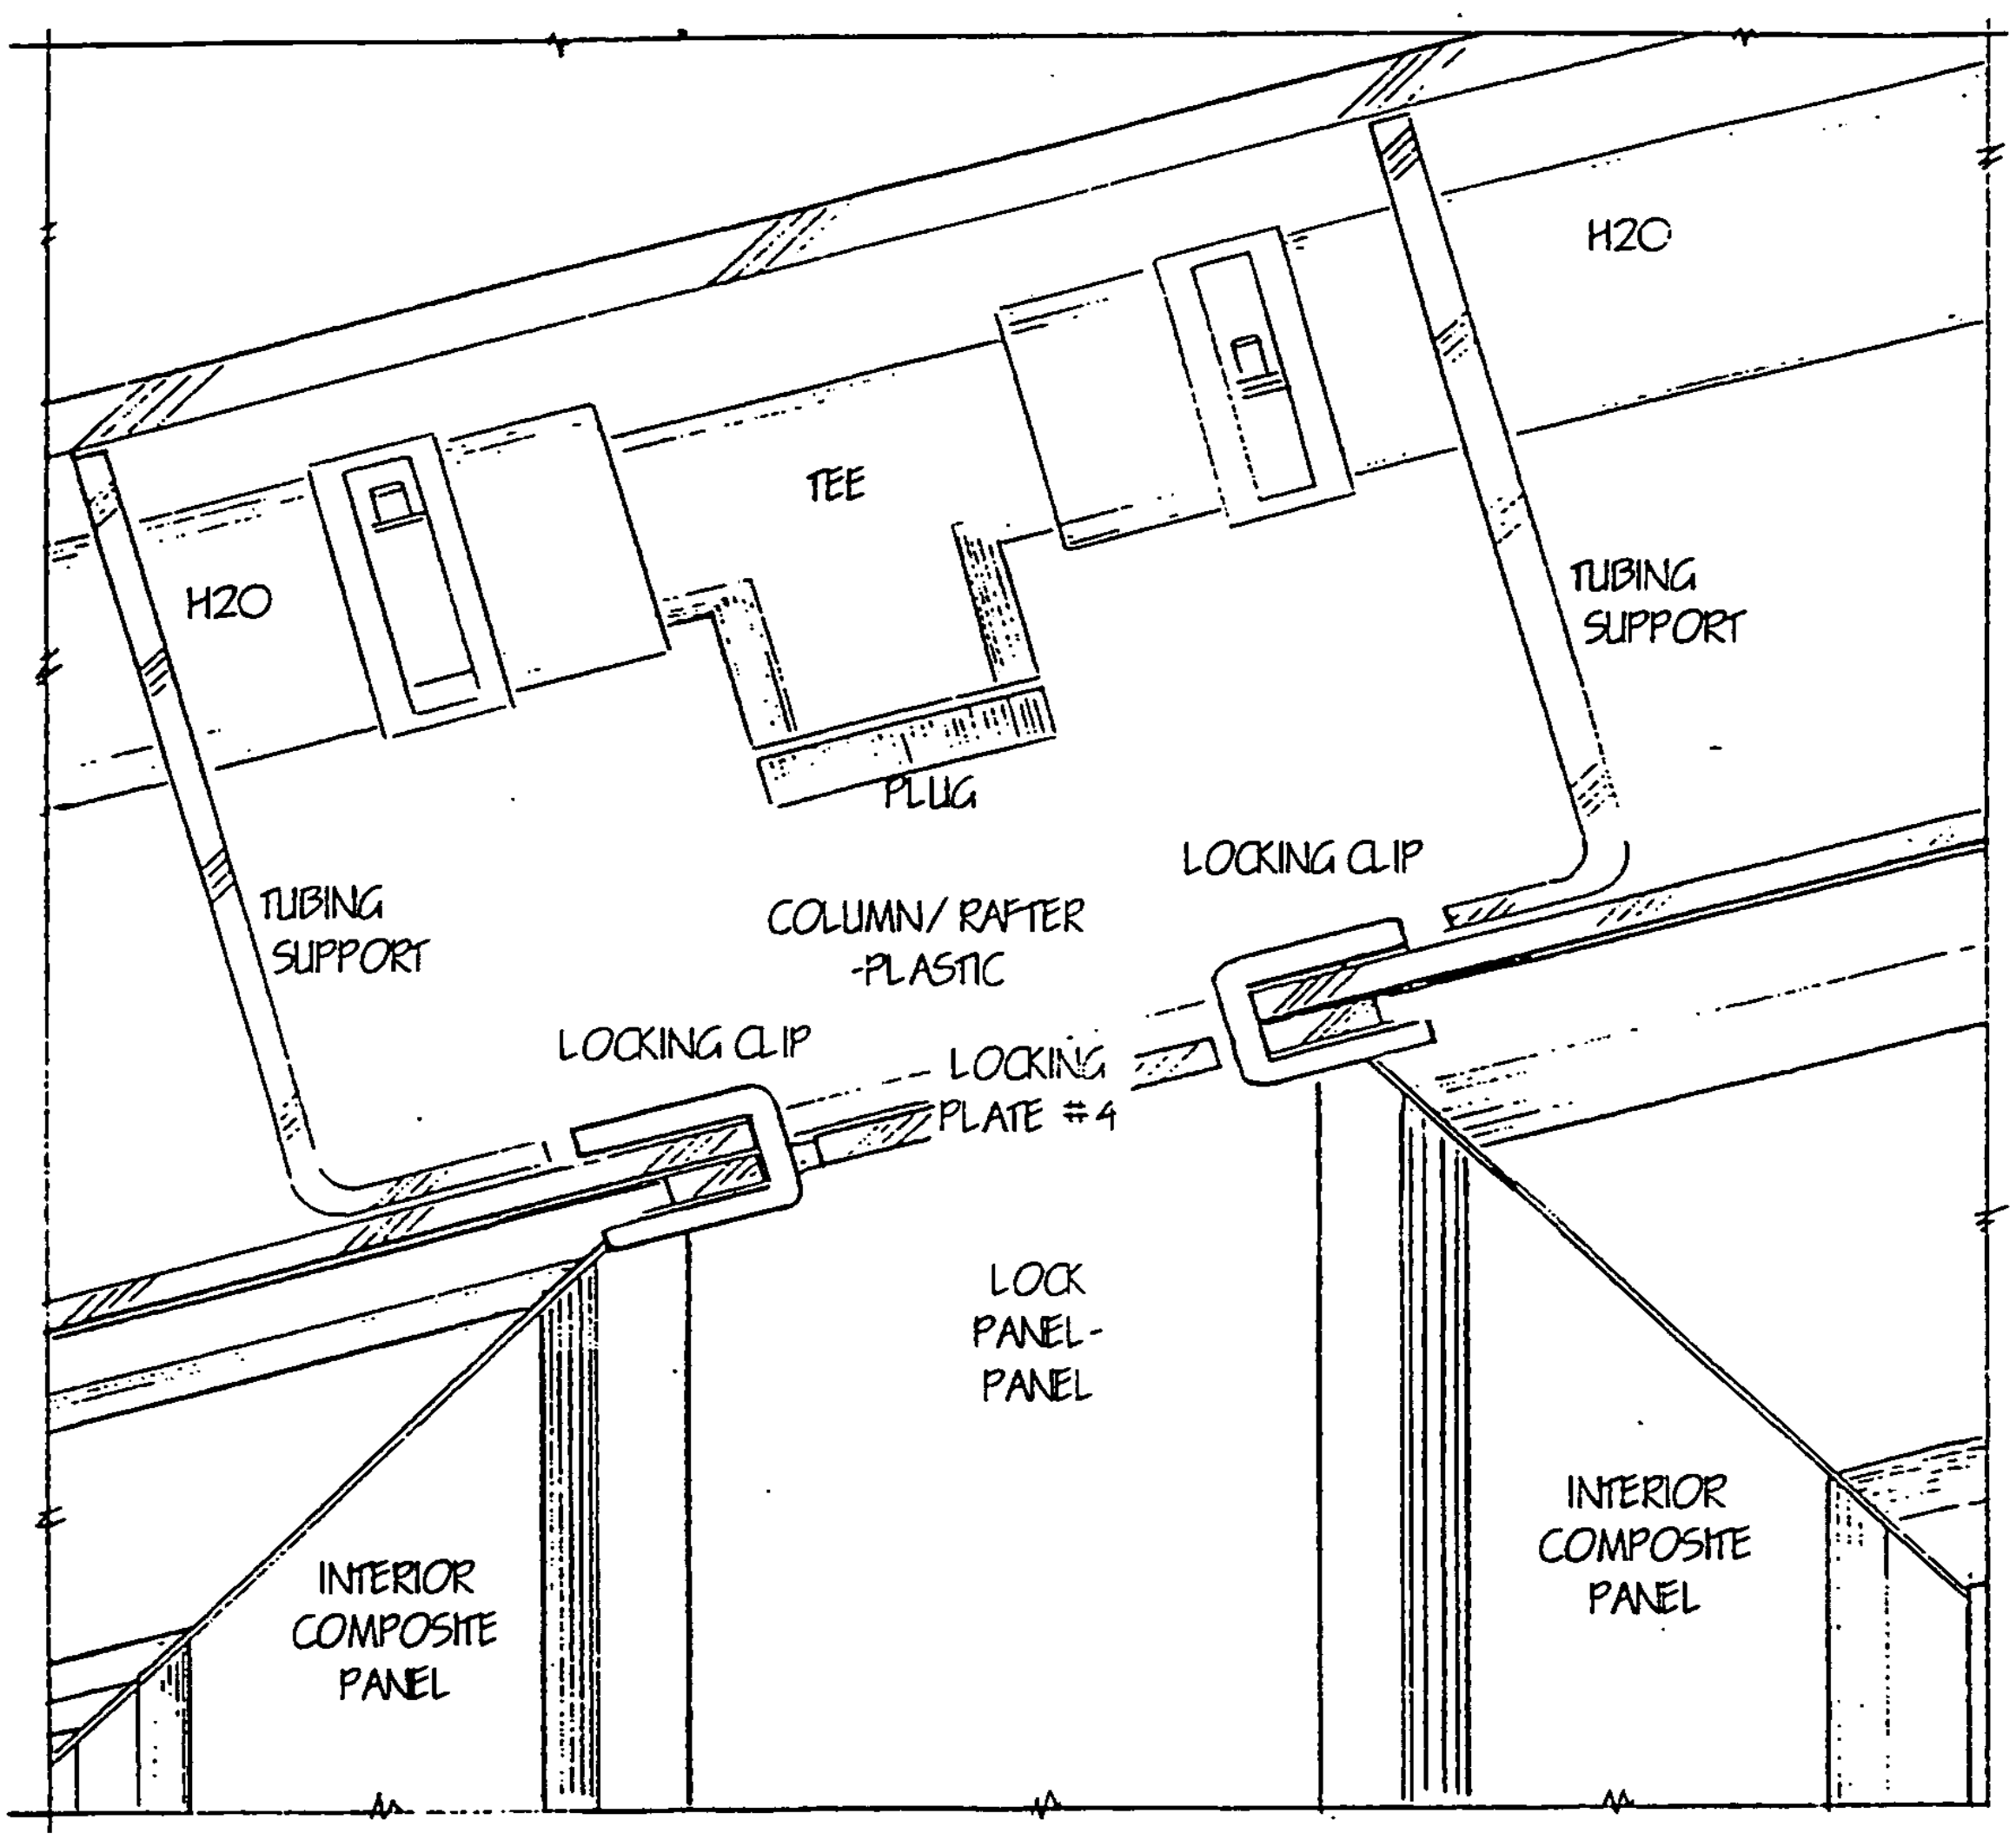
H2O
TEE
H2O
TUBING SUPPORT
PLUG
LOCKING CLIP
TUBING SUPPORT
COLUMN/ RAFTER -PLASTIC
LOCKING CLIP
LOCKING PLATE #4
LOCK PANEL-PANEL
INTERIOR COMPOSITE PANEL
INTERIOR COMPOSITE PANEL

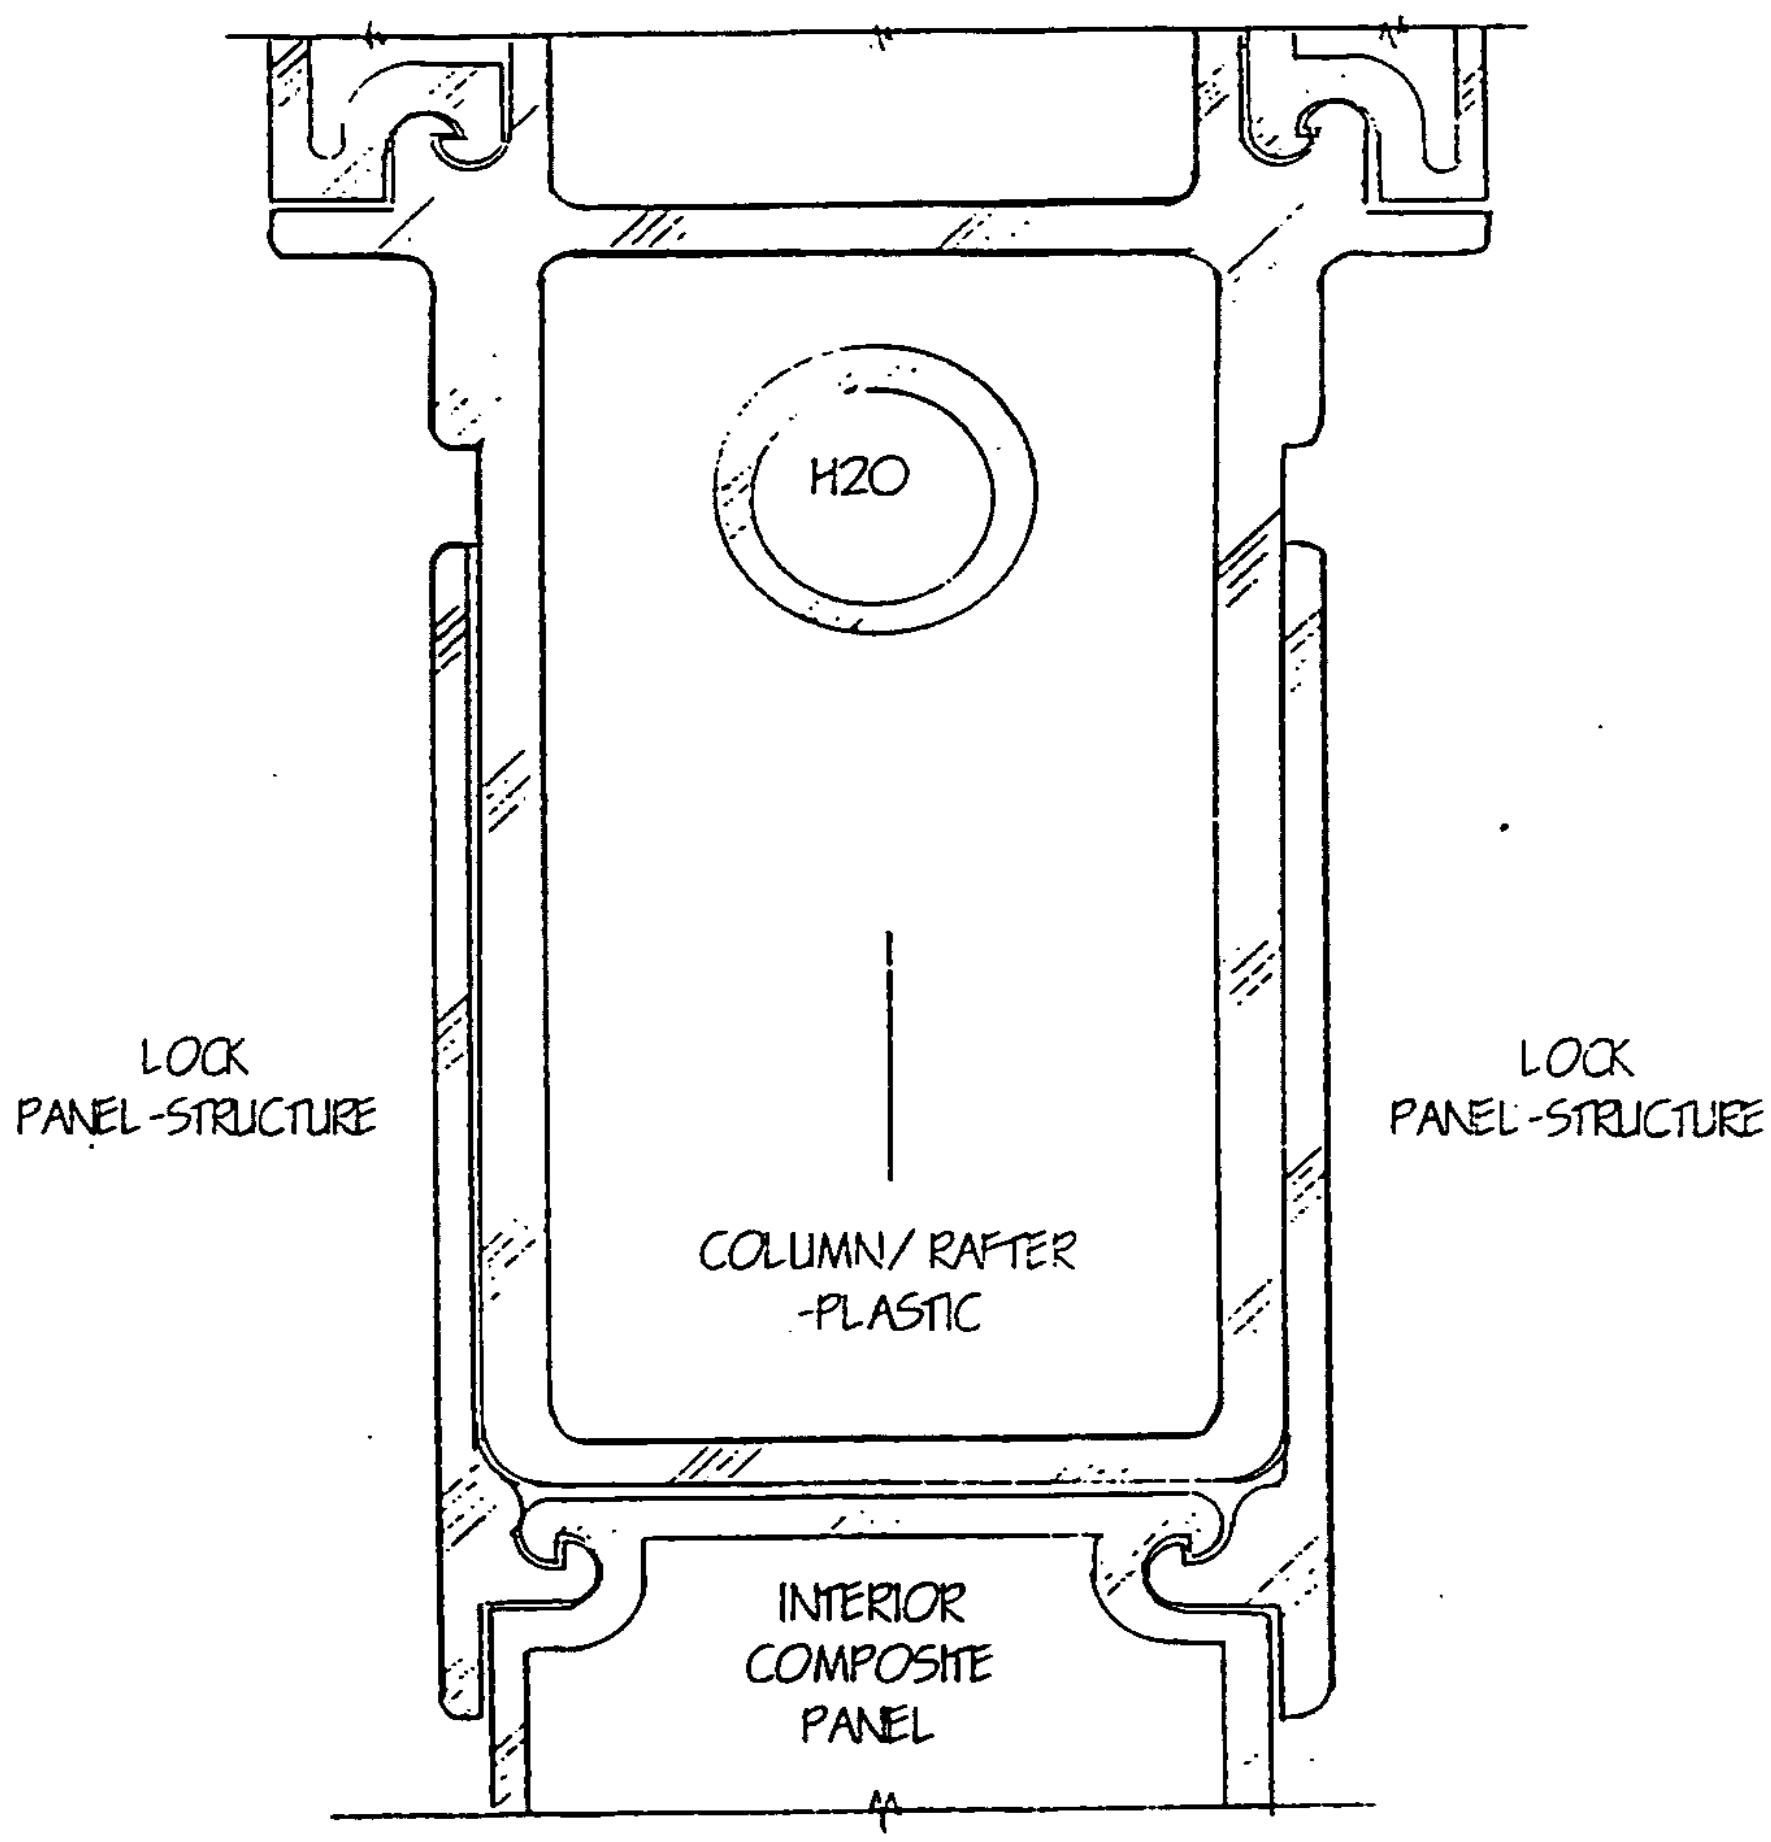
H2O
LOCK
PANEL-STRUCTURE
LOCK
PANEL-STRUCTURE
COLUMN/ RAFTER
-PLASTIC
INTERIOR
COMPOSITE
PANEL

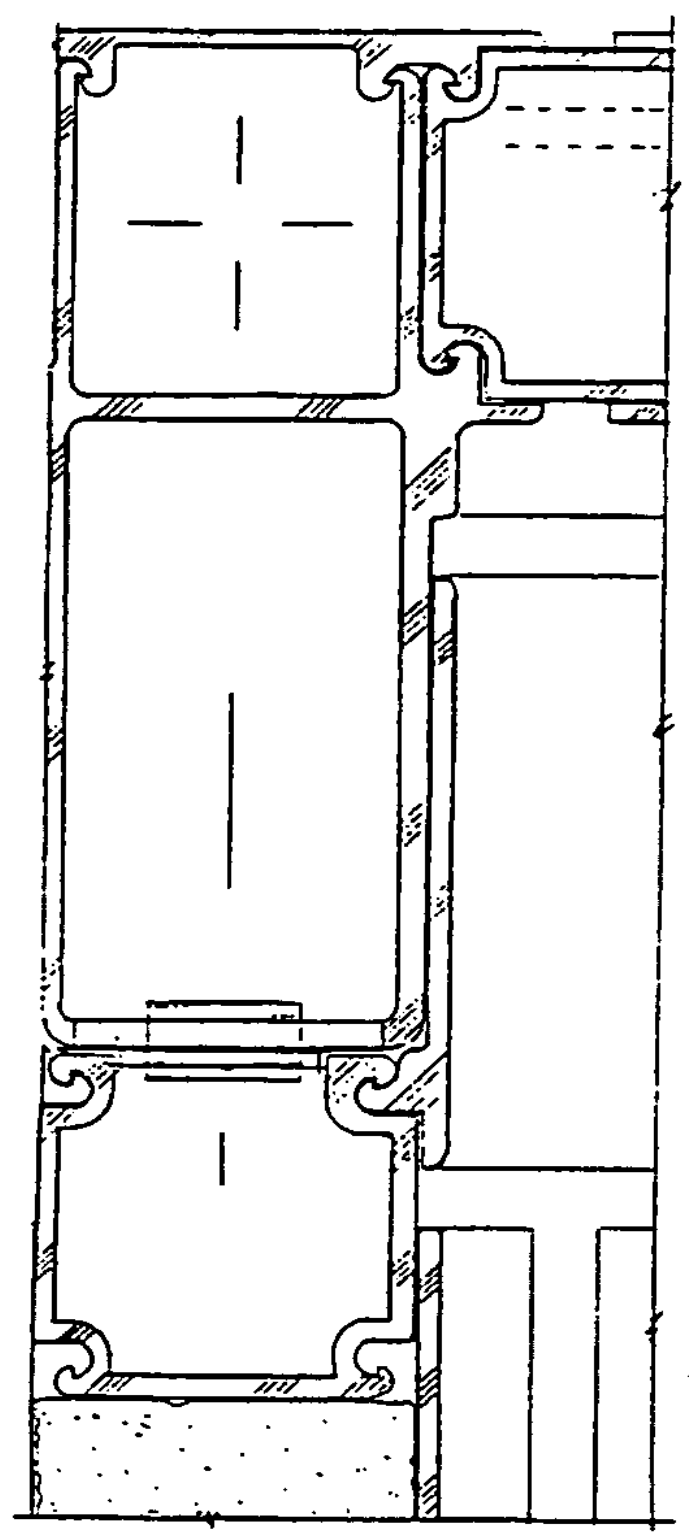

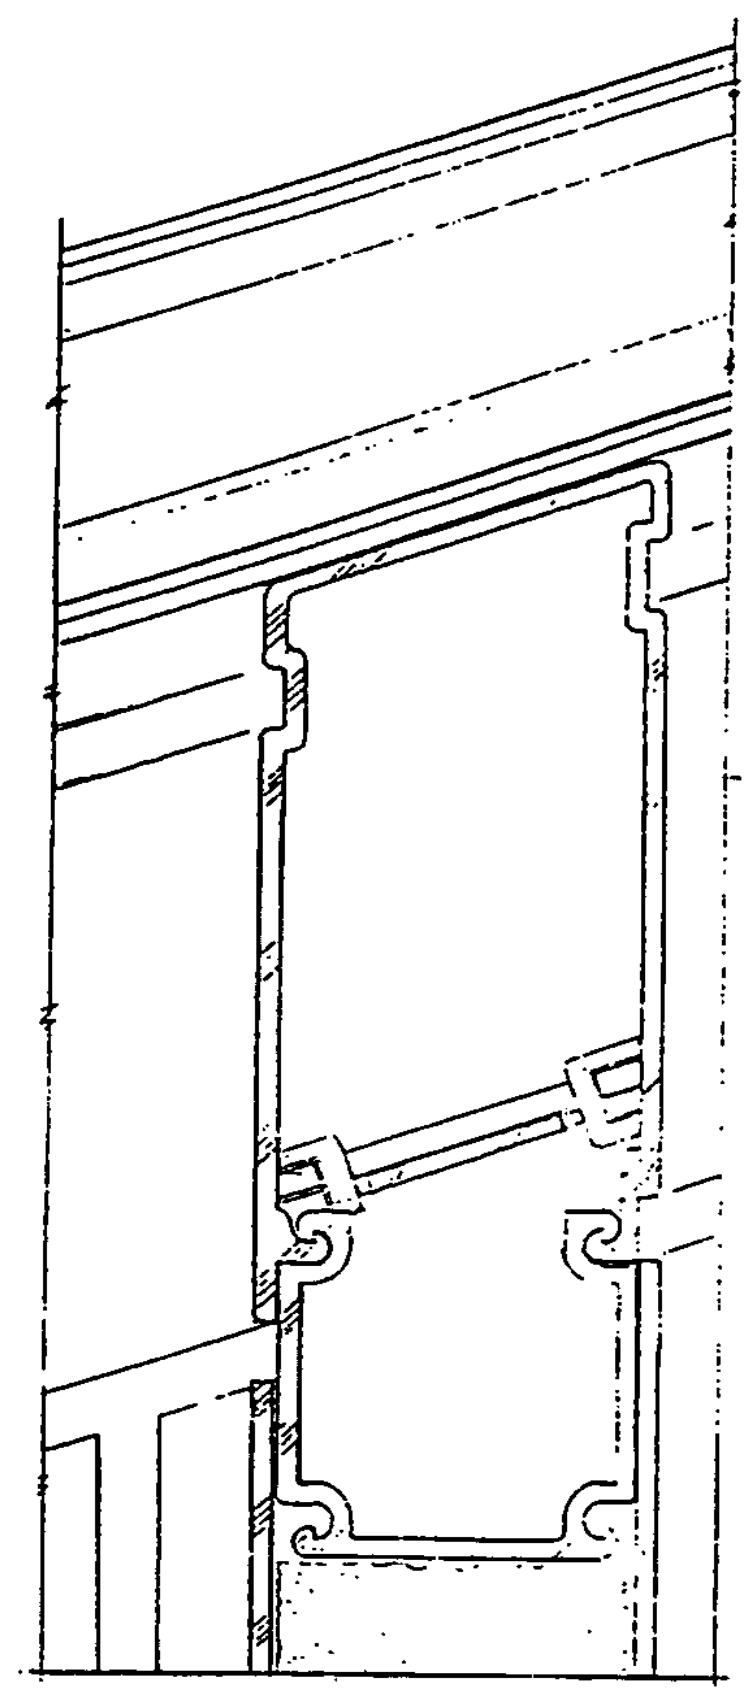

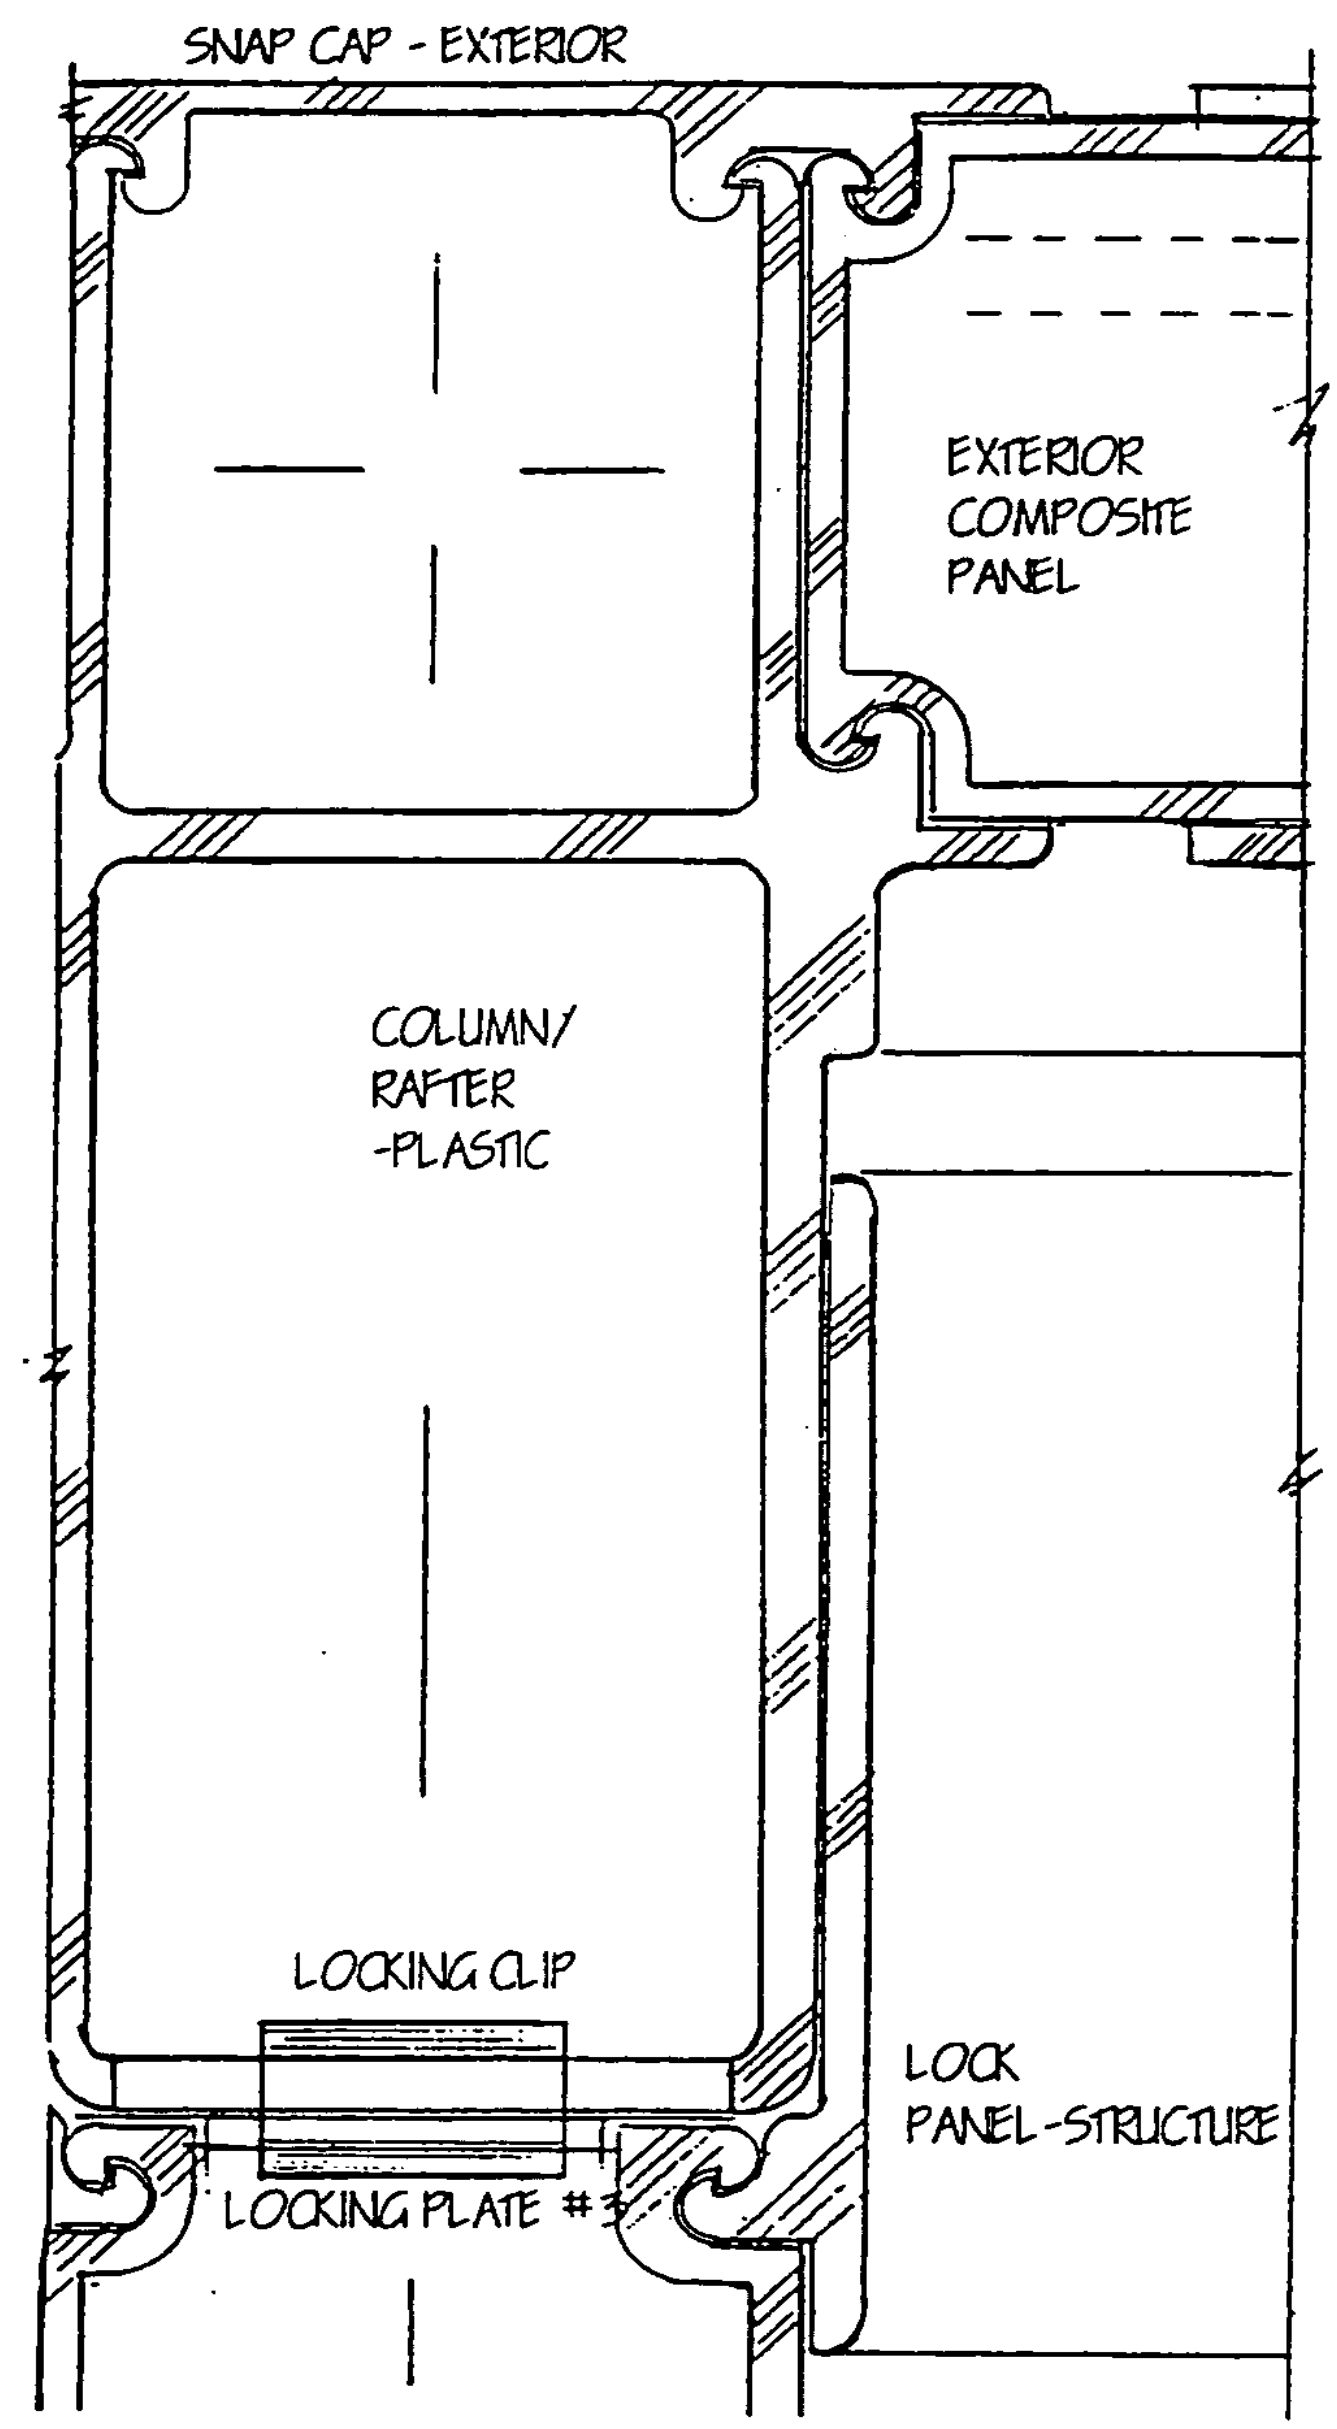
SNAP CAP - EXTERIOR
EXTERIOR COMPOSITE PANEL
COLUMN/ RAFTER -PLASTIC
LOCKING CLIP
LOCK PANEL-STRUCTURE
LOCKING PLATE #3

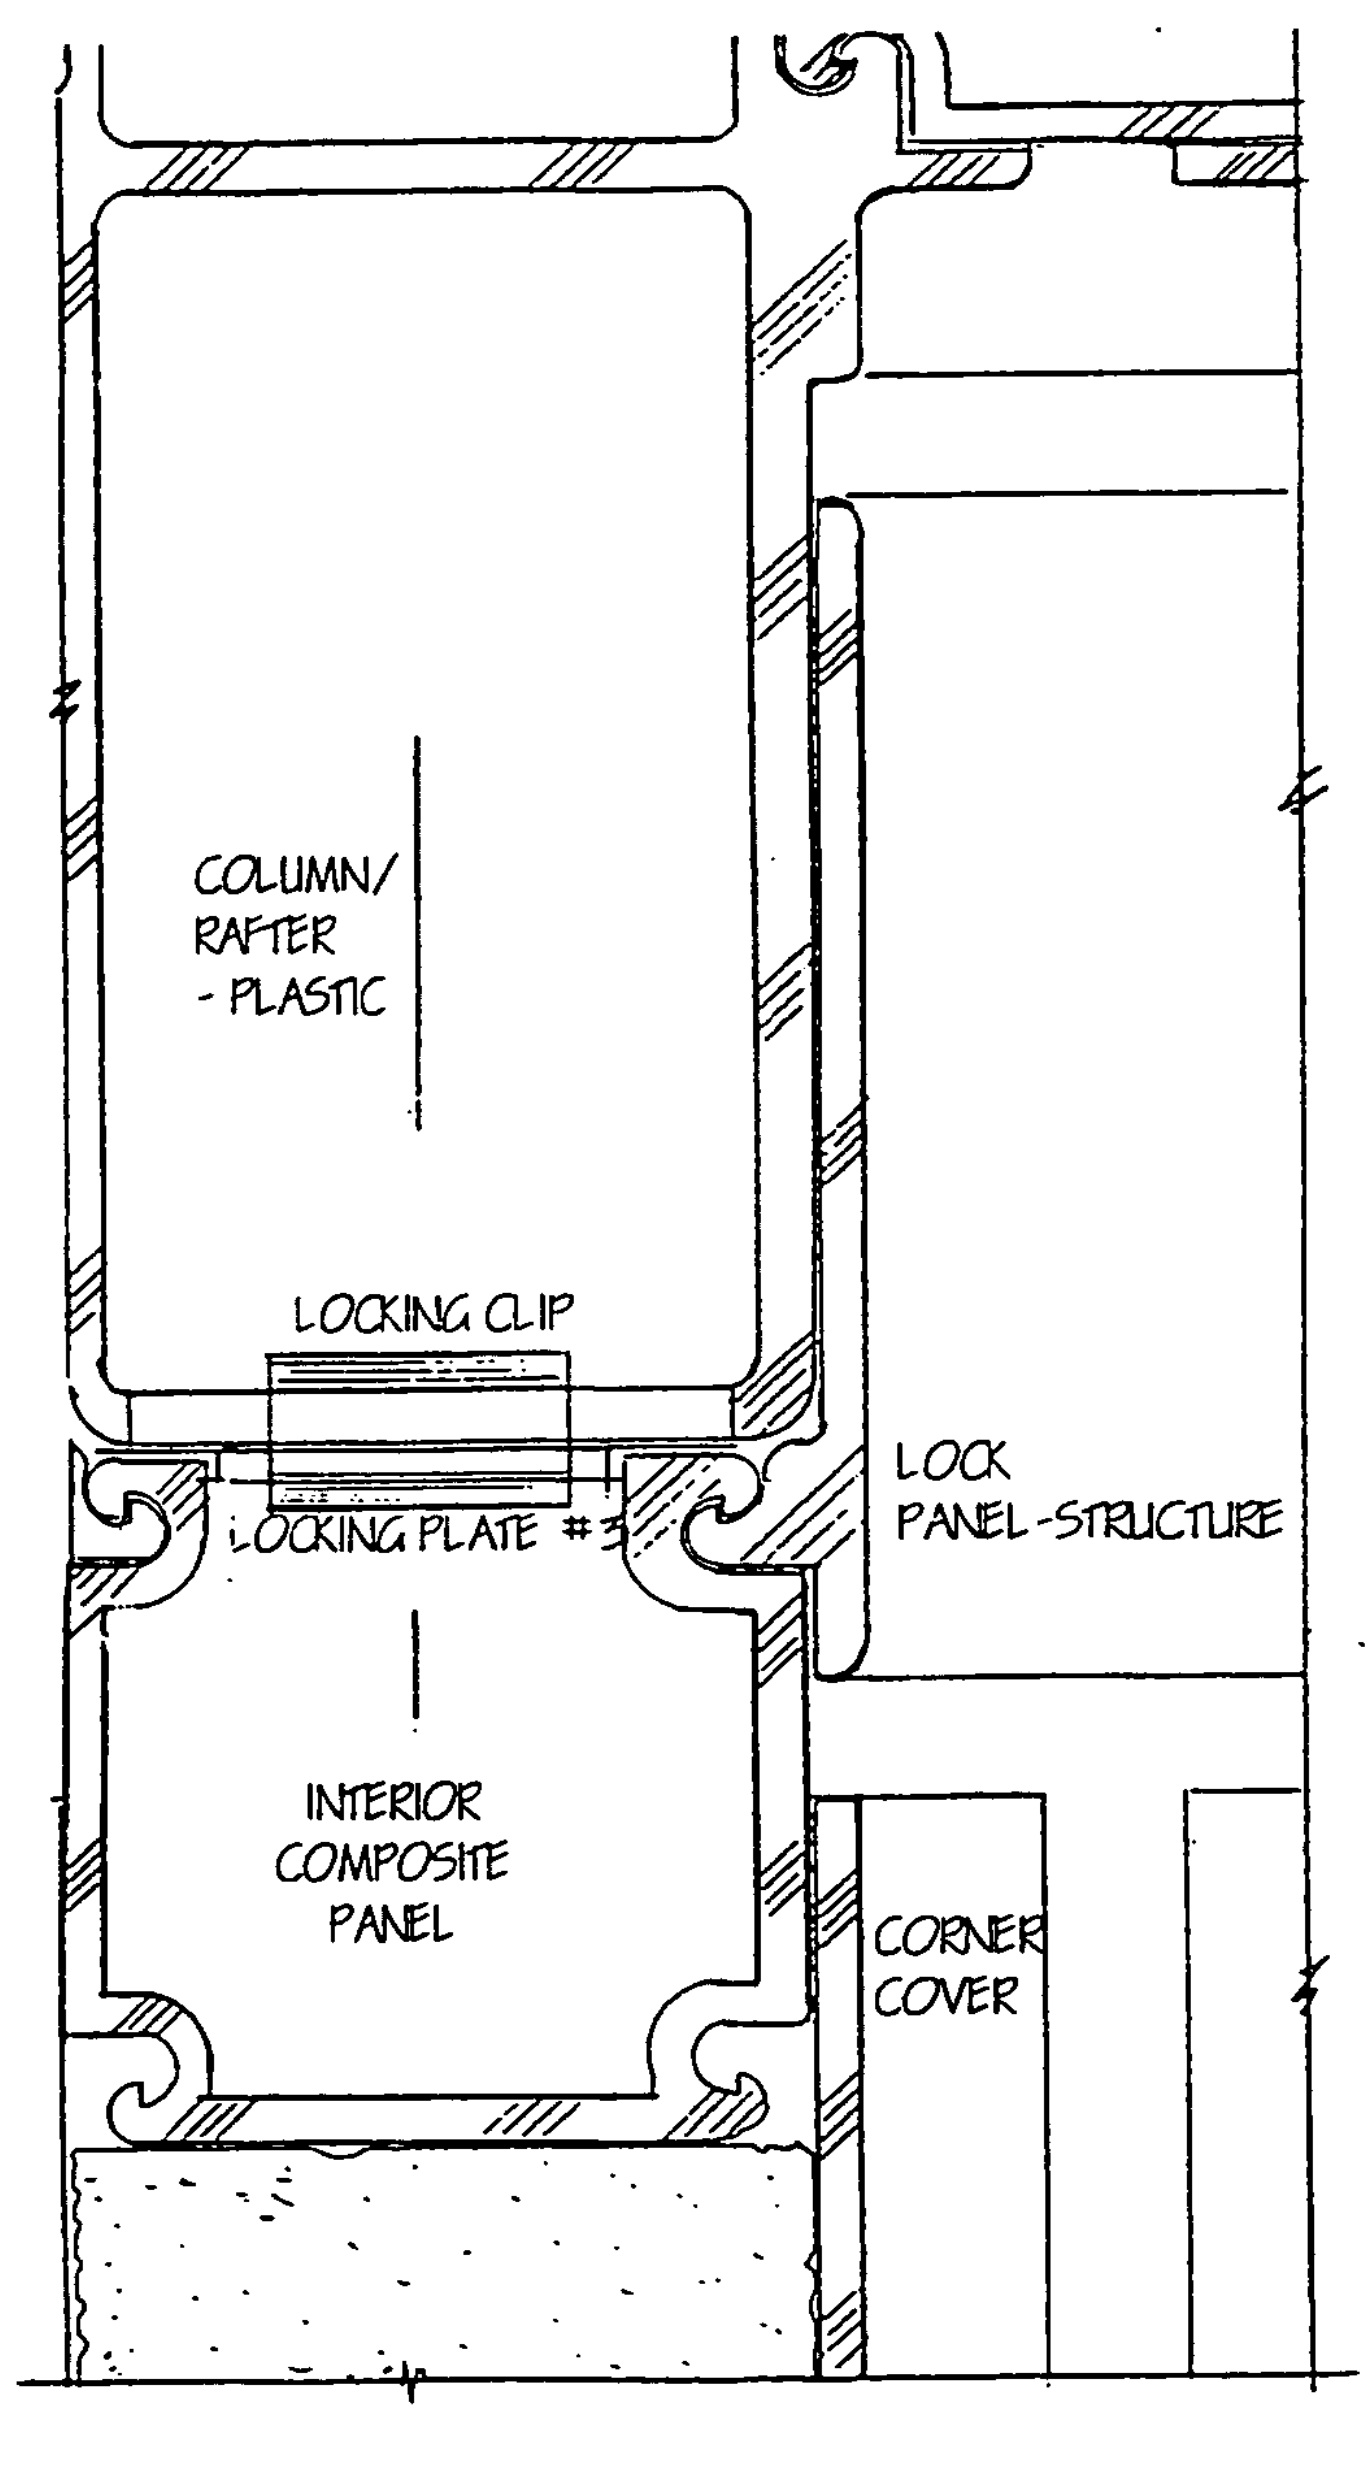
COLUMN/
RAFTER
- PLASTIC
LOCKING CLIP
LOCKING PLATE #3
LOCK
PANEL-STRUCTURE
INTERIOR
COMPOSITE
PANEL
CORNER
COVER

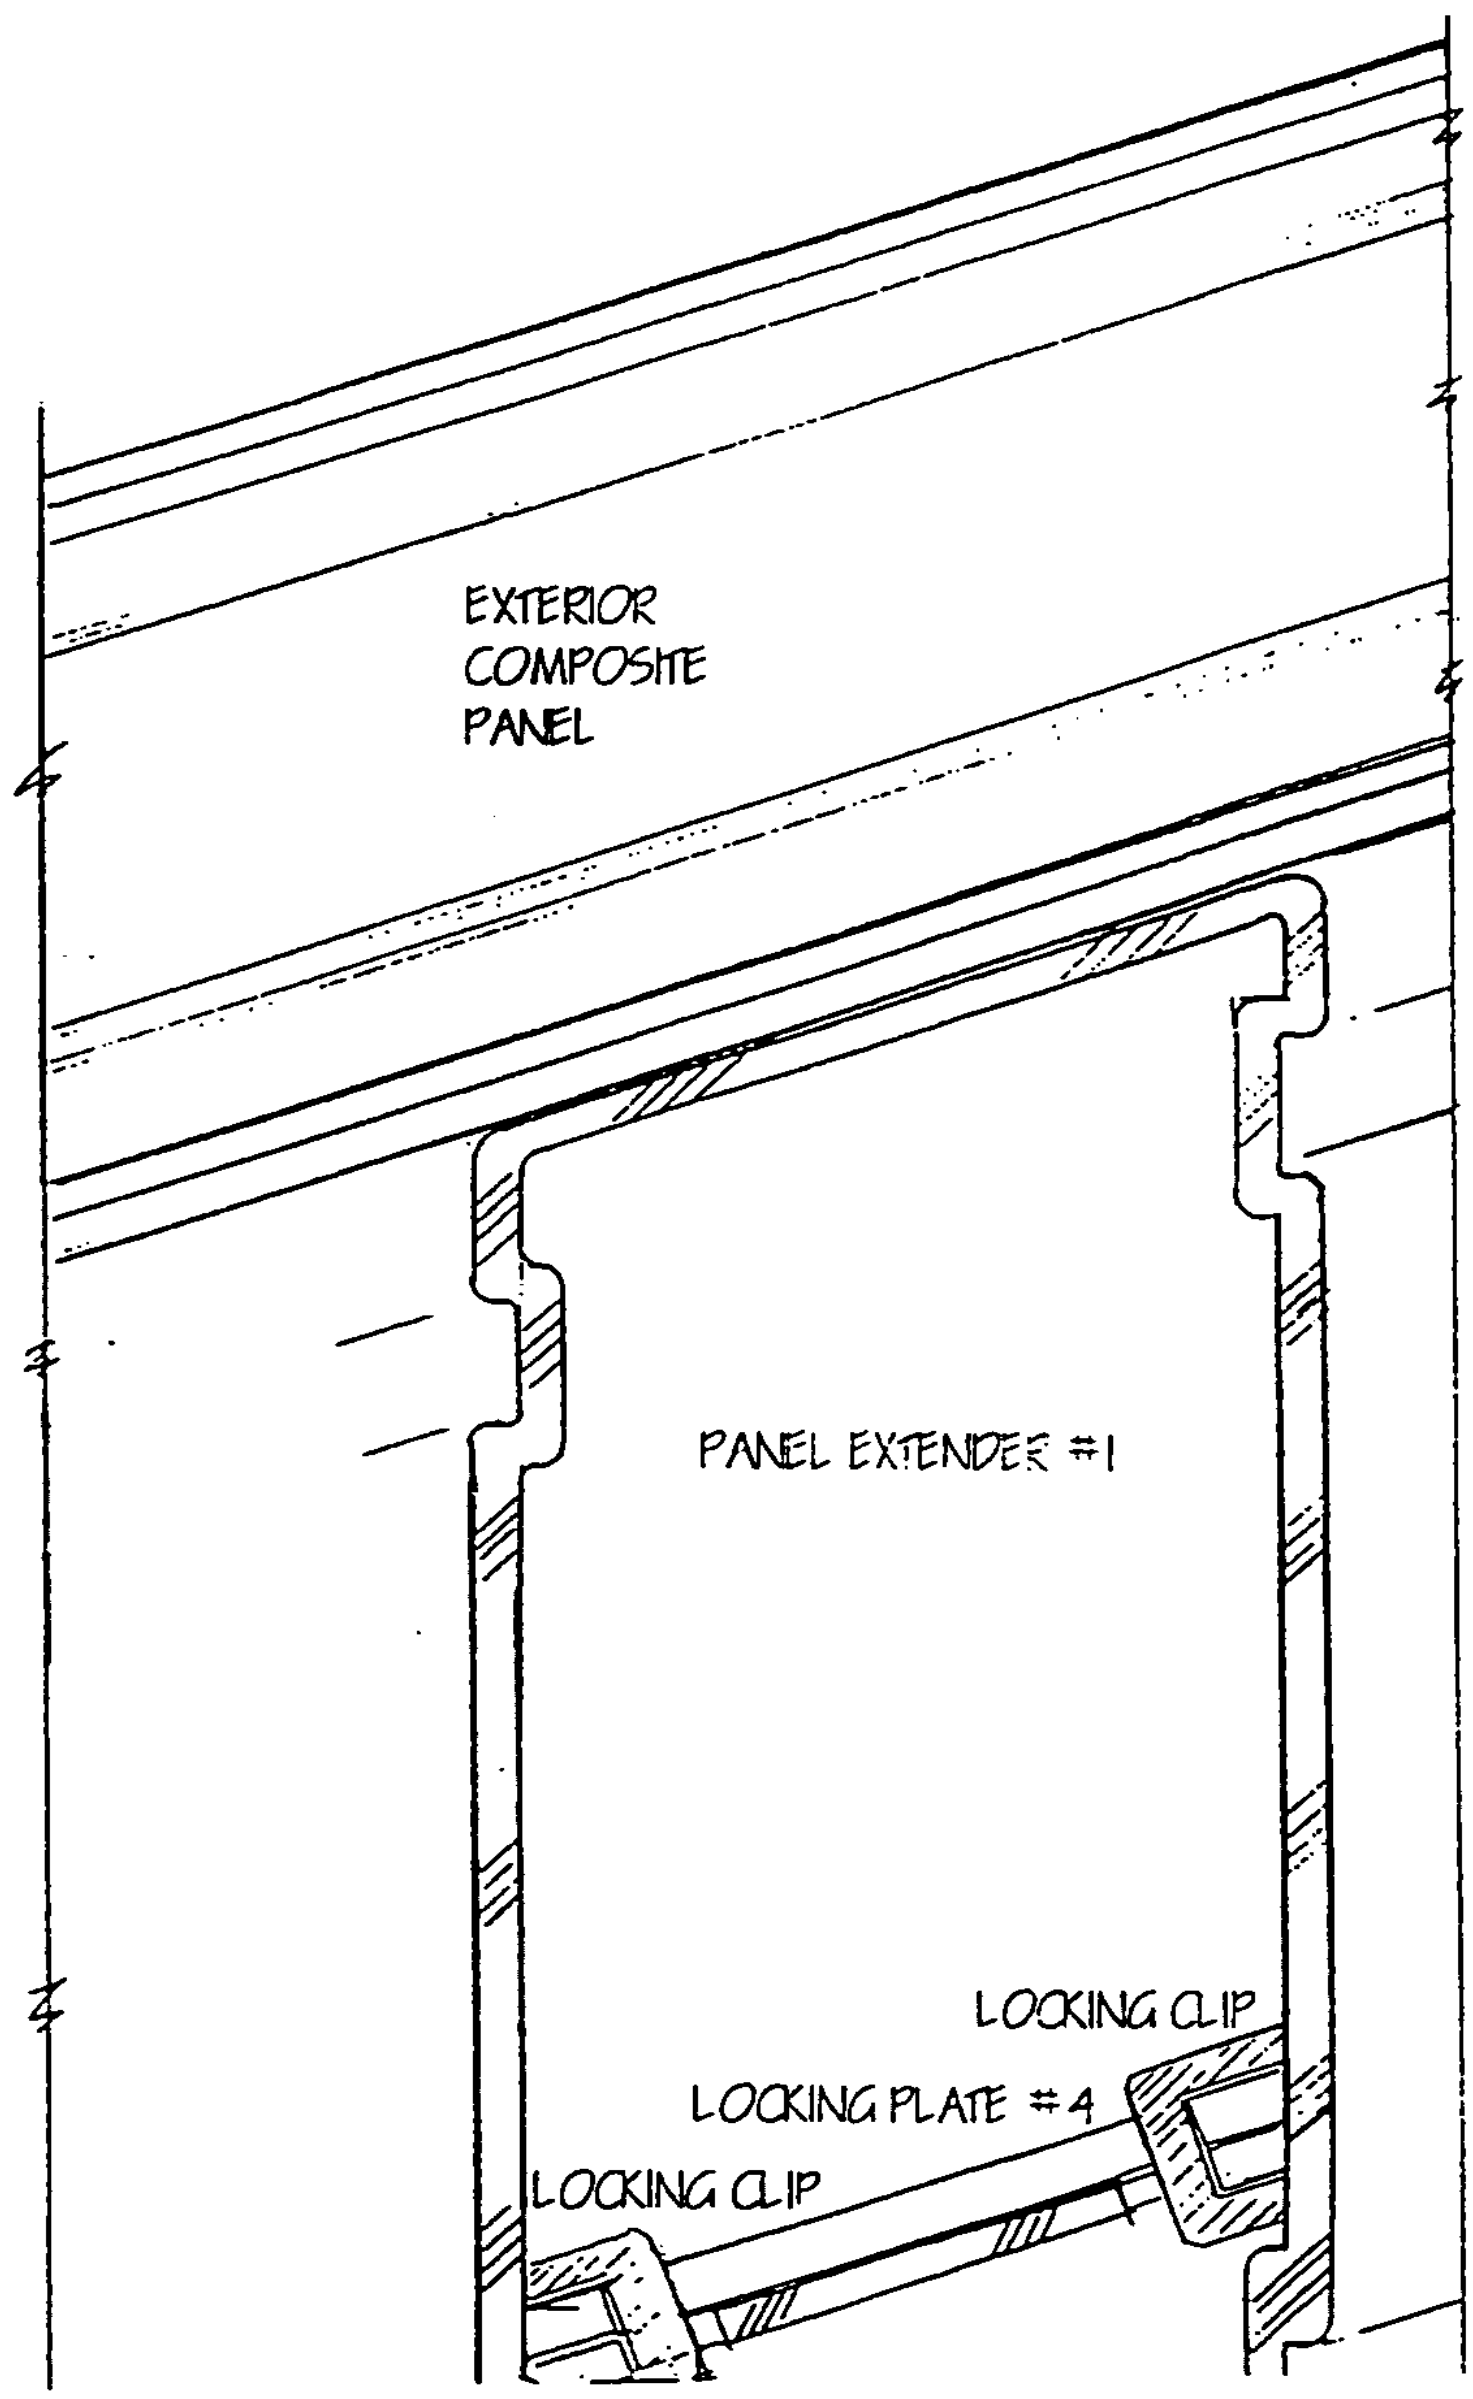
EXTERIOR
COMPOSITE
PANEL
PANEL EXTENDER #1
LOCKING CLIP
LOCKING PLATE #4
LOCKING CLIP

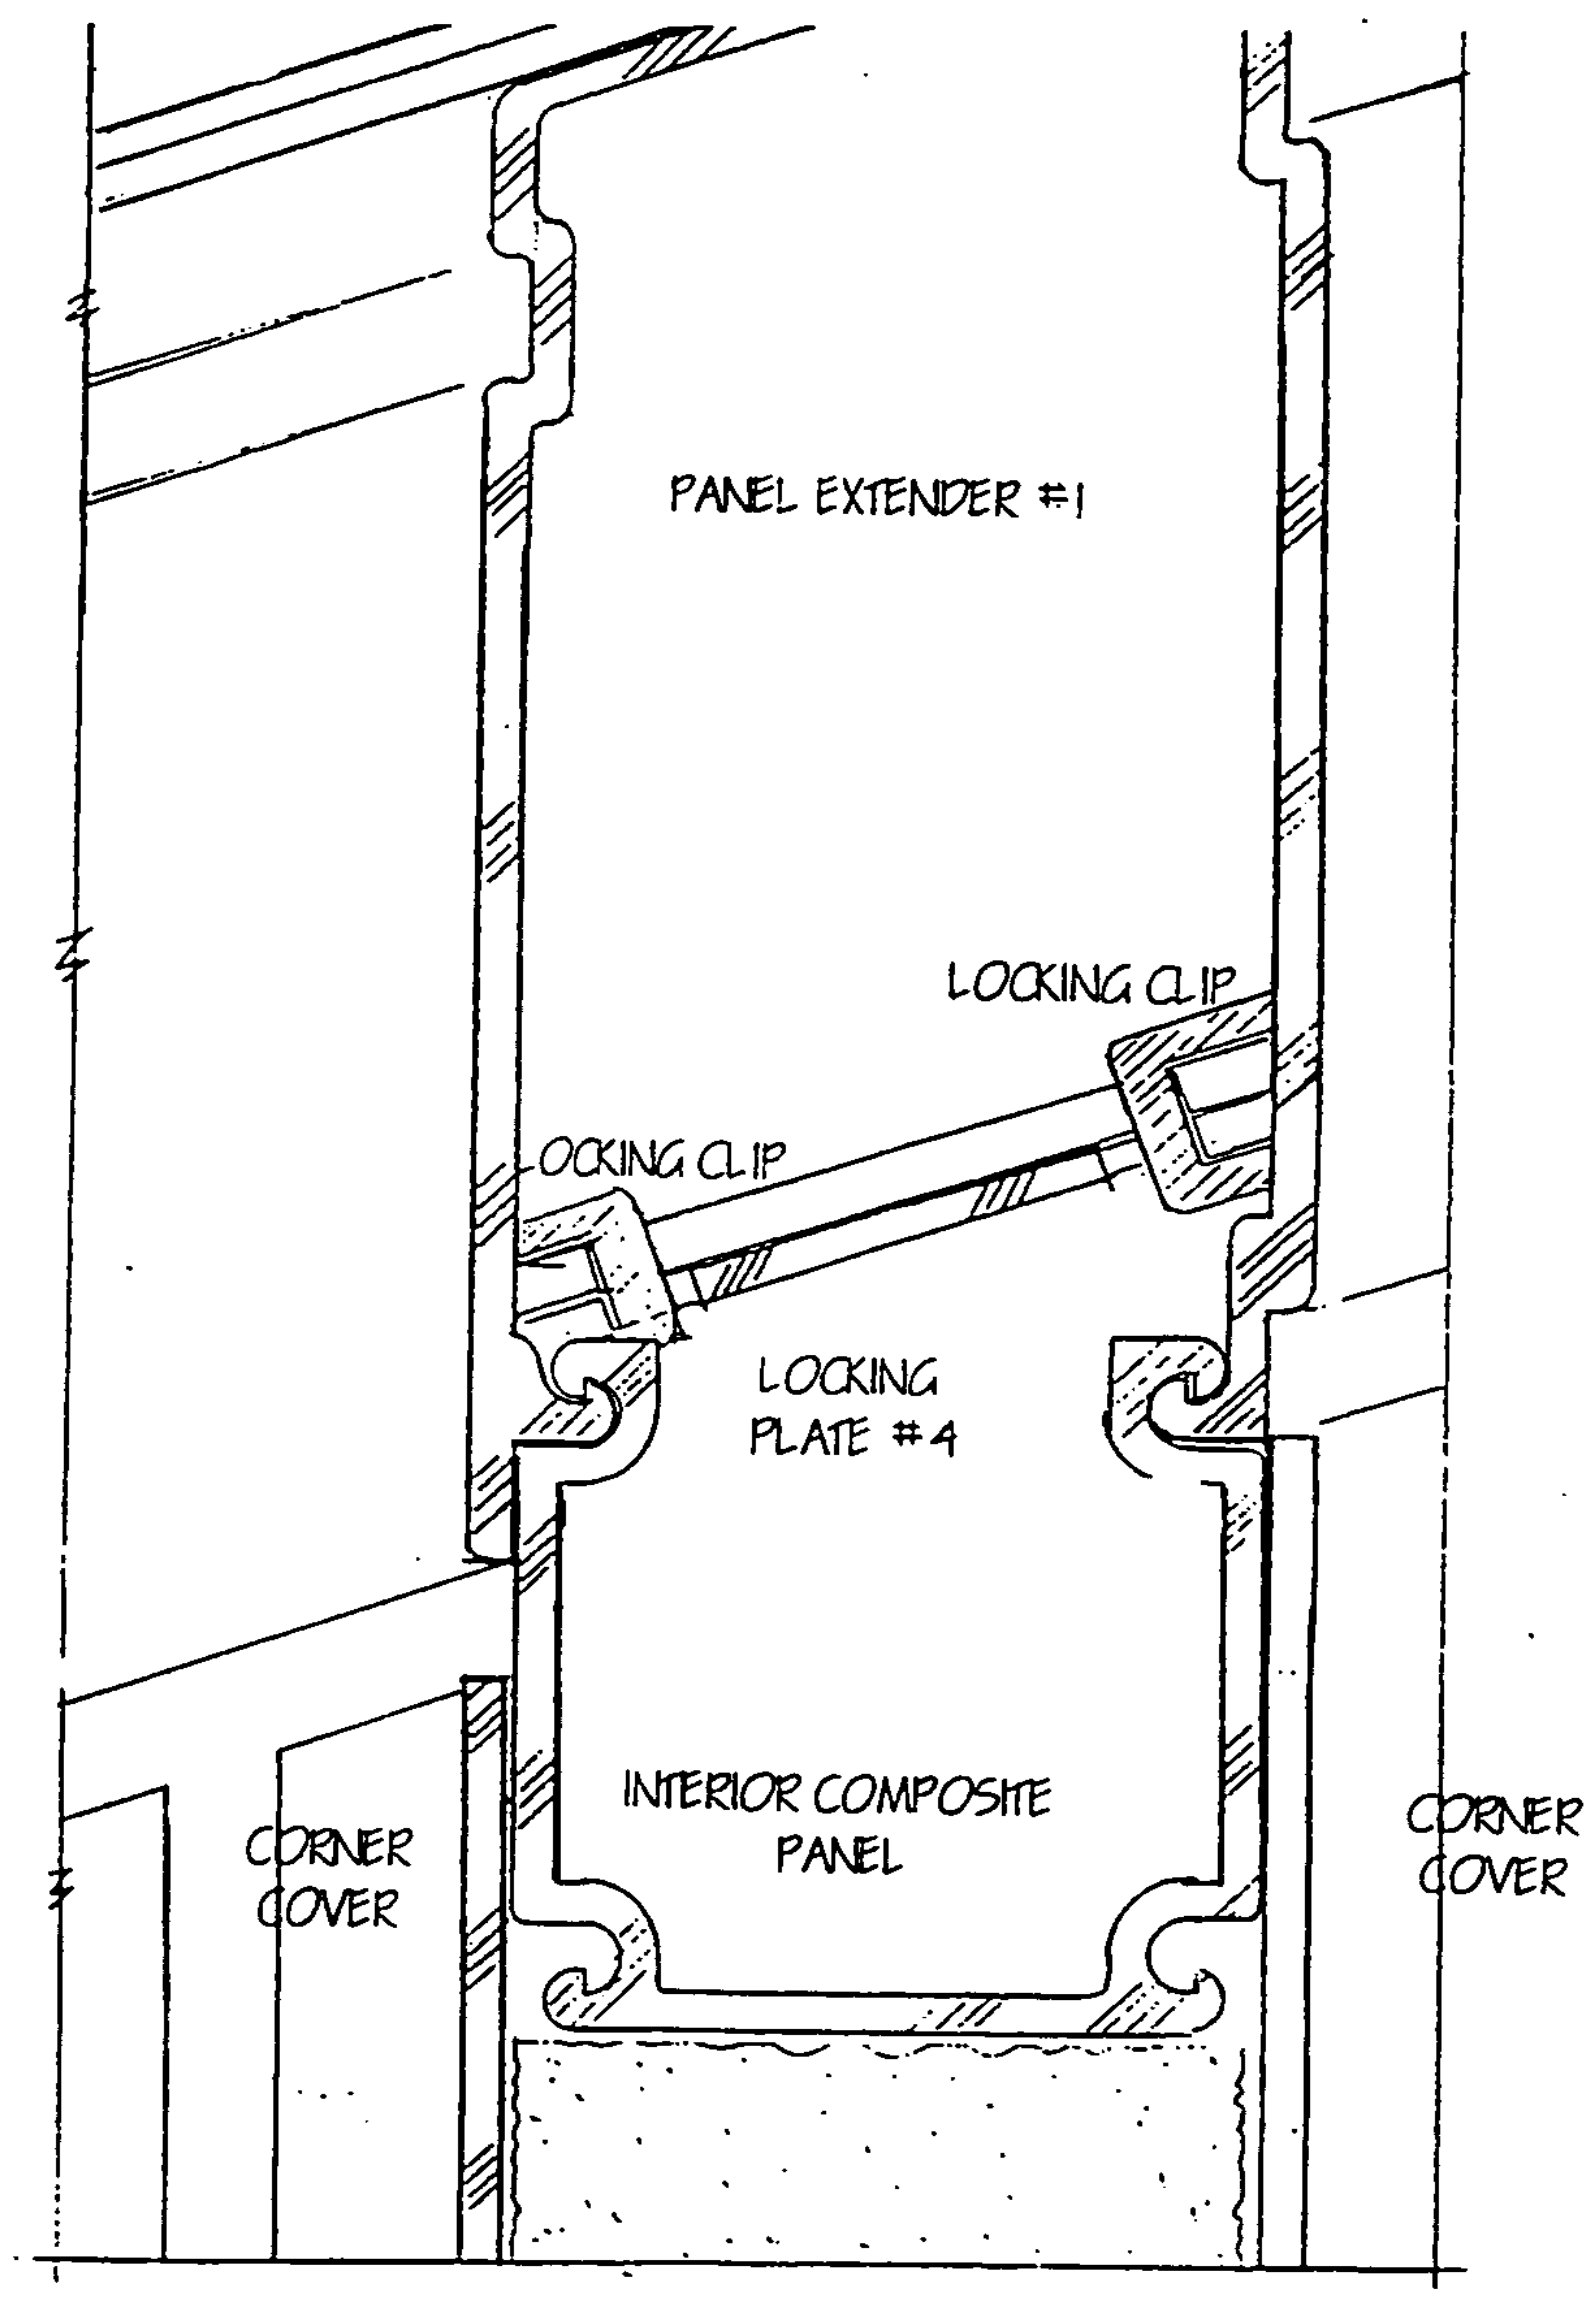
PANEL EXTENDER #1
LOCKING CLIP
LOCKING CLIP
LOCKING
PLATE #4
INTERIOR COMPOSITE
PANEL
CORNER
COVER
CORNER
COVER

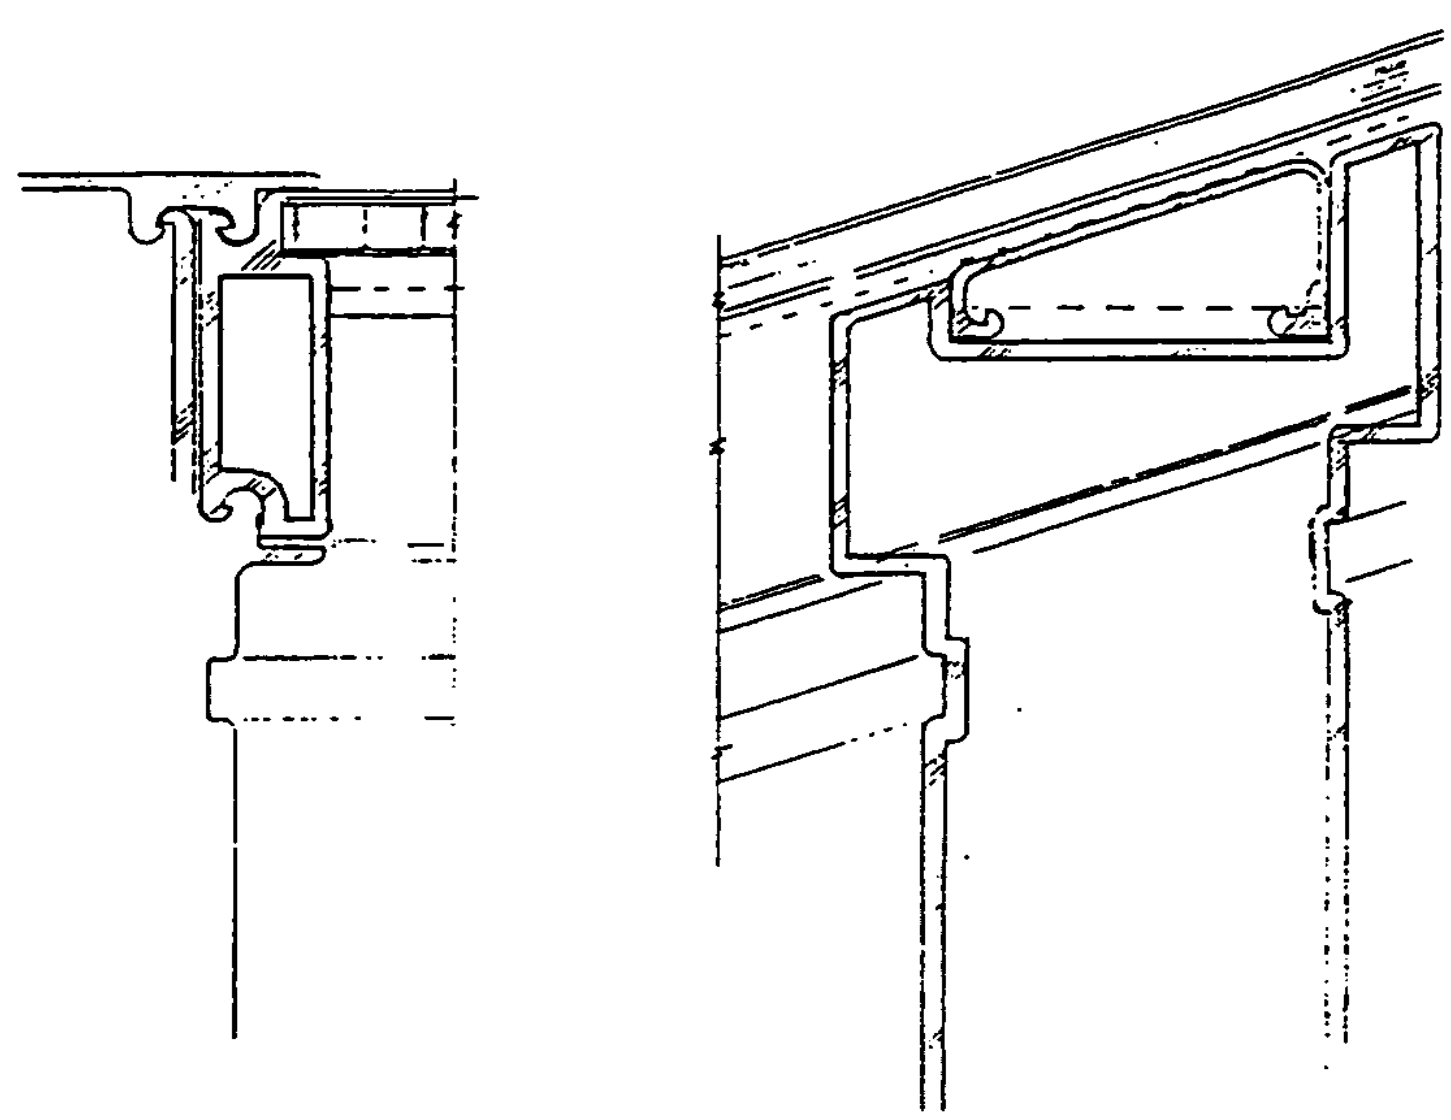

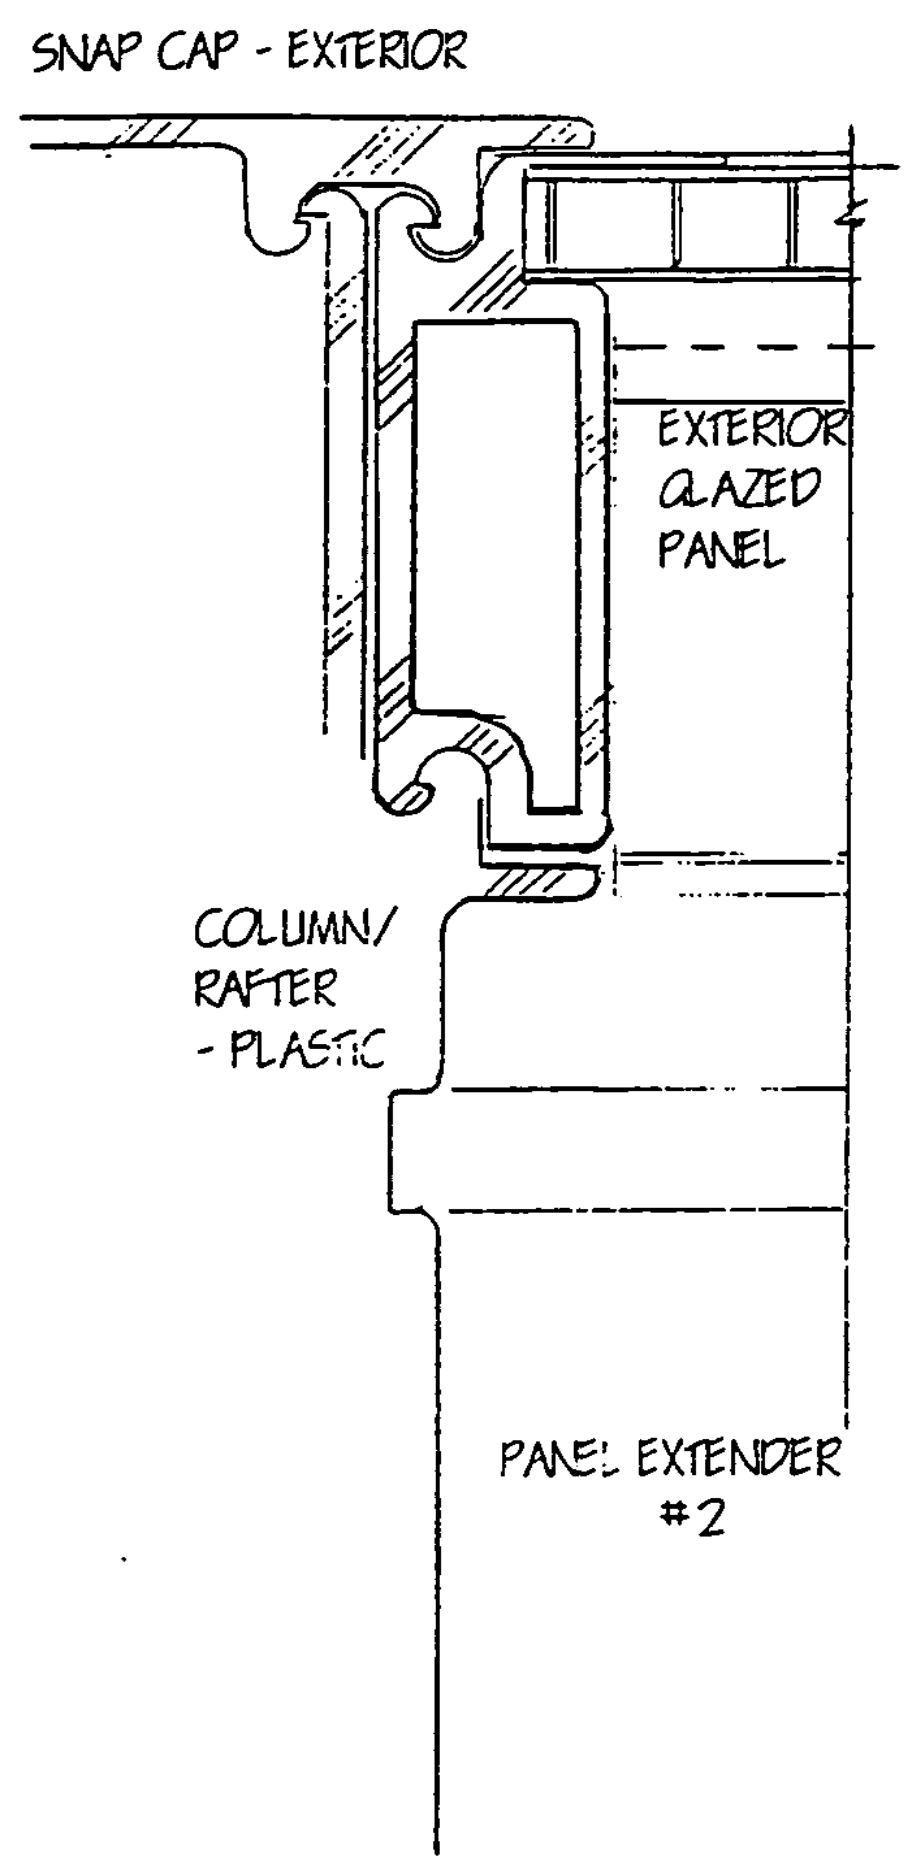
SNAP CAP - EXTERIOR
EXTERIOR GLAZED PANEL
COLUMN/ RAFTER - PLASTIC
PANEL EXTENDER #2

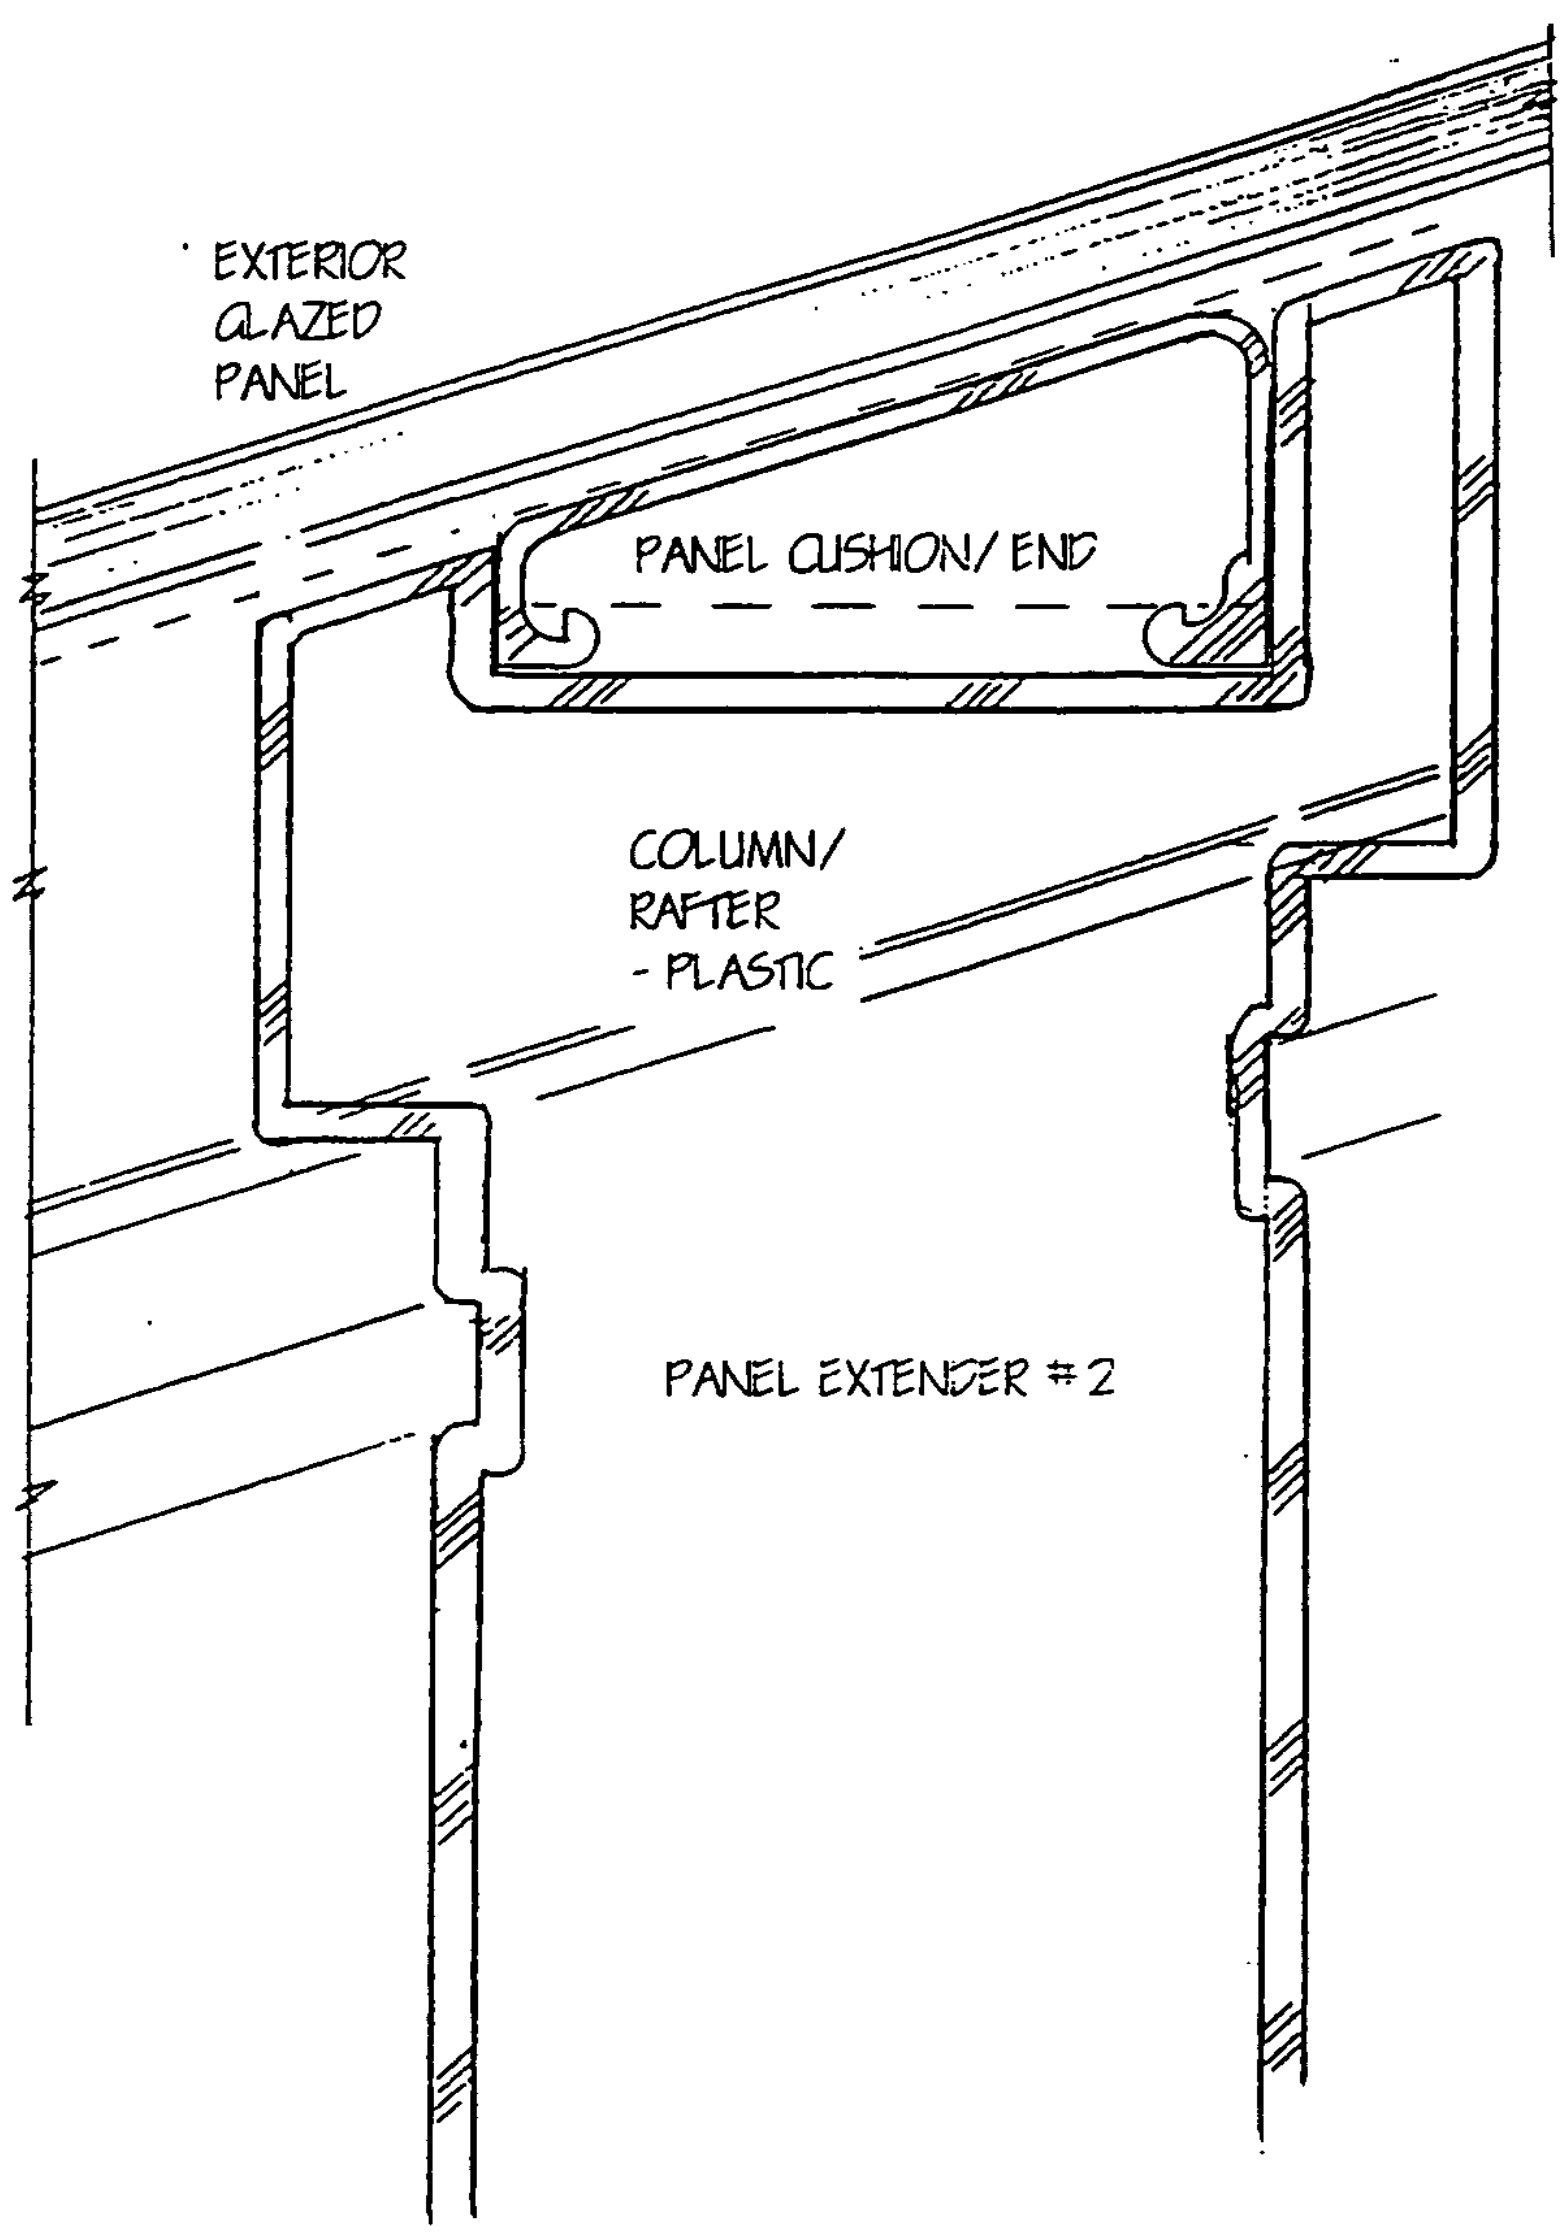
EXTERIOR
GLAZED
PANEL
PANEL CUSHION/ END
COLUMN/
RAFTER
- PLASTIC
PANEL EXTENDER #2

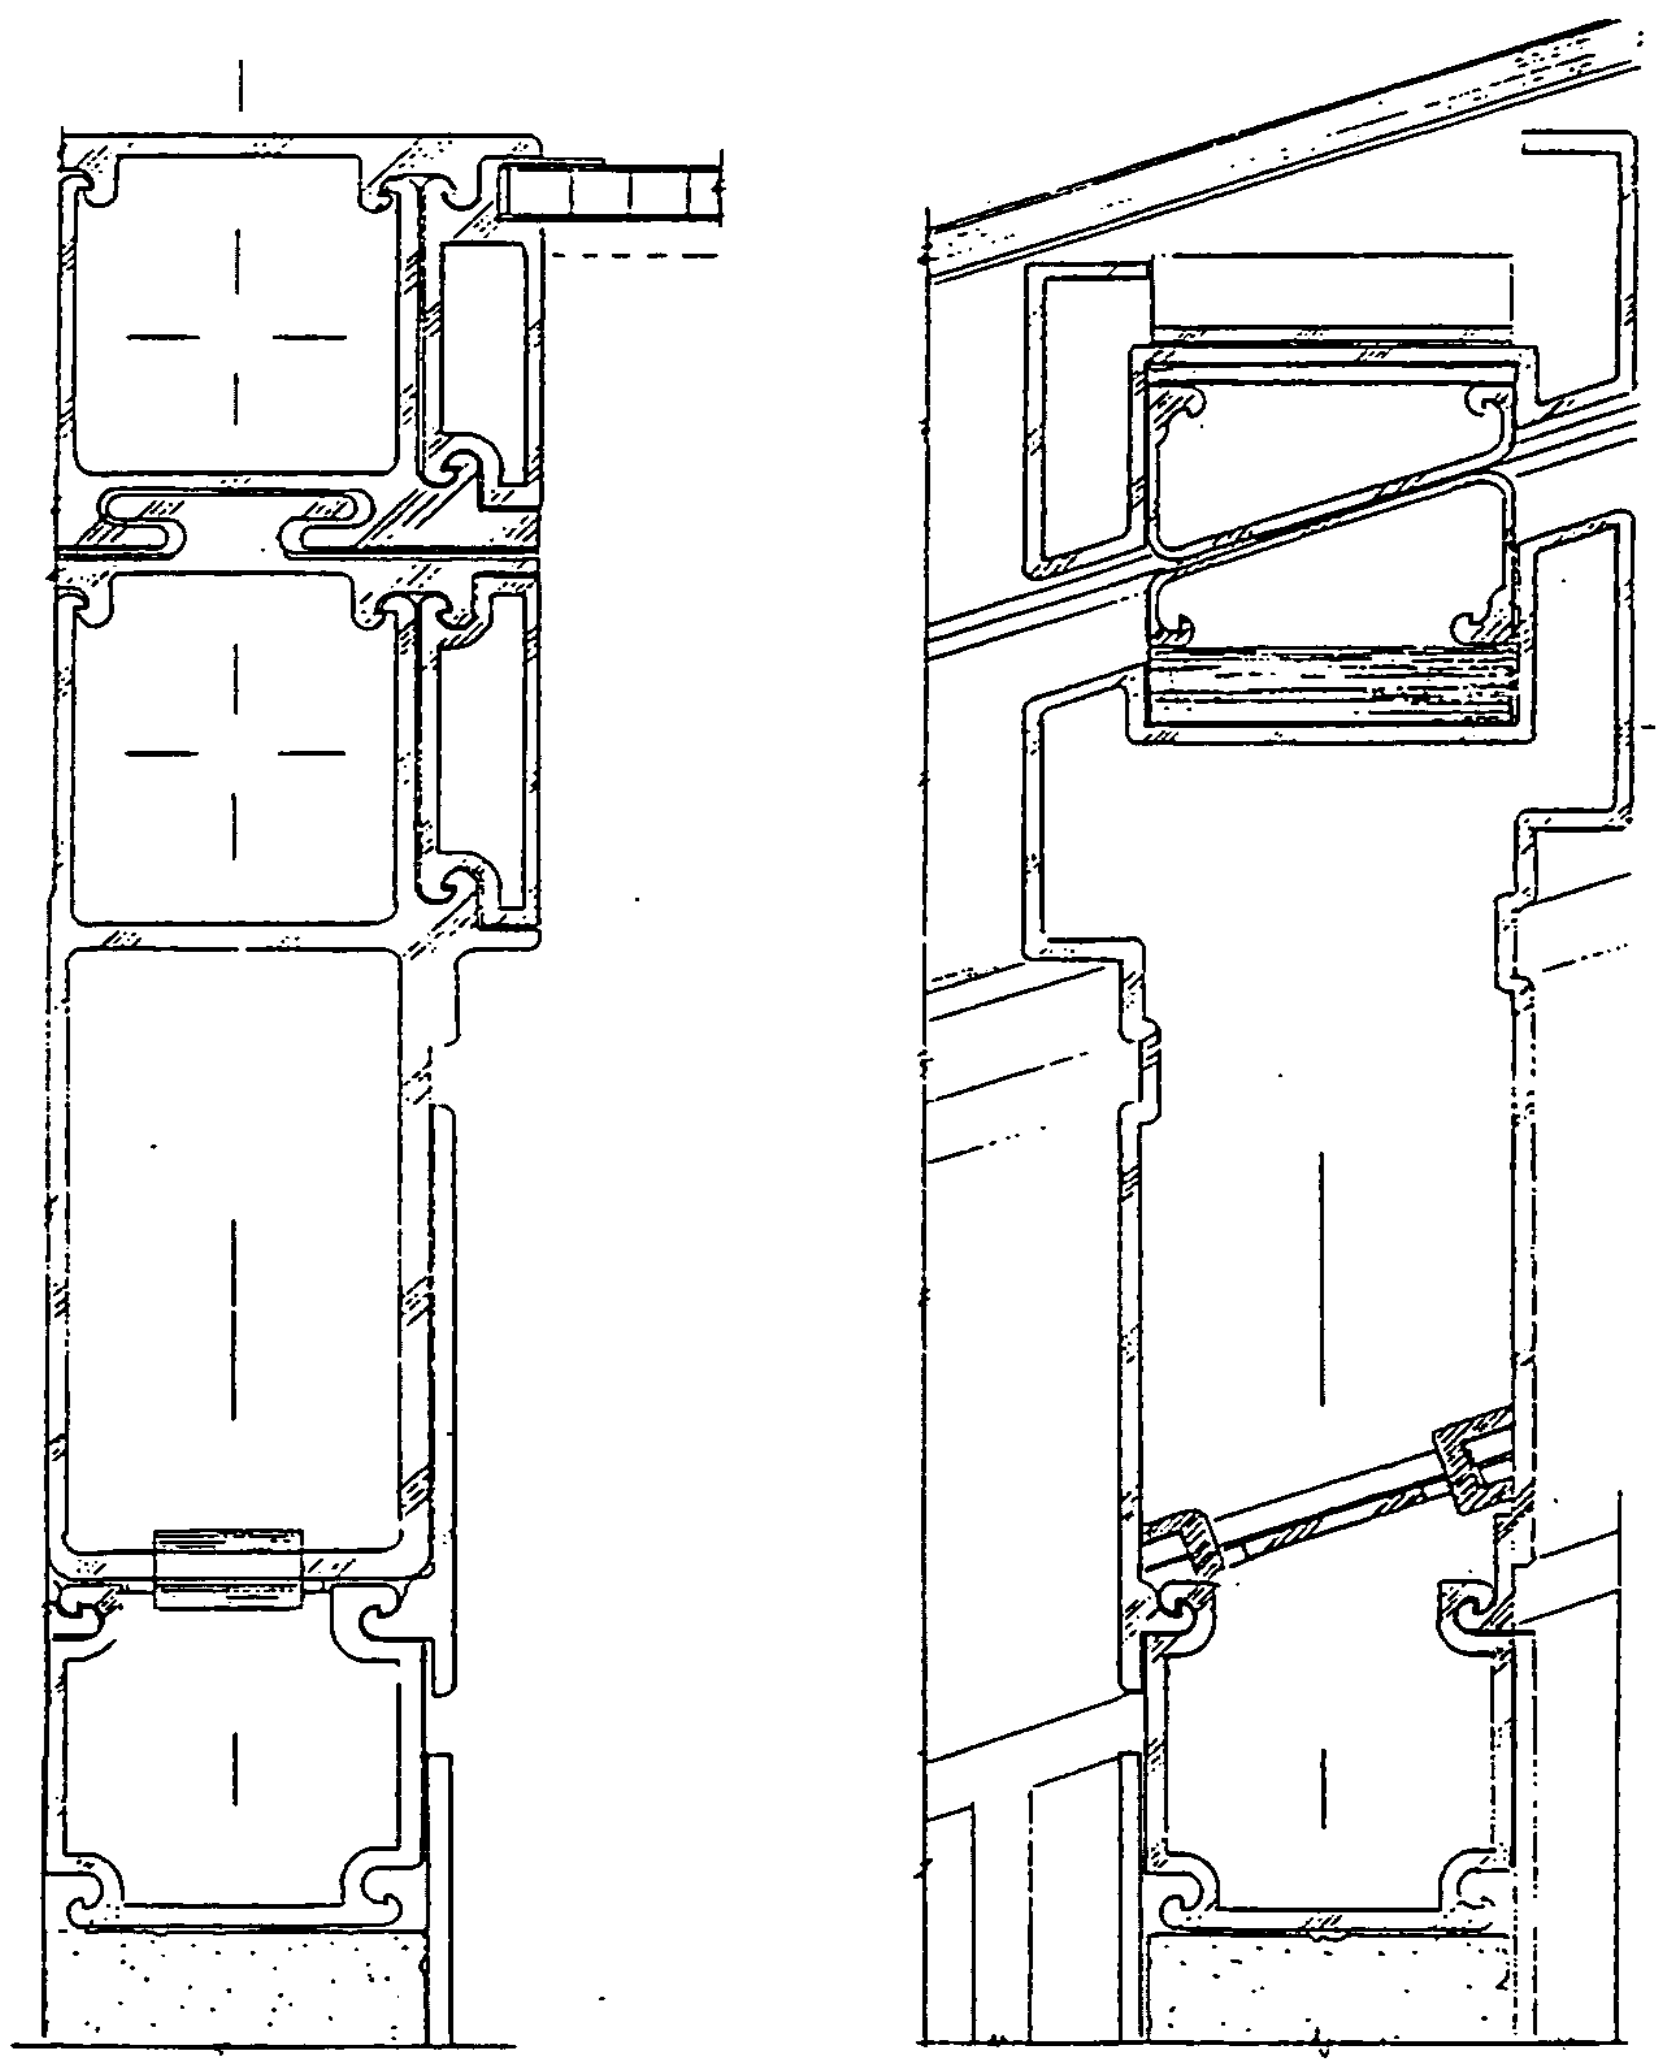

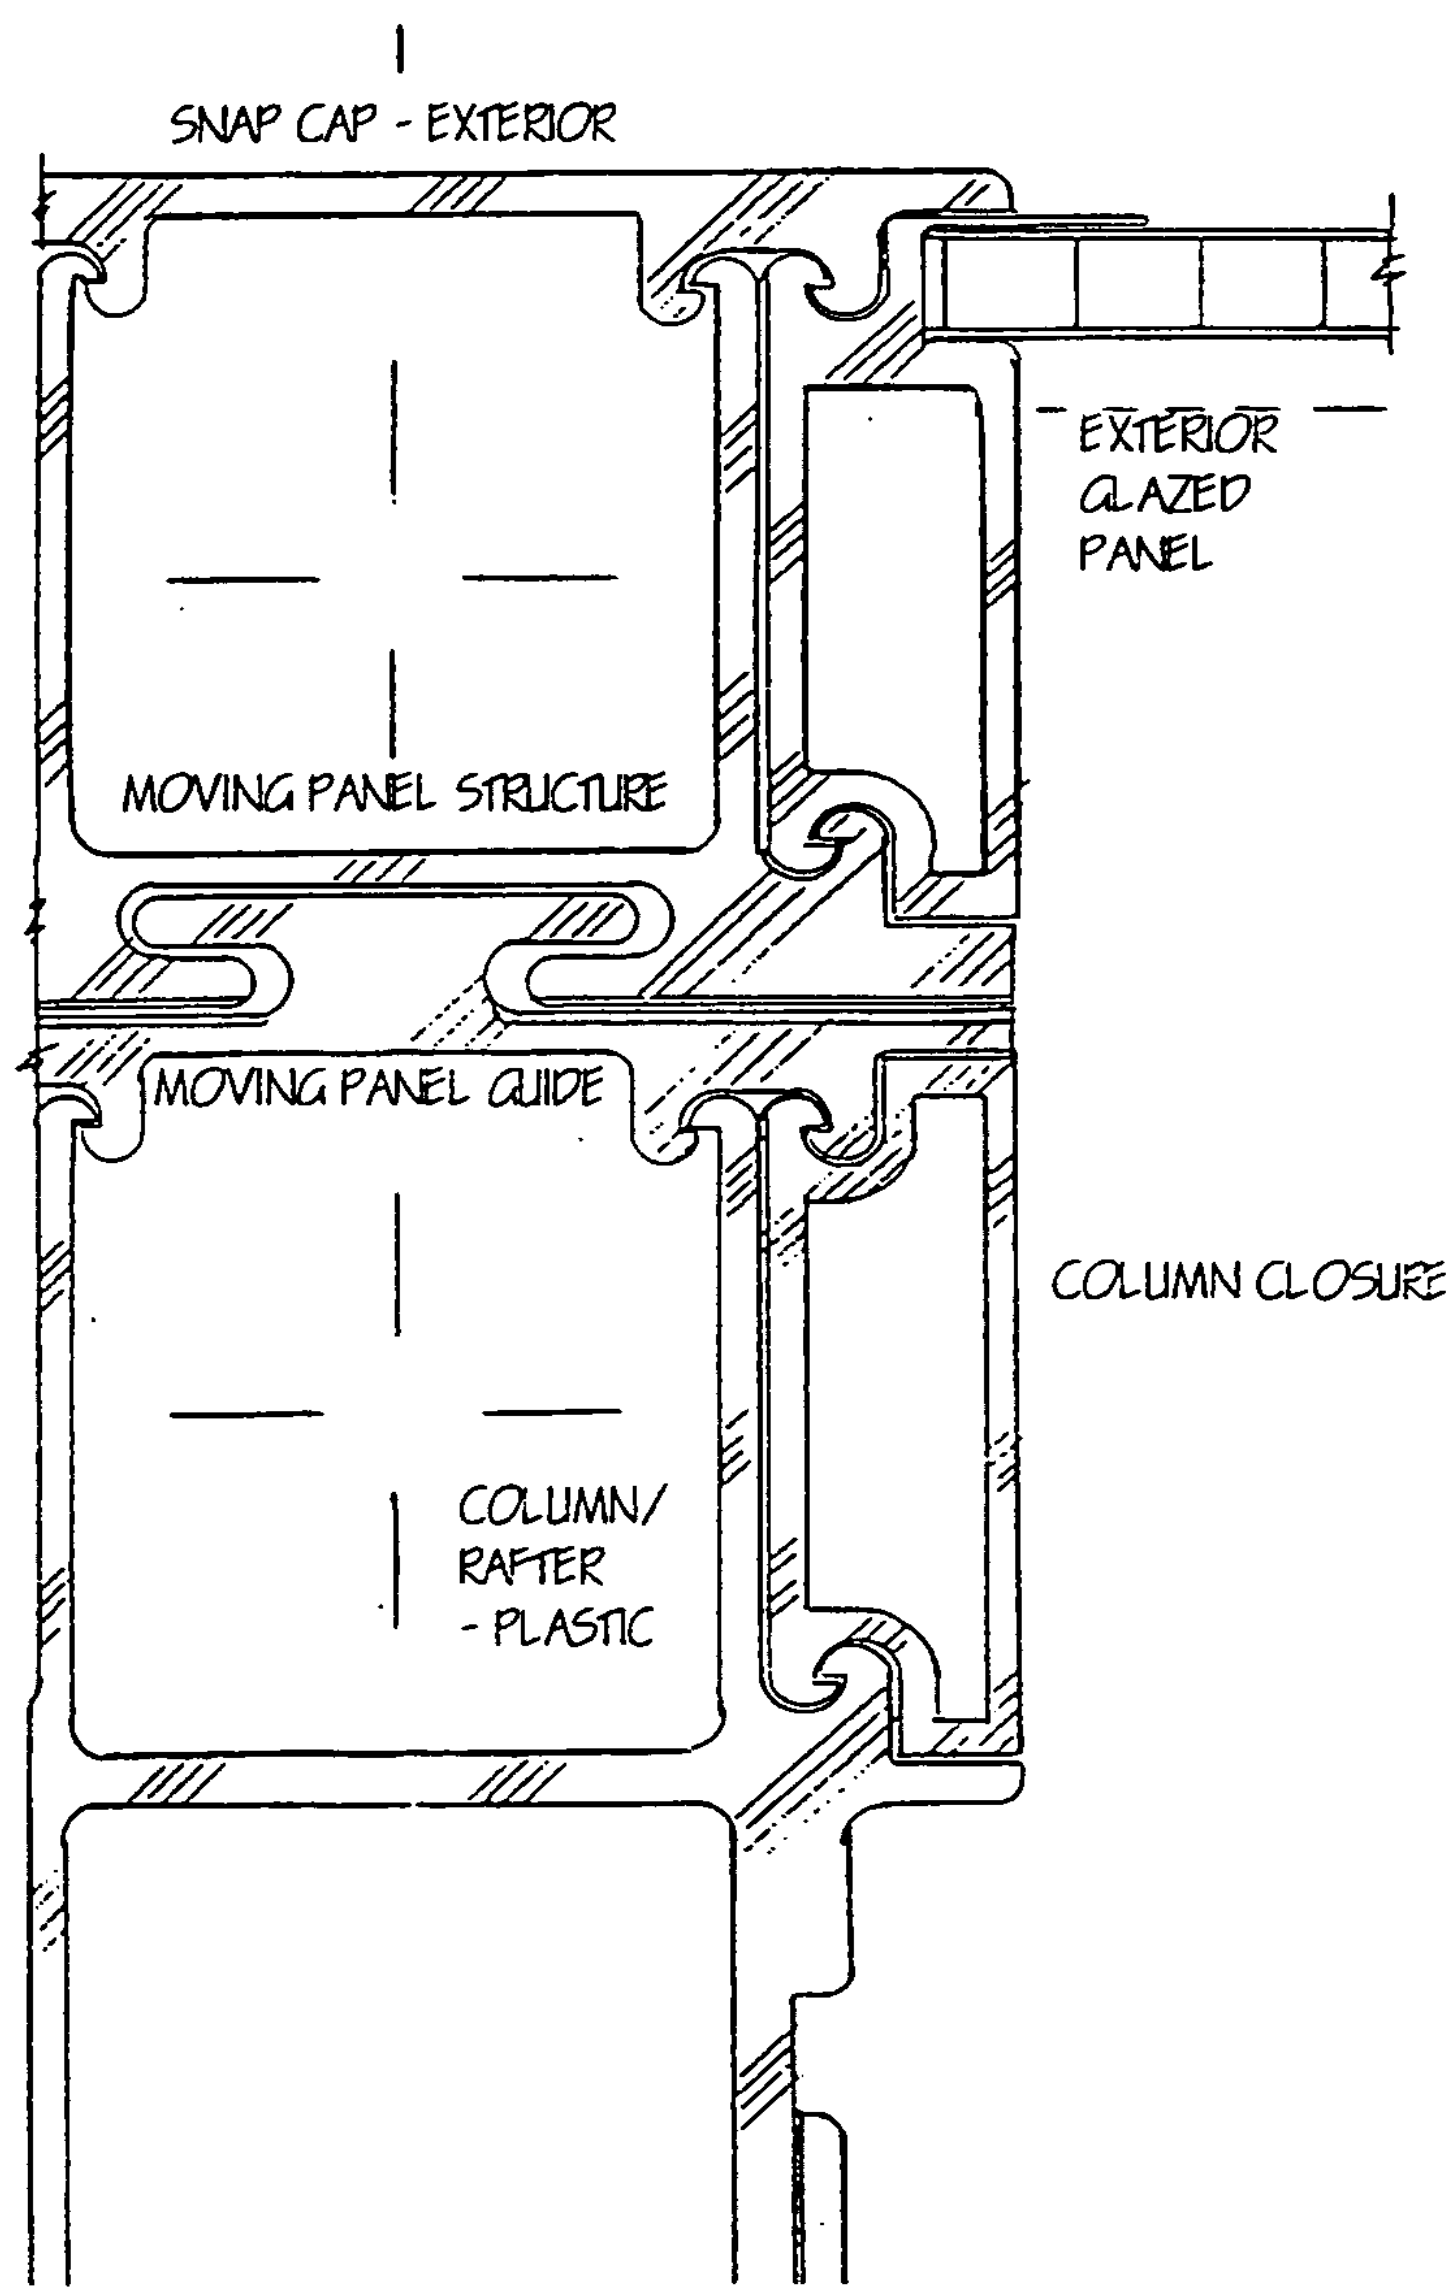
SNAP CAP - EXTERIOR
EXTERIOR GLAZED PANEL
MOVING PANEL STRUCTURE
MOVING PANEL GUIDE
COLUMN CLOSURE
COLUMN/ RAFTER - PLASTIC

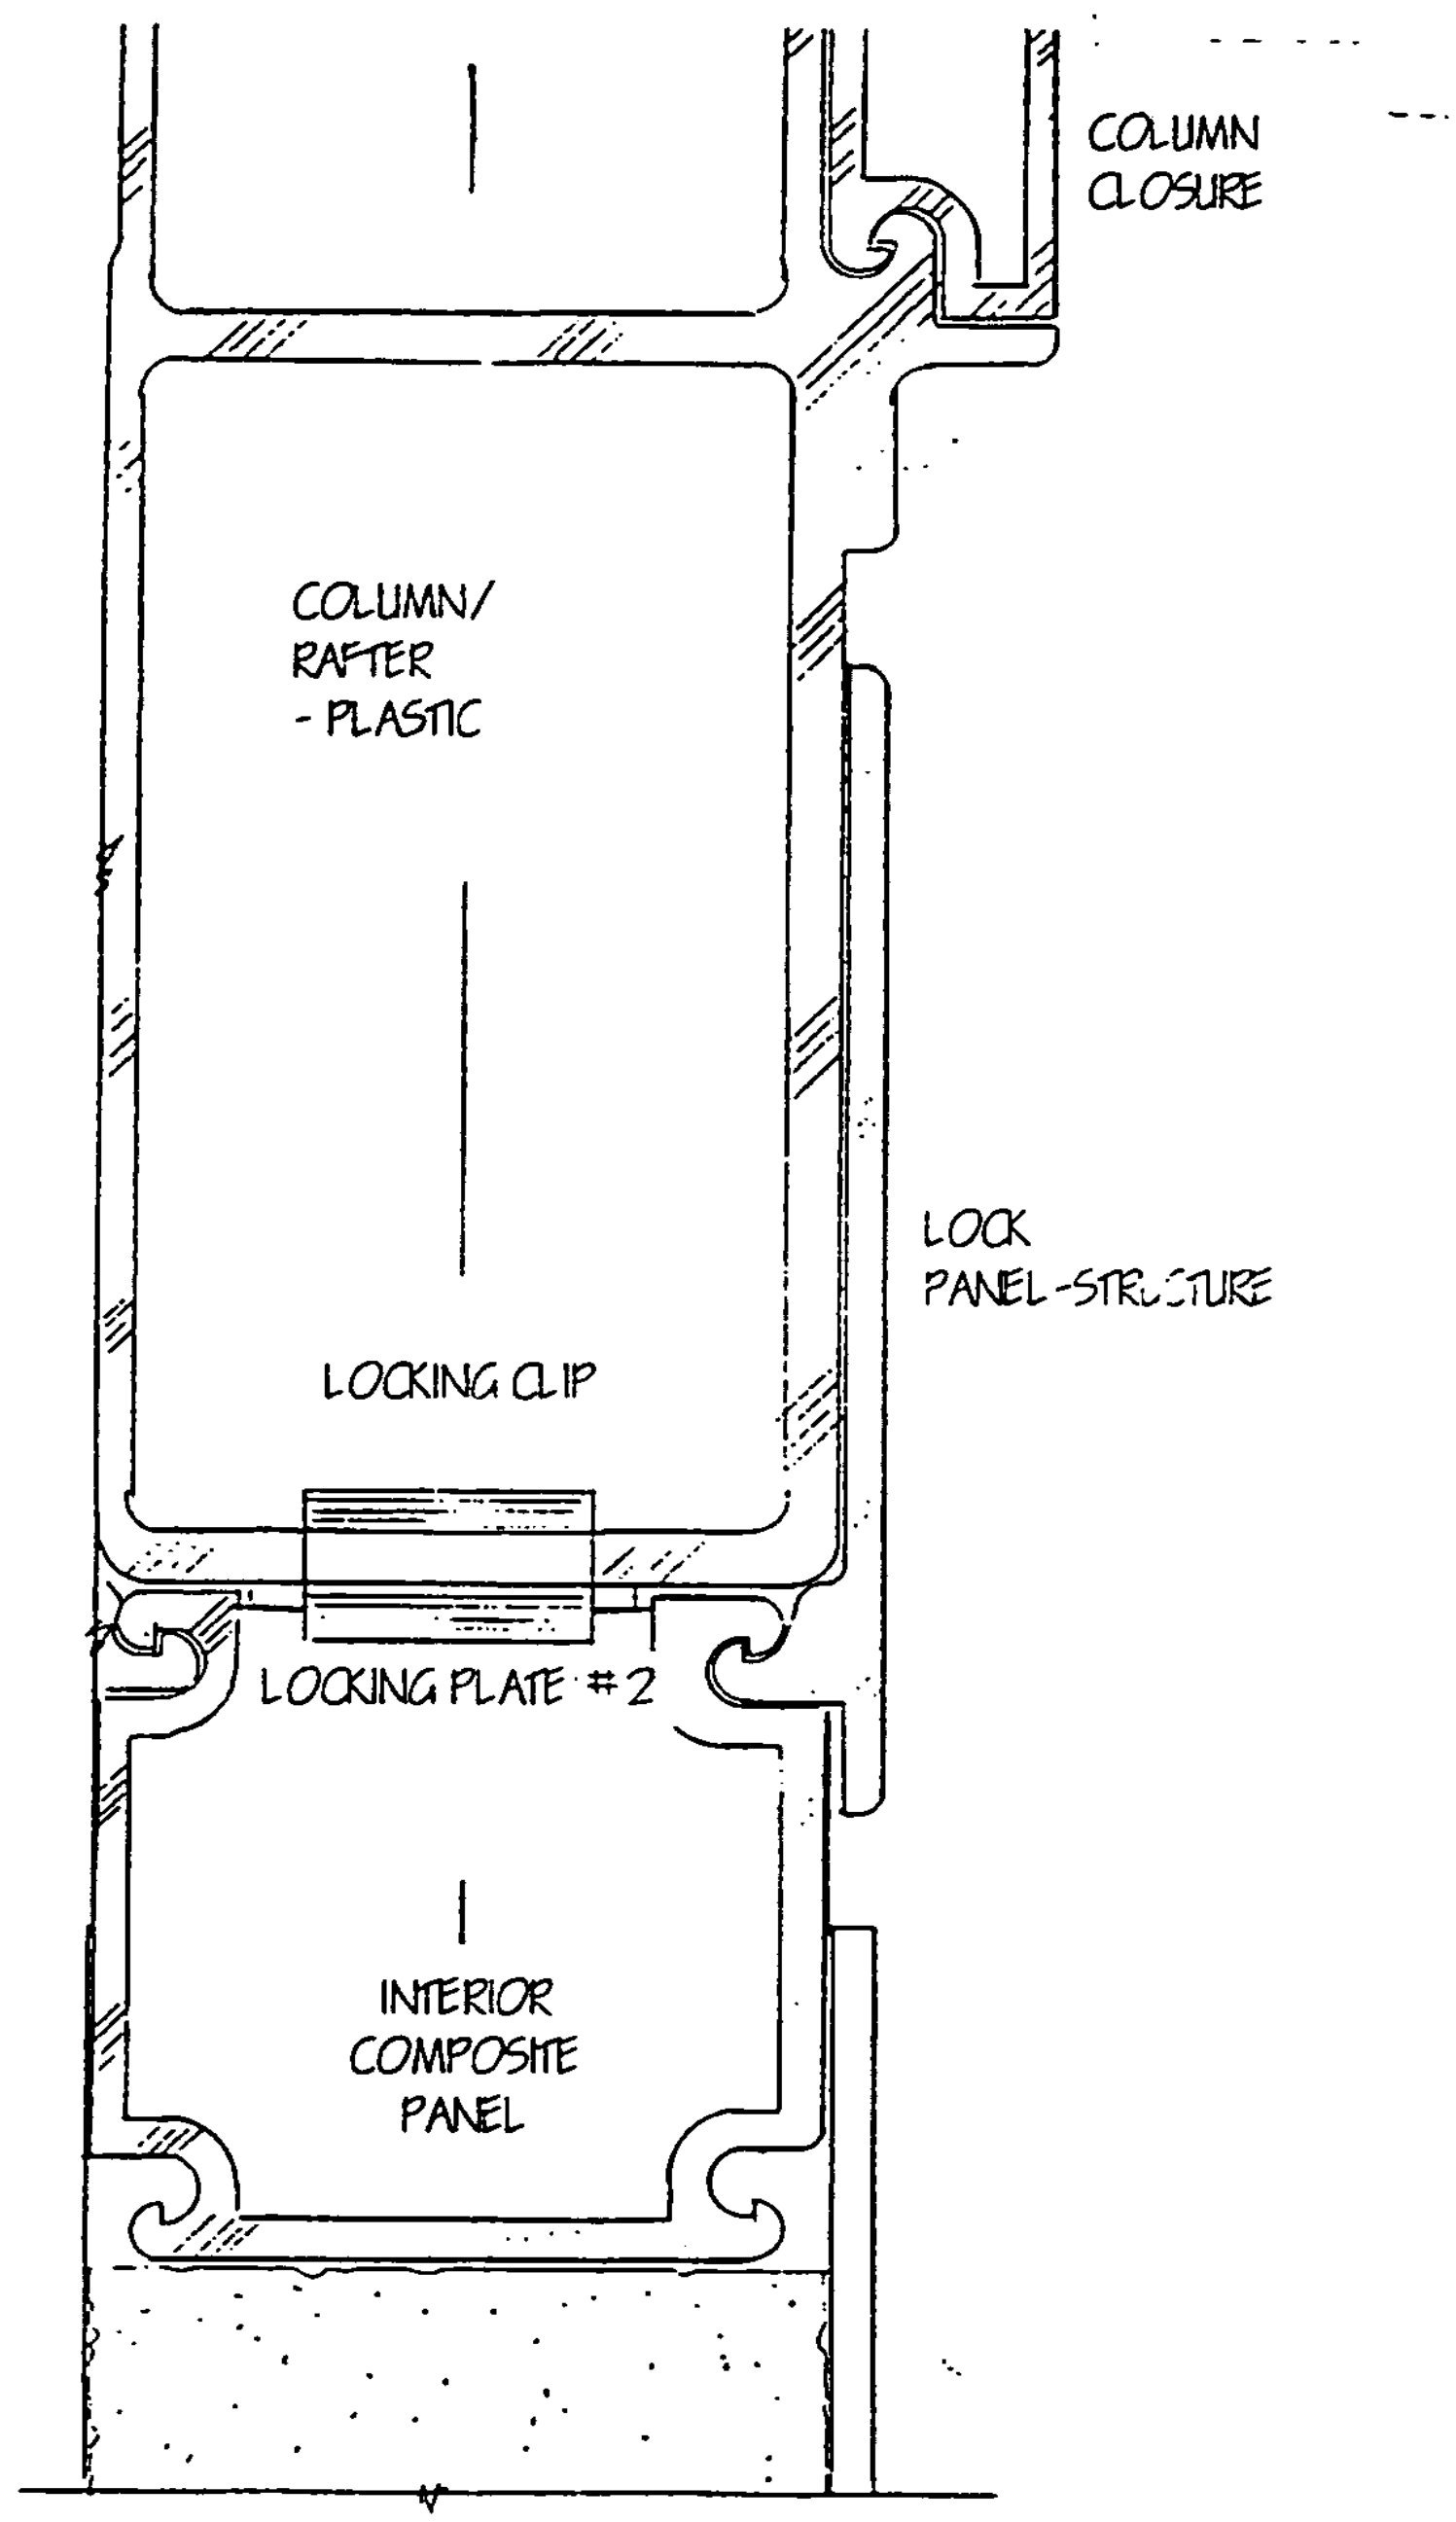
COLUMN
CLOSURE
COLUMN/
RAFTER
- PLASTIC
LOCK
PANEL-STRUCTURE
LOCKING CLIP
LOCKING PLATE #2
INTERIOR
COMPOSITE
PANEL

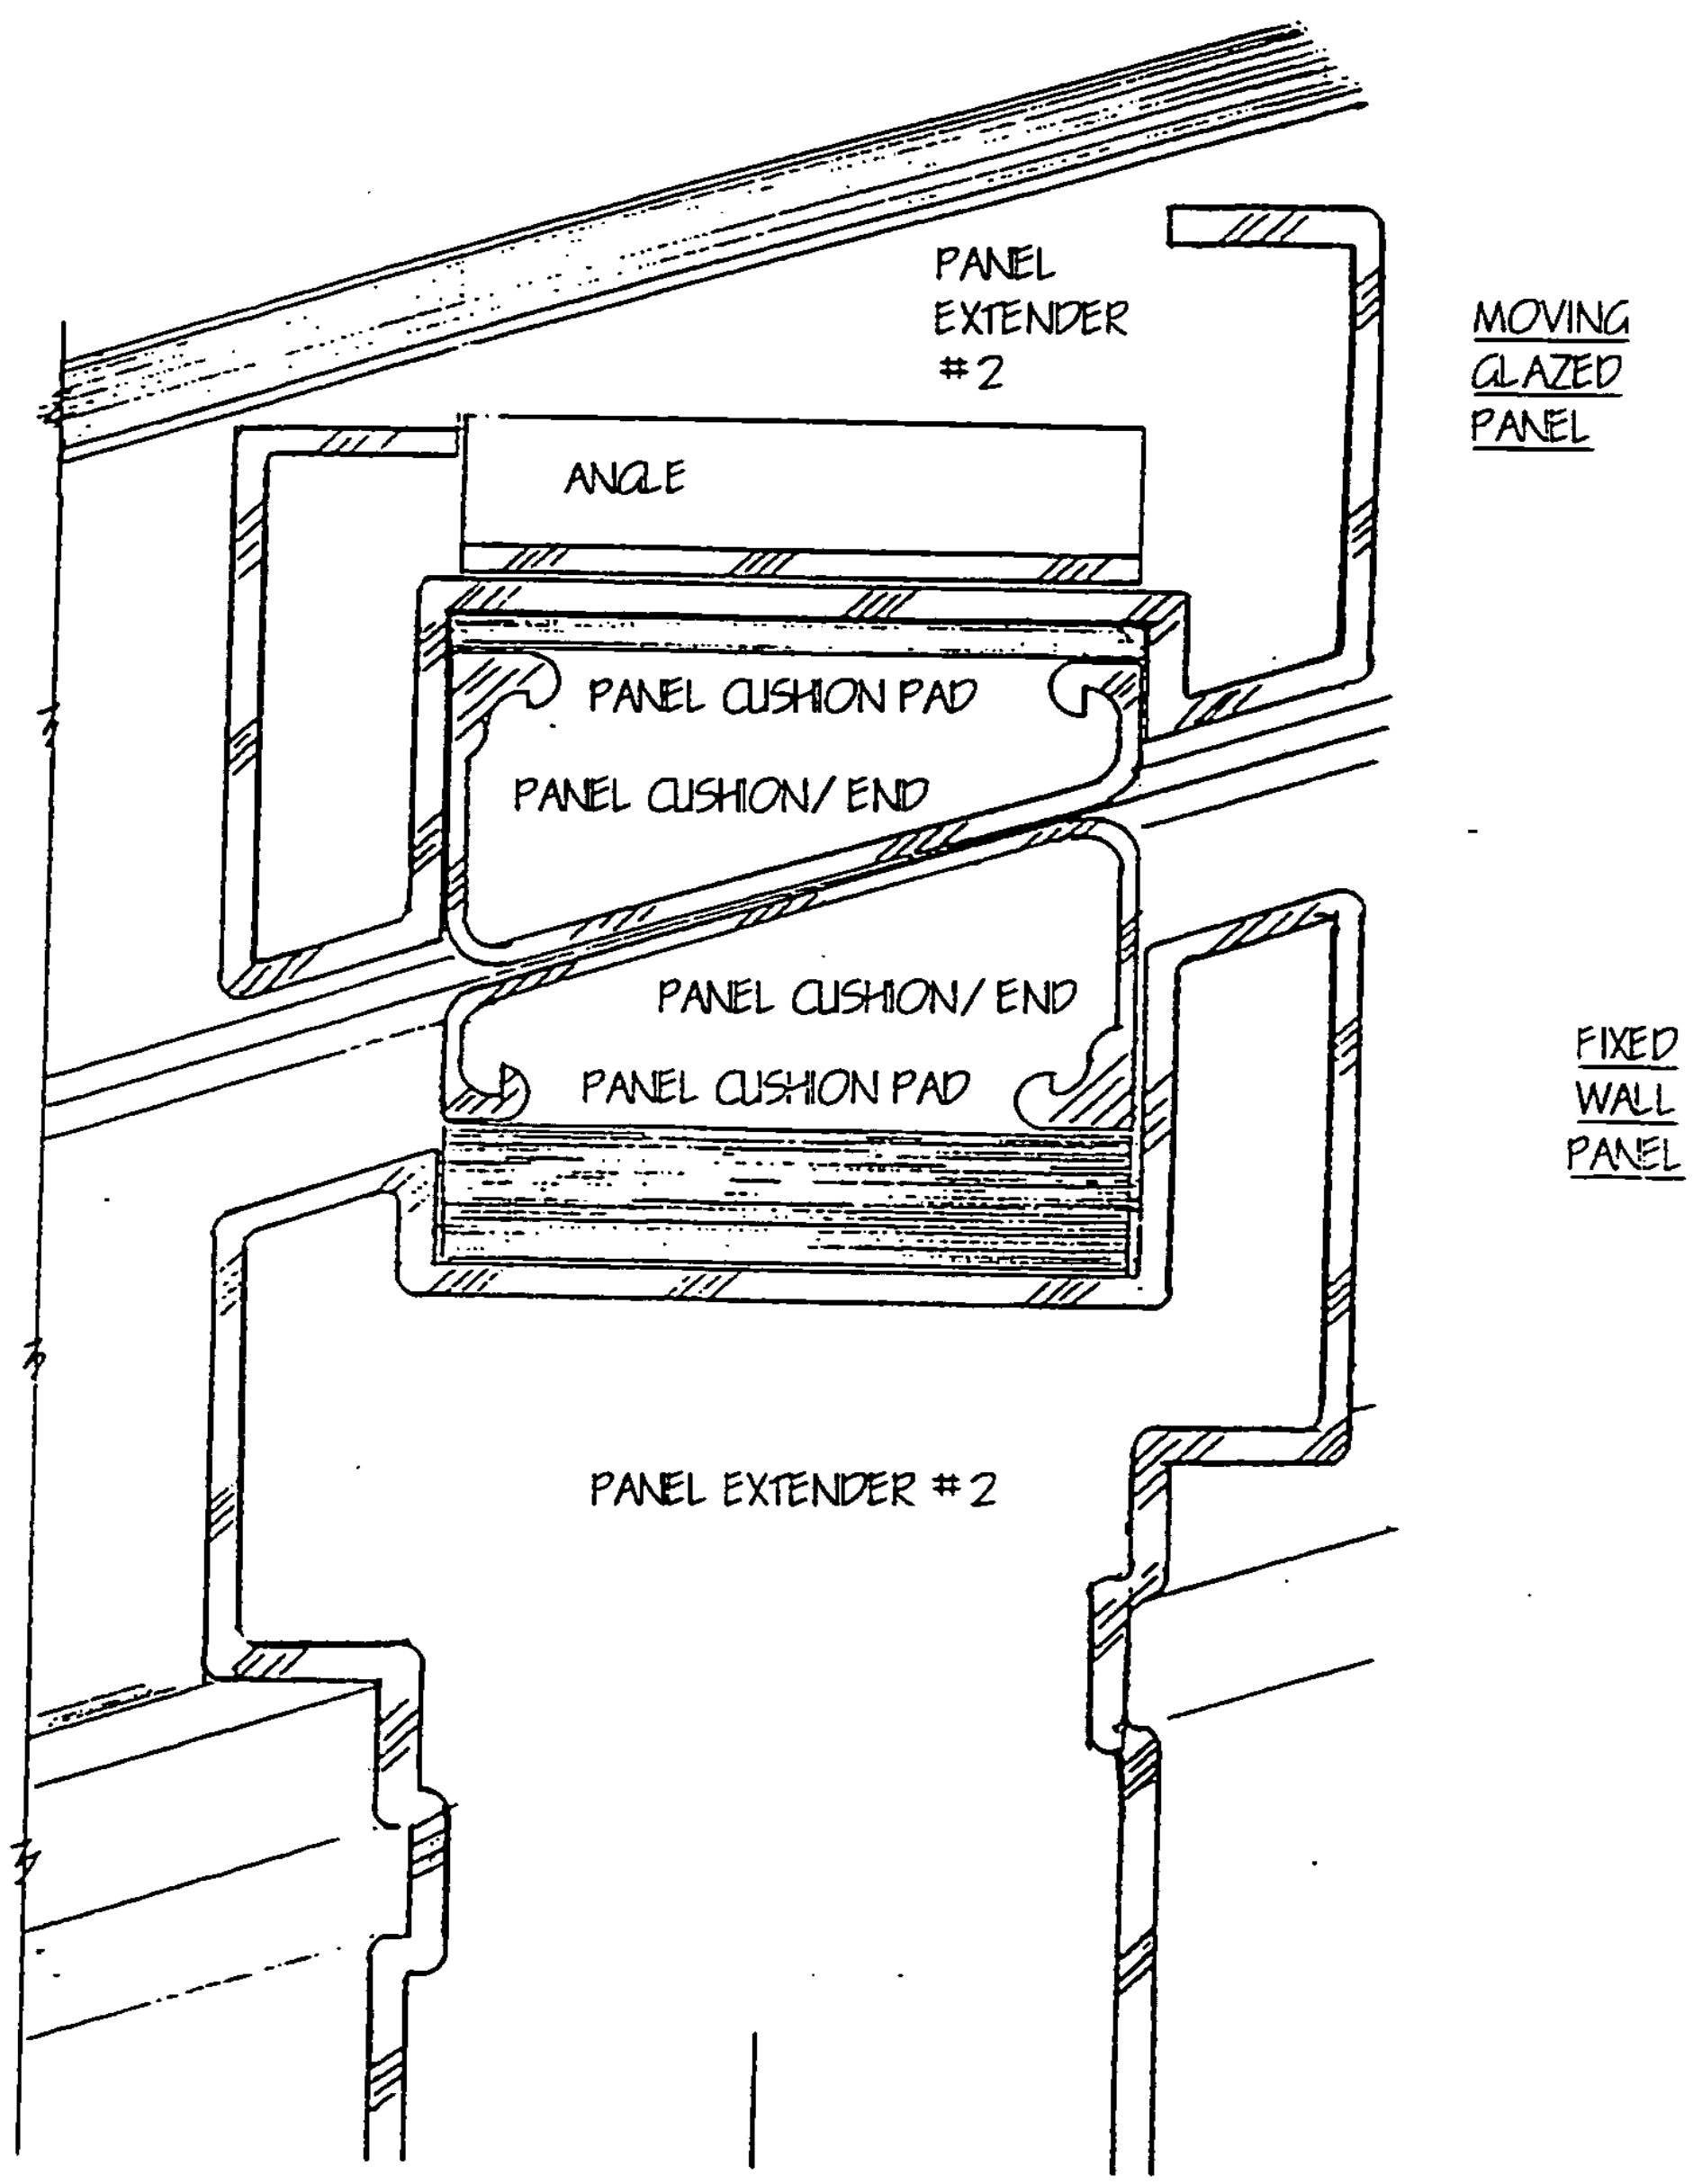
PANEL
EXTENDER
#2
MOVING
GLAZED
PANEL
ANGLE
PANEL CUSHION PAD
PANEL CUSHION/ END
PANEL CUSHION/ END
PANEL CUSHION PAD
FIXED
WALL
PANEL
PANEL EXTENDER #2

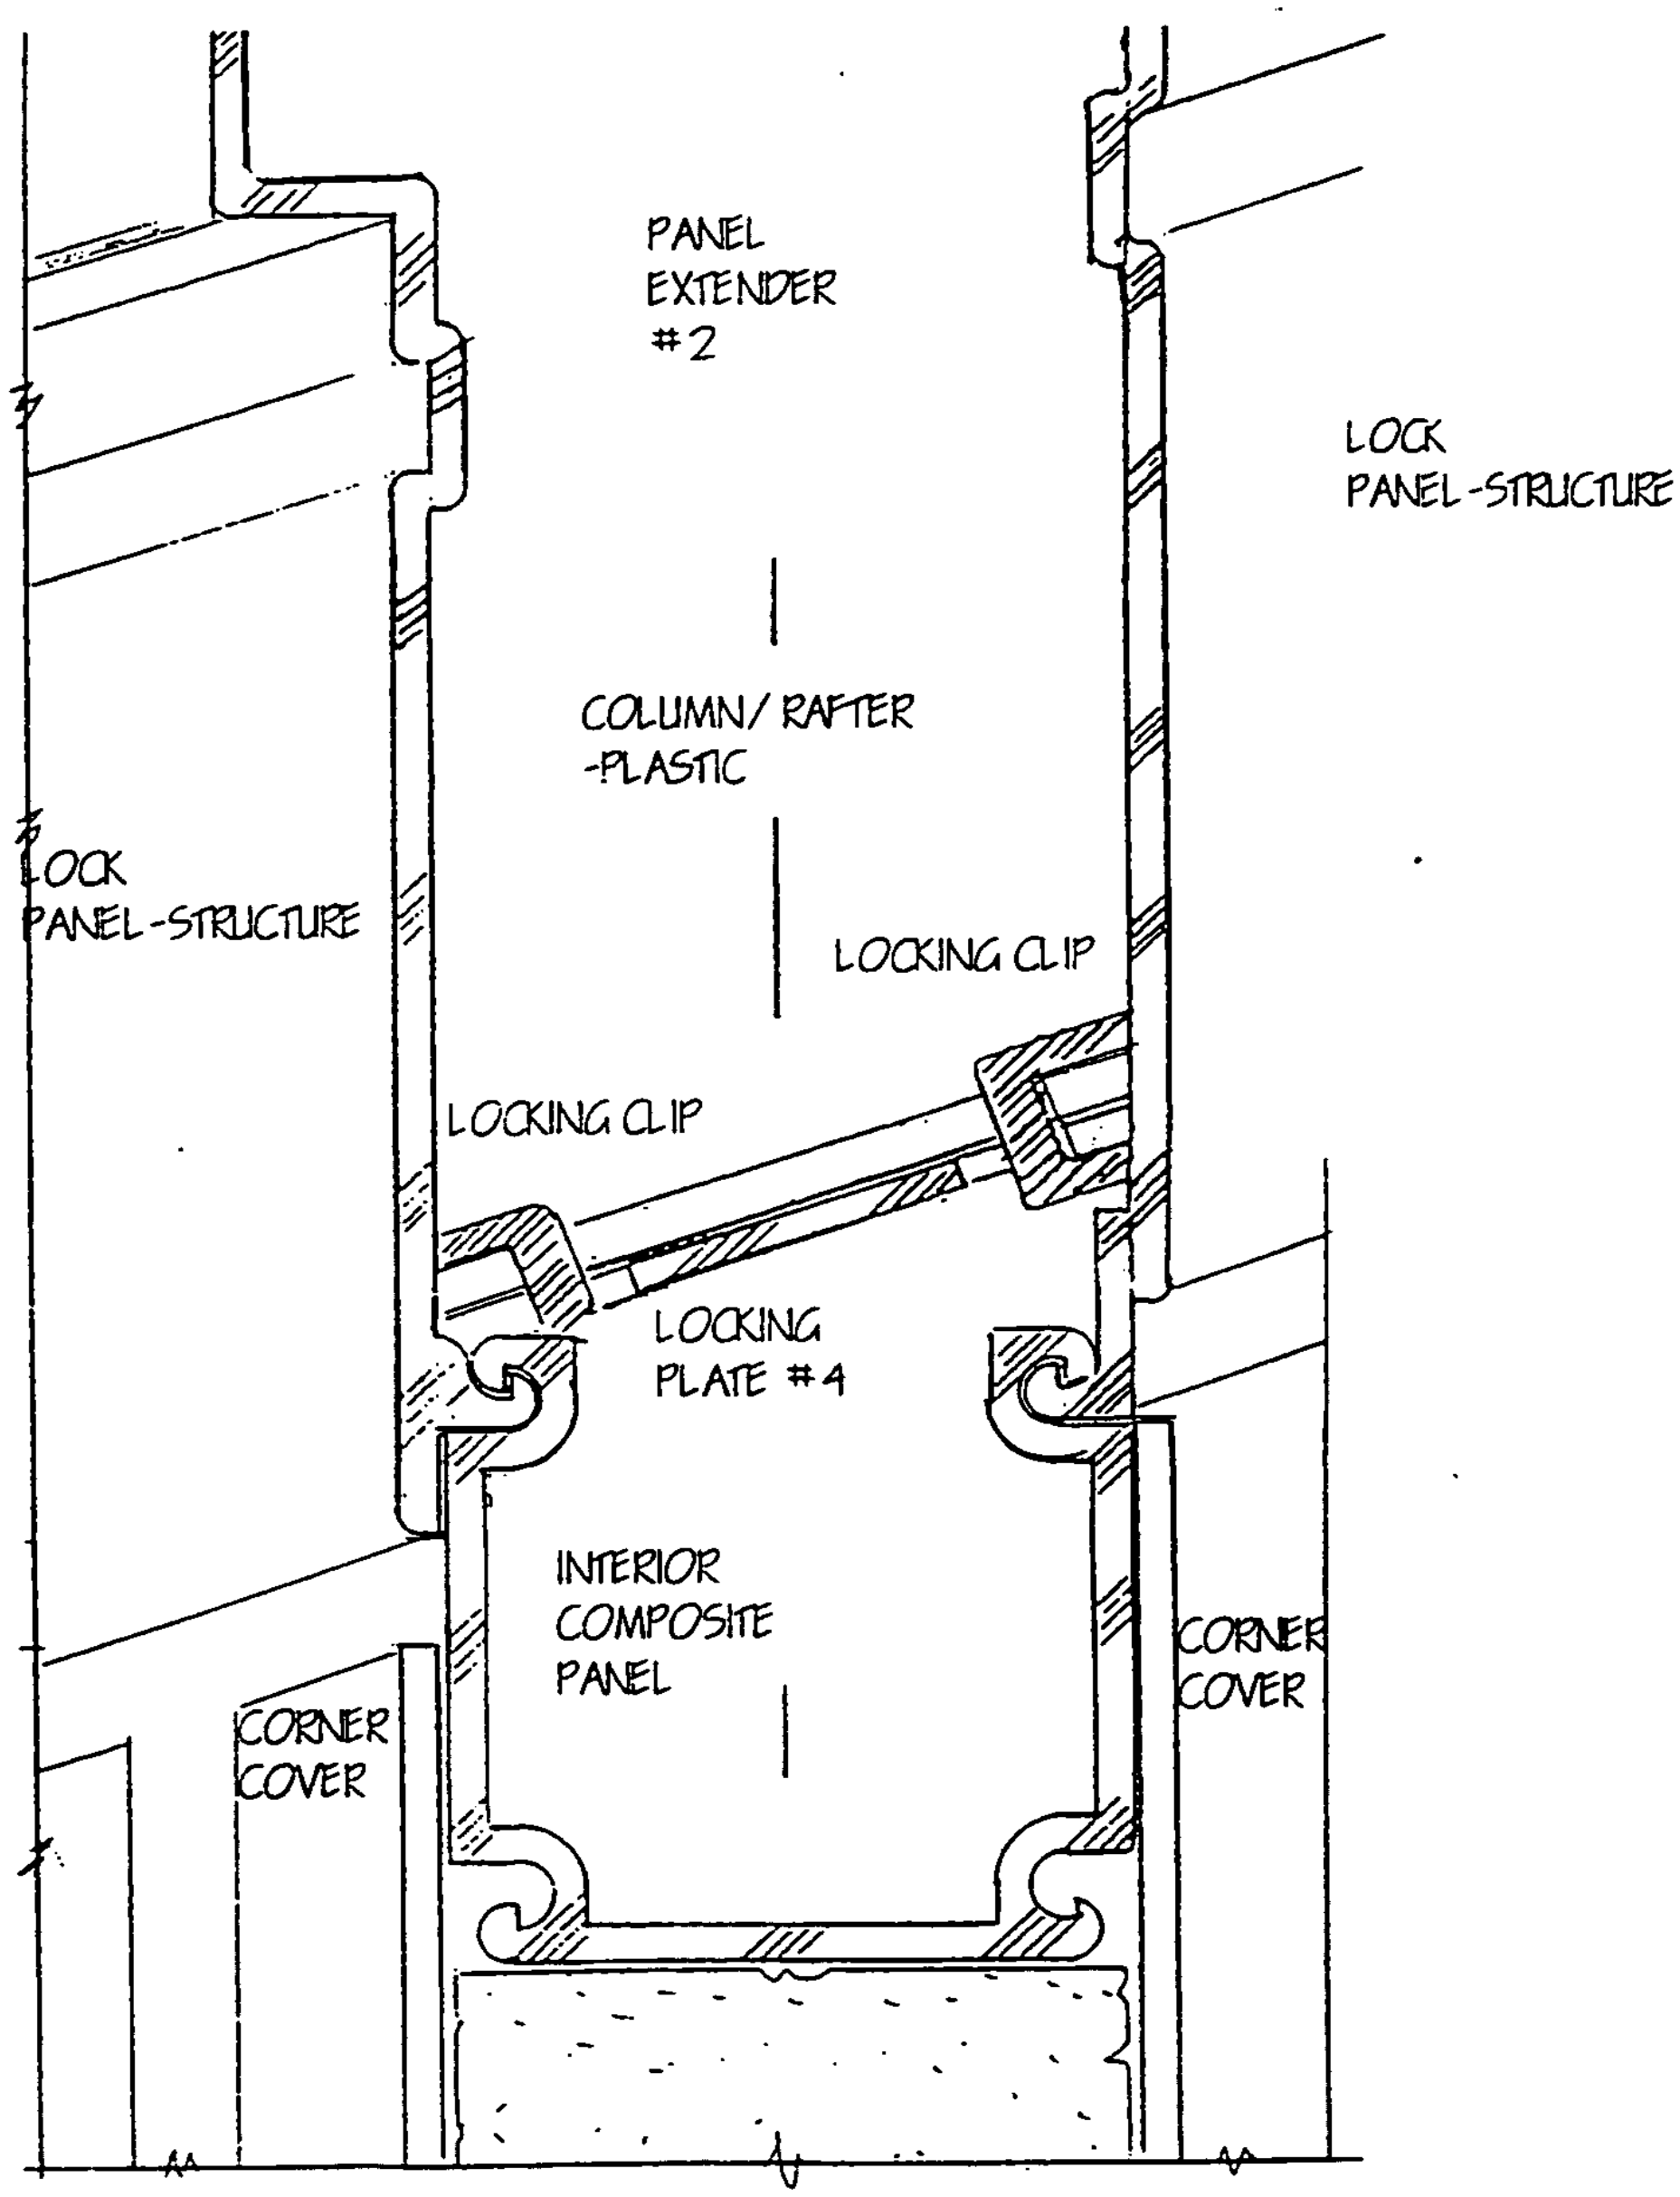
PANEL
EXTENDER
#2
LOCK
PANEL-STRUCTURE
COLUMN/ RAFTER
-PLASTIC
LOCK
PANEL-STRUCTURE
LOCKING CLIP
LOCKING CLIP
LOCKING
PLATE #4
INTERIOR
COMPOSITE
PANEL
CORNER
COVER
CORNER
COVER

INDEX: INTERIOR WALL

DRAWING	DESCRIPTION
IW01A-019	PLAN @ EXTERIOR SIDEWALL @ ADJOINING INTERIOR WALL
IW01B-019	PLAN @ EXTERIOR GABLE COLUMN @ ADJOINING INTERIOR WALL
IW01C-019	PLAN @ END OF INTERIOR WALL
IW01D-019	PLAN @ INTERIOR WALL CONNECTION
IW01E-019	PLAN @ INTERIOR WALL CORNER
IW01F-019	PLAN @ 3-WAY INTERIOR WALL
IW01G-019	PLAN @ 4-WAY INTERIOR CORNER
IW02A-019	SECTION @ BASE OF INTERIOR WALL
IW02B-019	SECTION @ BASE OF INTERIOR WALL
IW03A-019	SECTION @ TOP OF INTERIOR WALL @ JUNCTION
IW03B-019	SECTION @ TOP OF INTERIOR WALL @ JUNCTION
IW03C-019	SECTION @ TOP OF INTERIOR WALL @ WALL PANEL
IW04A-019	SECTION @ JUNCTION OF WALL @ FIXED COMPOSITE ROOF
IW04B-019	SECTION @ JUNCTION OF WALL @ FIXED COMPOSITE ROOF
IW04C-019	SECTION @ JUNCTION OF WALL @ FIXED COMPOSITE ROOF
IW04D-019	SECTION @ JUNCTION OF WALL @ FIXED COMPOSITE ROOF
IW04E-019	SECTION @ JUNCTION OF WALL @ FIXED COMPOSITE ROOF
IW05A-019	SECTION @ JUNCTION OF WALL @ FIXED GLAZED ROOF
IW05B-019	SECTION @ JUNCTION OF WALL @ FIXED GLAZED ROOF
IW05C-019	SECTION @ JUNCTION OF WALL @ FIXED GLAZED ROOF
IW06A-019	SECTION @ JUNCTION OF WALL @ MOVING ROOF
IW06B-019	SECTION @ JUNCTION OF WALL @ MOVING ROOF
IW06C-019	SECTION @ JUNCTION OF WALL @ MOVING ROOF
IW06D-019	SECTION @ JUNCTION OF WALL @ MOVING ROOF
IW06E-019	SECTION @ JUNCTION OF WALL @ MOVING ROOF

INDEX: MANIFOLD UNIT

DRAWING	DESCRIPTION
MU01A-019	MANIFOLD CONTROL SYSTEM
MU02A-019	DETAILS @ MANIFOLD UNIT
MU02B-019	PLAN @ MANIFOLD @ DOOR
MU03A-019	FIRE SUPPRESSION SYSTEM @ RAFTER
MU04A-019	SECTION @ EXTERIOR HOSE BIB
MU05A-019	PRE-PLUMBED WALL
MU05B-019	CONCEPT @ PLUMBING WALL
MU06A-019	PLAN OF MODULAR BATHROOM
MU06B-019	PLAN OF MODULAR BATHROOM
MU07A-019	SECTION @ DRAINAGE SYSTEMFOR ELECTRICAL PROTECTION
MU07B-019	SECTION @ BASE OF WALL

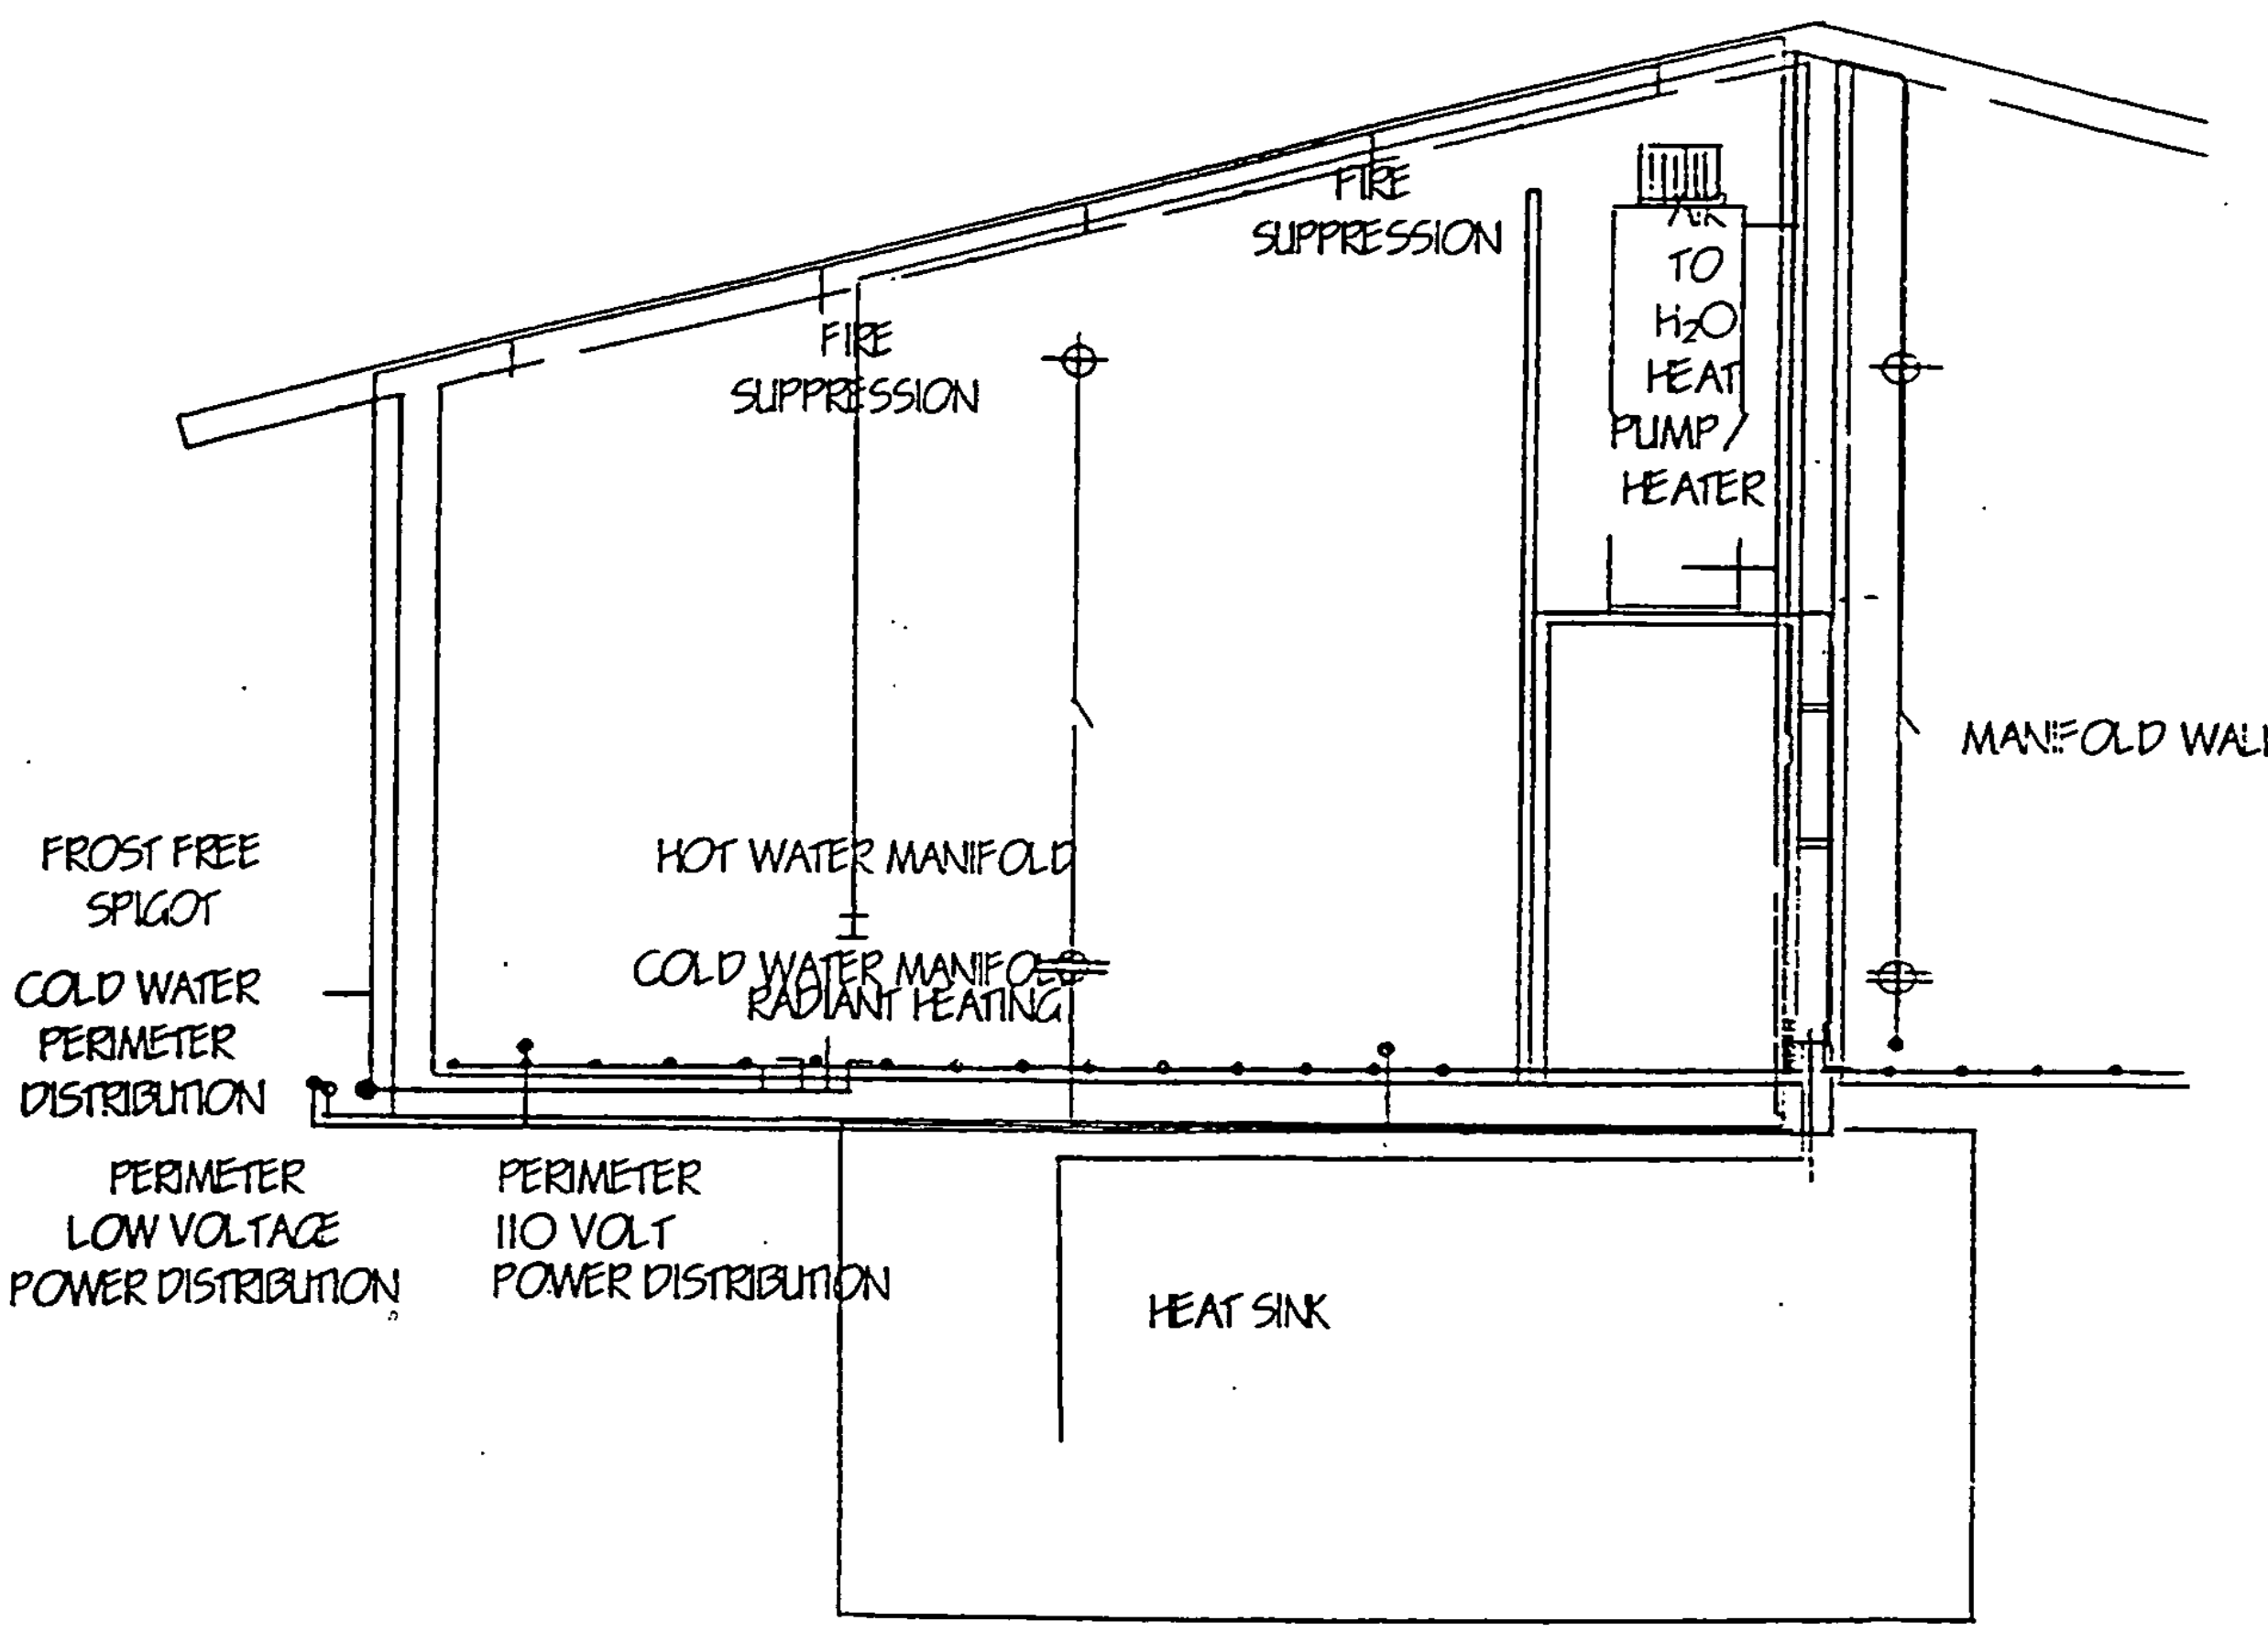
FIRE
SUPPRESSION
FIRE
SUPPRESSION
TO
H_2O
HEAT
PUMP /
HEATER
MANIFOLD WALL
FROST FREE
SPIGOT
HOT WATER MANIFOLD
COLD WATER
PERIMETER
DISTRIBUTION
RADIANT HEATING
PERIMETER
LOW VOLTAGE
POWER DISTRIBUTION
PERIMETER
110 VOLT
POWER DISTRIBUTION
HEAT SINK

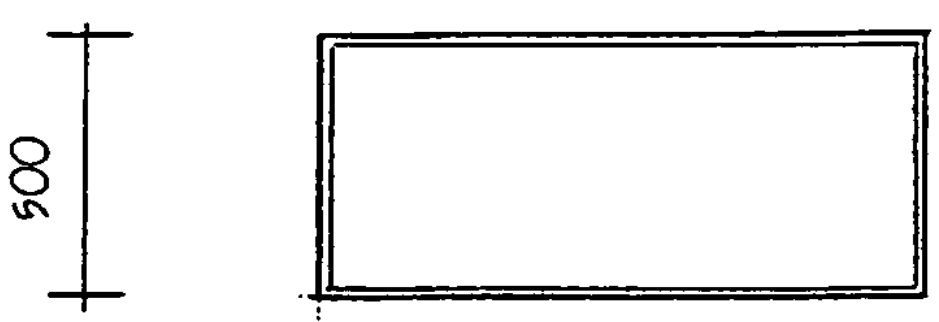

PLAN @ TOP

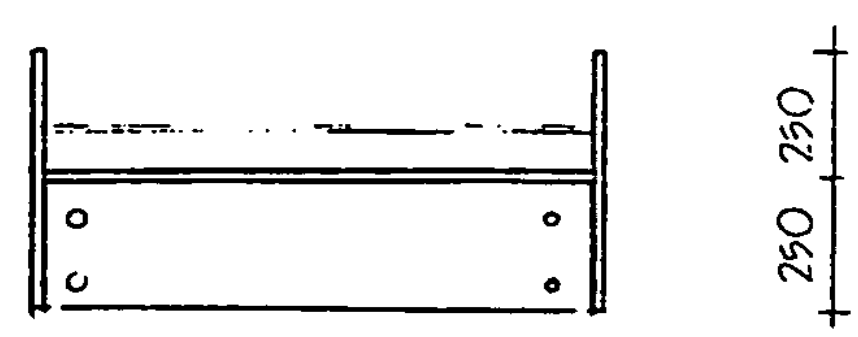

PLAN @ BOTTOM

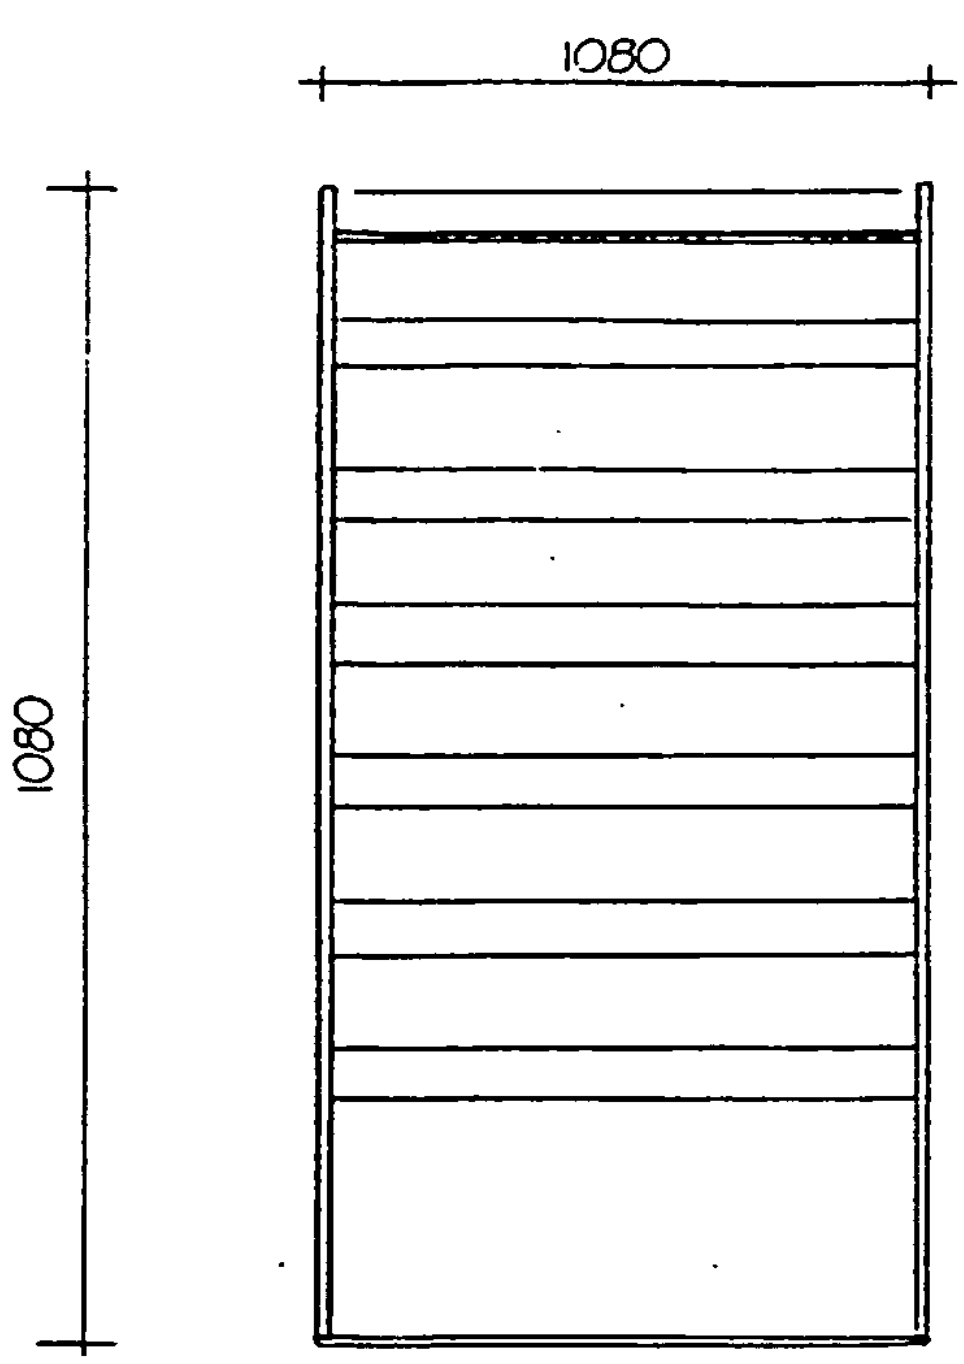

ELEVATION

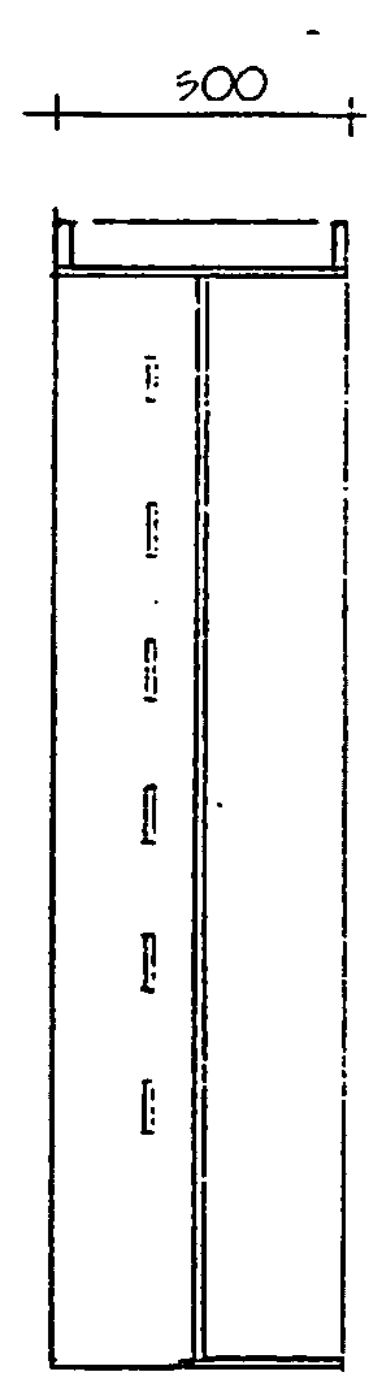

SECTION

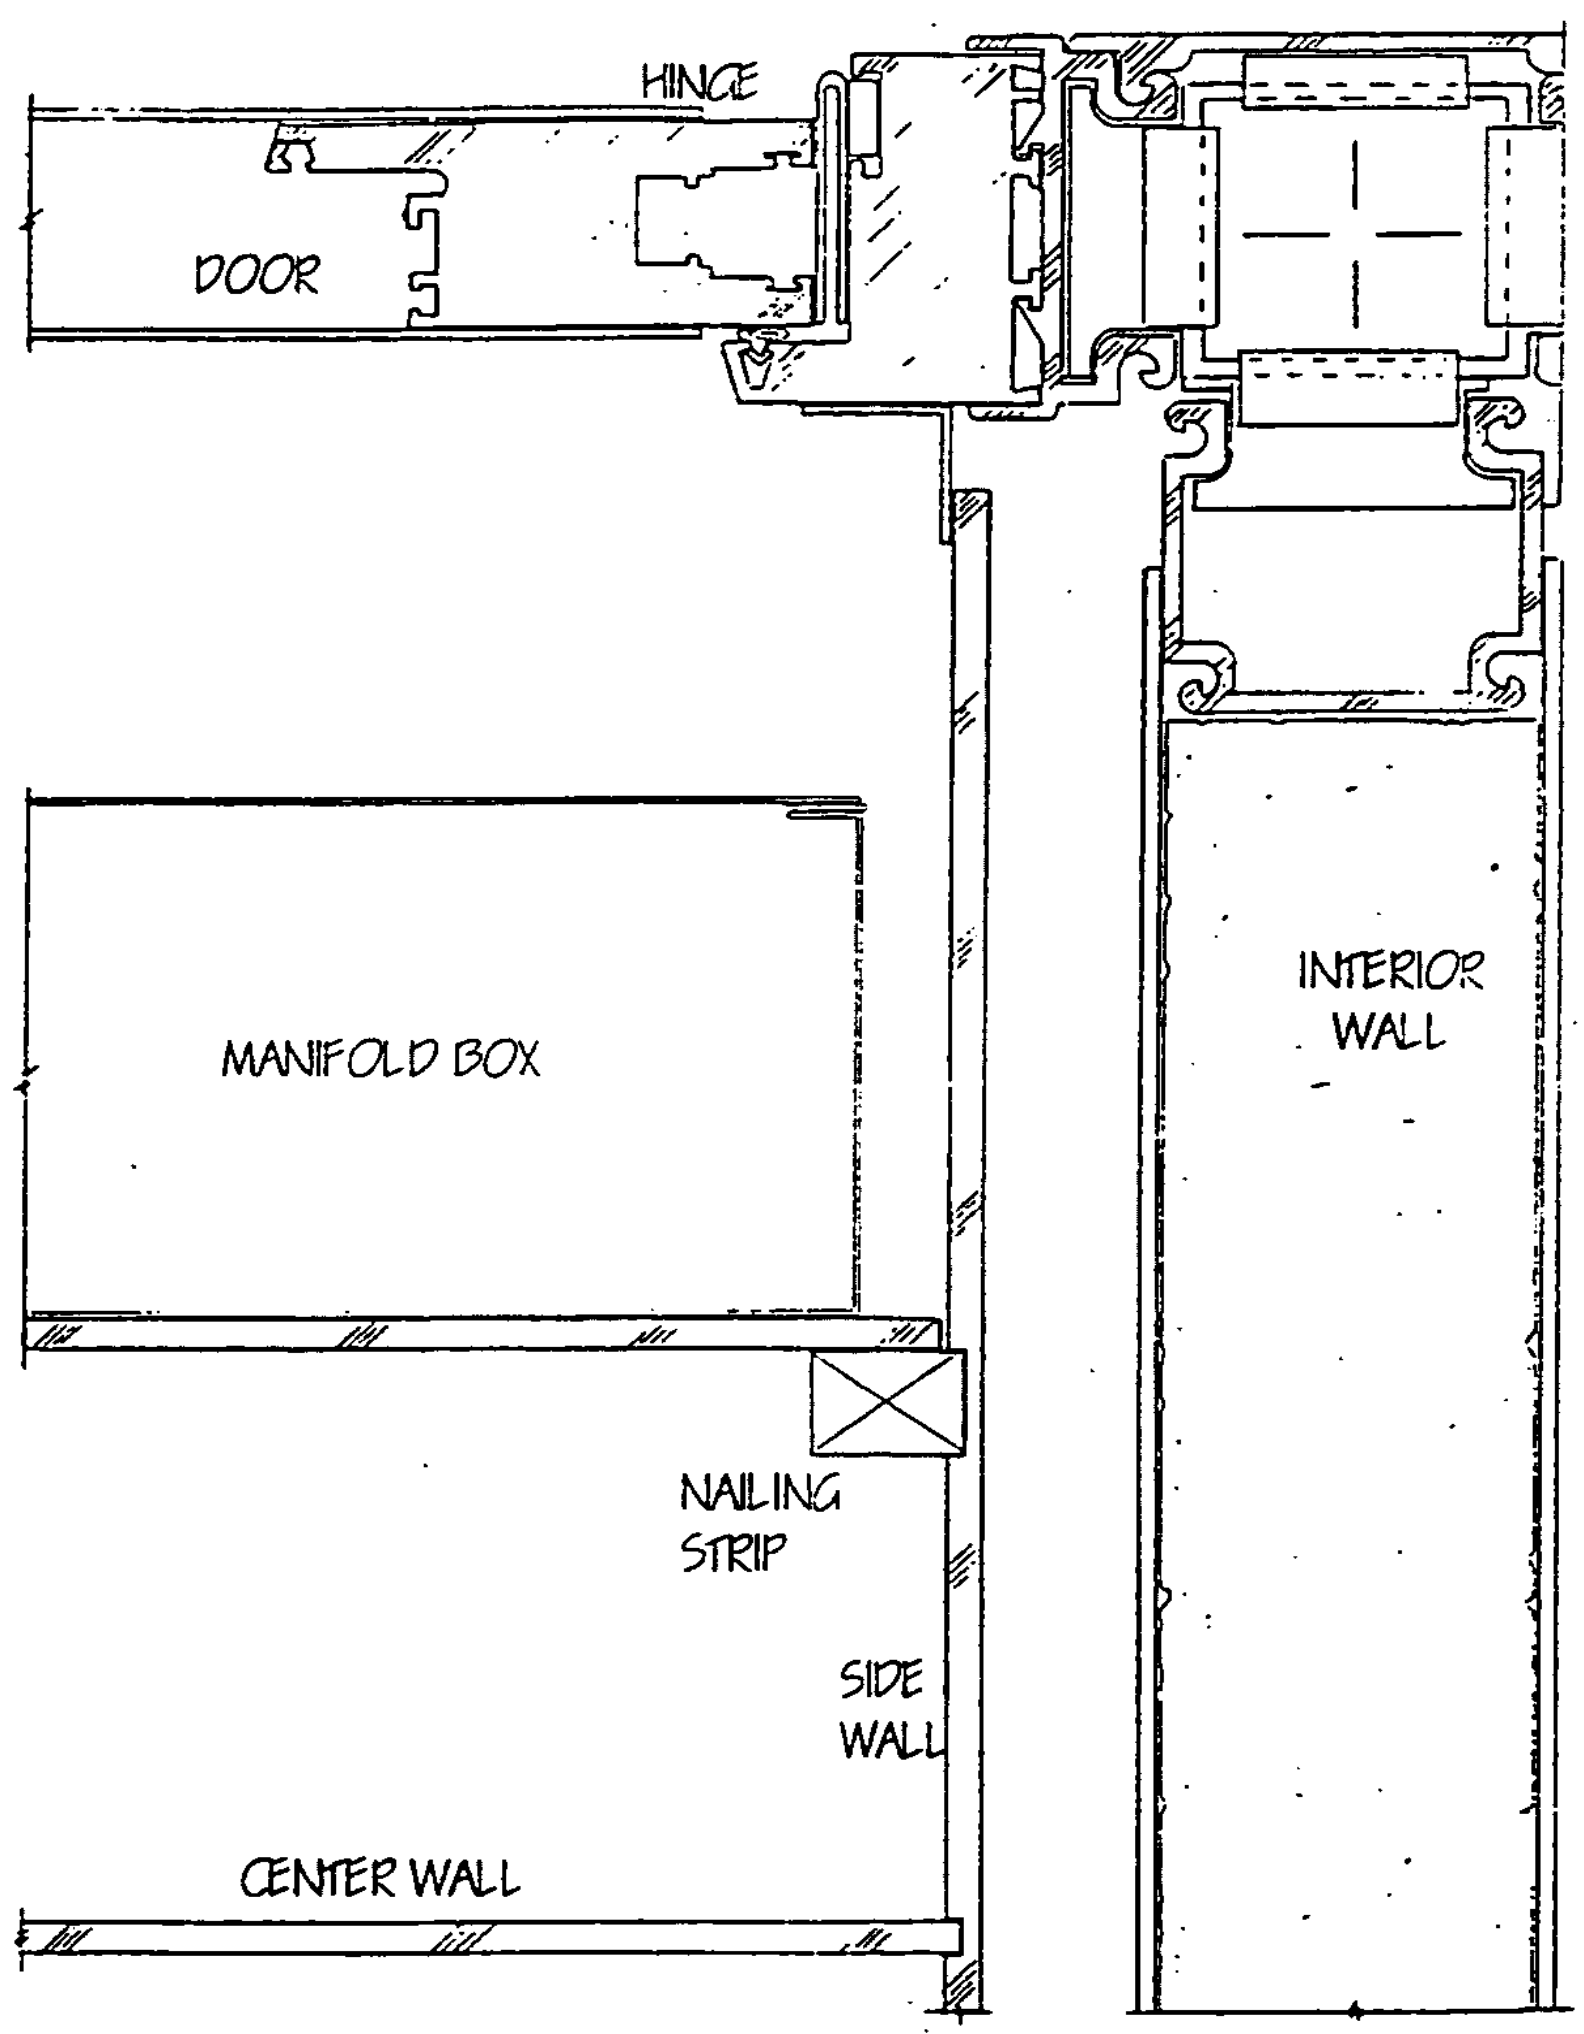
HINGE
DOOR
MANIFOLD BOX
INTERIOR WALL
NAILING STRIP
SIDE WALL
CENTER WALL

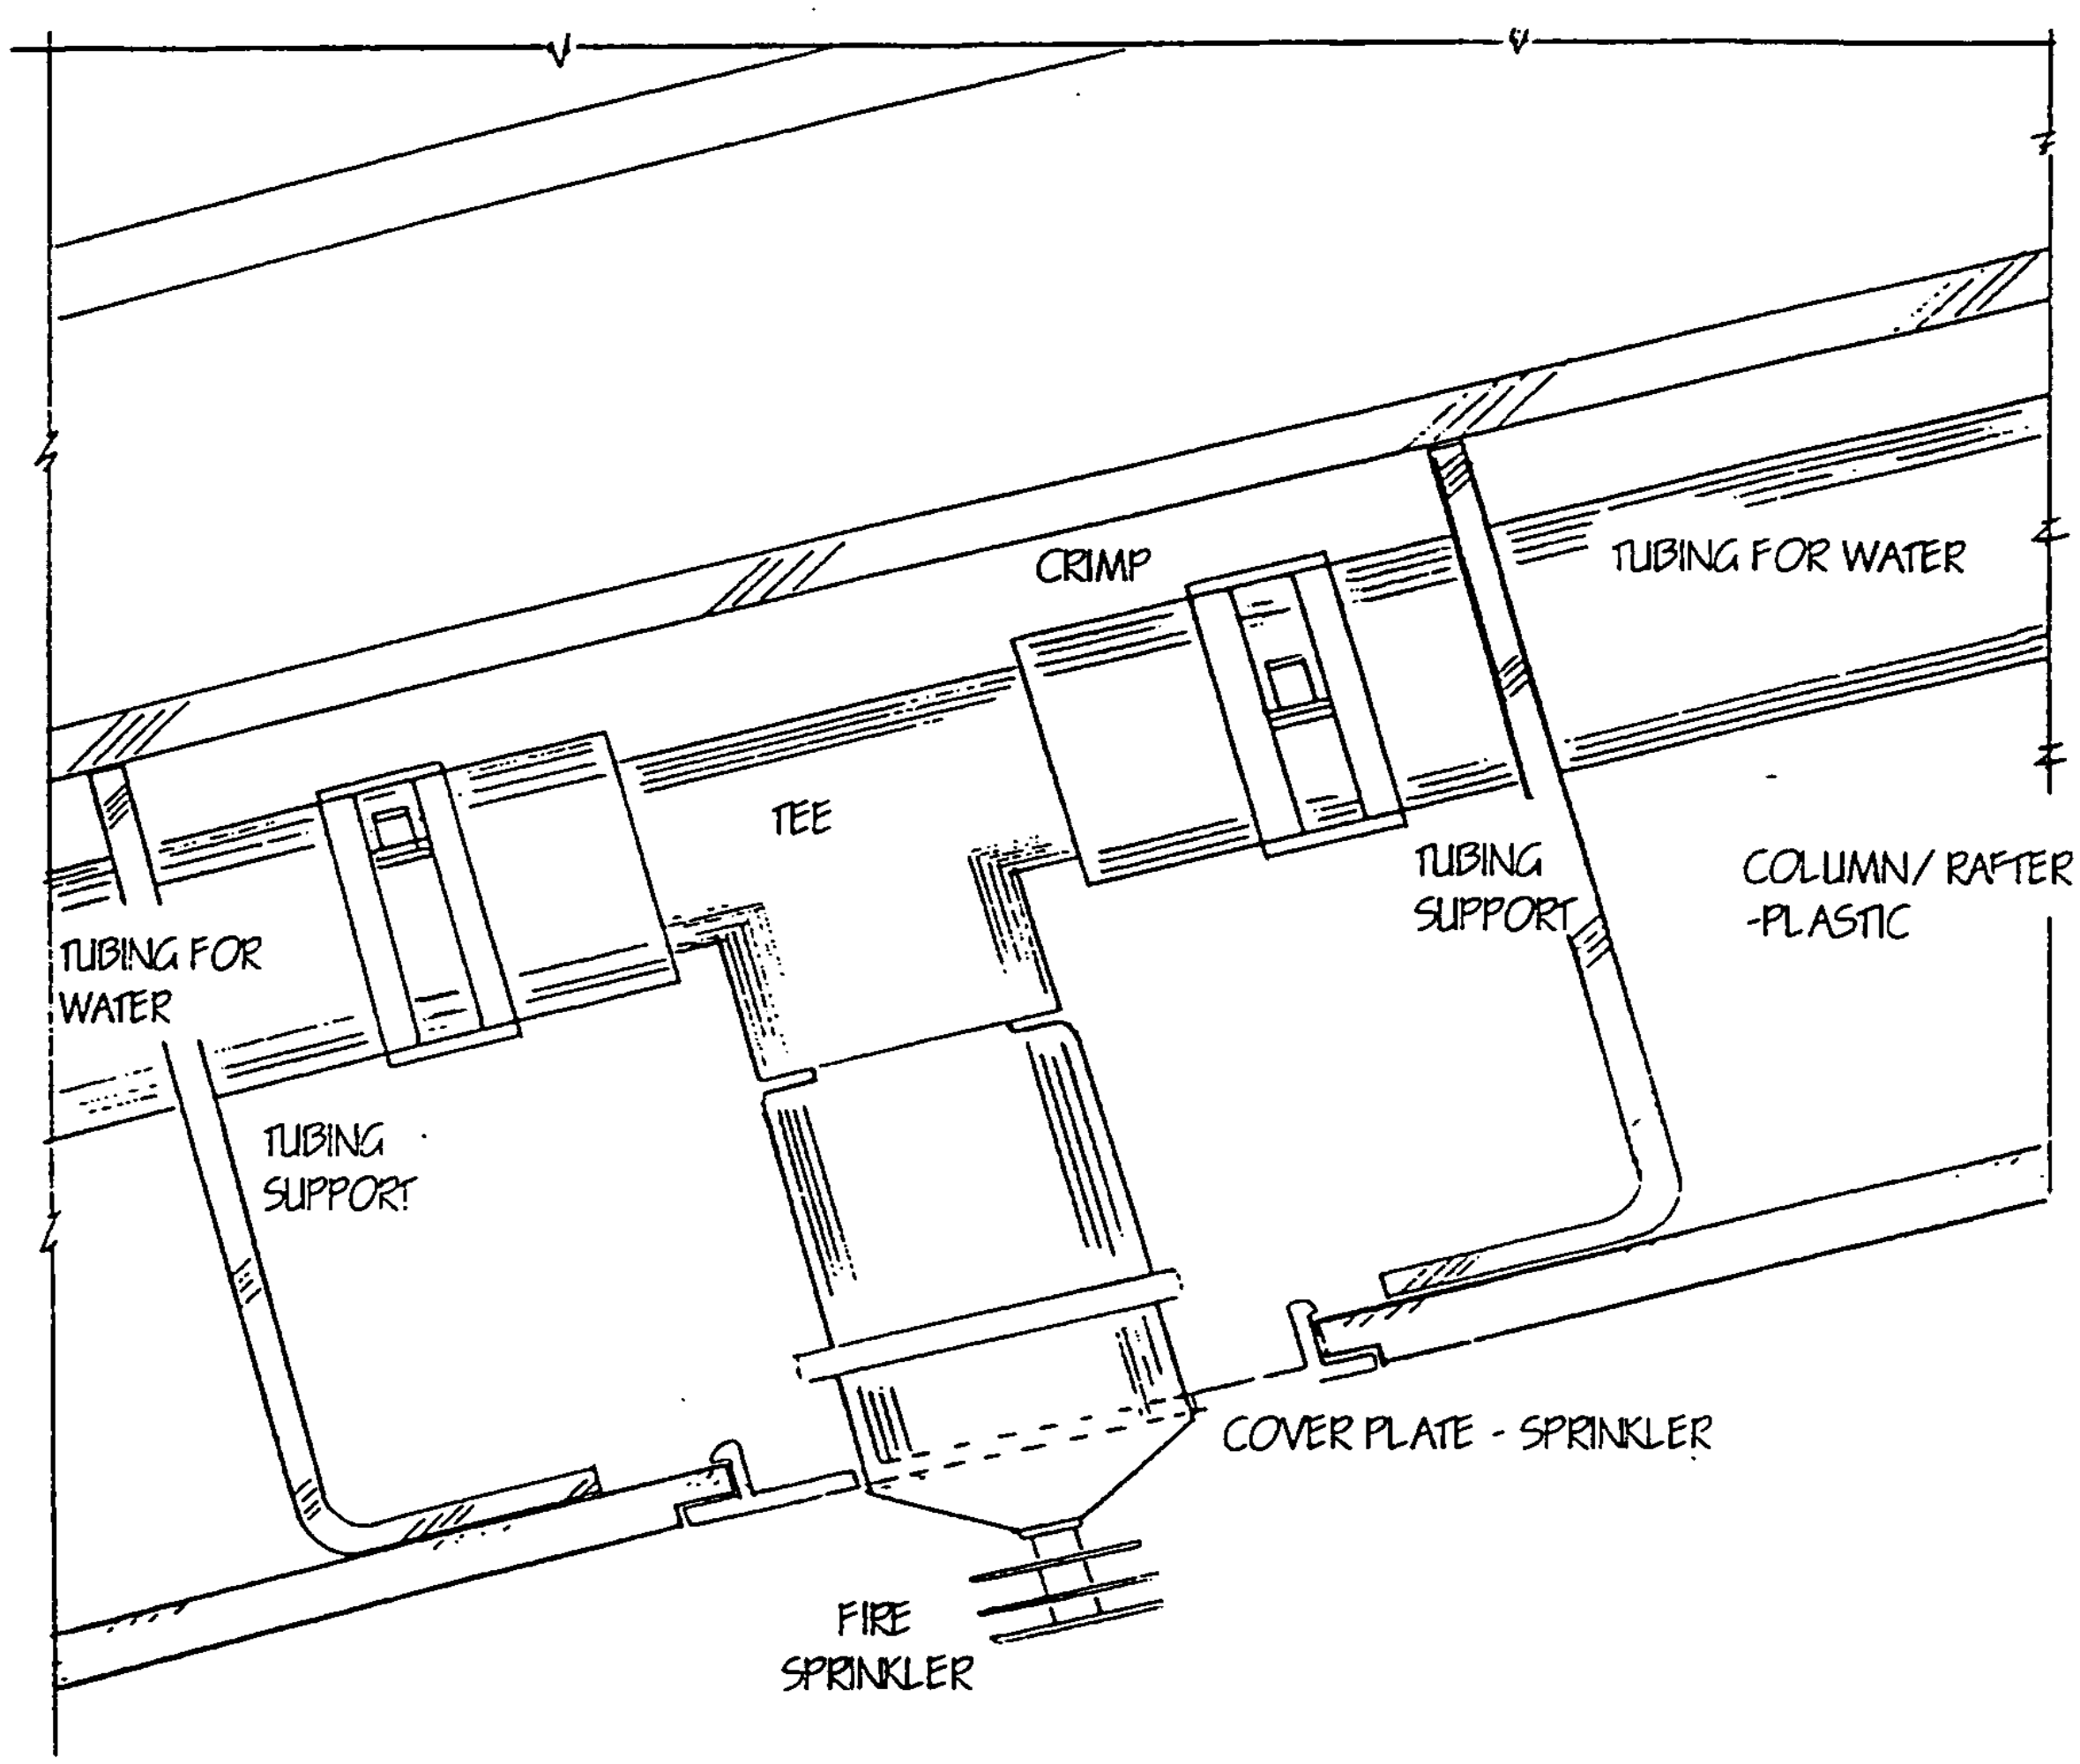
CRIMP
TUBING FOR WATER
TEE
TUBING SUPPORT
COLUMN/ RAFTER -PLASTIC
TUBING FOR WATER
TUBING SUPPORT
COVER PLATE - SPRINKLER
FIRE SPRINKLER

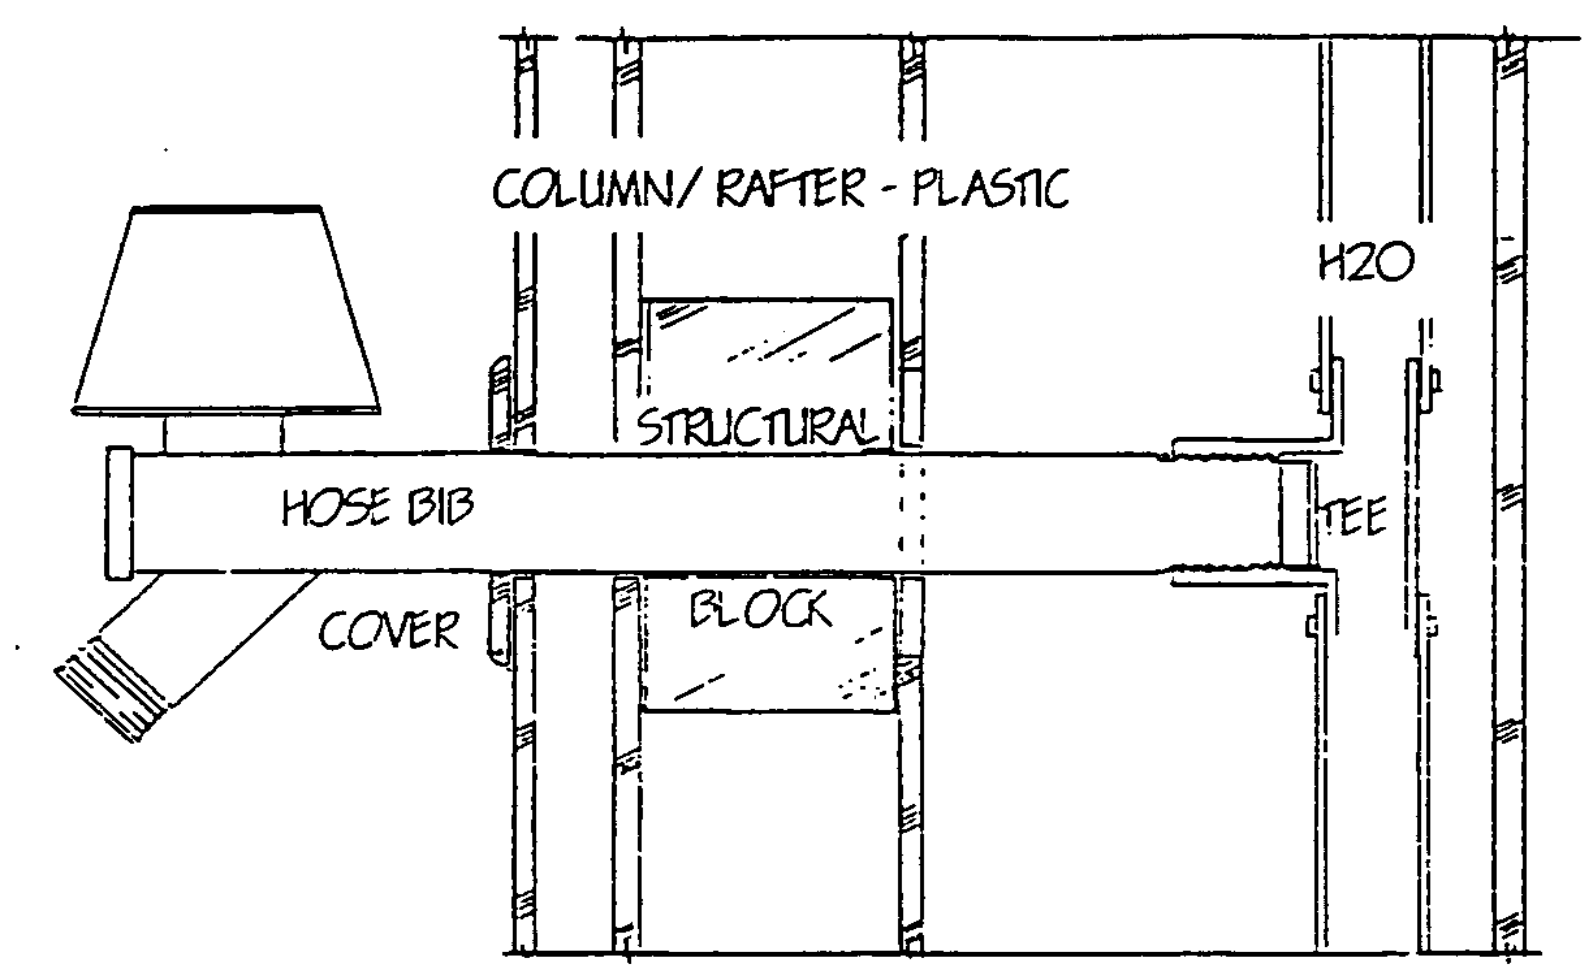
COLUMN/ RAFTER - PLASTIC
H2O
STRUCTURAL
HOSE BIB
TEE
COVER
BLOCK

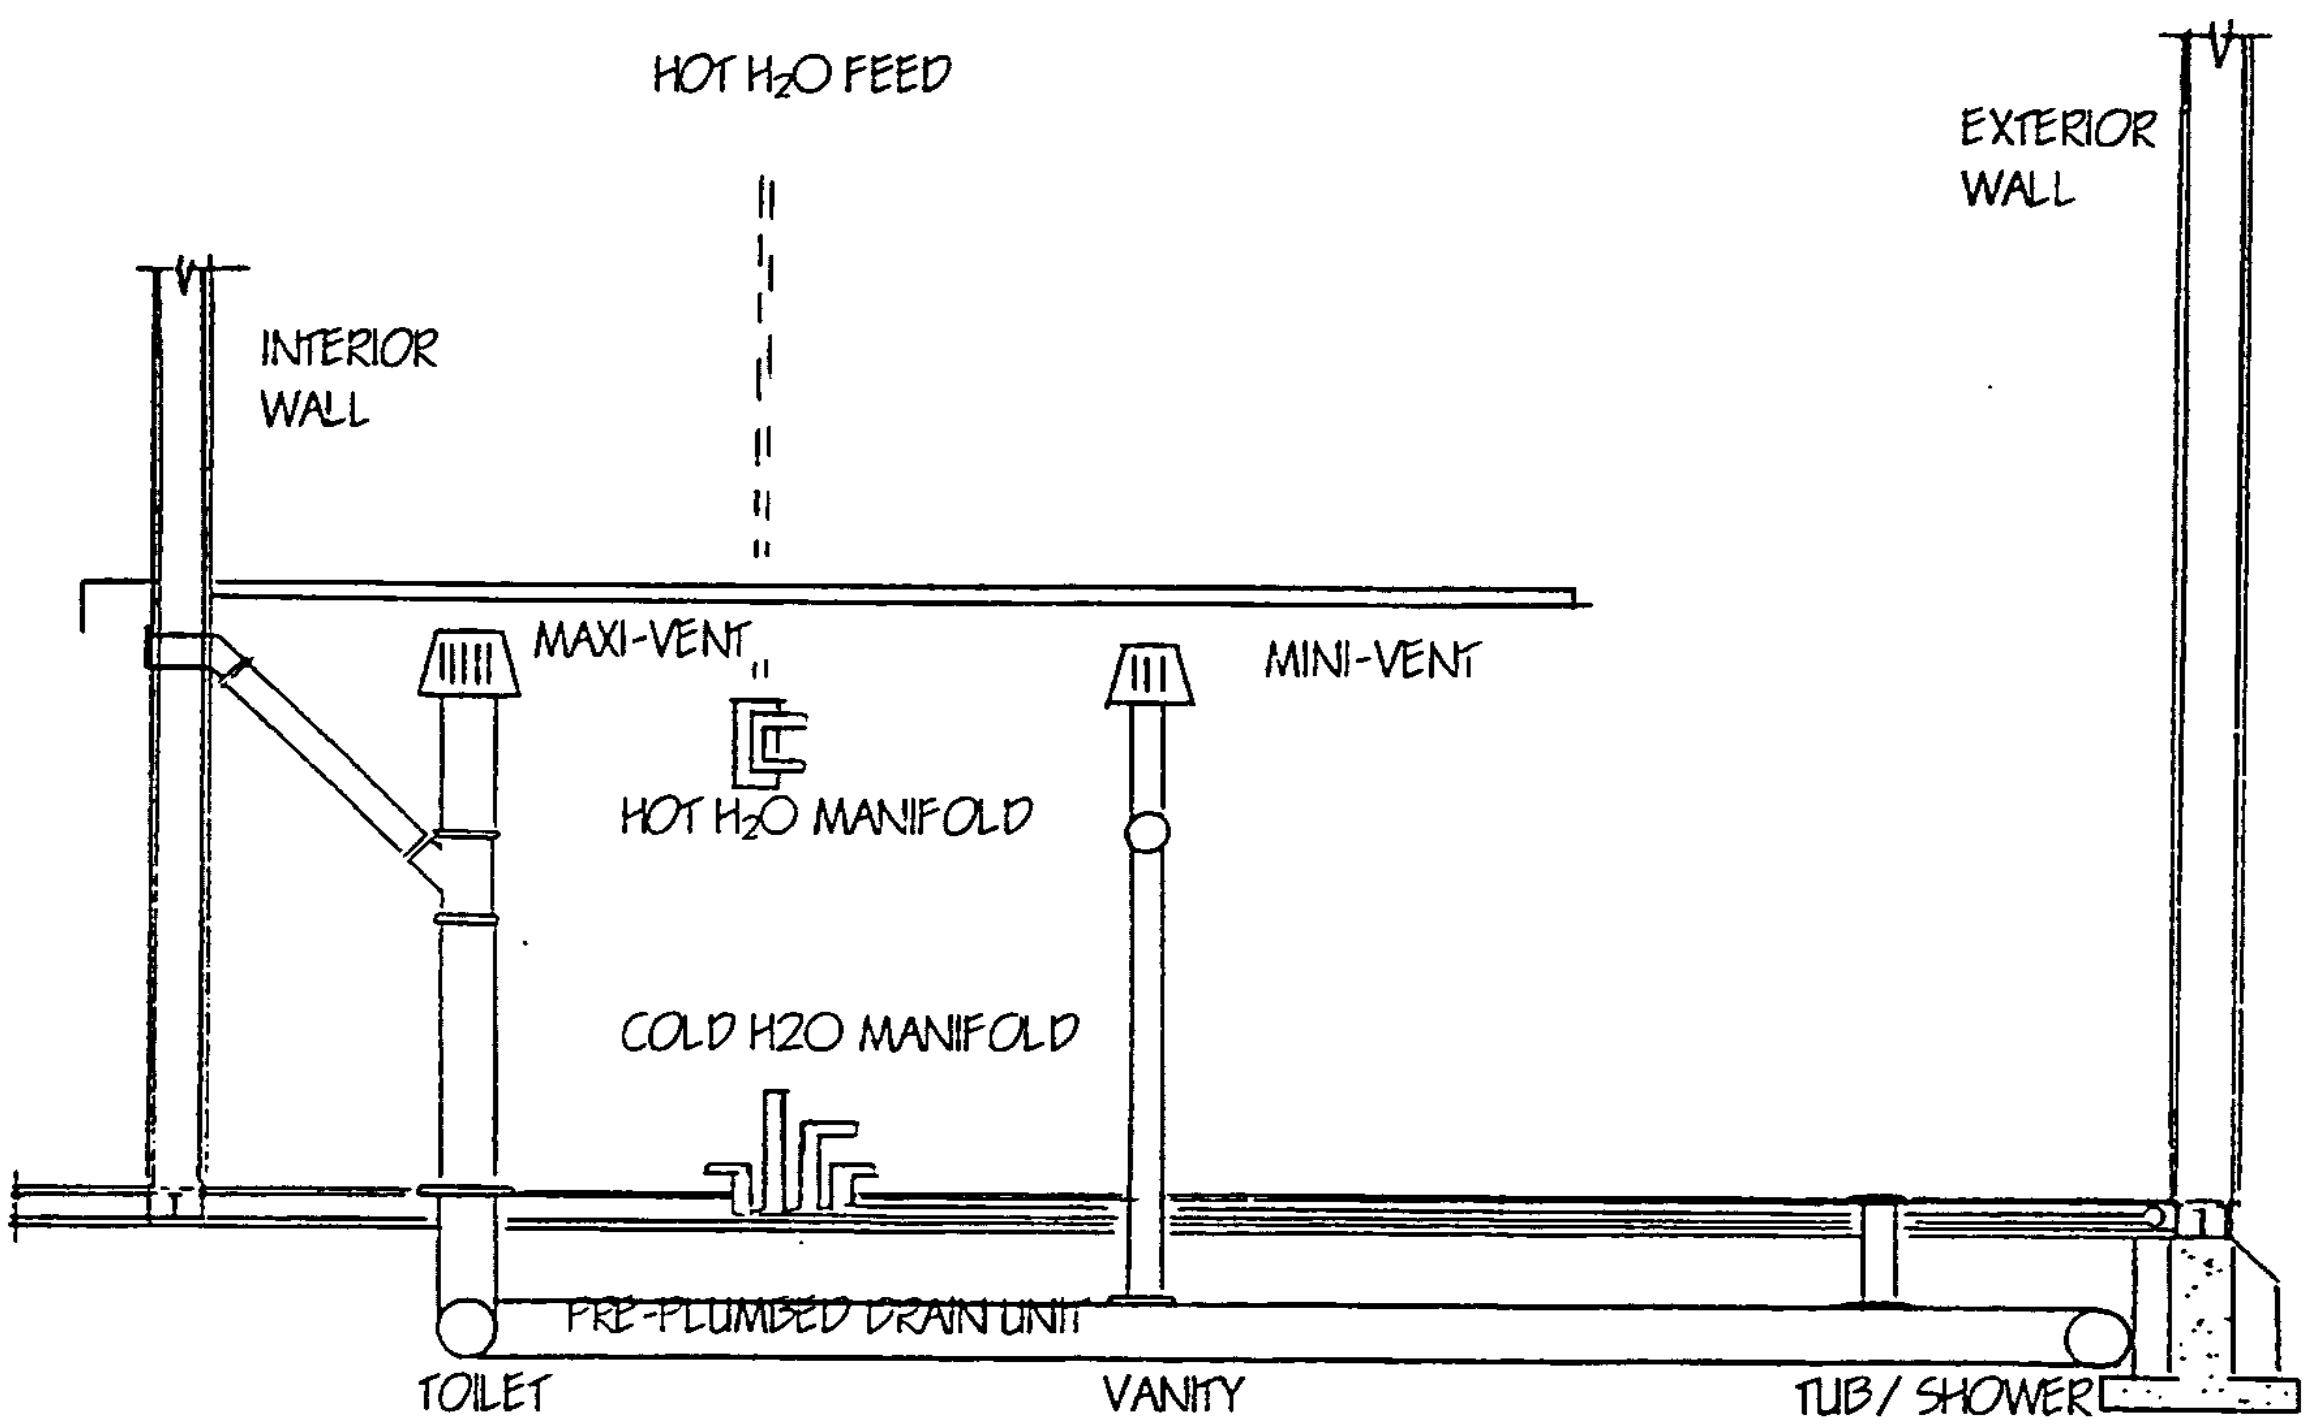
HOT H_2O FEED
EXTERIOR WALL
INTERIOR WALL
MAXI-VENT
MINI-VENT
HOT H_2O MANIFOLD
COLD H2O MANIFOLD
PRE-PLUMBED DRAIN UNIT
TOILET
VANITY
TUB / SHOWER

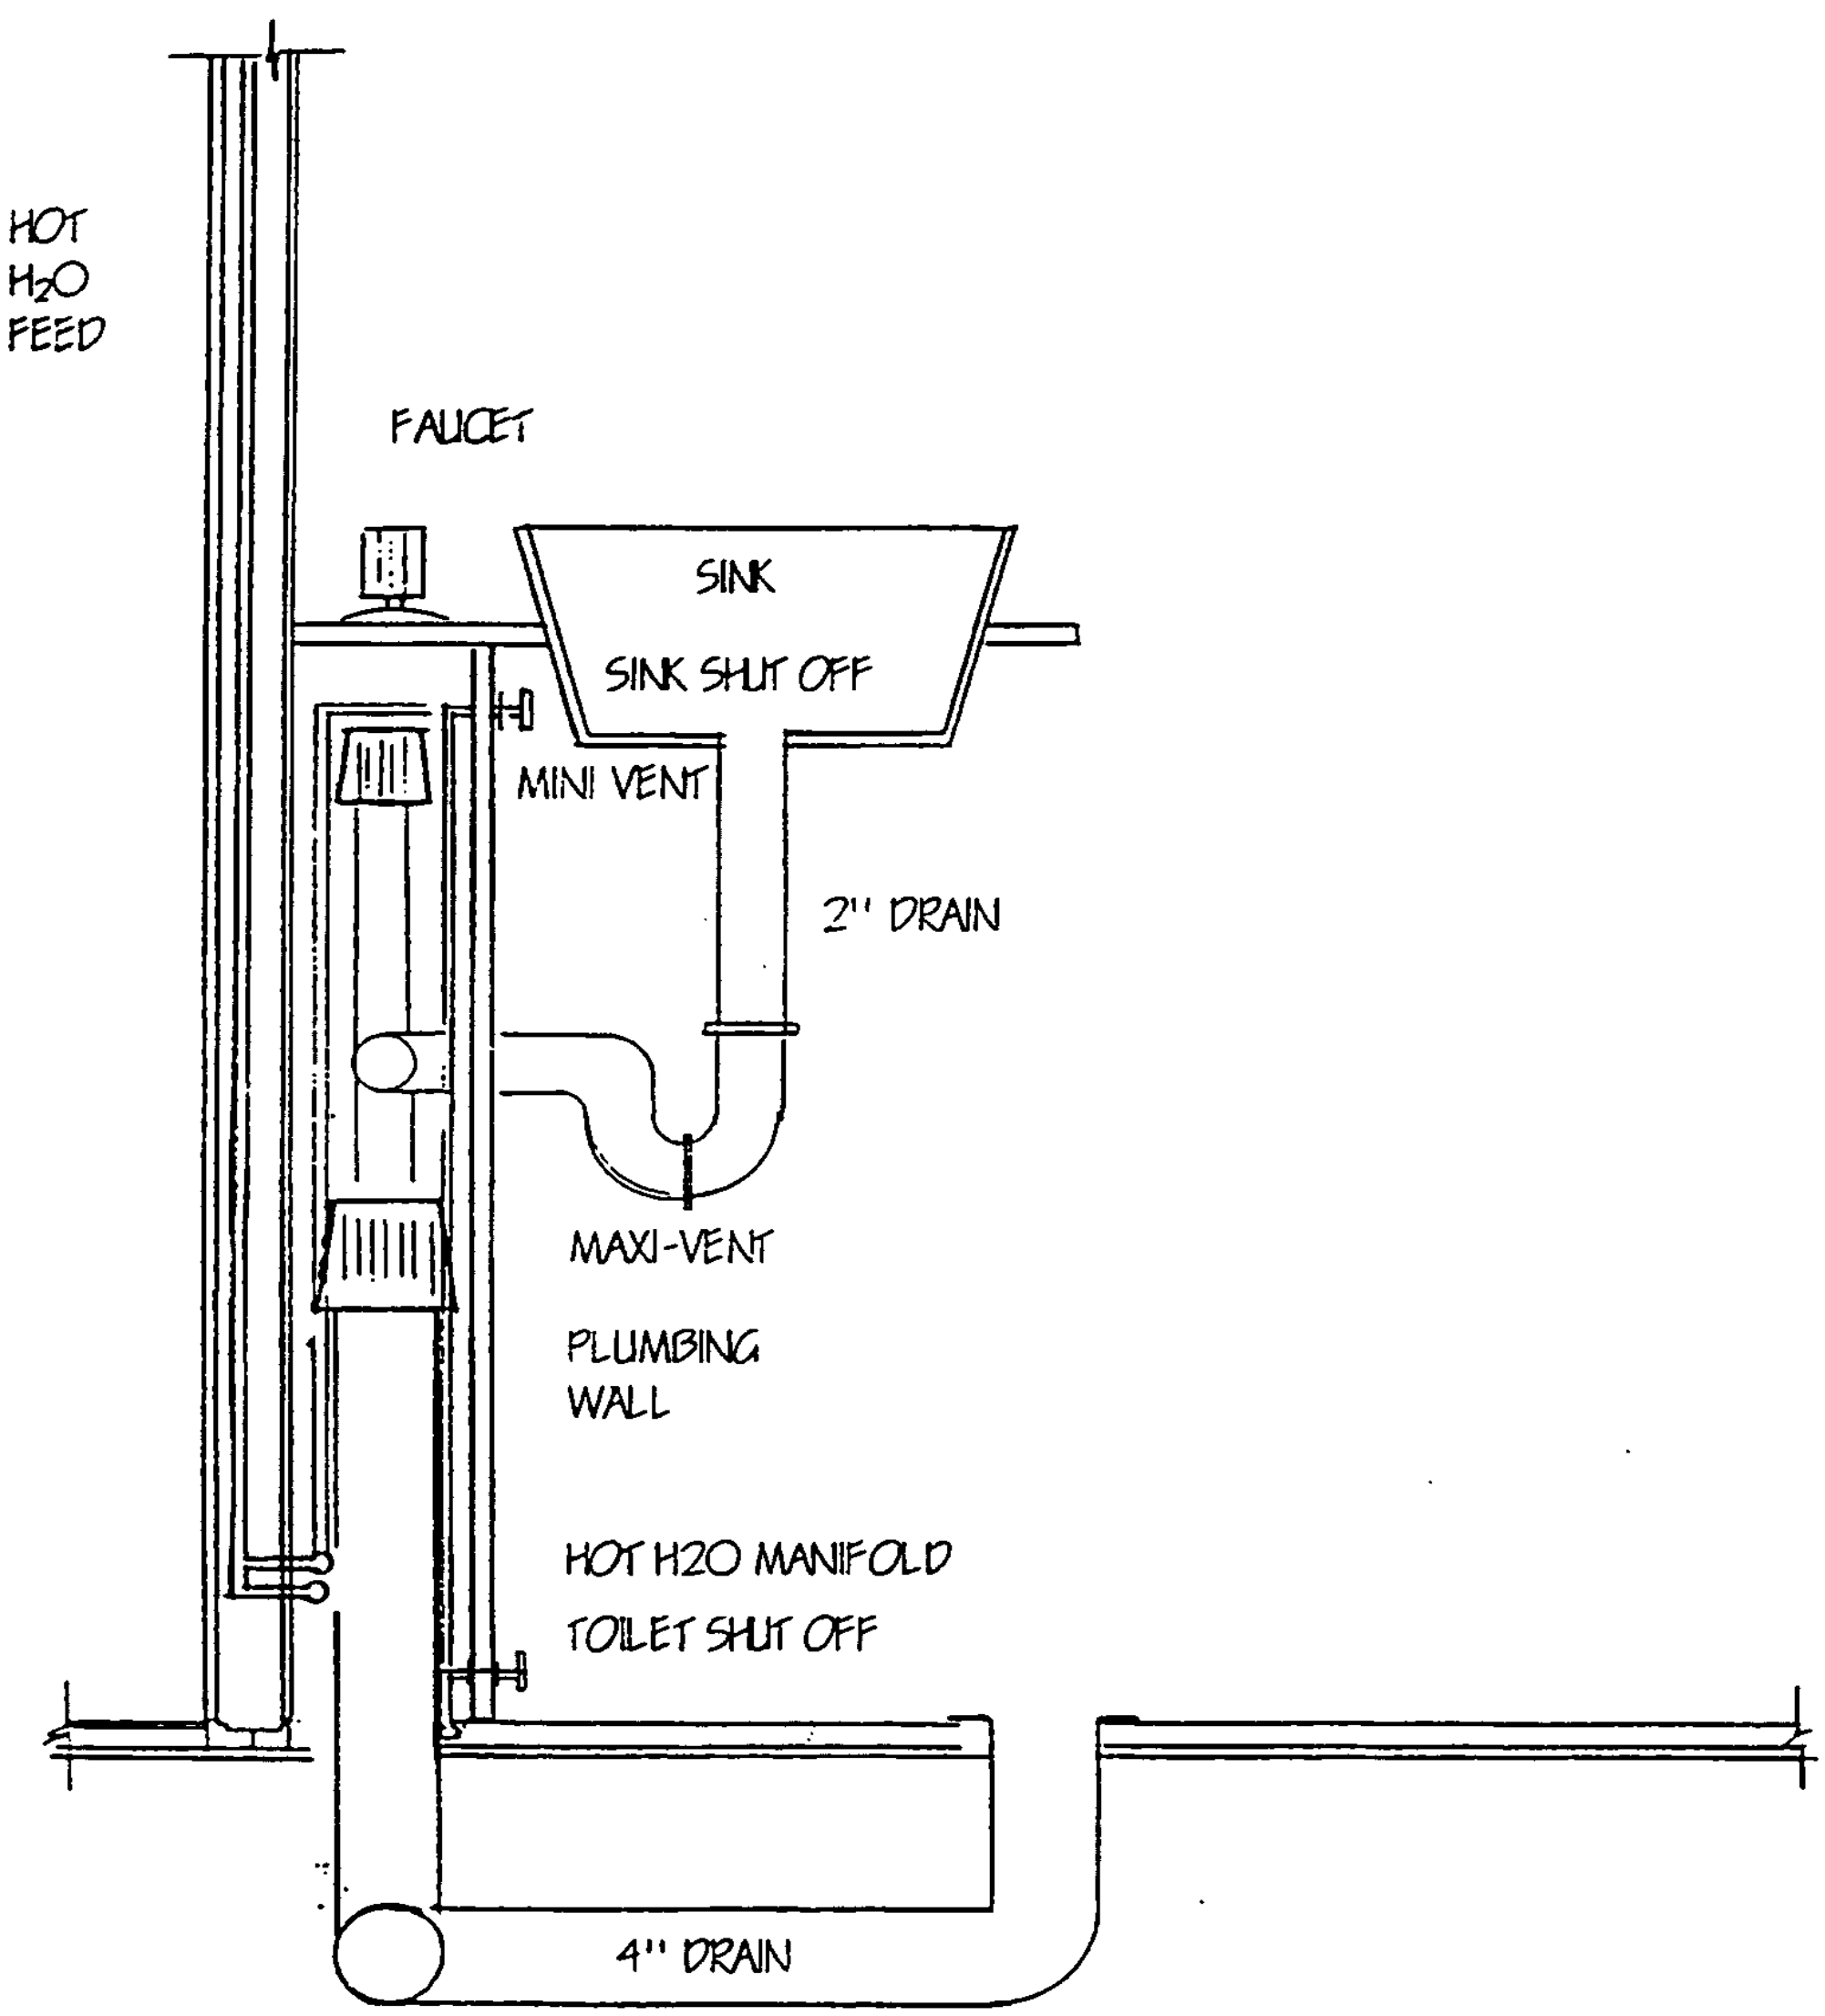
HOT
H2O
FEED
FAUCET
SINK
SINK SHUT OFF
MINI VENT
2" DRAIN
MAXI-VENT
PLUMBING
WALL
HOT H2O MANIFOLD
TOILET SHUT OFF
4" DRAIN

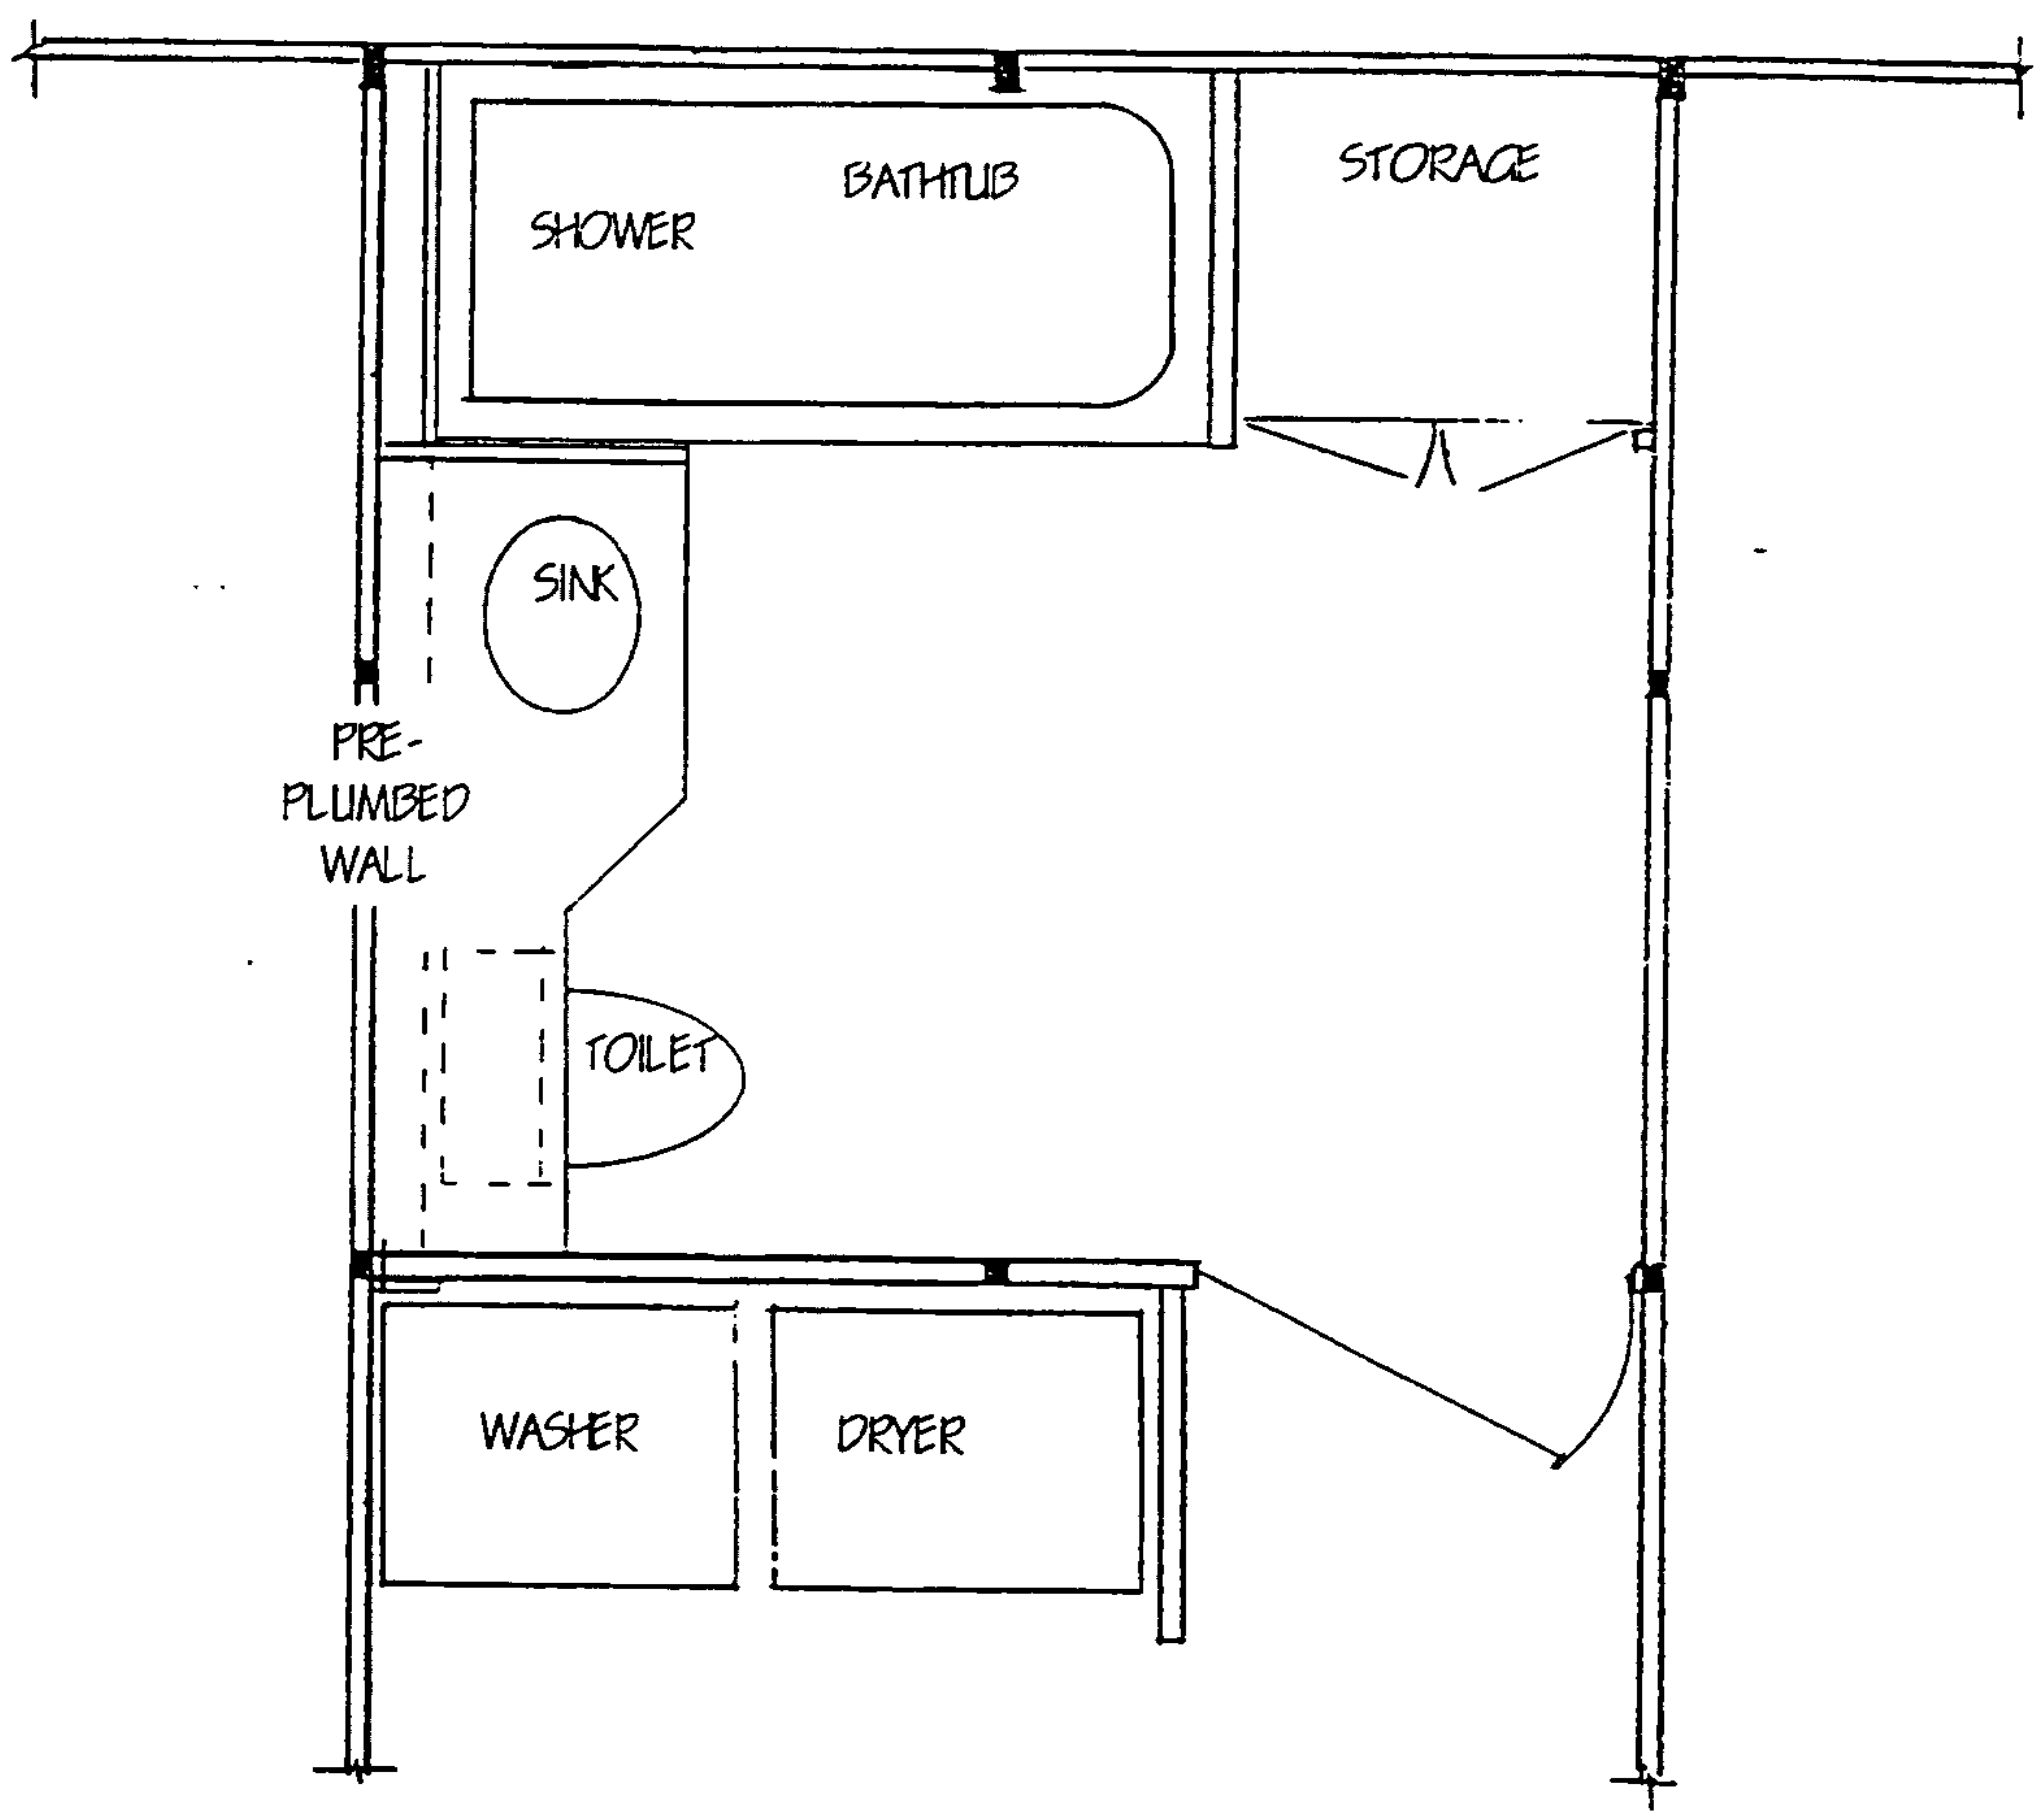
BATHTUB
SHOWER
STORAGE
SINK
PRE-
PLUMBED
WALL
TOILET
WASHER
DRYER

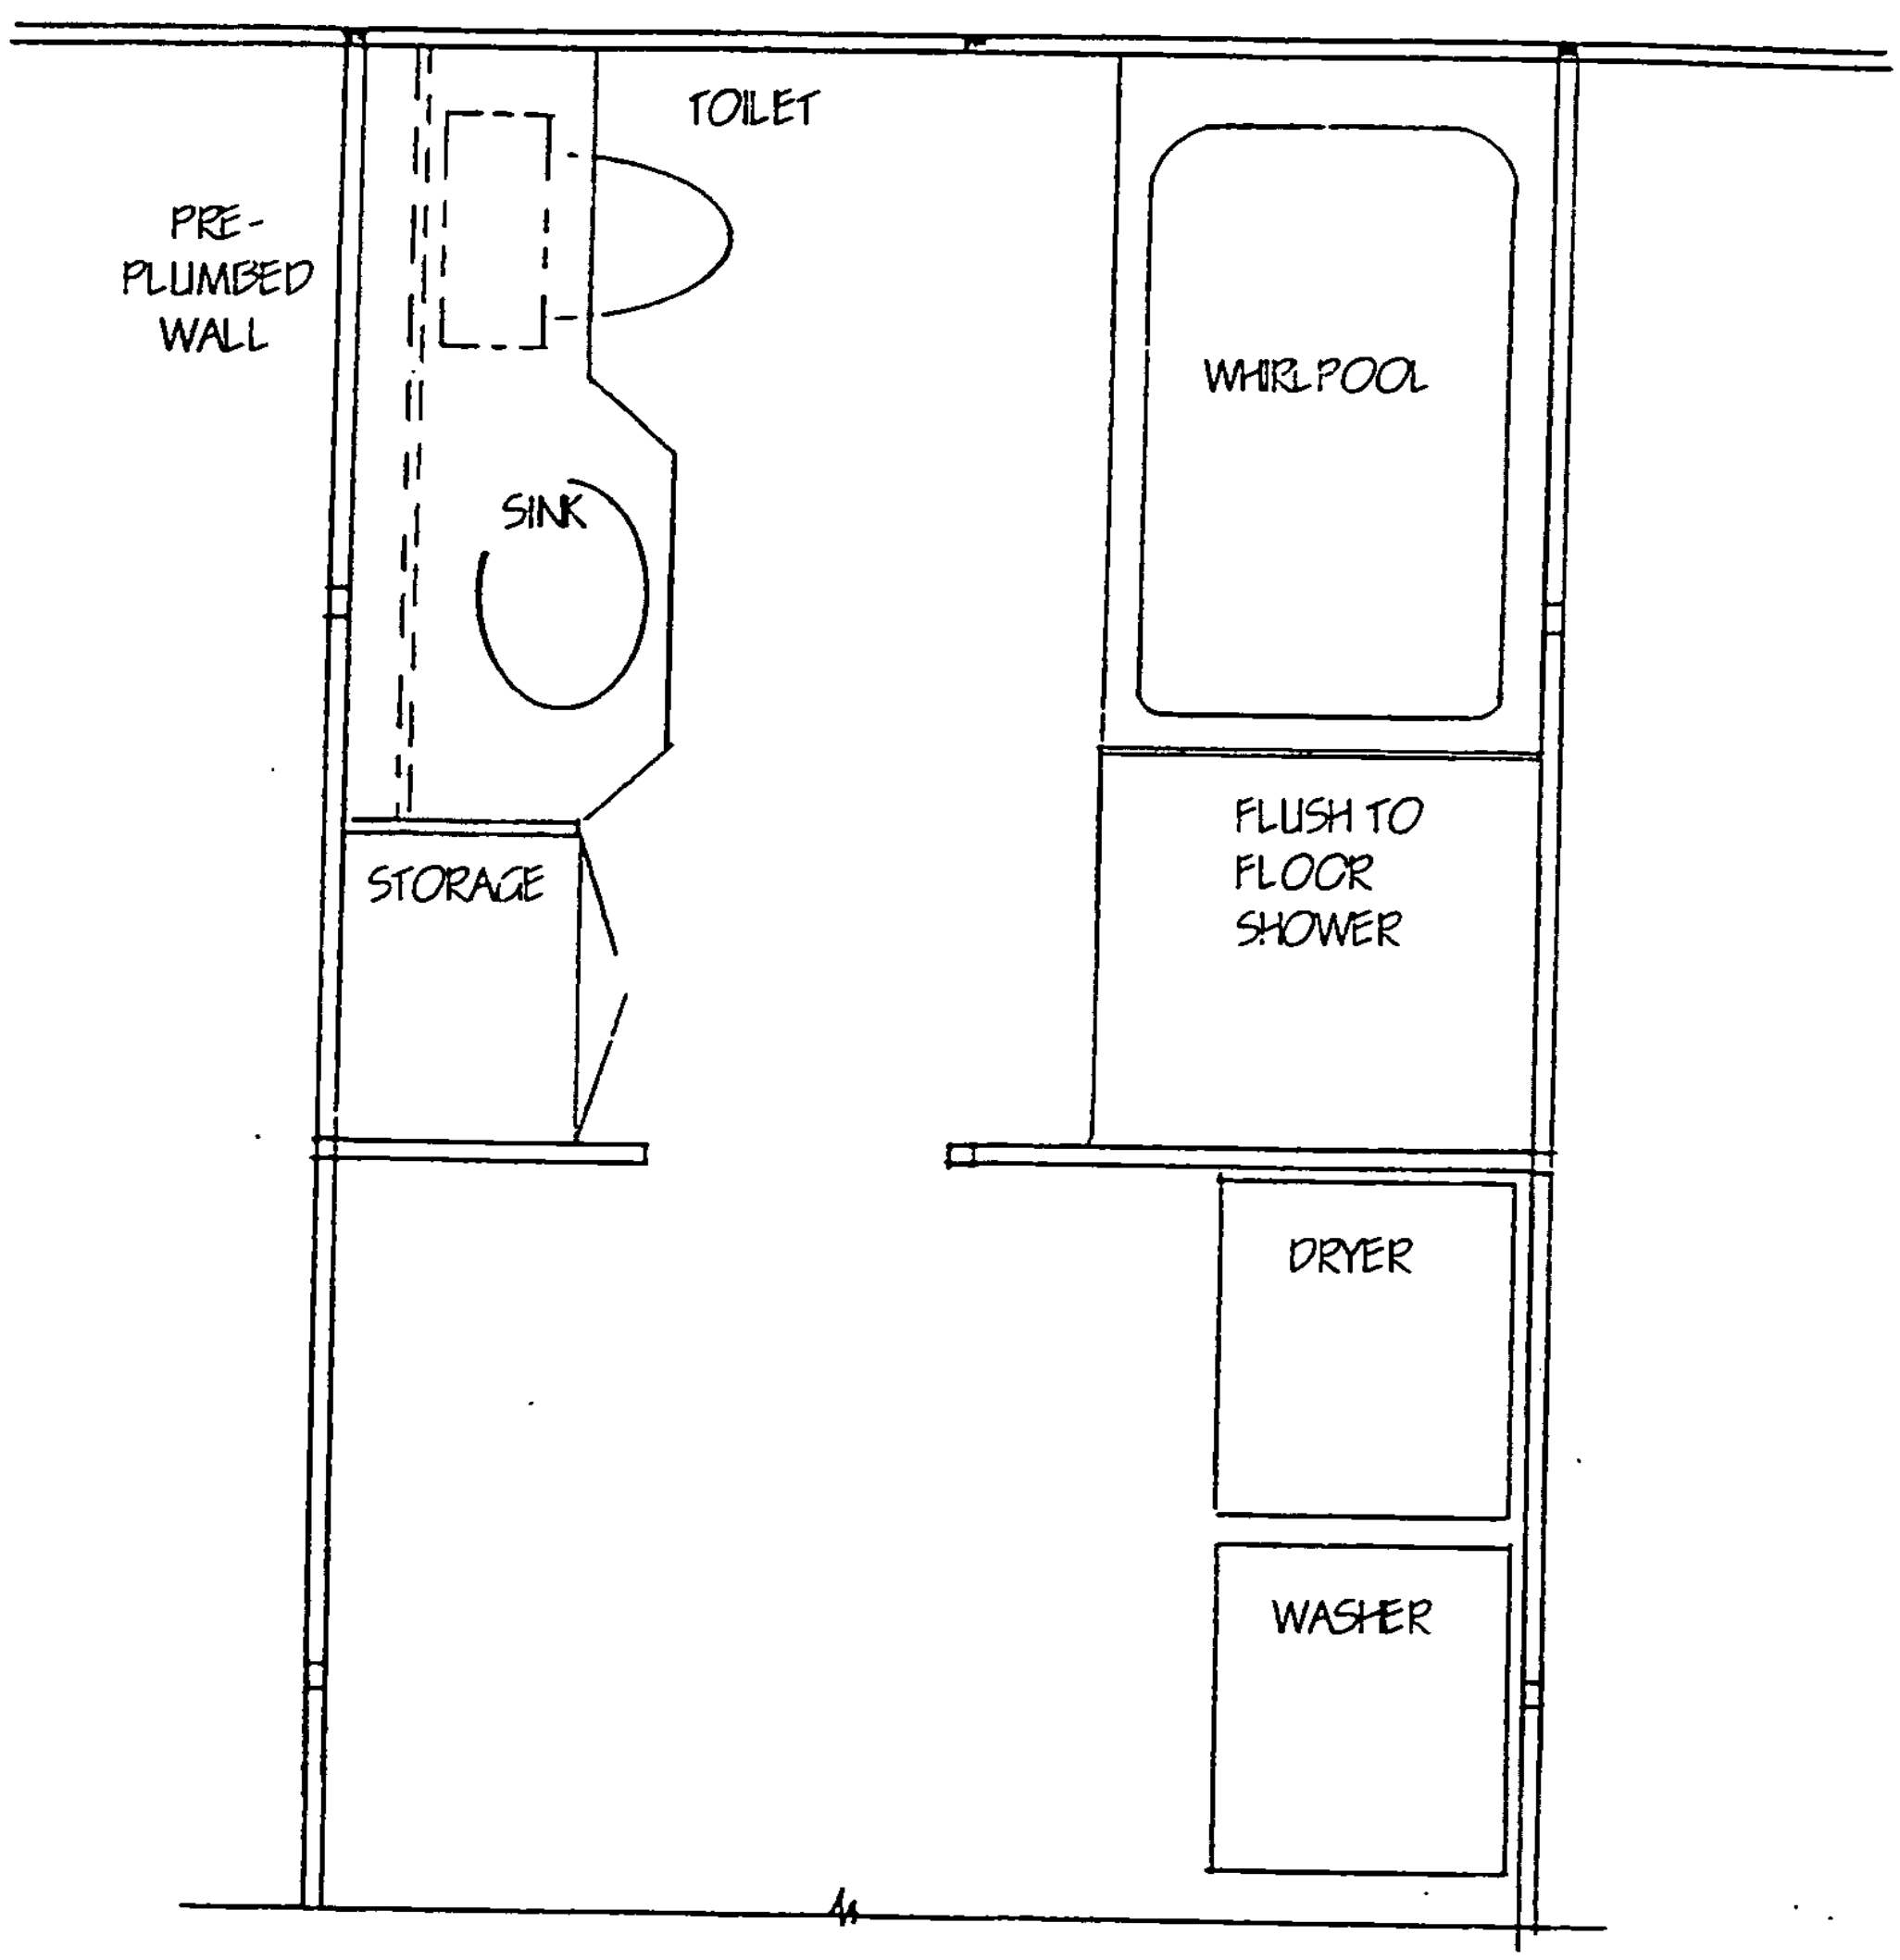
TOILET
PRE-
PLUMBED
WALL
WHIRLPOOL
SINK
STORAGE
FLUSH TO
FLOOR
SHOWER
DRYER
WASHER

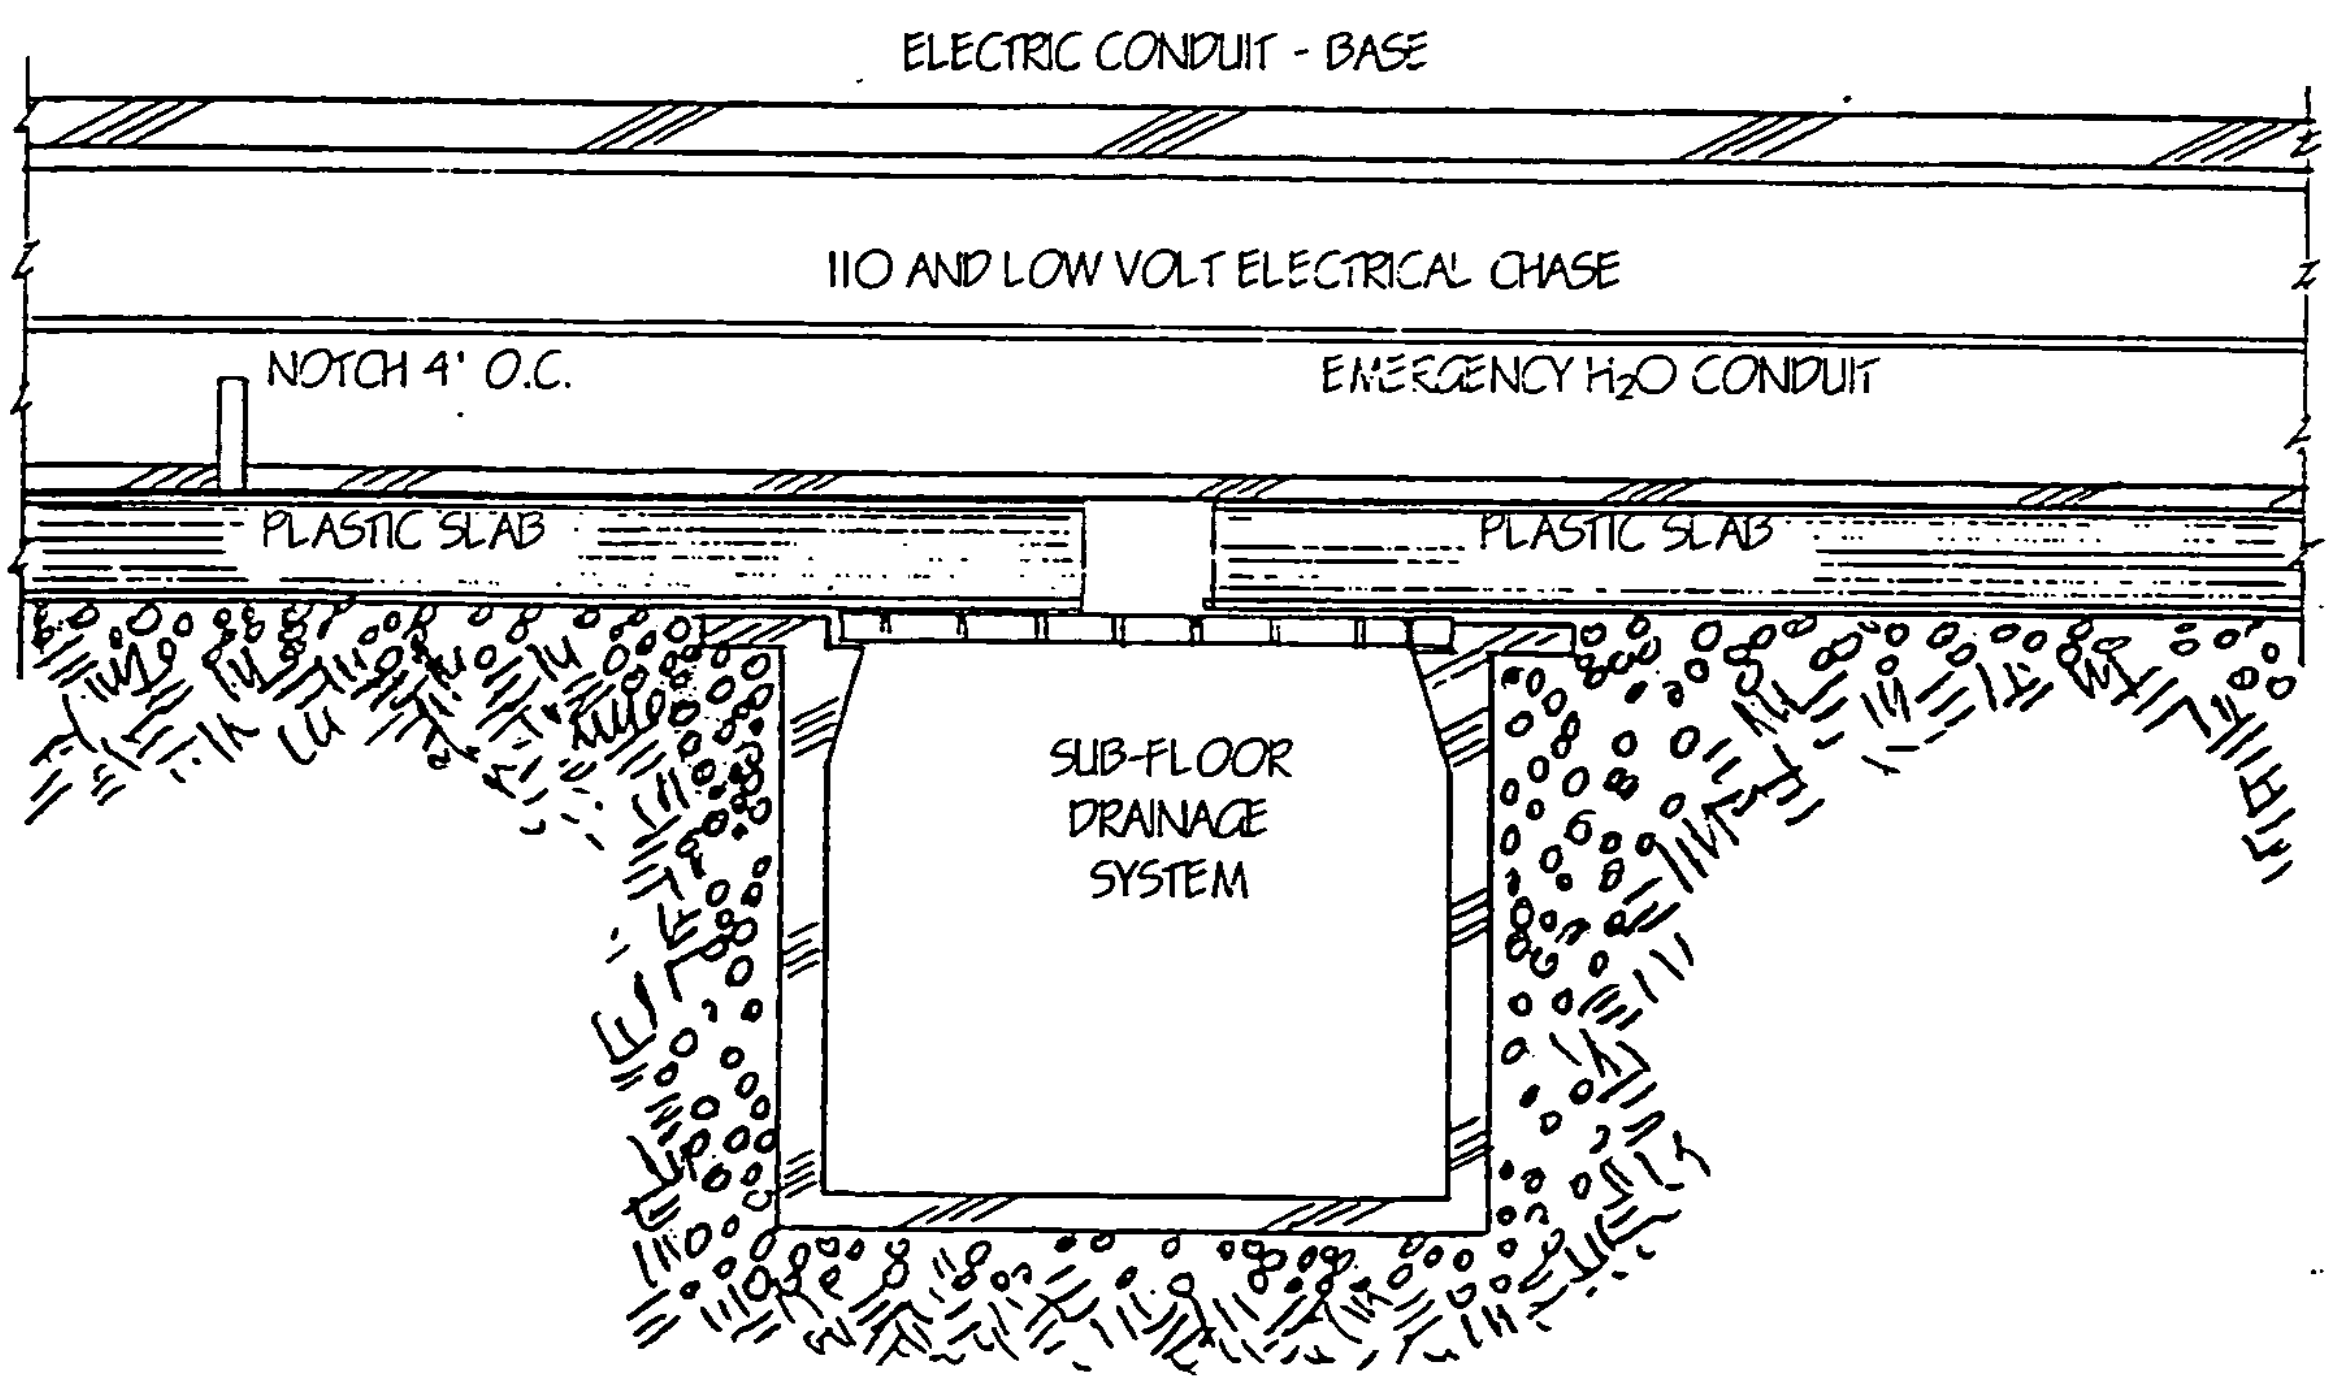
ELECTRIC CONDUIT - BASE
110 AND LOW VOLT ELECTRICAL CHASE
NOTCH 4' O.C.
EMERGENCY H2O CONDUIT
PLASTIC SLAB
PLASTIC SLAB
SUB-FLOOR
DRAINAGE
SYSTEM

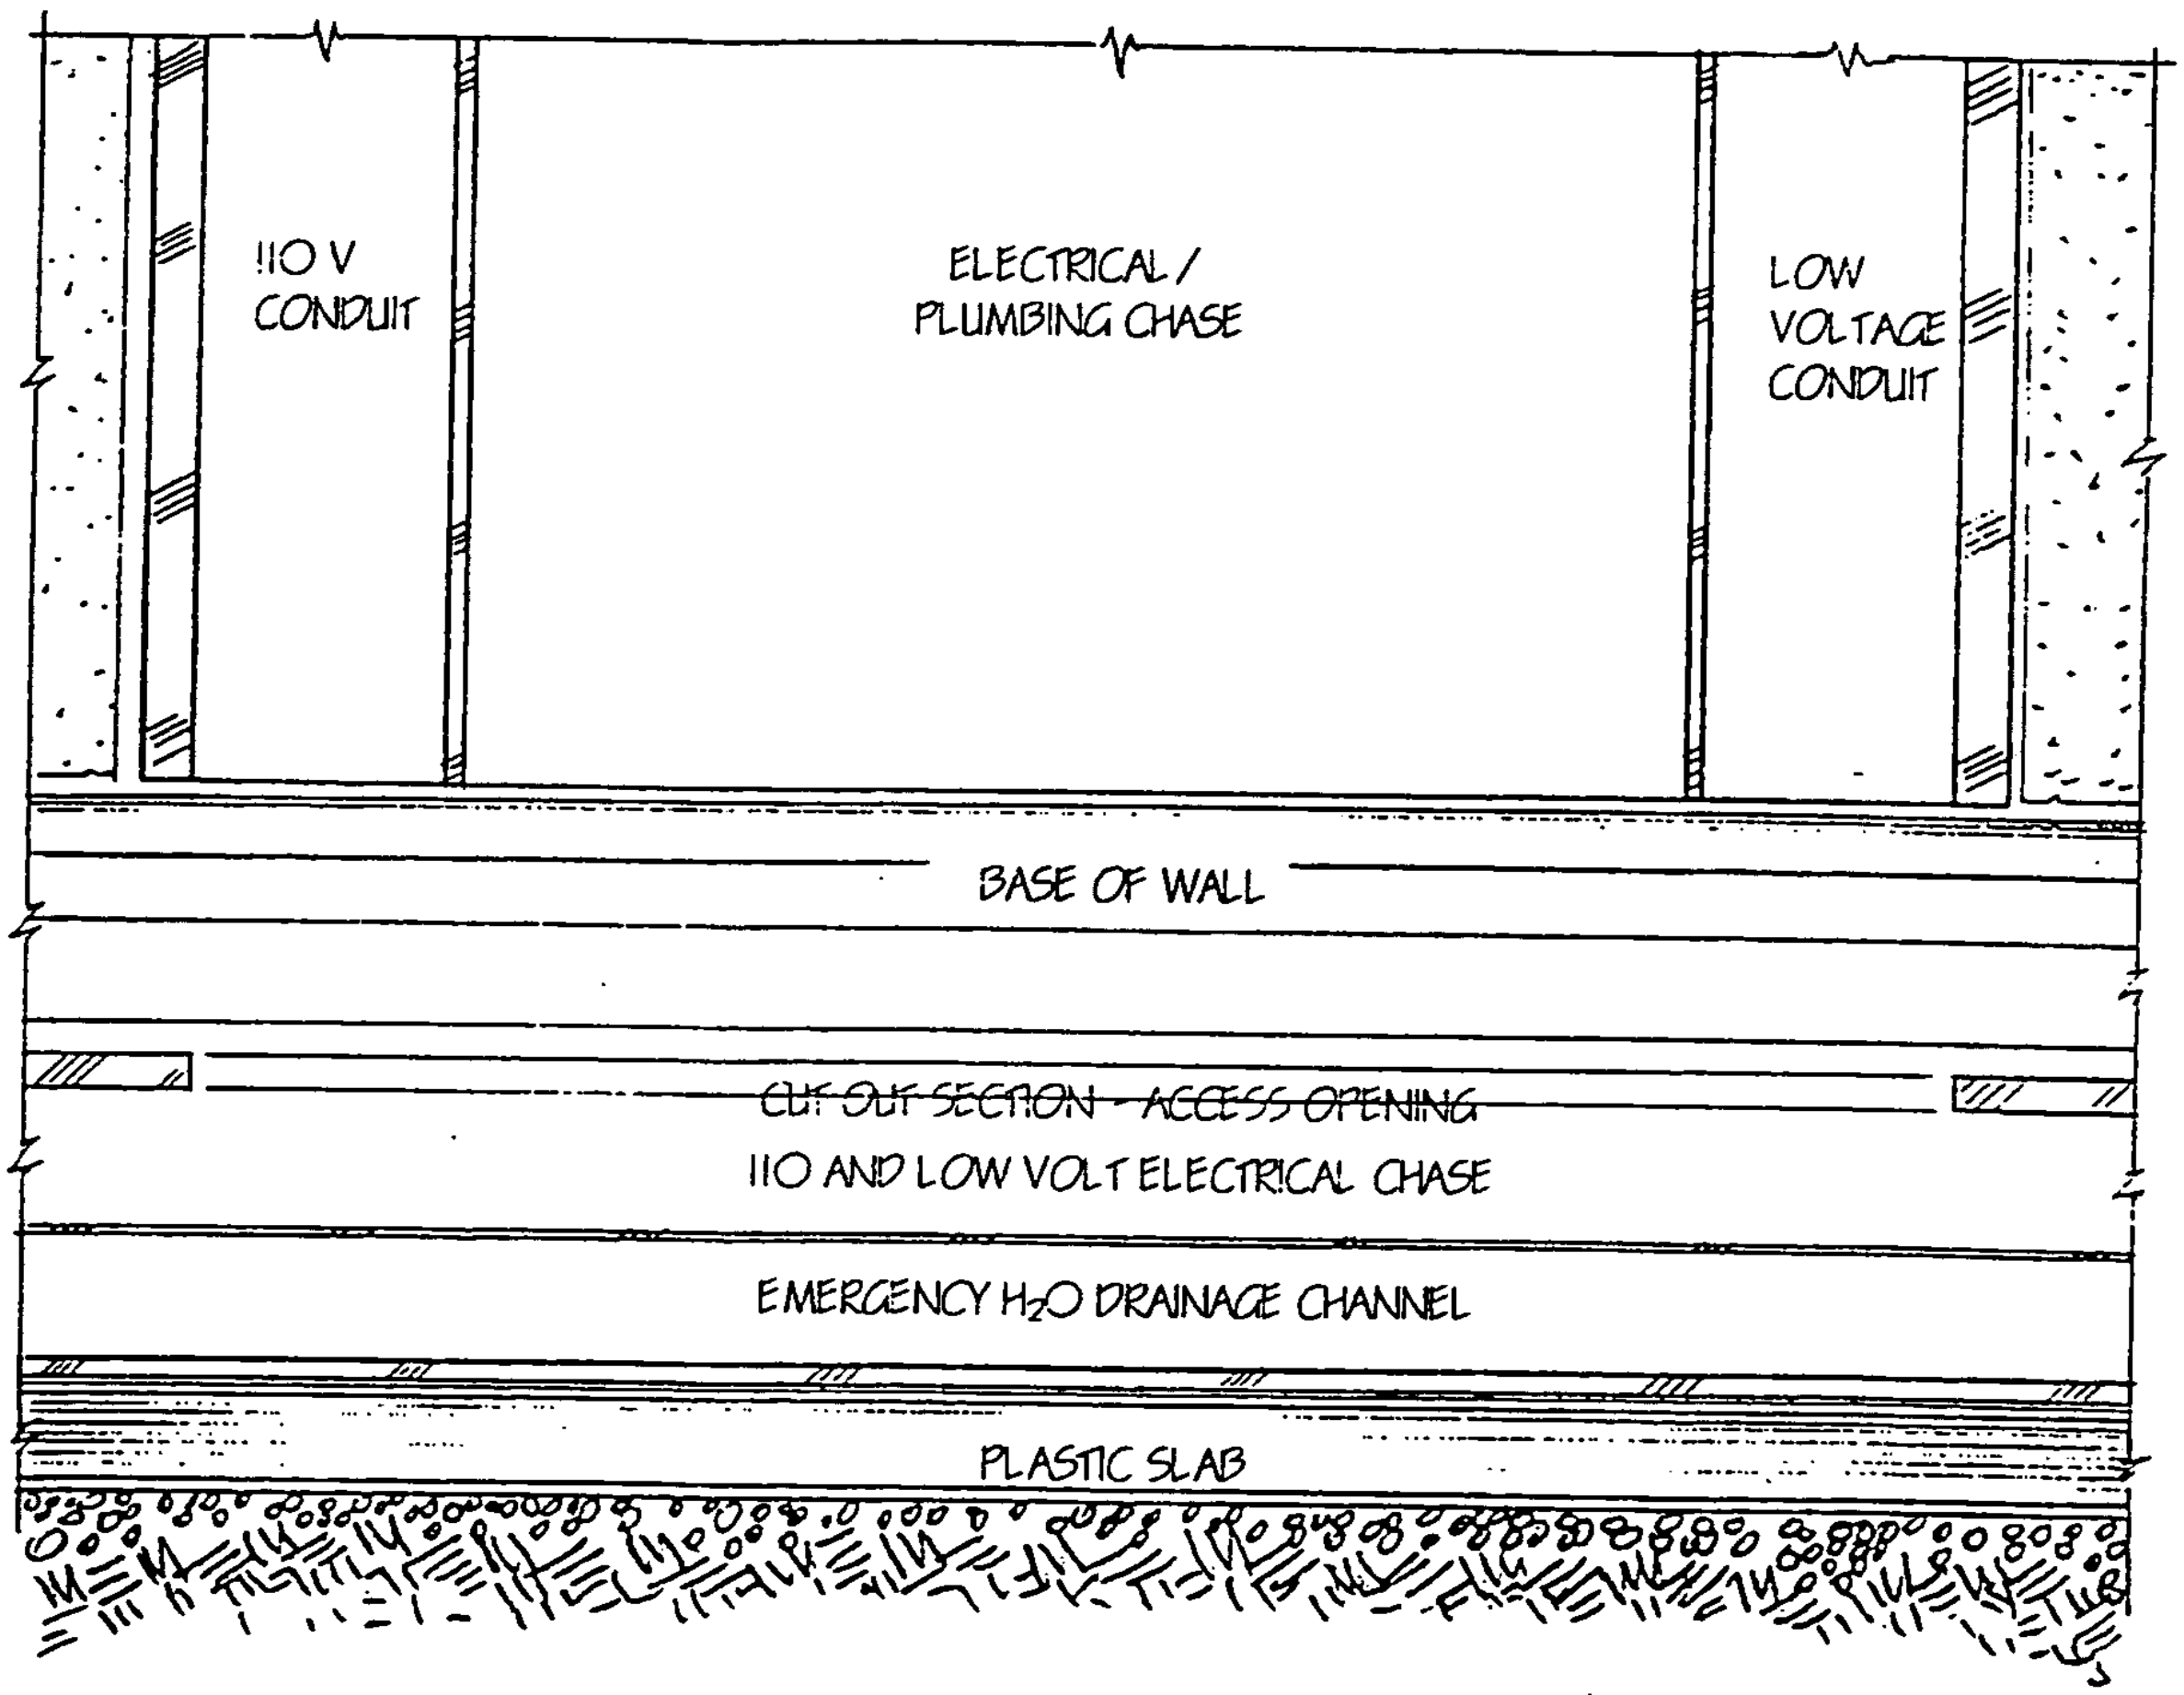
110 V
CONDUIT
ELECTRICAL /
PLUMBING CHASE
LOW
VOLTAGE
CONDUIT
BASE OF WALL
CUT OUT SECTION - ACCESS OPENING
110 AND LOW VOLT ELECTRICAL CHASE
EMERGENCY H2O DRAINAGE CHANNEL
PLASTIC SLAB

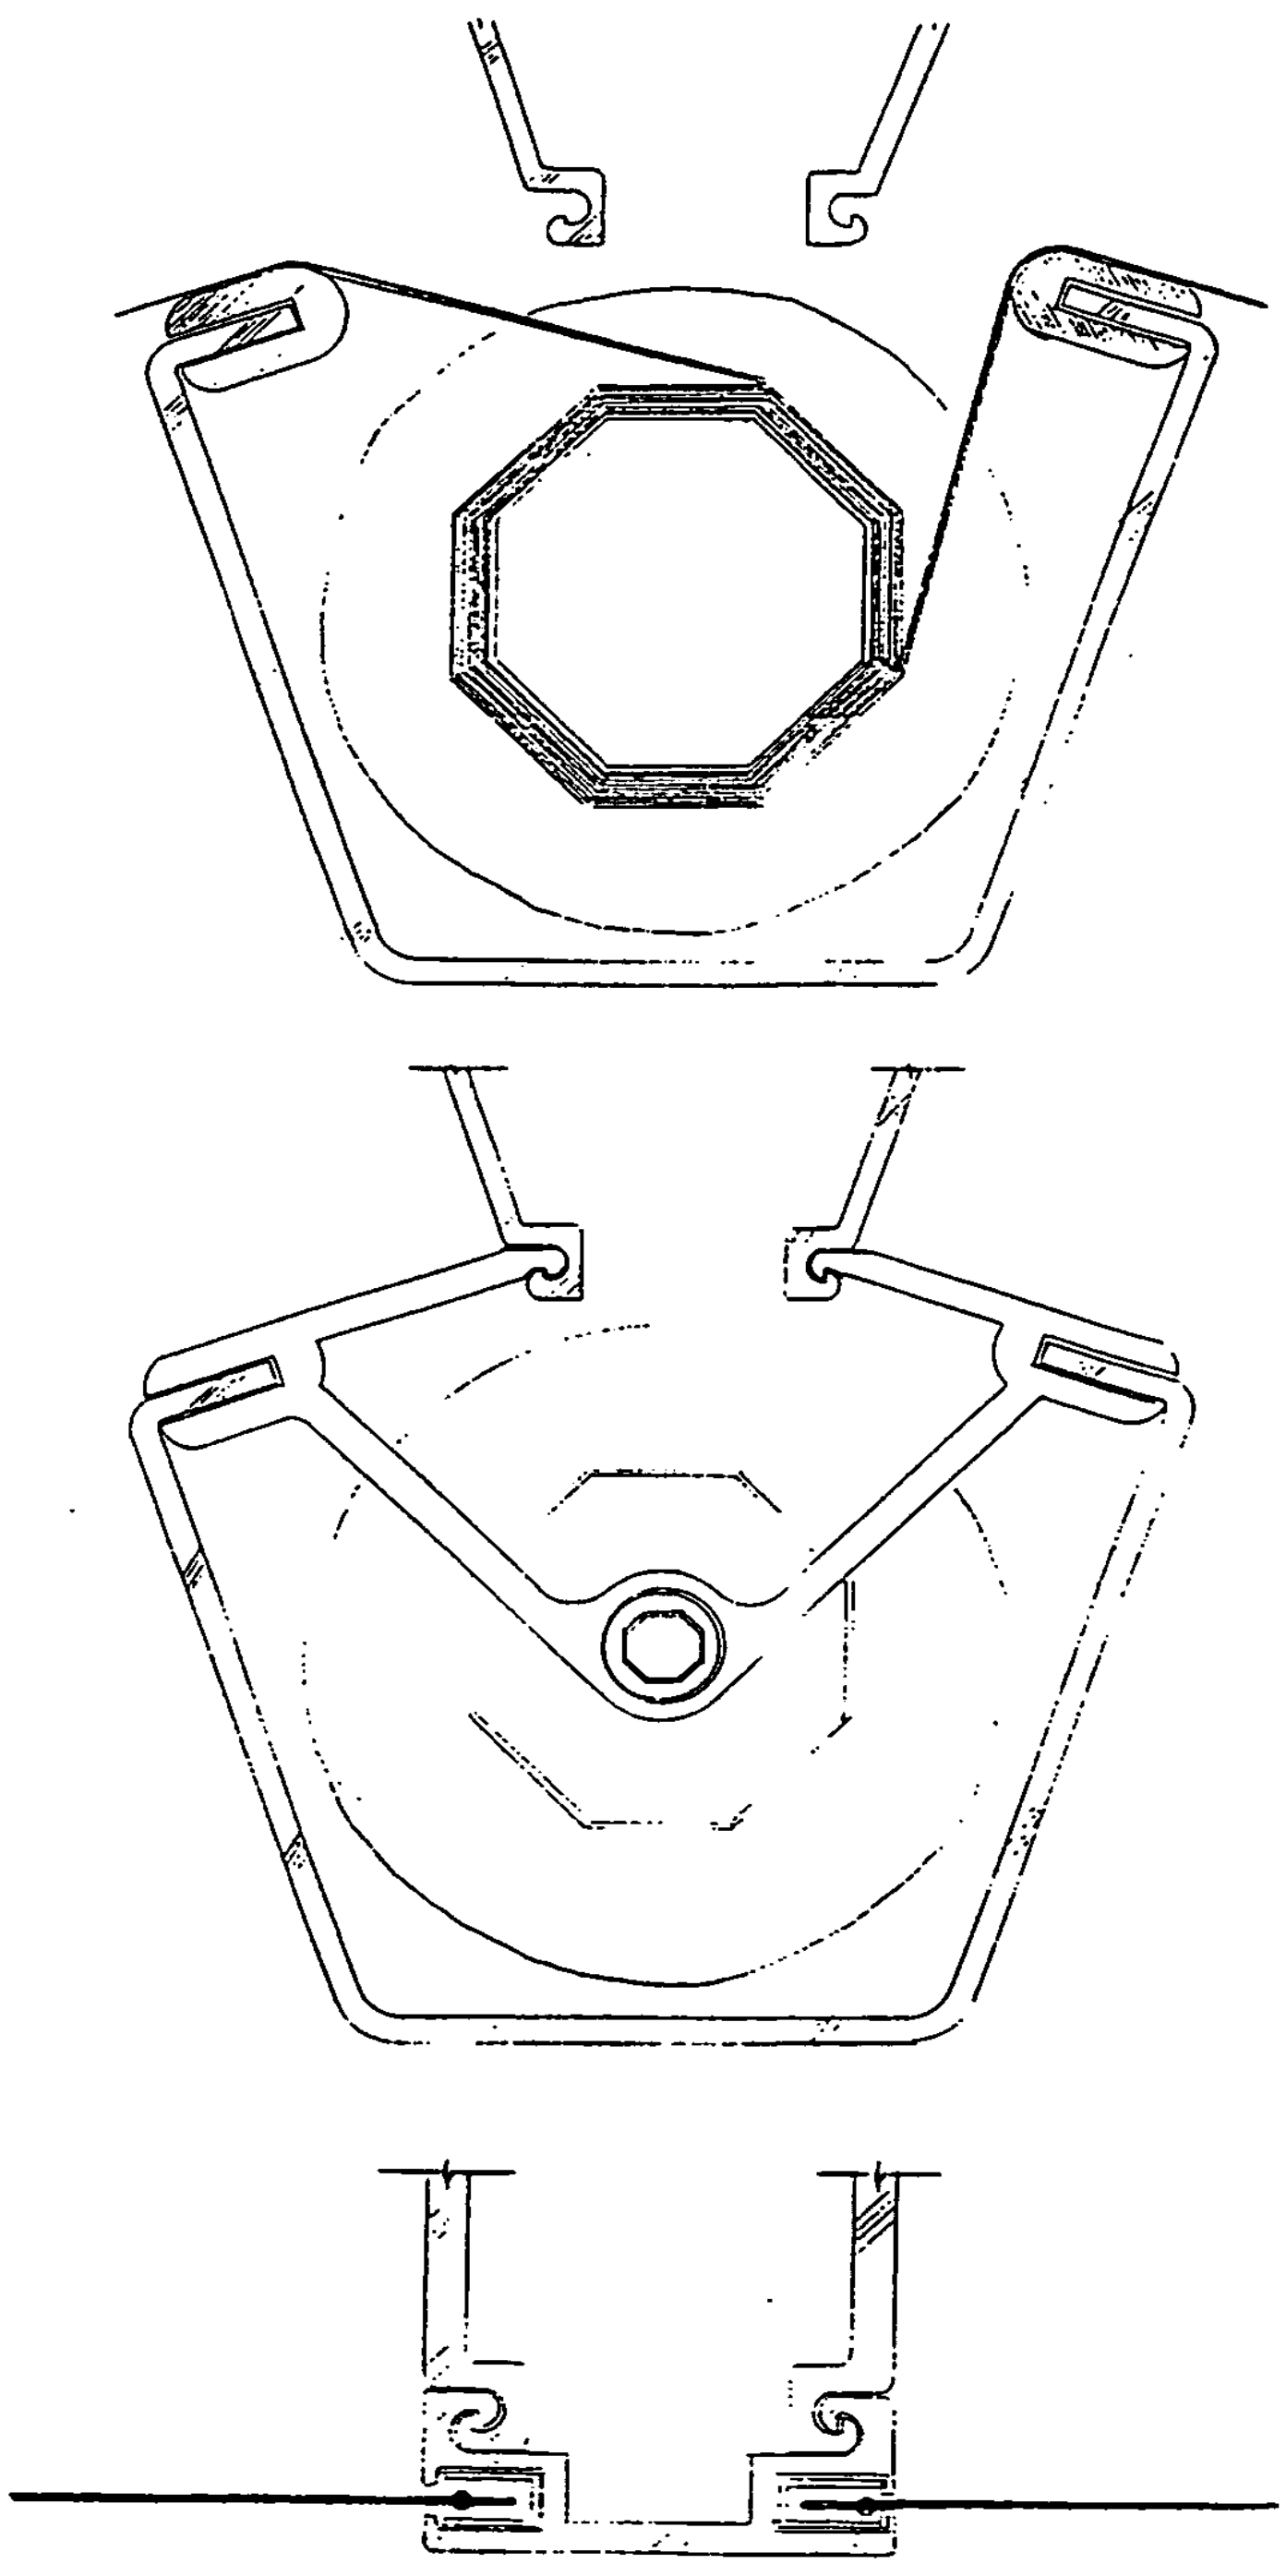

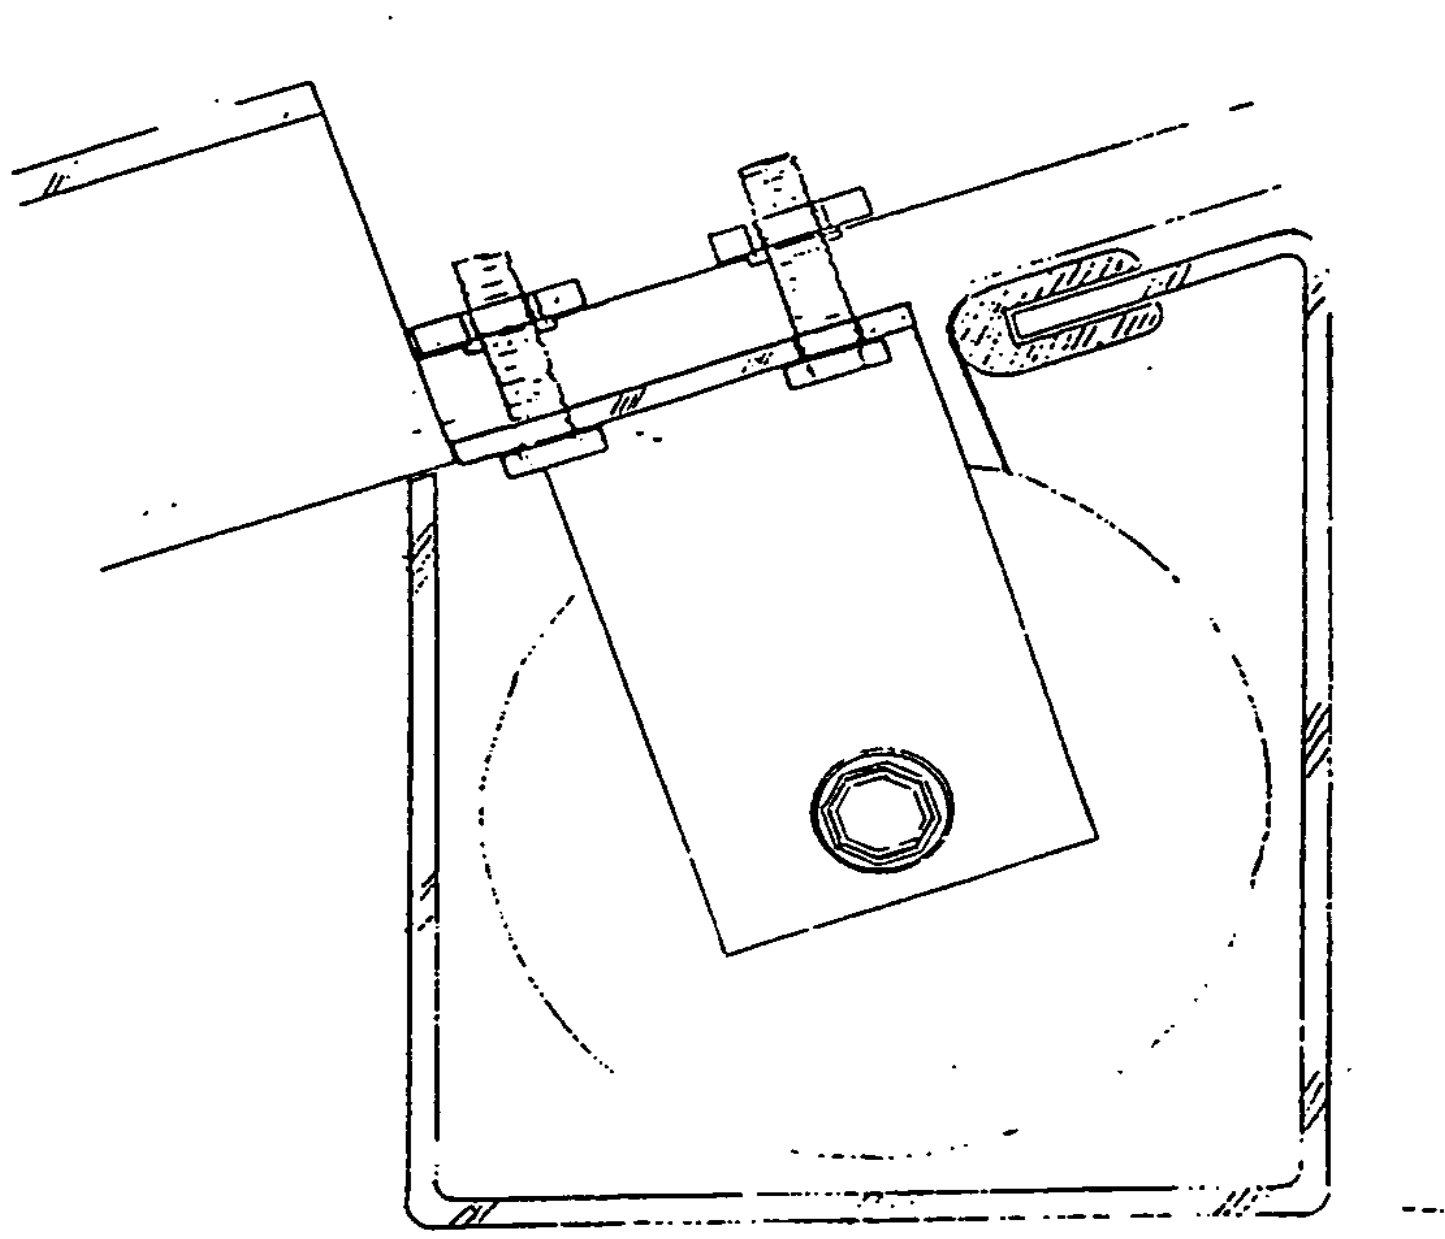

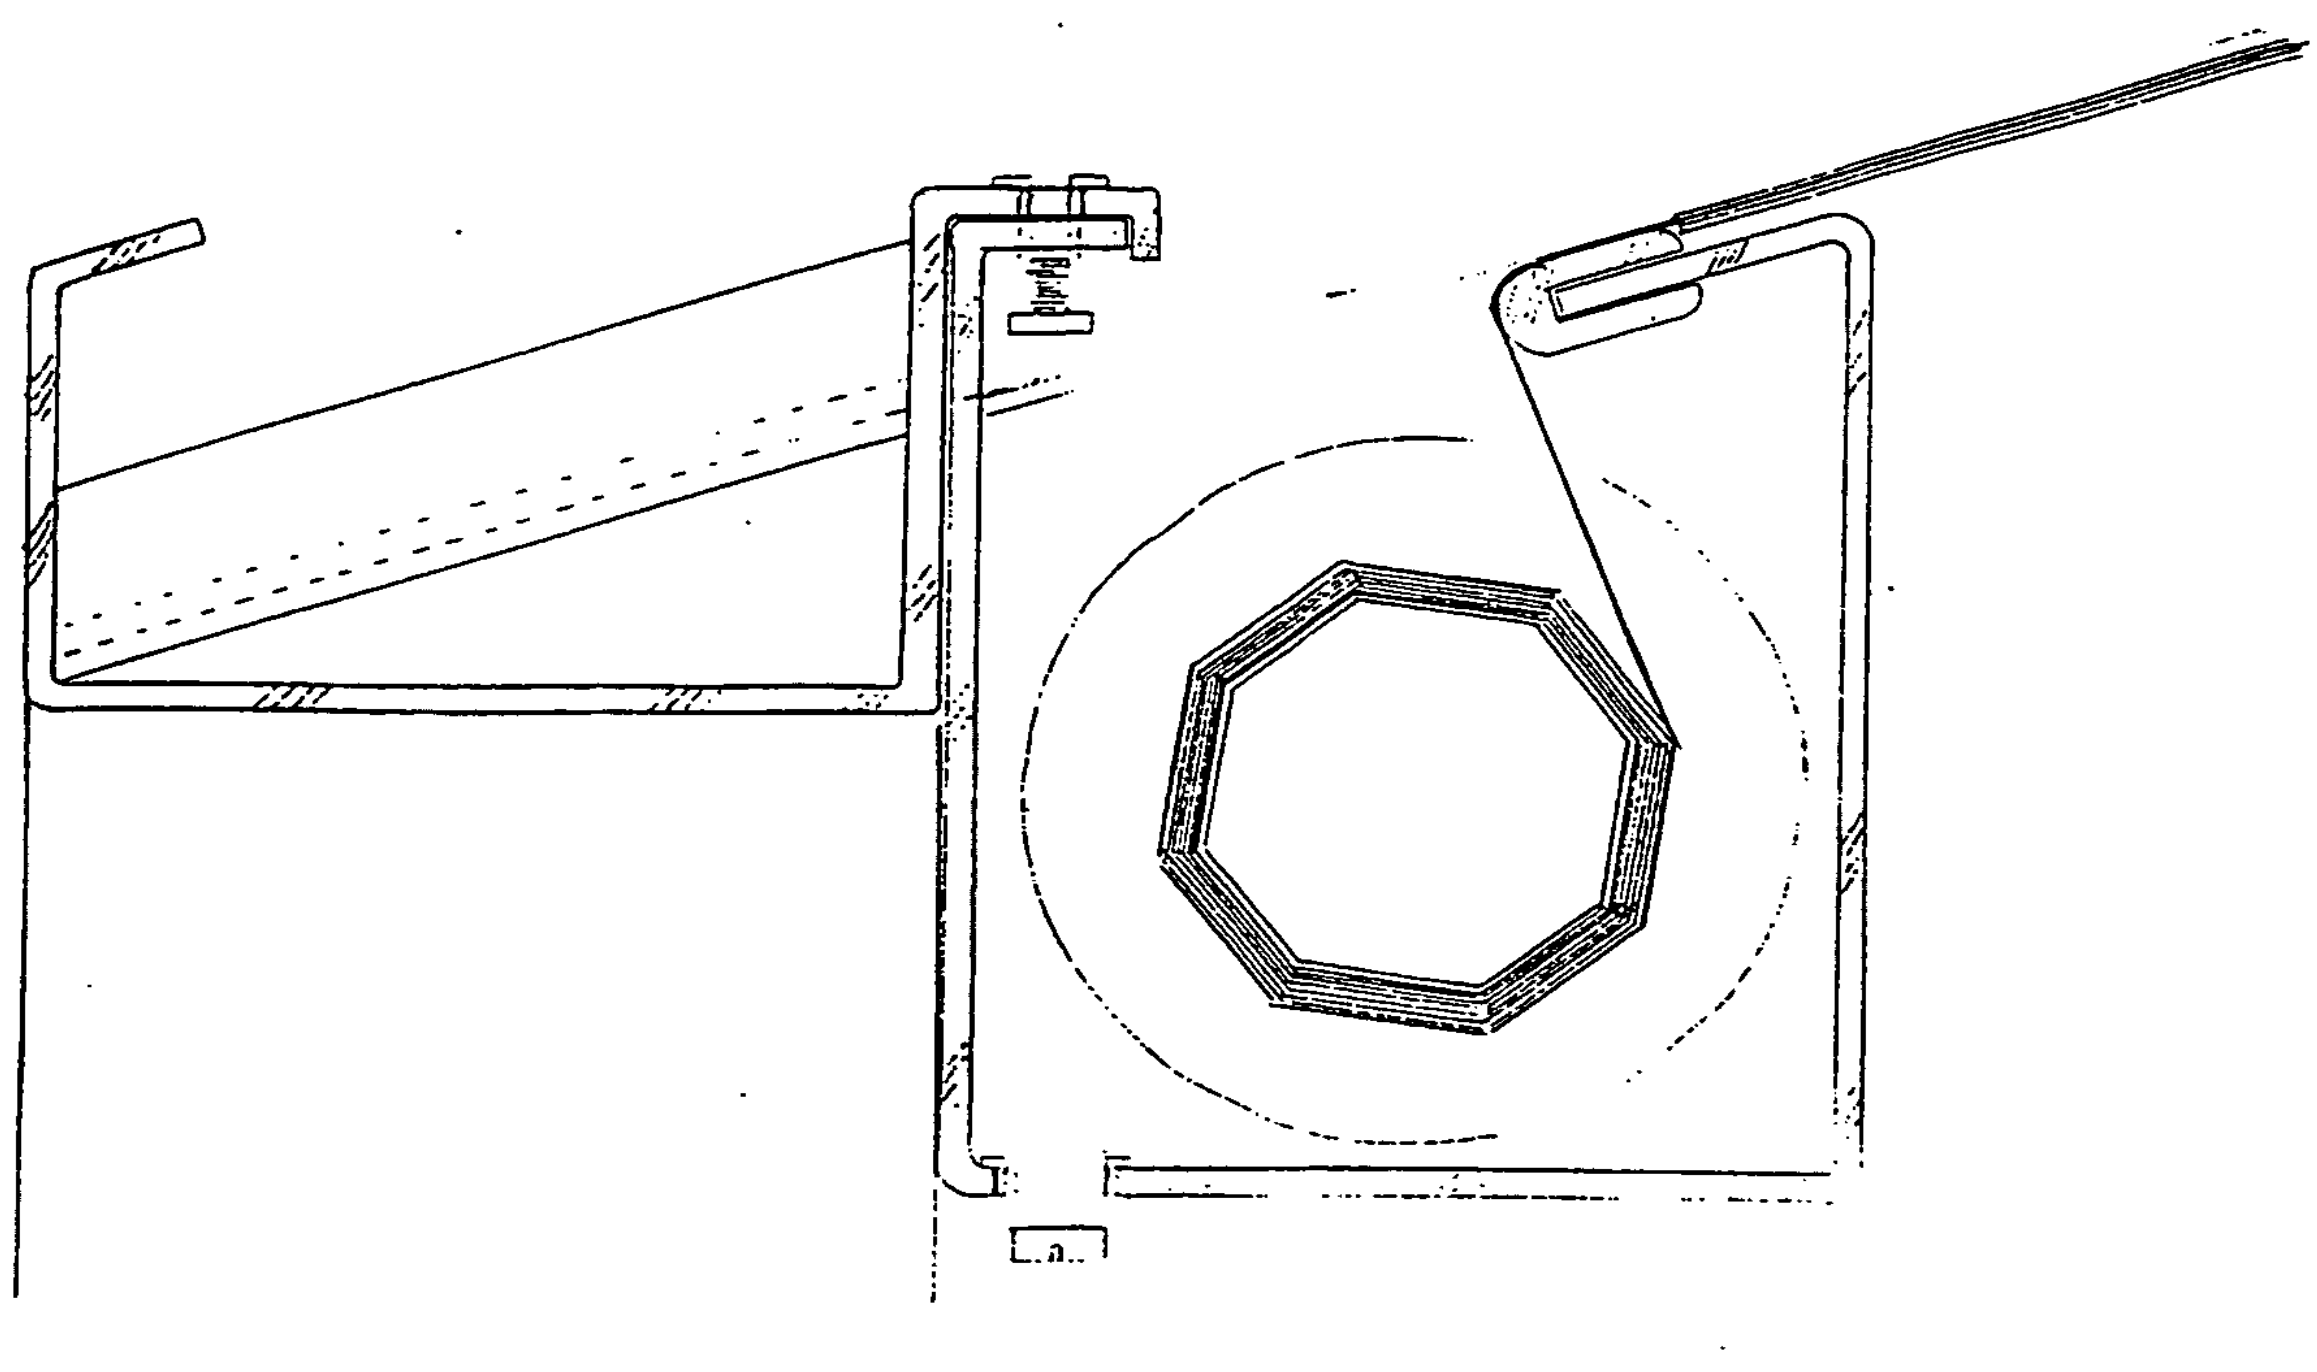

Customization templat 'stem

When the desire is for customization, it is easily accomplished.

The exact final desired position is marked on the extrusion, the provided template inserted over the extrusion to this mark, the locking handle on the template is tightened, the extrusion again is marked on the opposite edge of the template. The template is moved to the new mark. The extrusion is then cut and drilled. The second template inserted and the extrusion is drilled again and is ready to be snapped into place.

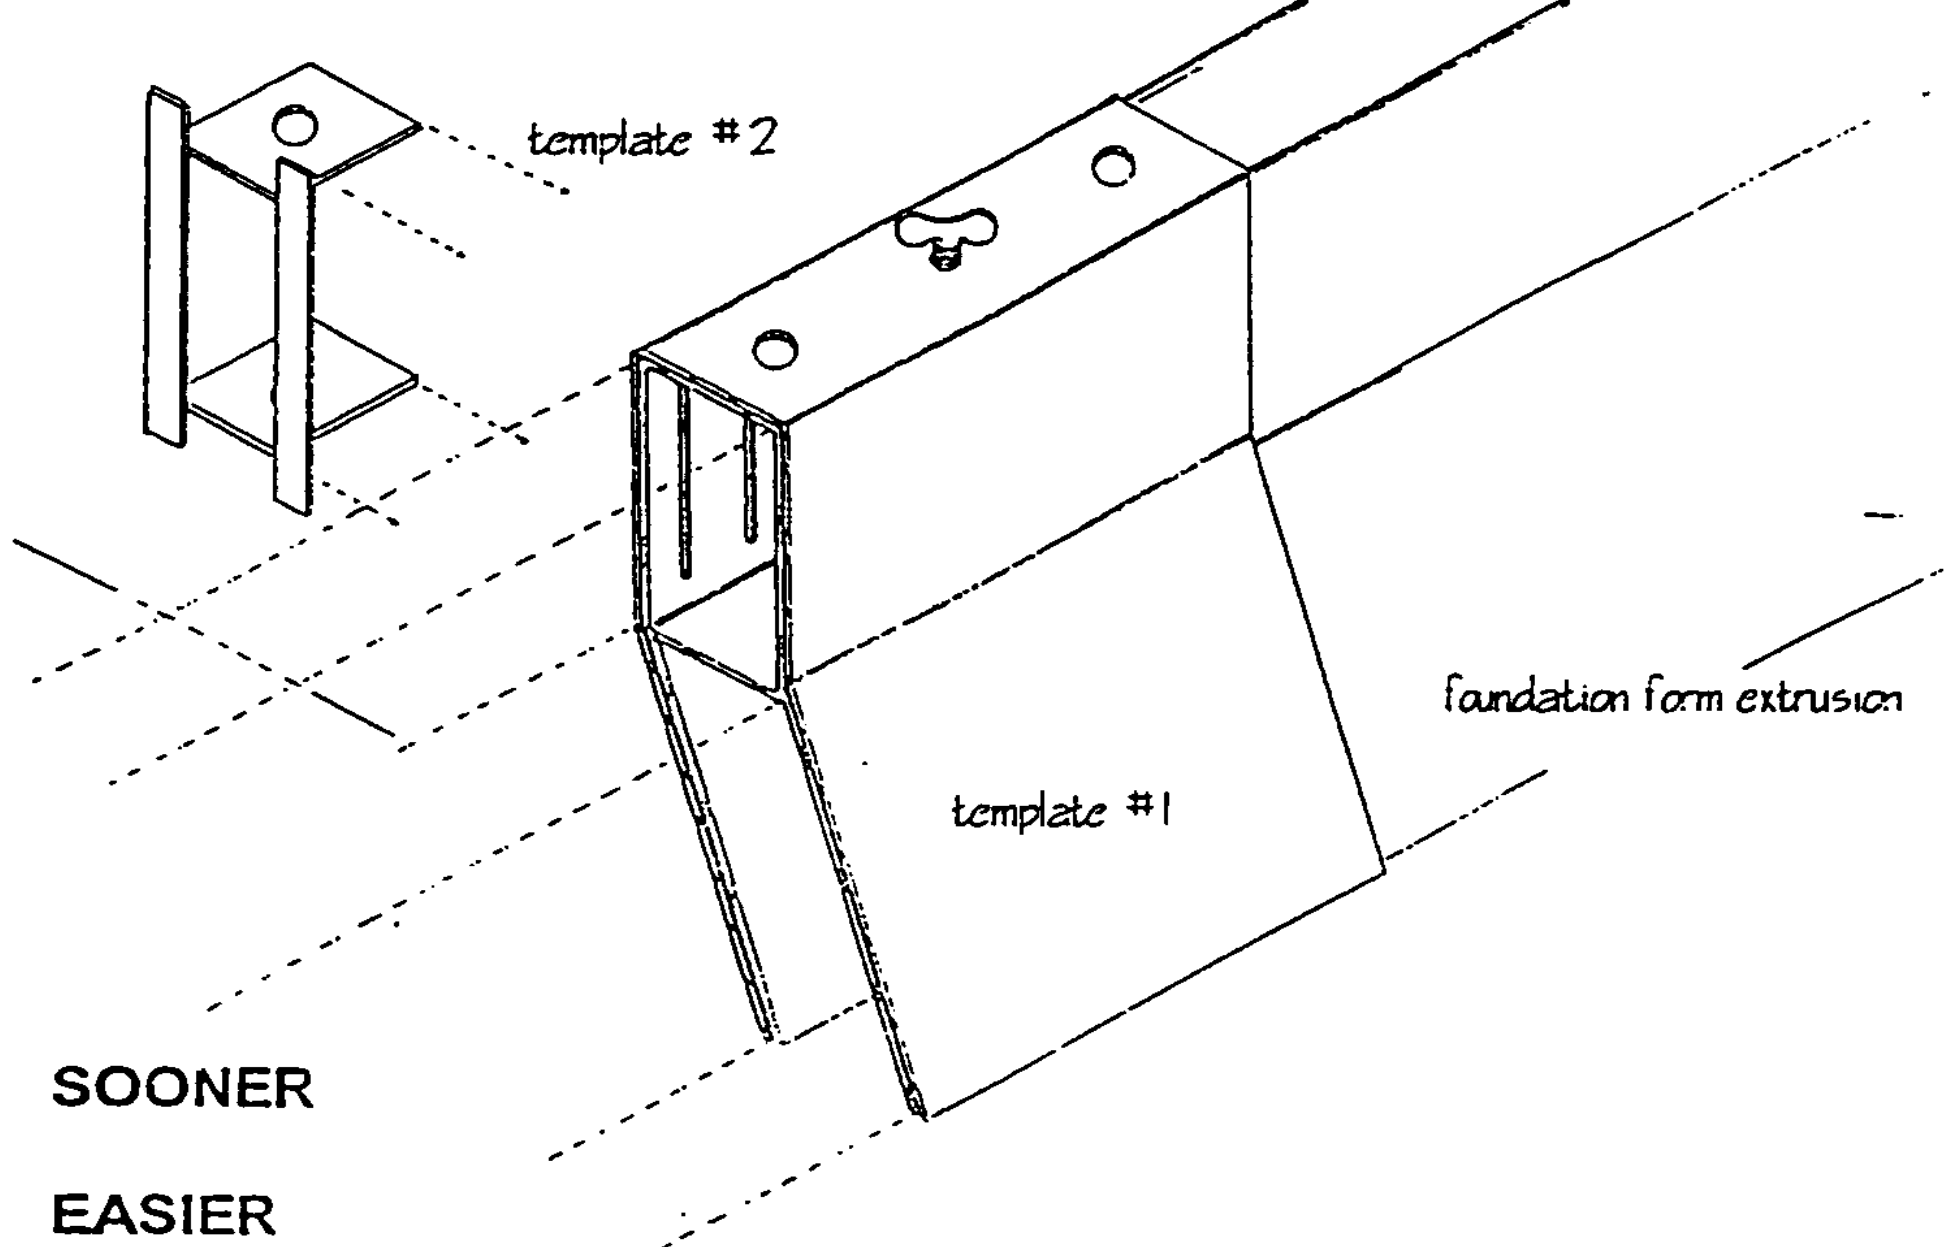

SOONER

EASIER

CHEAPER

SAFER

ABSTRACT
(a)(b)
46

Everything returns to the standard way of snapping-it-together from there.

After a few projects, the team will become very proficient and quickly finish this part of the work in a day. AND, the project is ready for them to proceed with the construction.

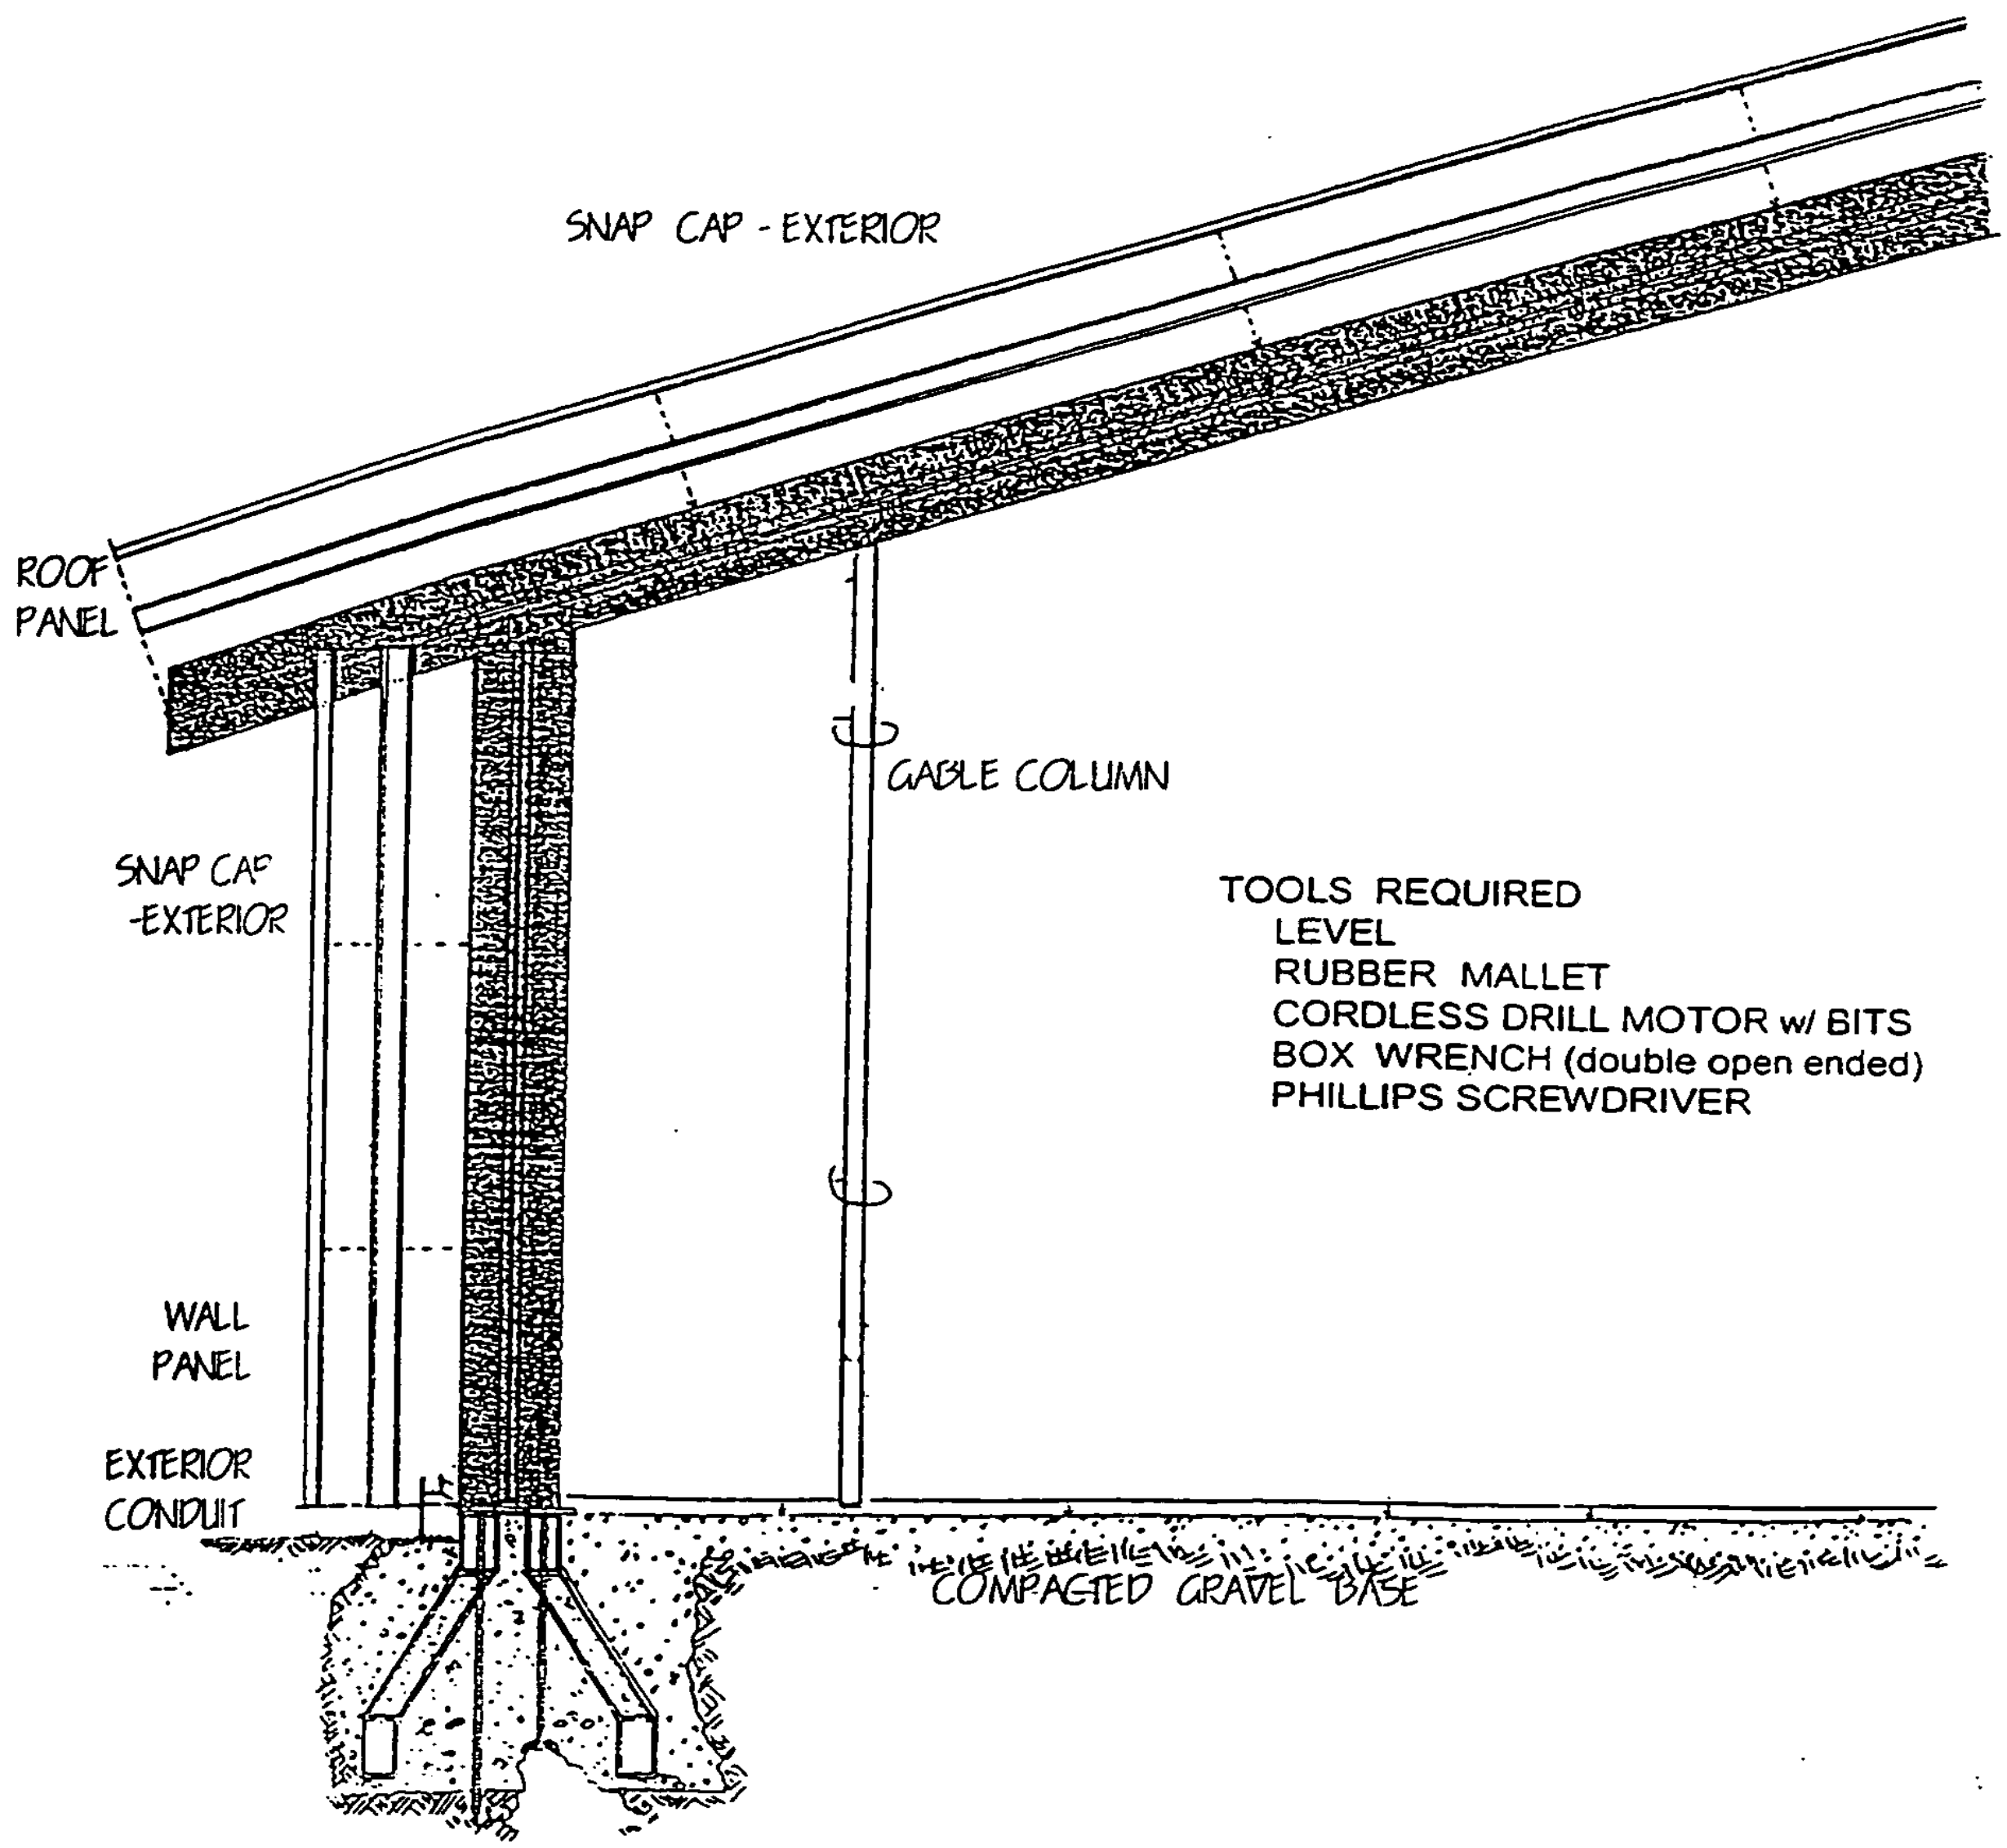

TOOLS REQUIRED
LEVEL
RUBBER MALLET
CORDLESS DRILL MOTOR w/ BITS
BOX WRENCH (double open ended)
PHILLIPS SCREWDRIVER

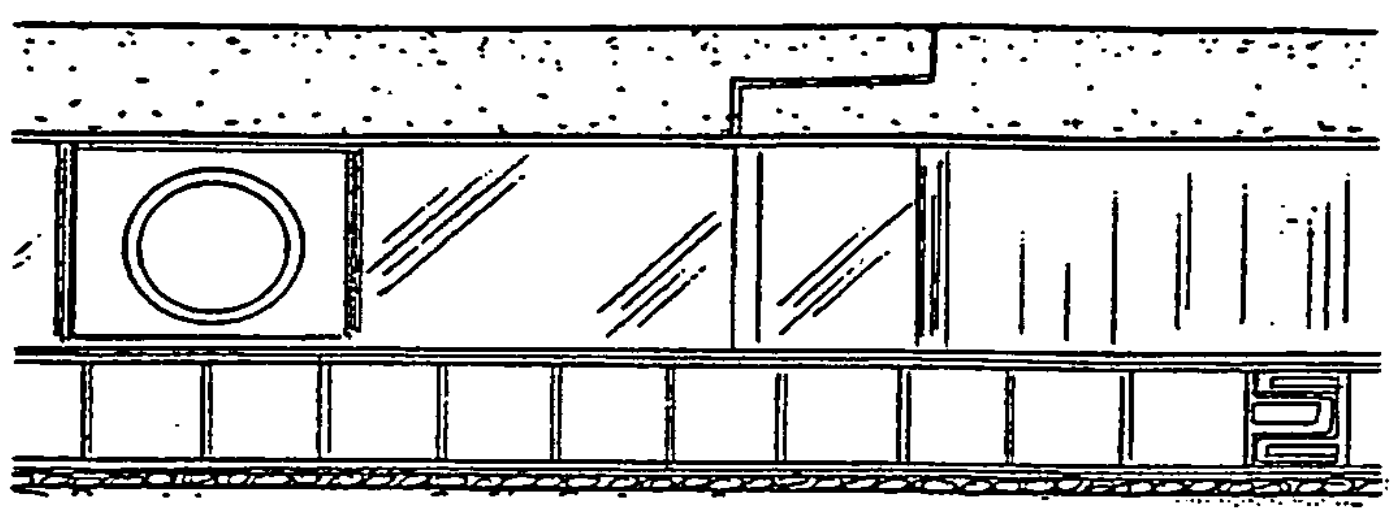
PHASE-CHANGE FLOORING
UTILITY SUB-FLOORING
BASE SUB-FLOORING
INSULATION BLANKET

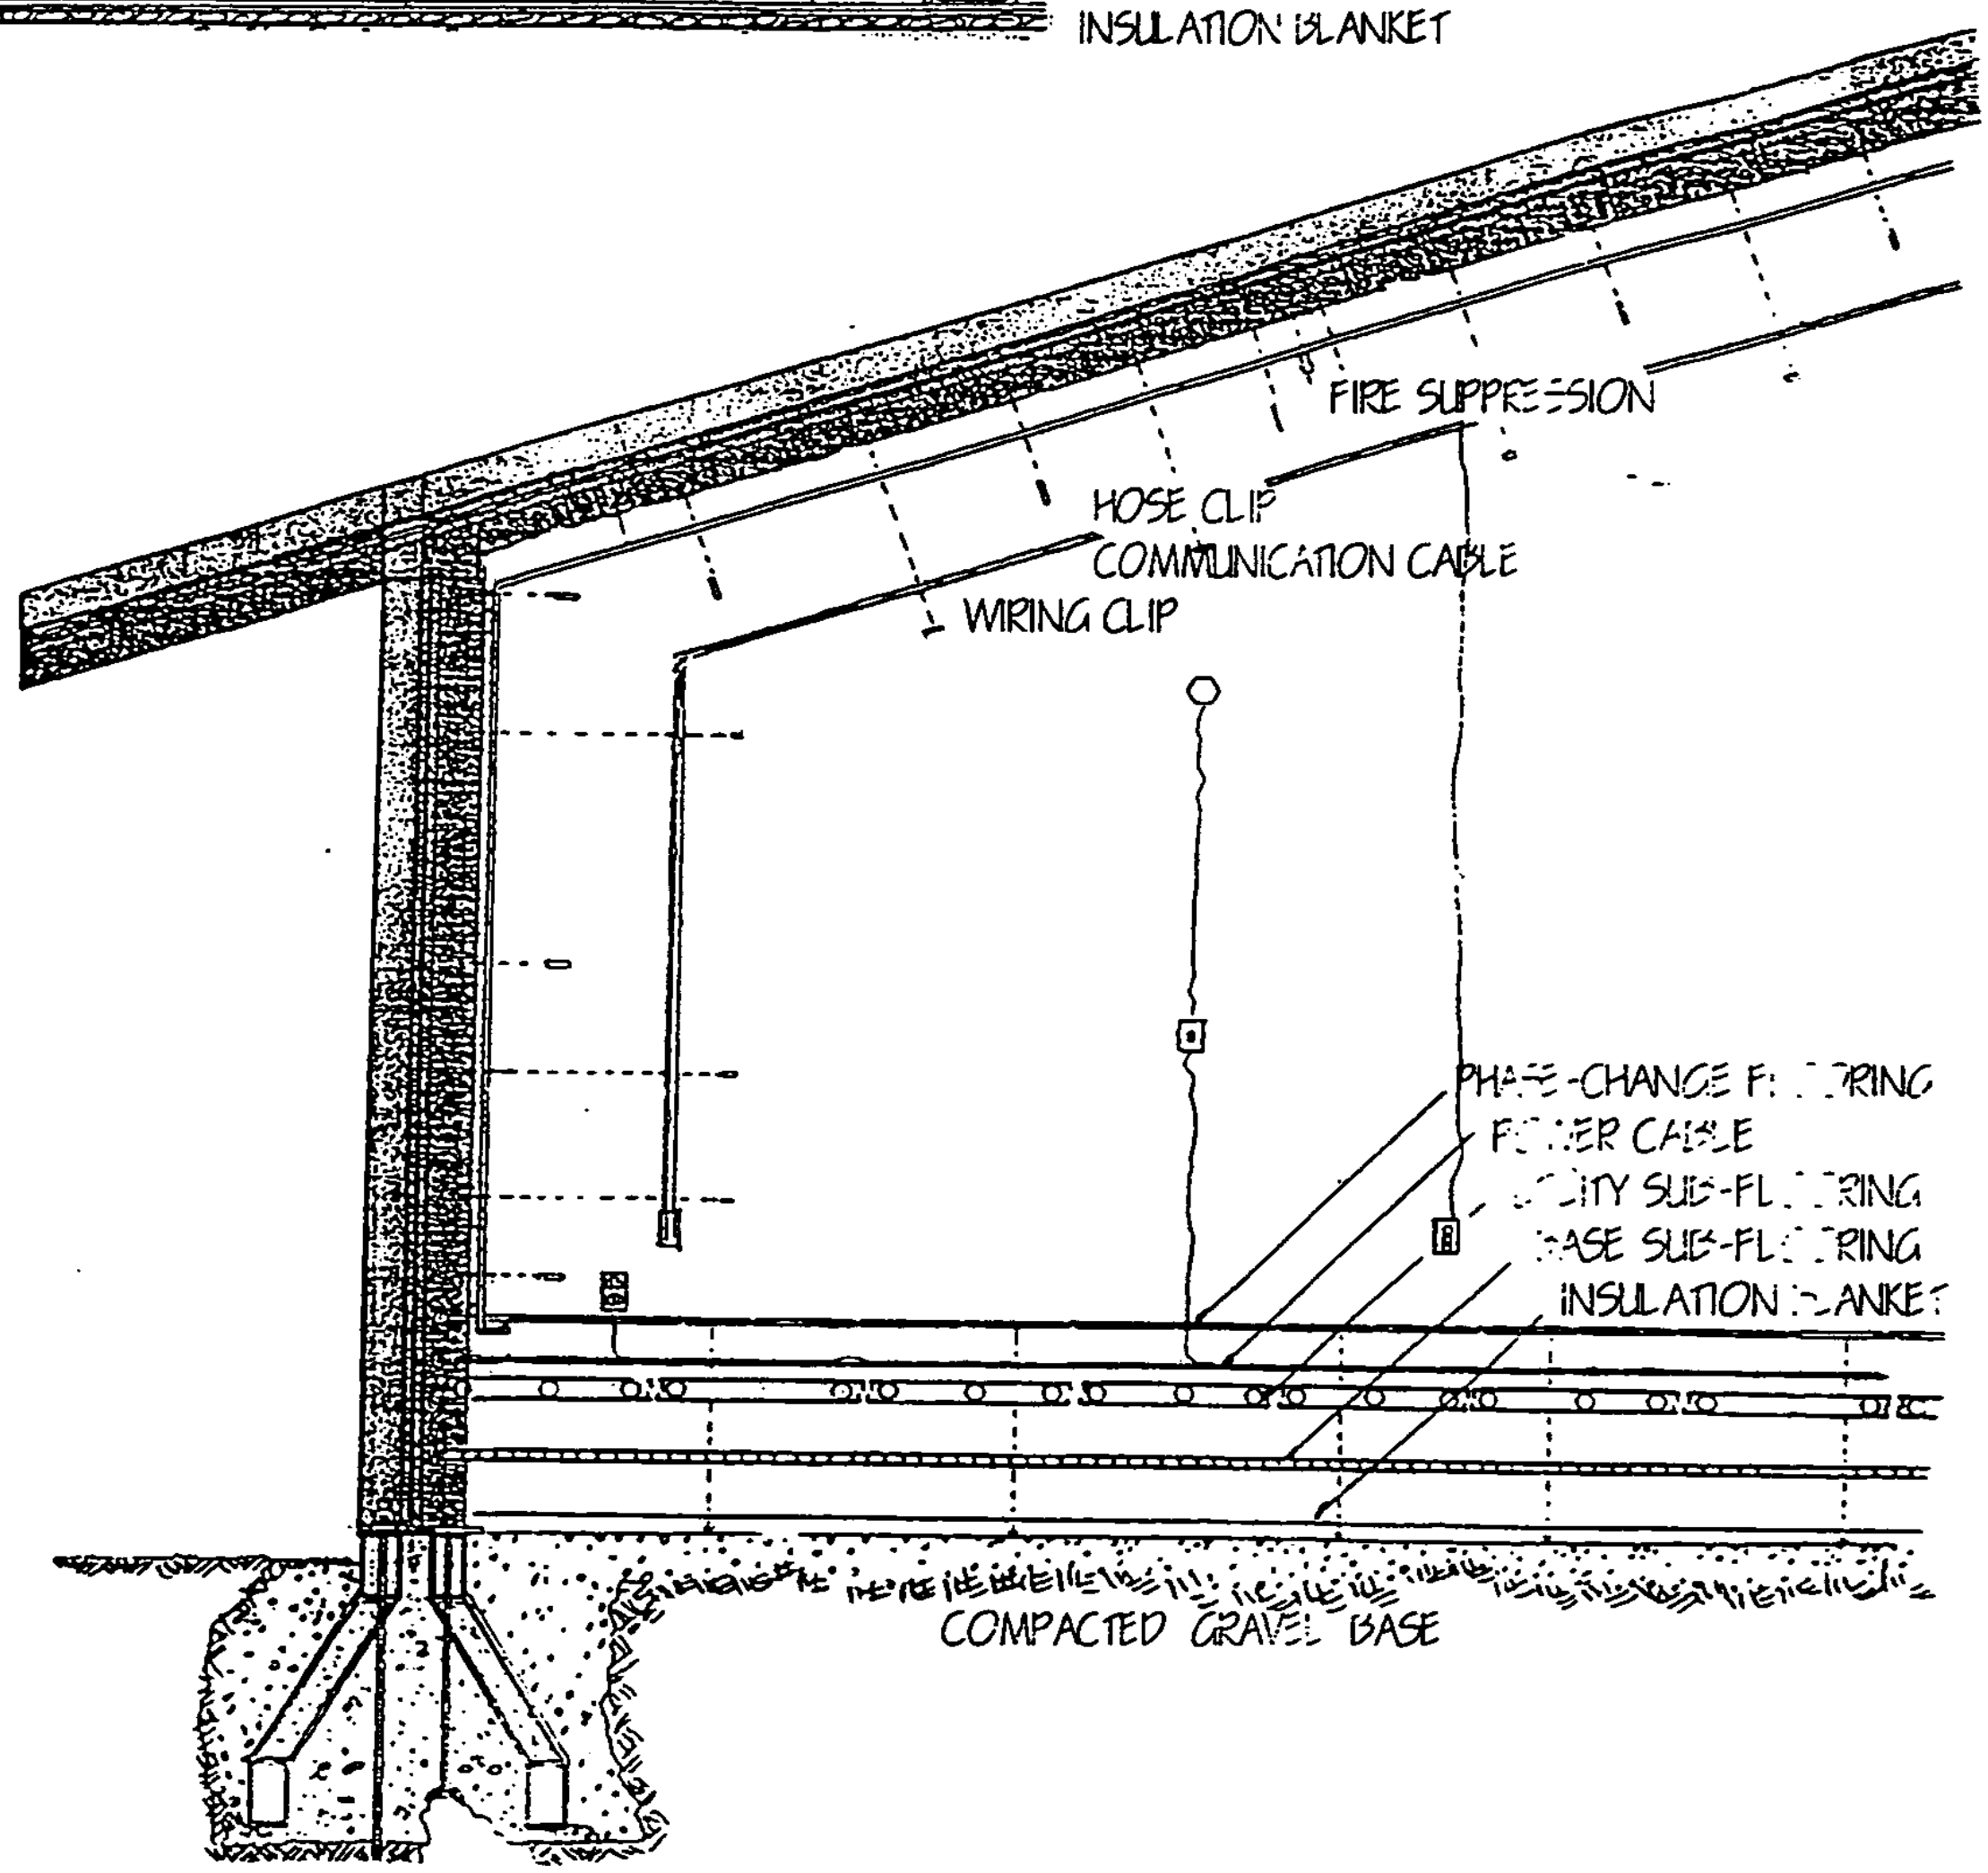
FIRE SUPPRESSION
HOSE CLIP
COMMUNICATION CABLE
WIRING CLIP
INSULATION
COMPACTED GRAVEL BASE

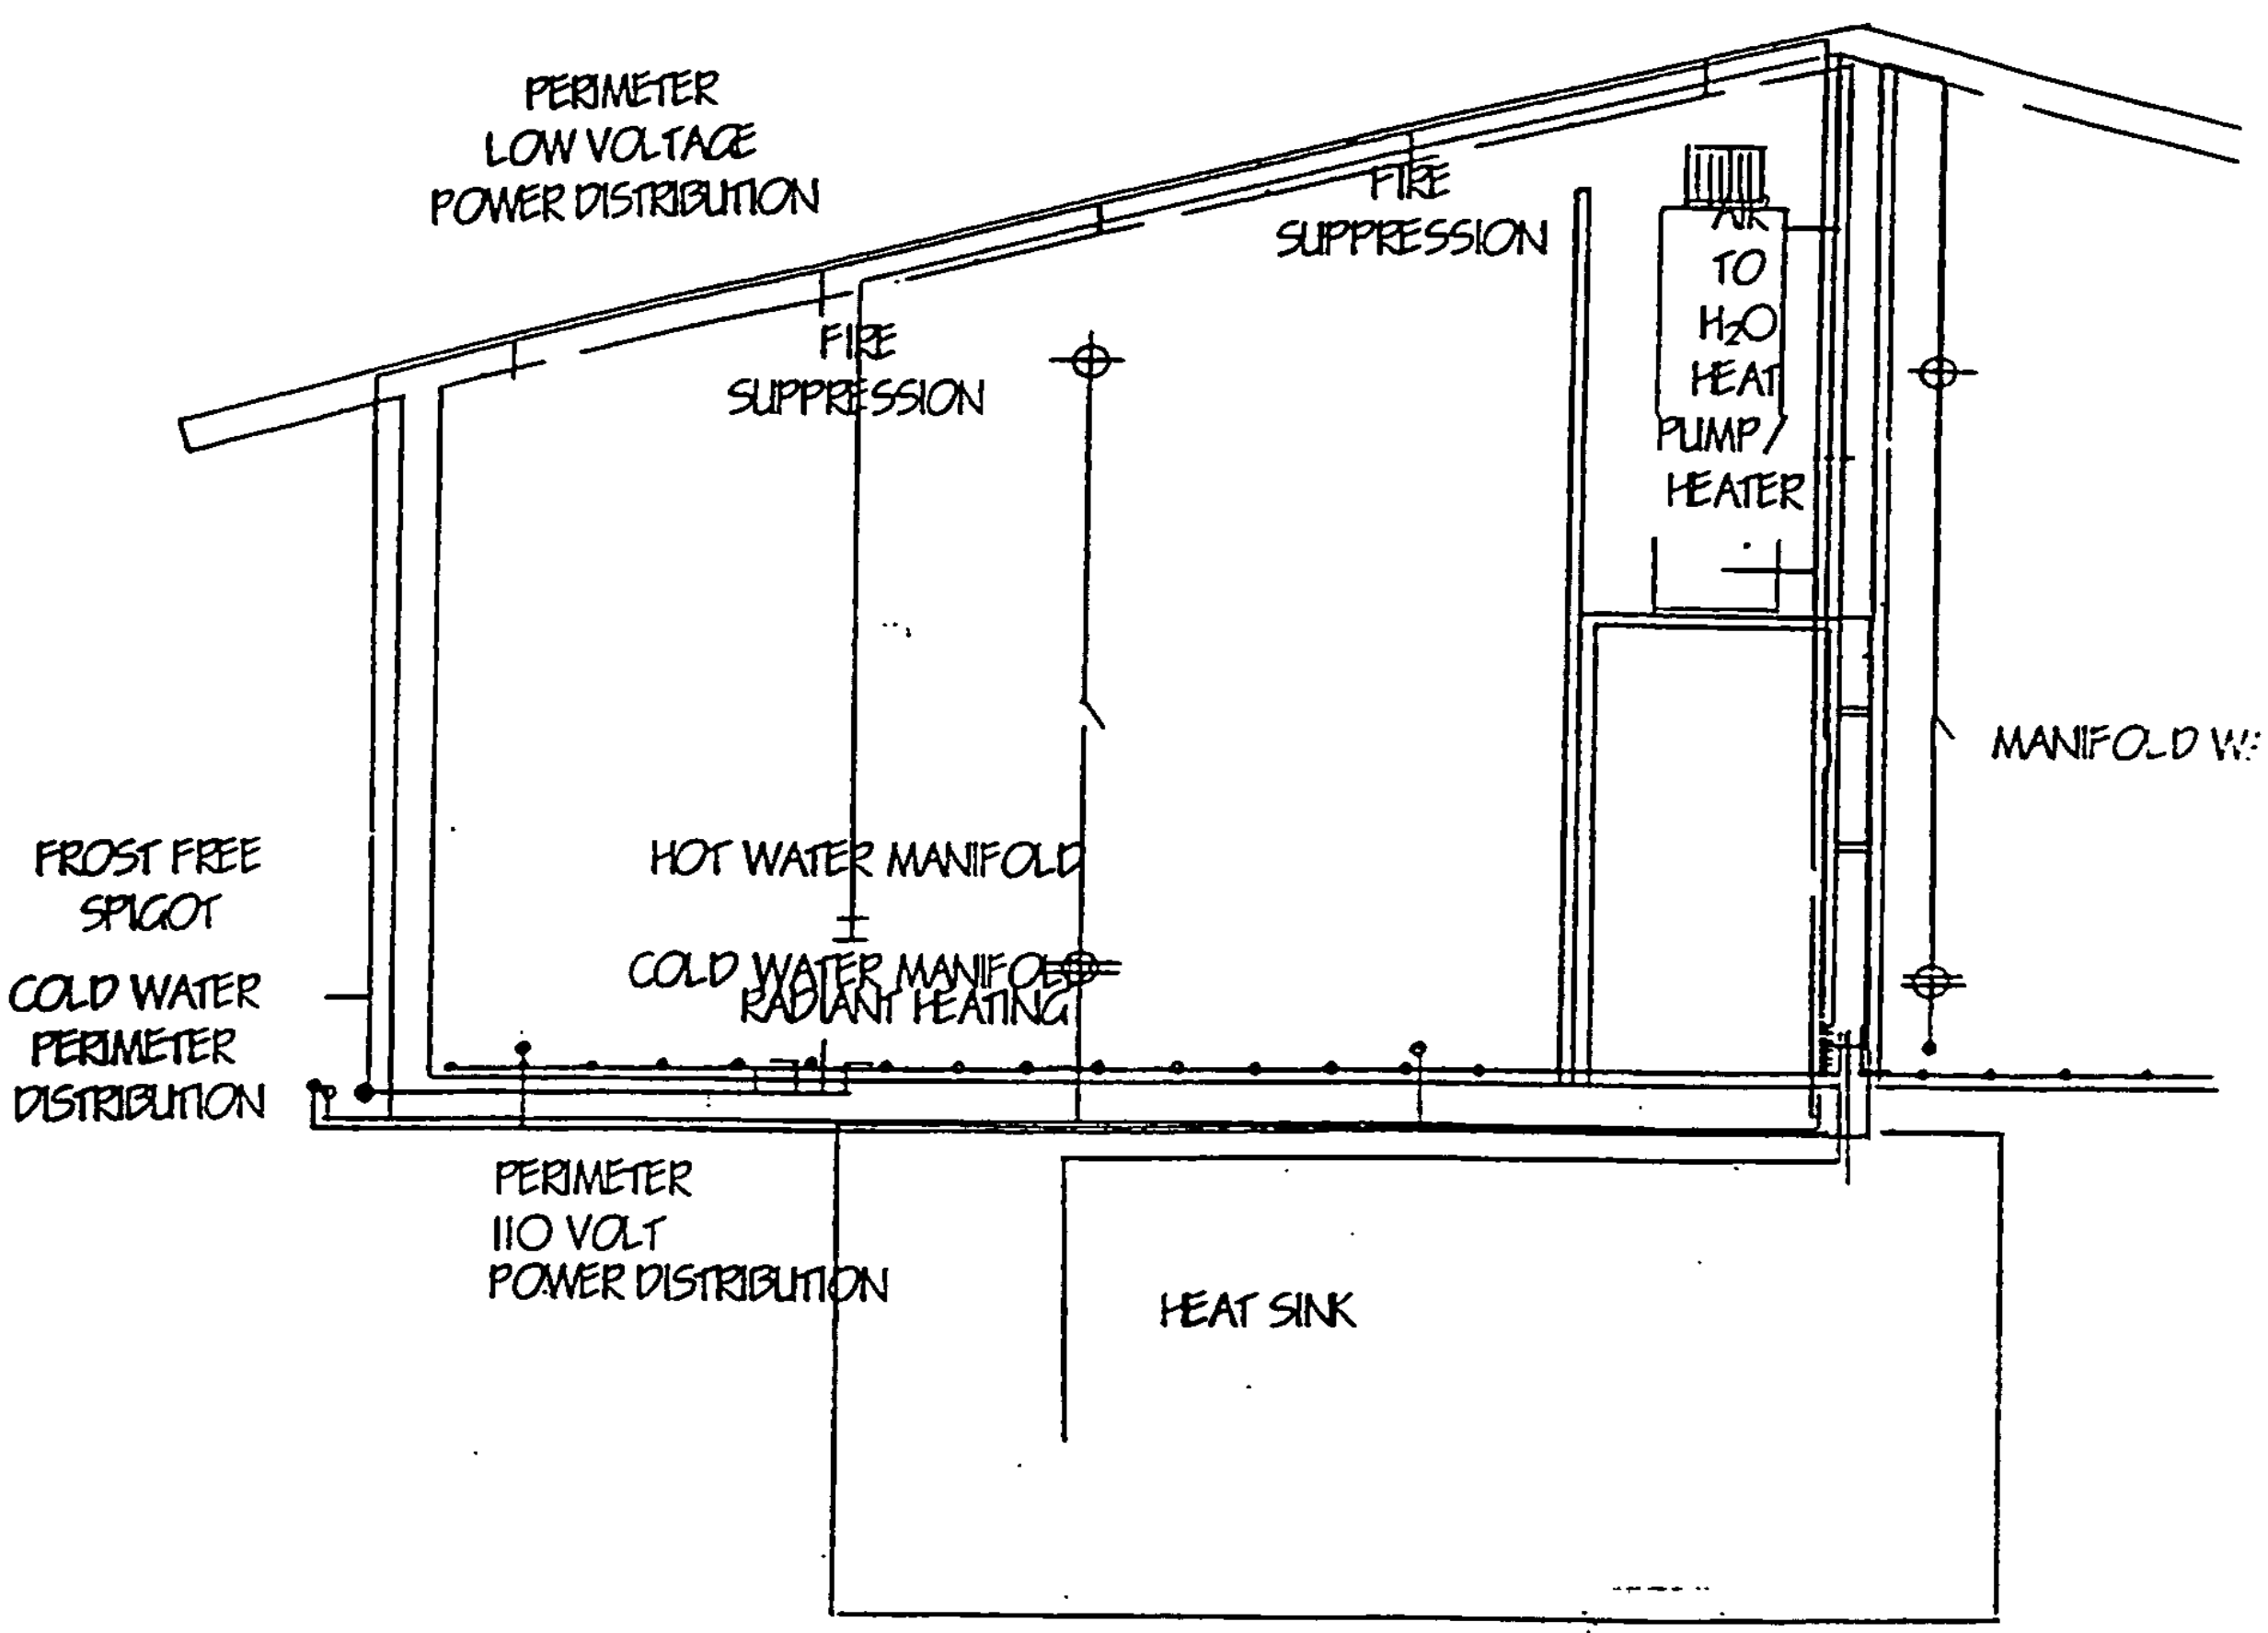
PERIMETER
LOW VOLTAGE
POWER DISTRIBUTION
FIRE
SUPPRESSION
FIRE
SUPPRESSION
AIR
TO
H_2O
HEAT
PUMP/
HEATER
MANIFOLD W
FROST FREE
SPIGOT
COLD WATER
PERIMETER
DISTRIBUTION
HOT WATER MANIFOLD
COLD WATER MANIFOLD
RADIANT HEATING
PERIMETER
110 VOLT
POWER DISTRIBUTION
HEAT SINK

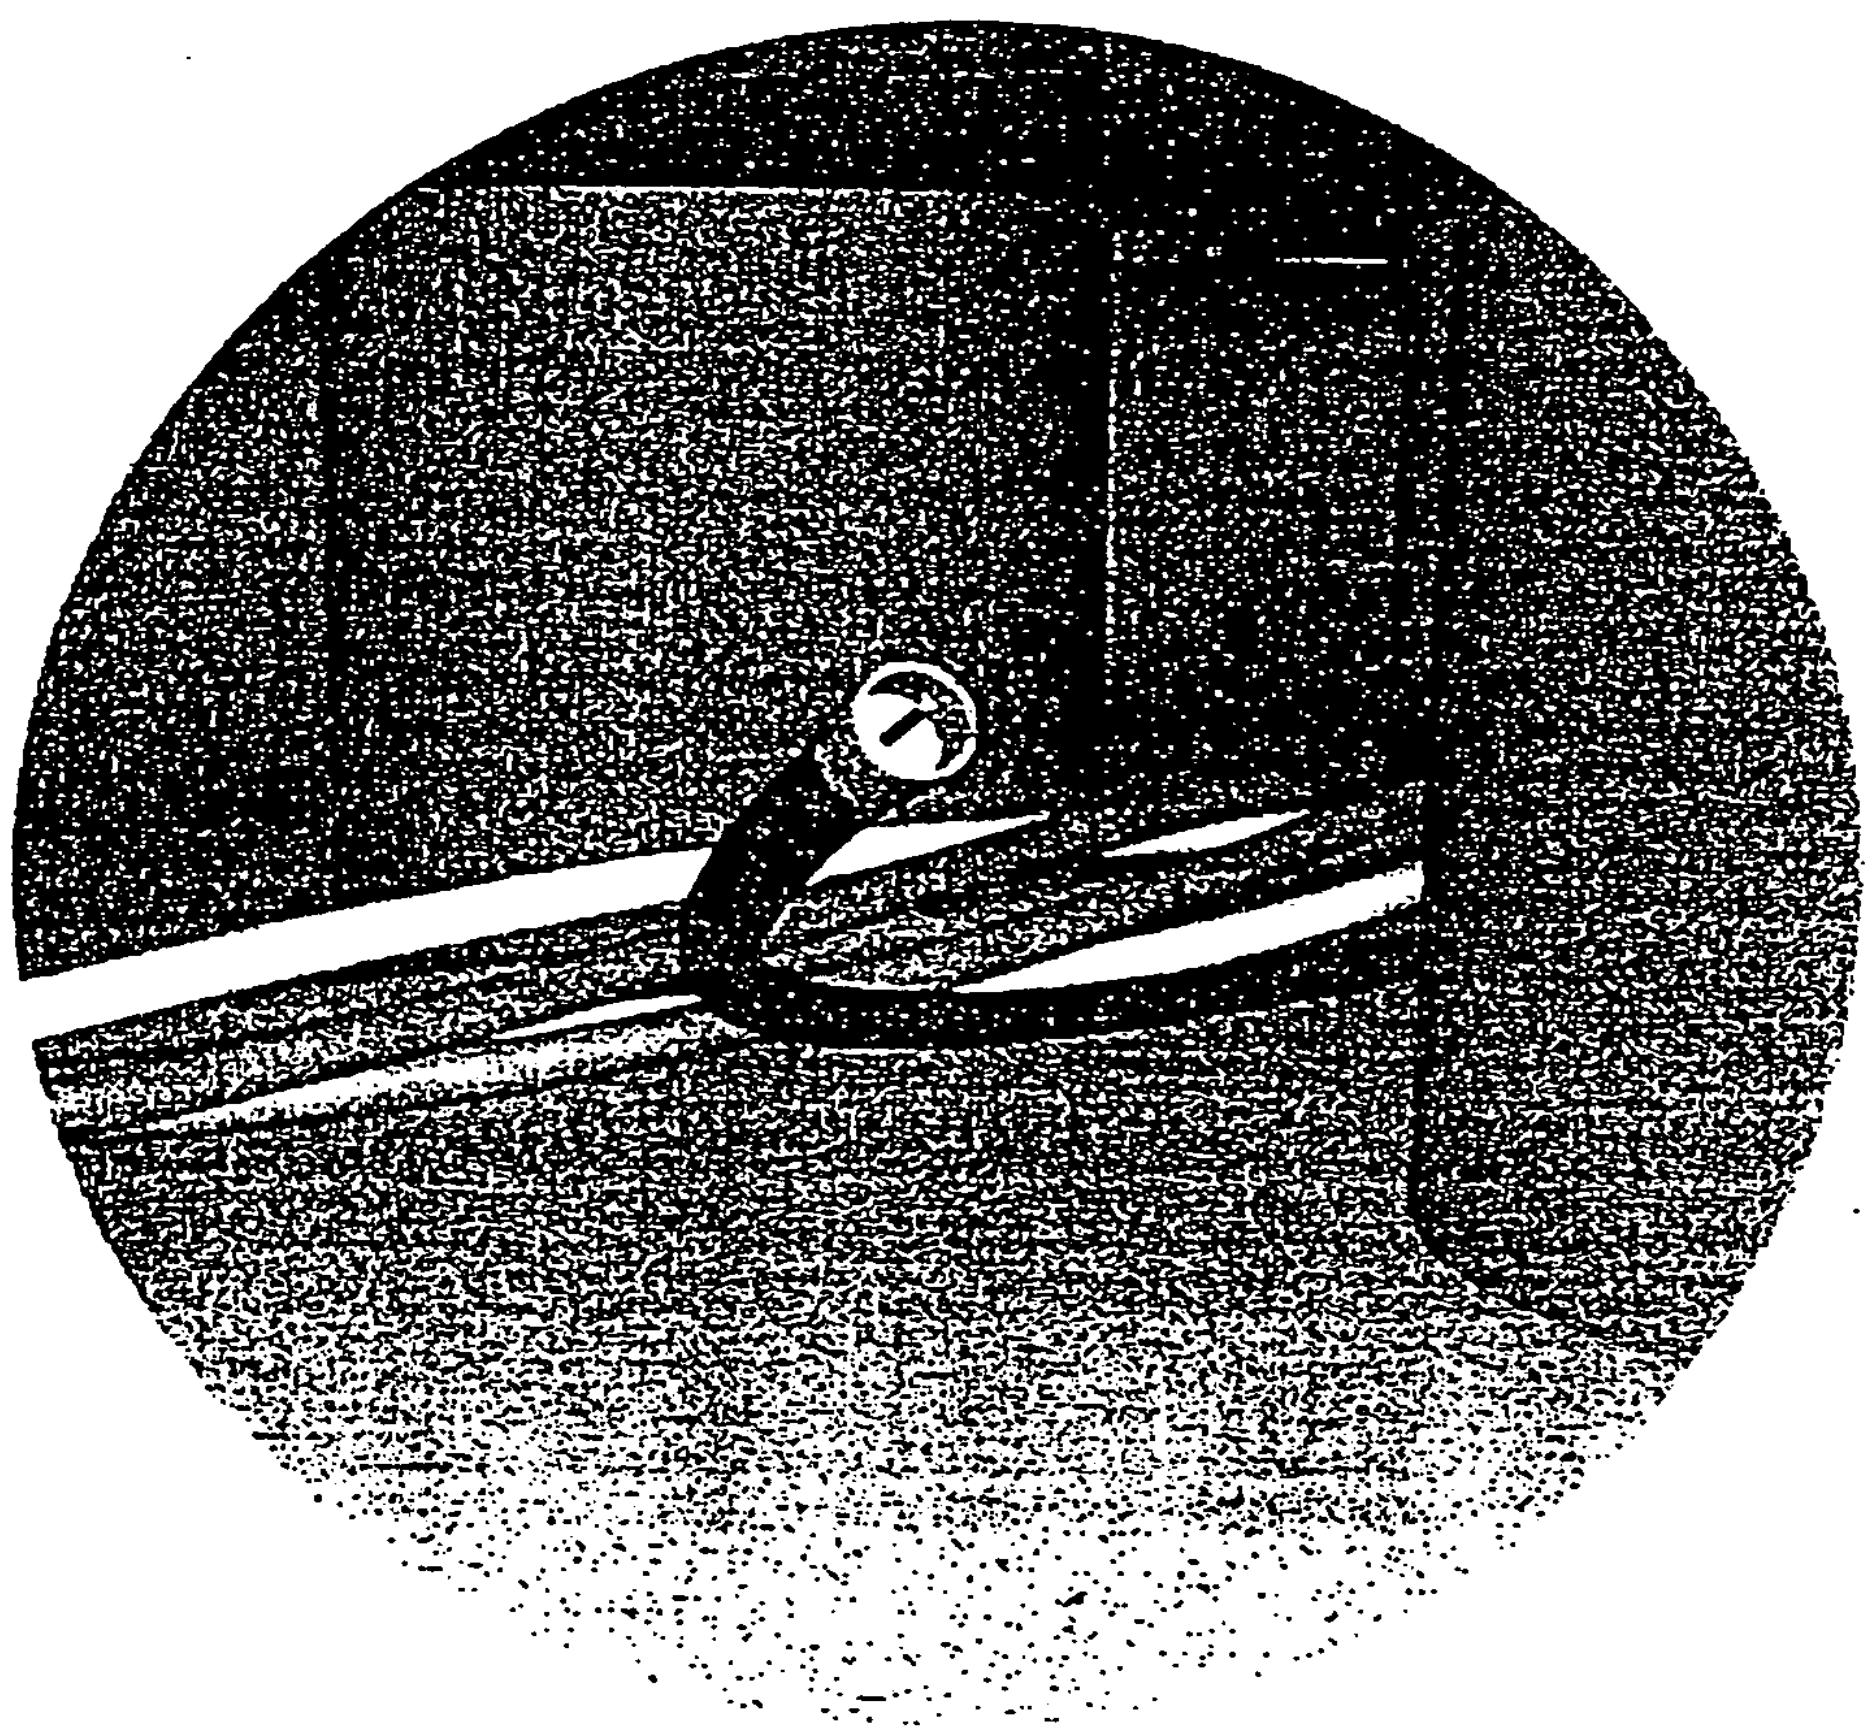

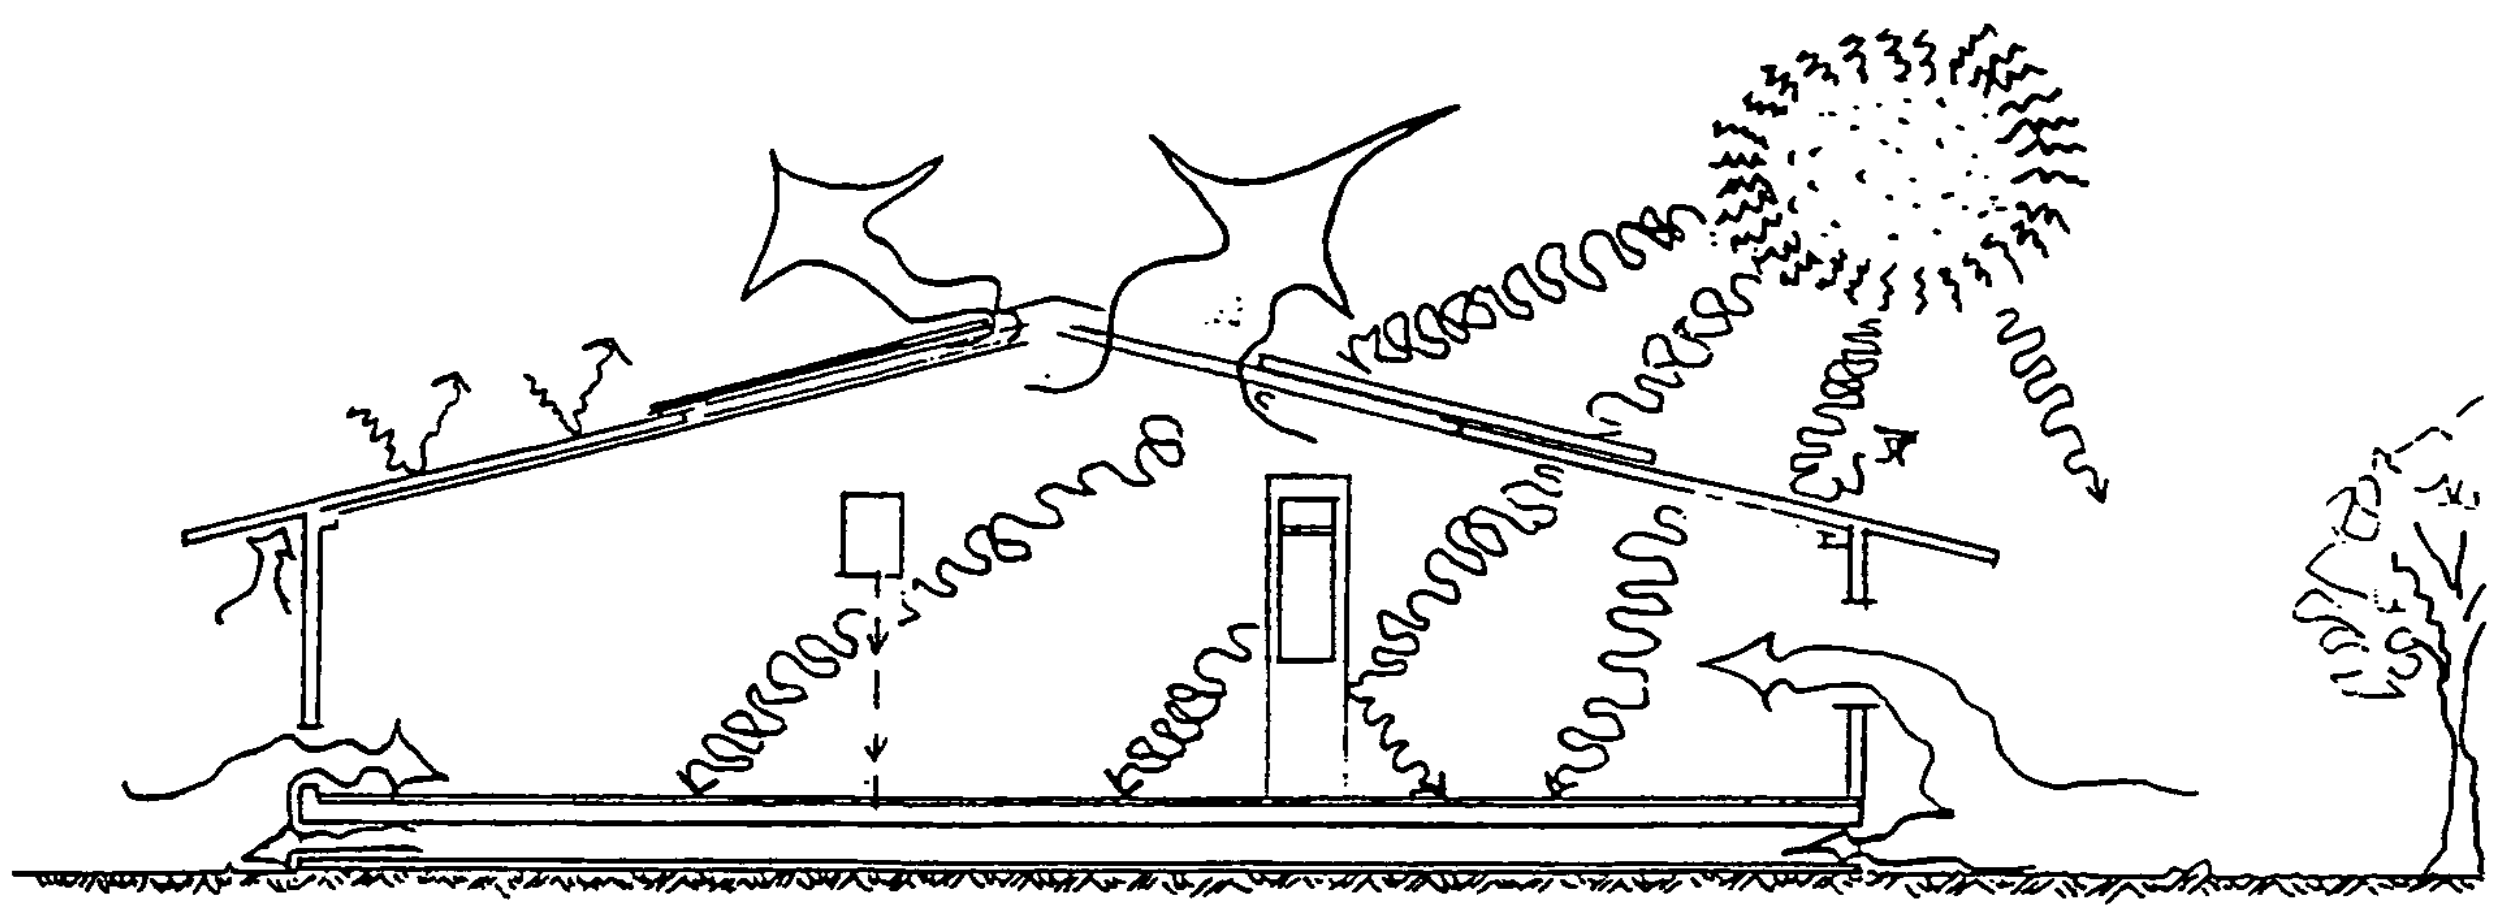

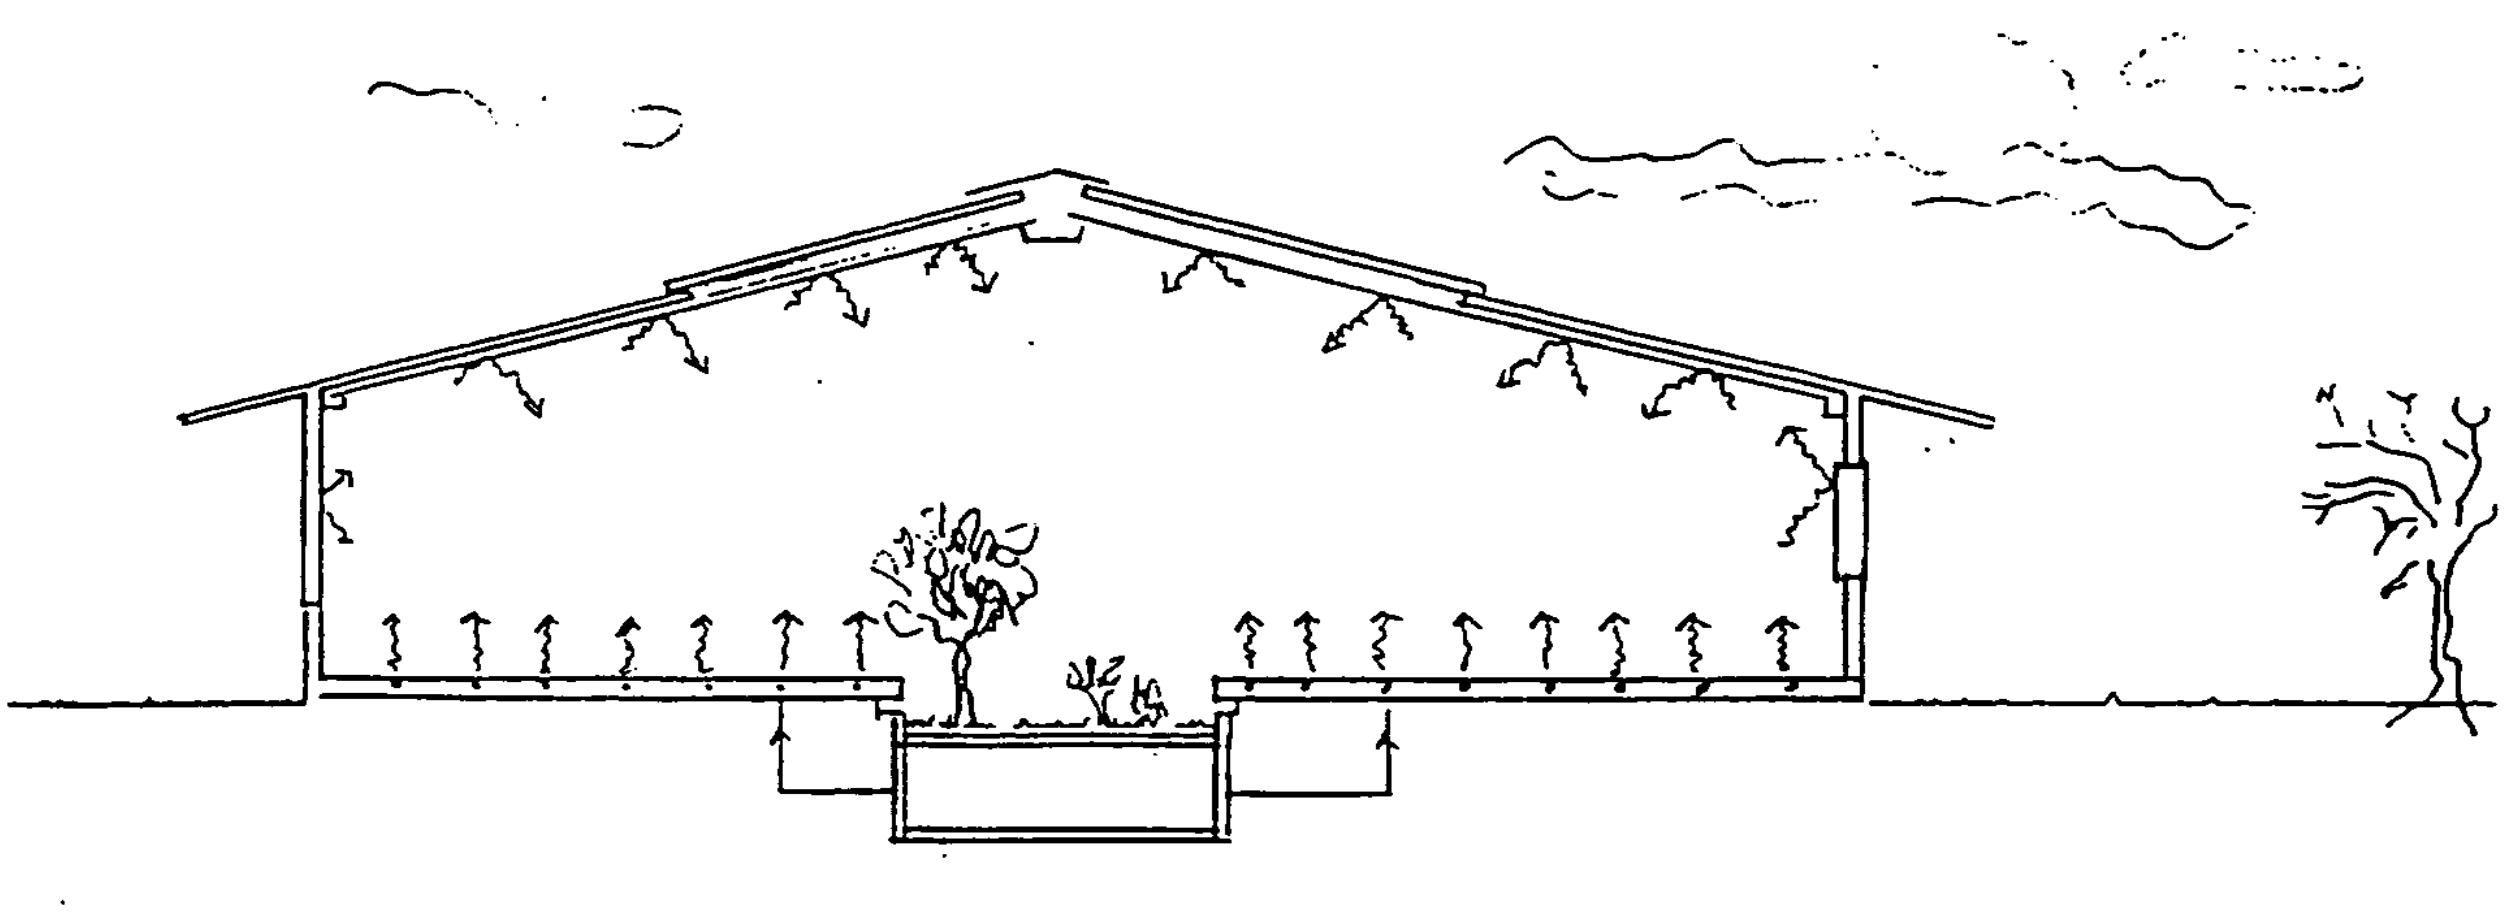

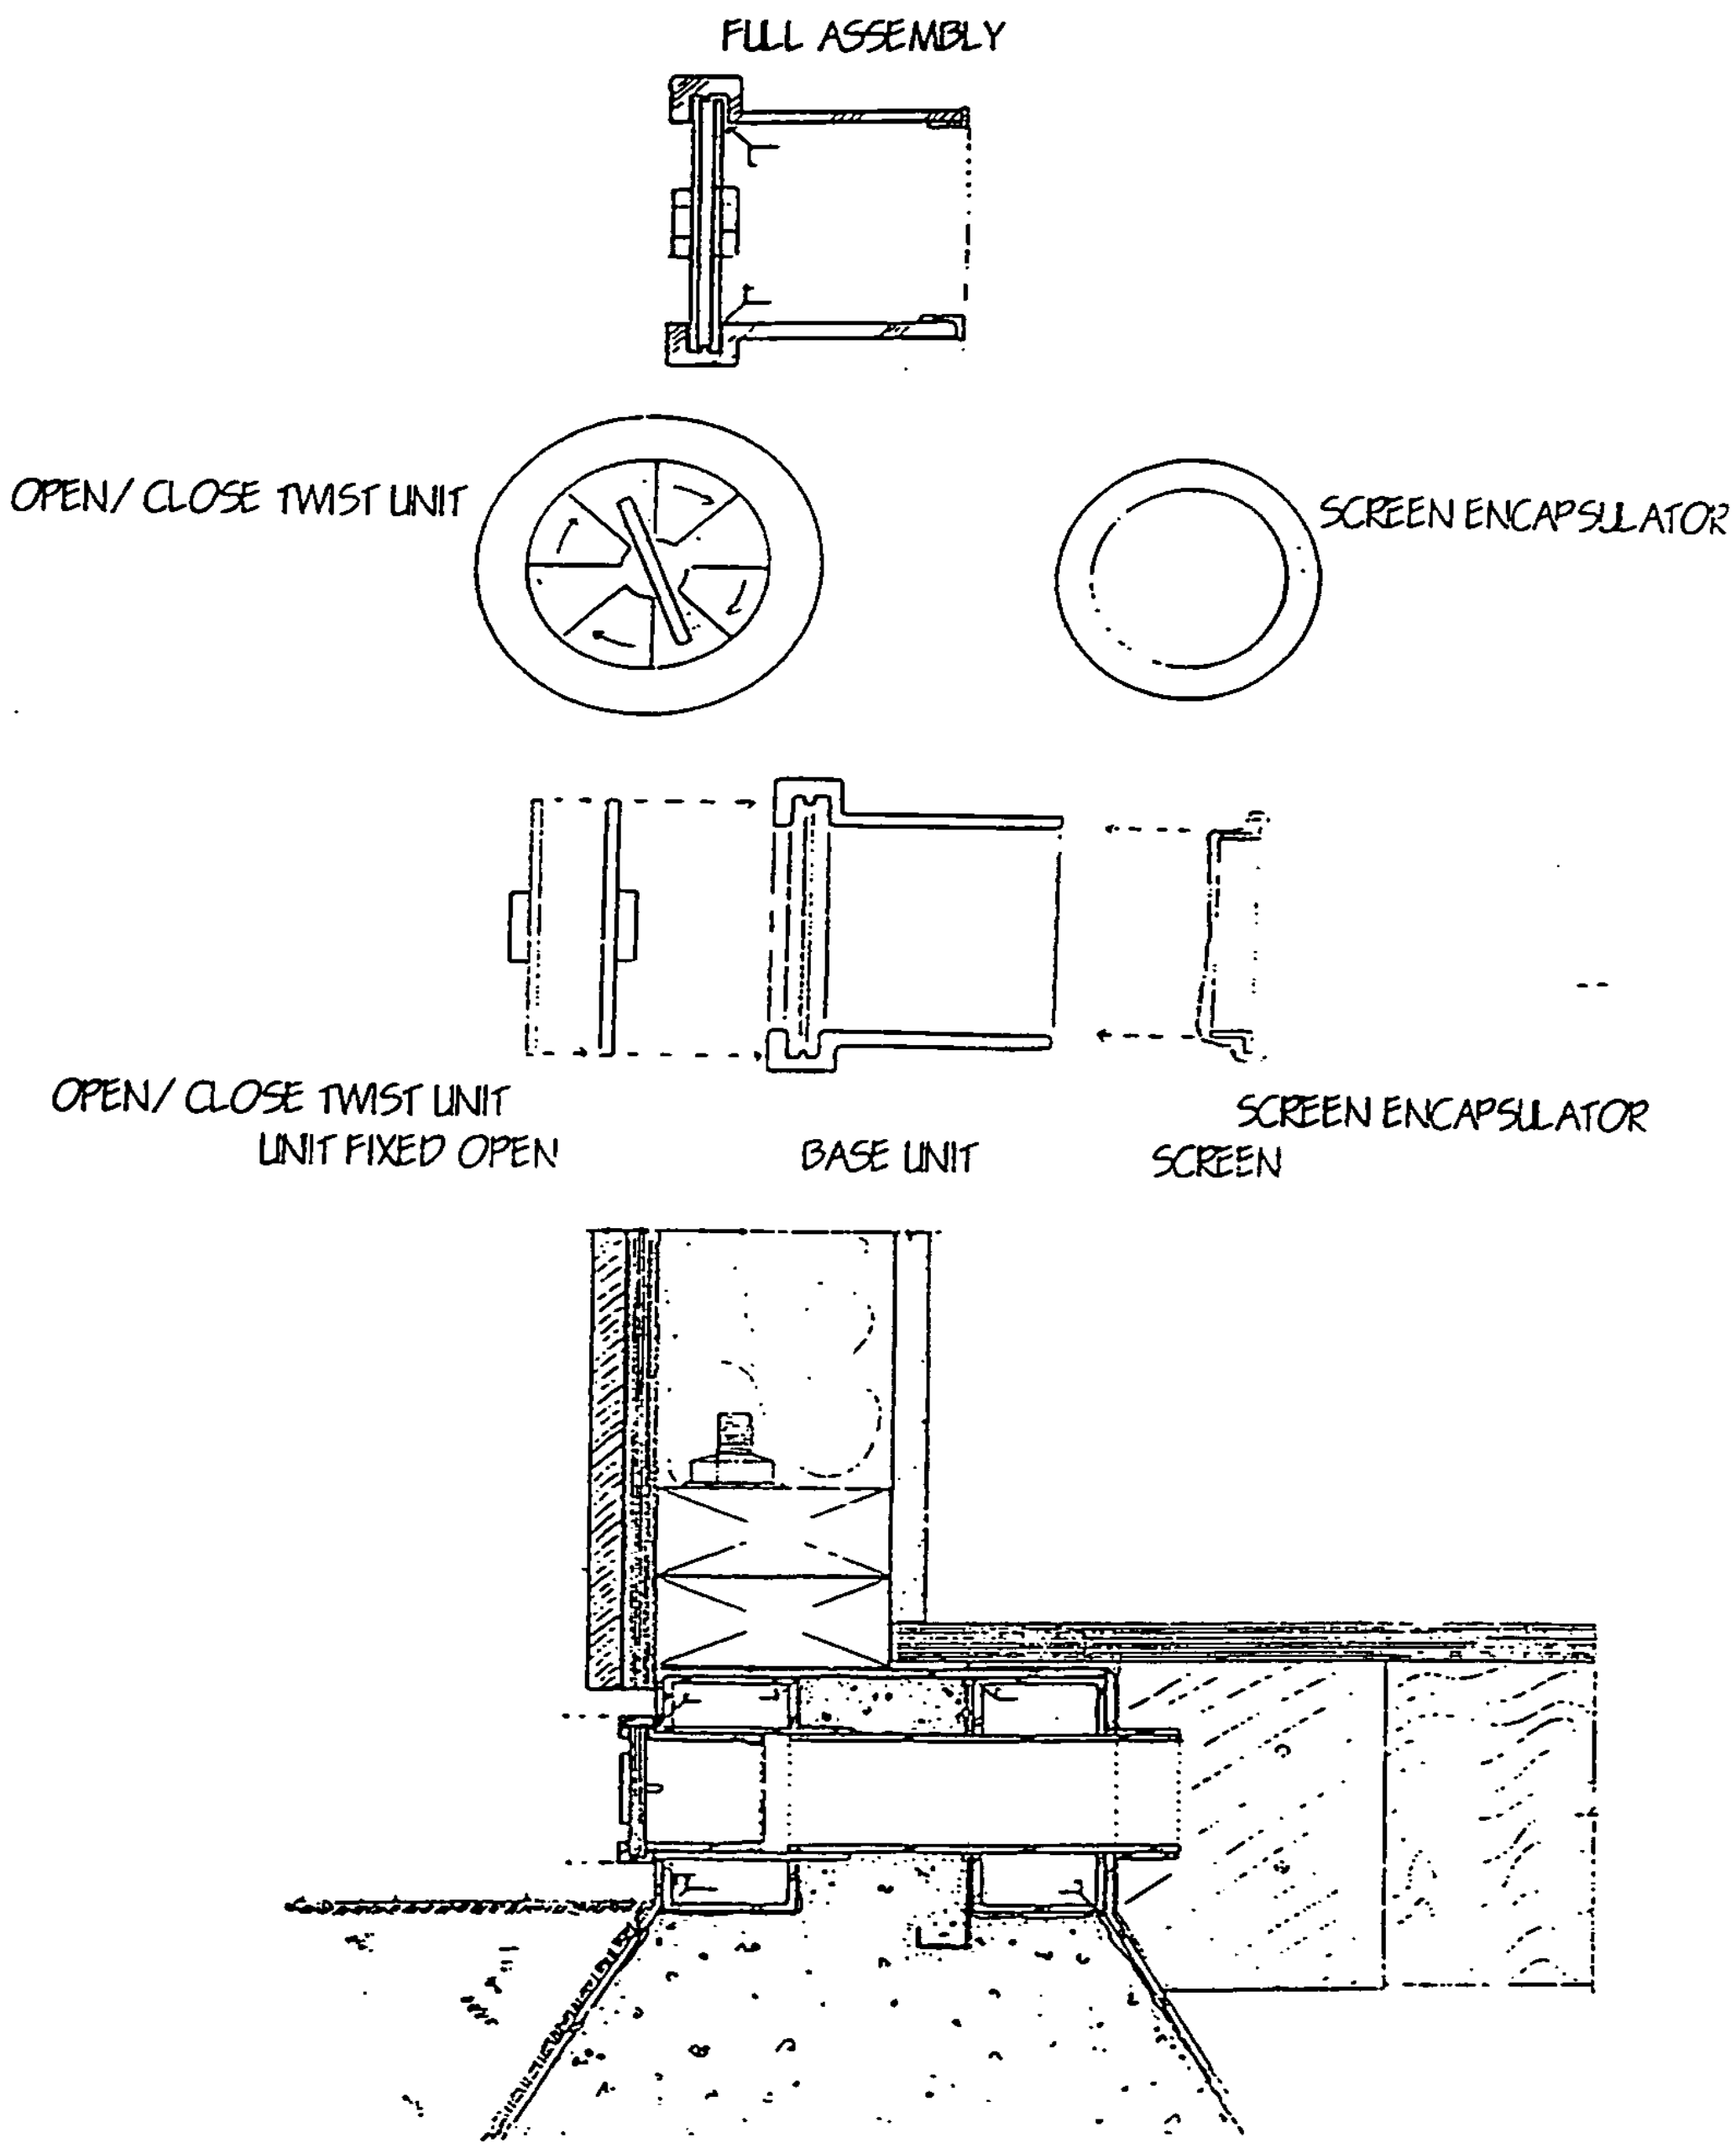
FULL ASSEMBLY
OPEN/ CLOSE TWIST UNIT
SCREEN ENCAPSULATOR
OPEN/ CLOSE TWIST UNIT
UNIT FIXED OPEN
BASE UNIT
SCREEN ENCAPSULATOR
SCREEN

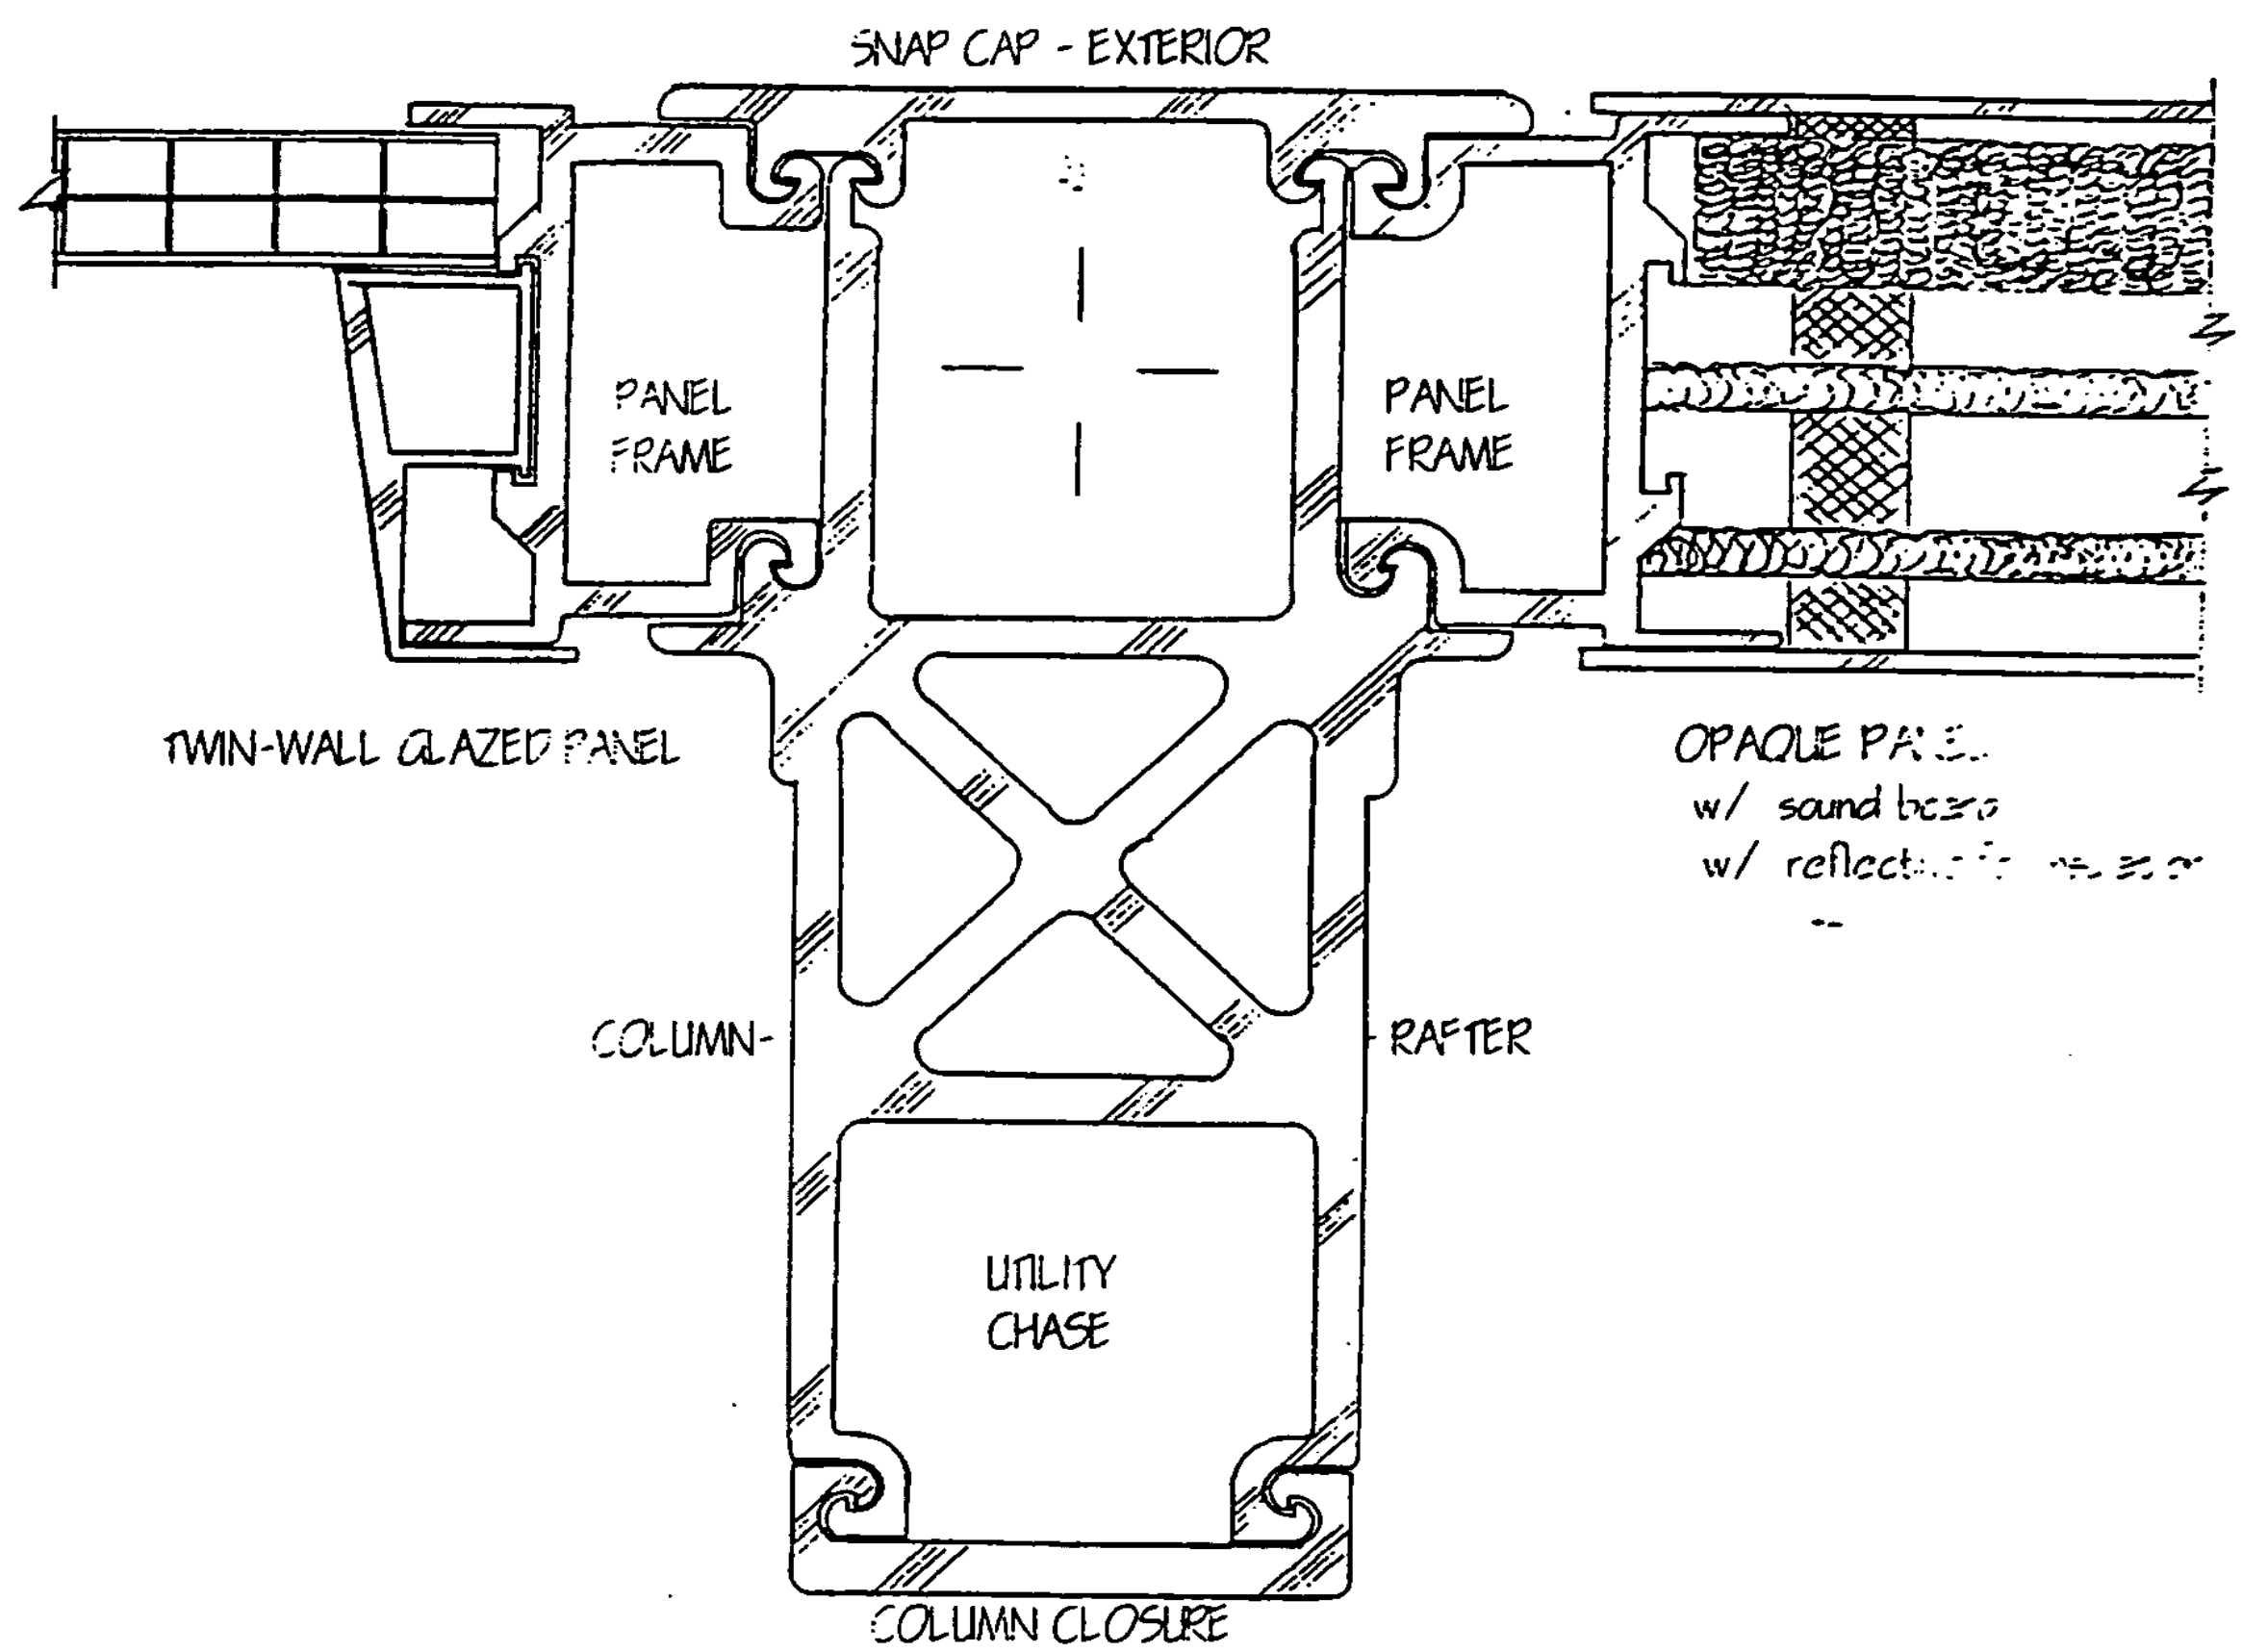
SNAP CAP - EXTERIOR
PANEL FRAME
PANEL FRAME
TWIN-WALL GLAZED PANEL
OPAQUE PA
w/ sound b
w/ reflect
COLUMN-
RAFTER
UTILITY CHASE
COLUMN CLOSURE

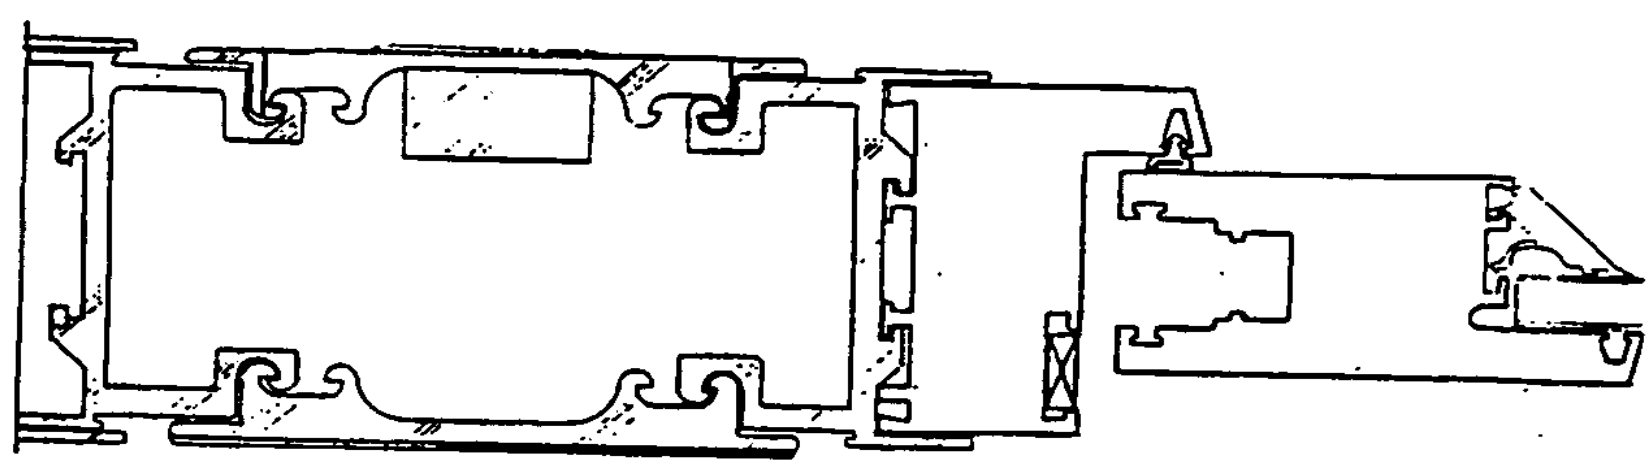

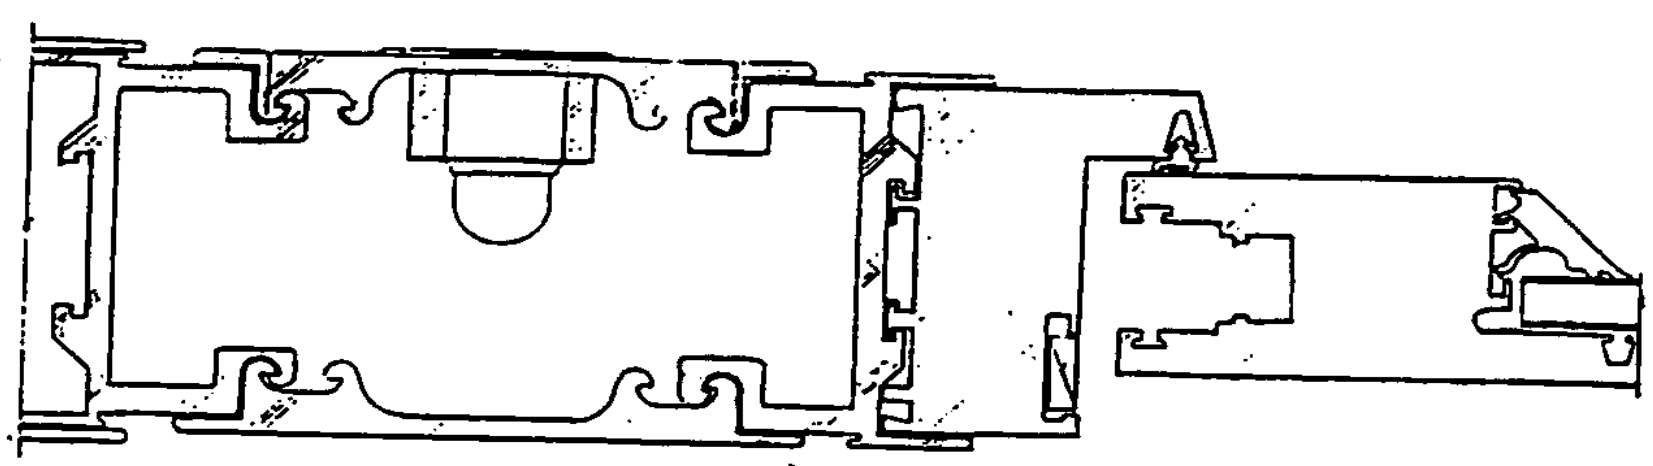

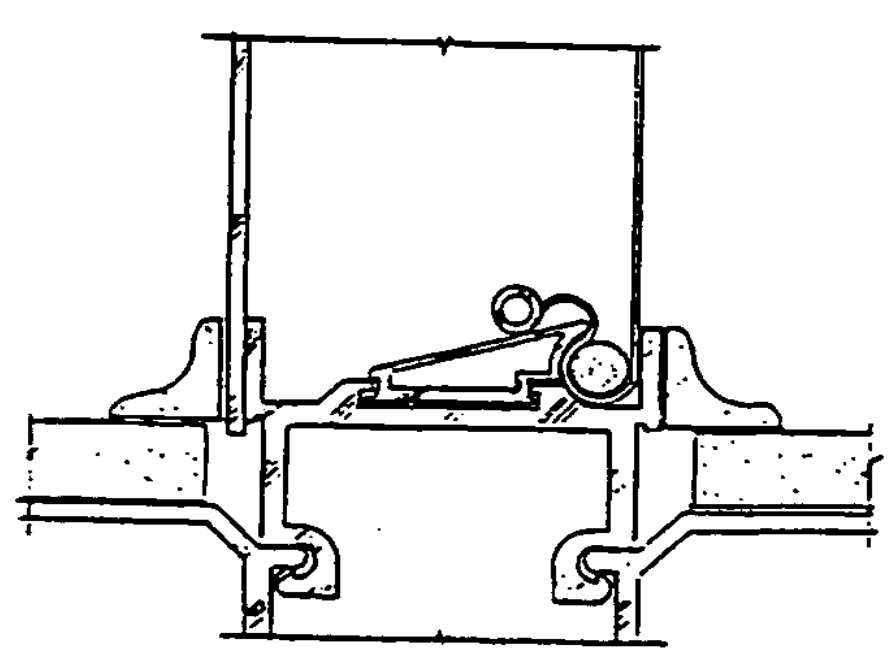

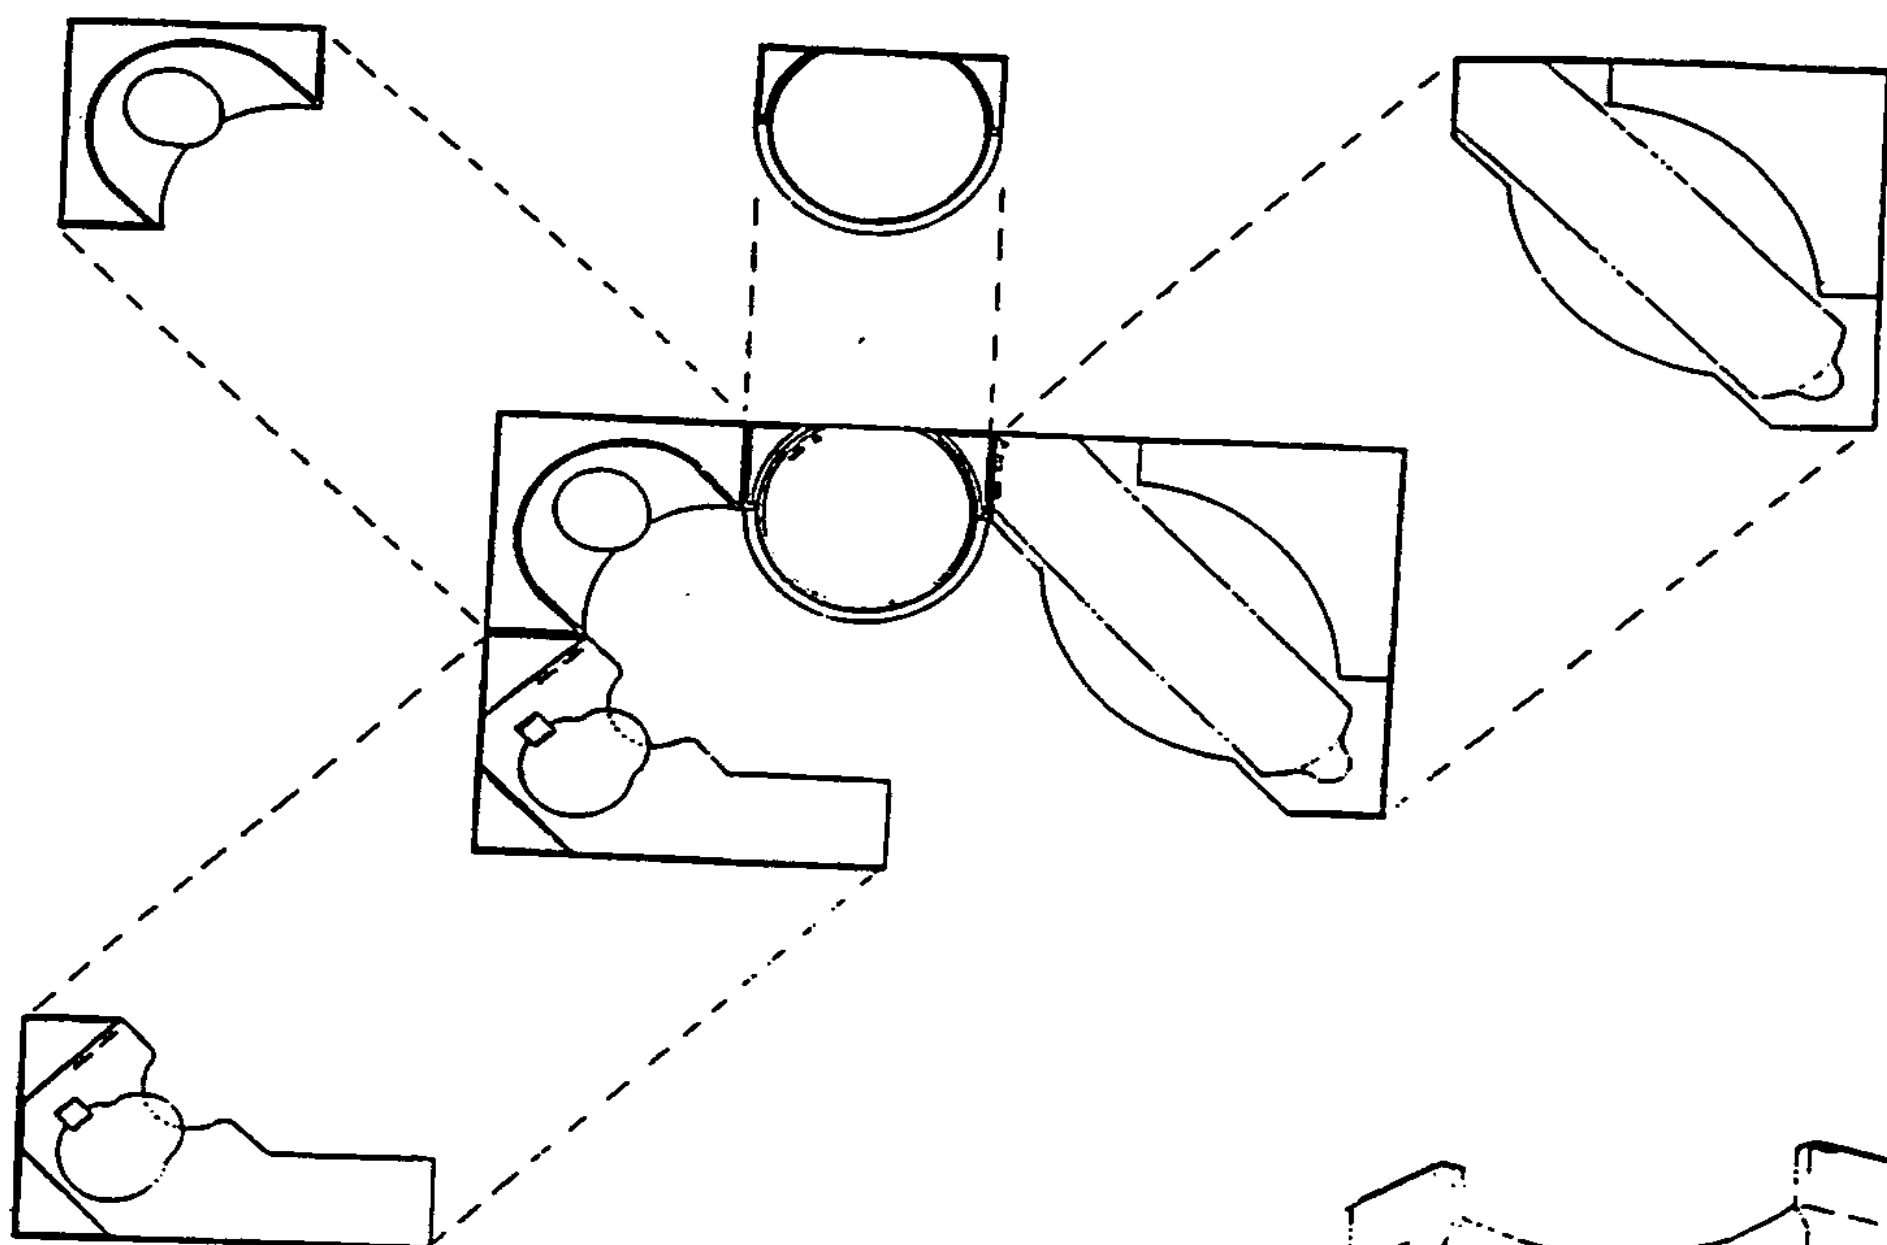

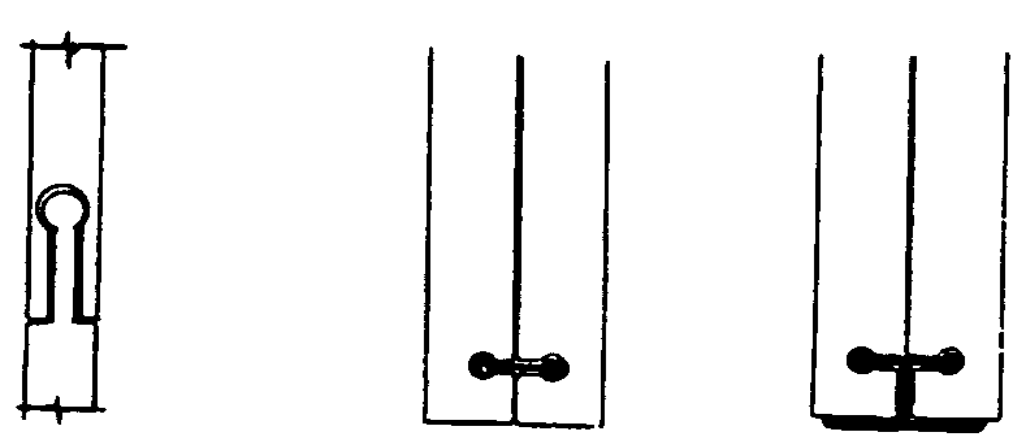

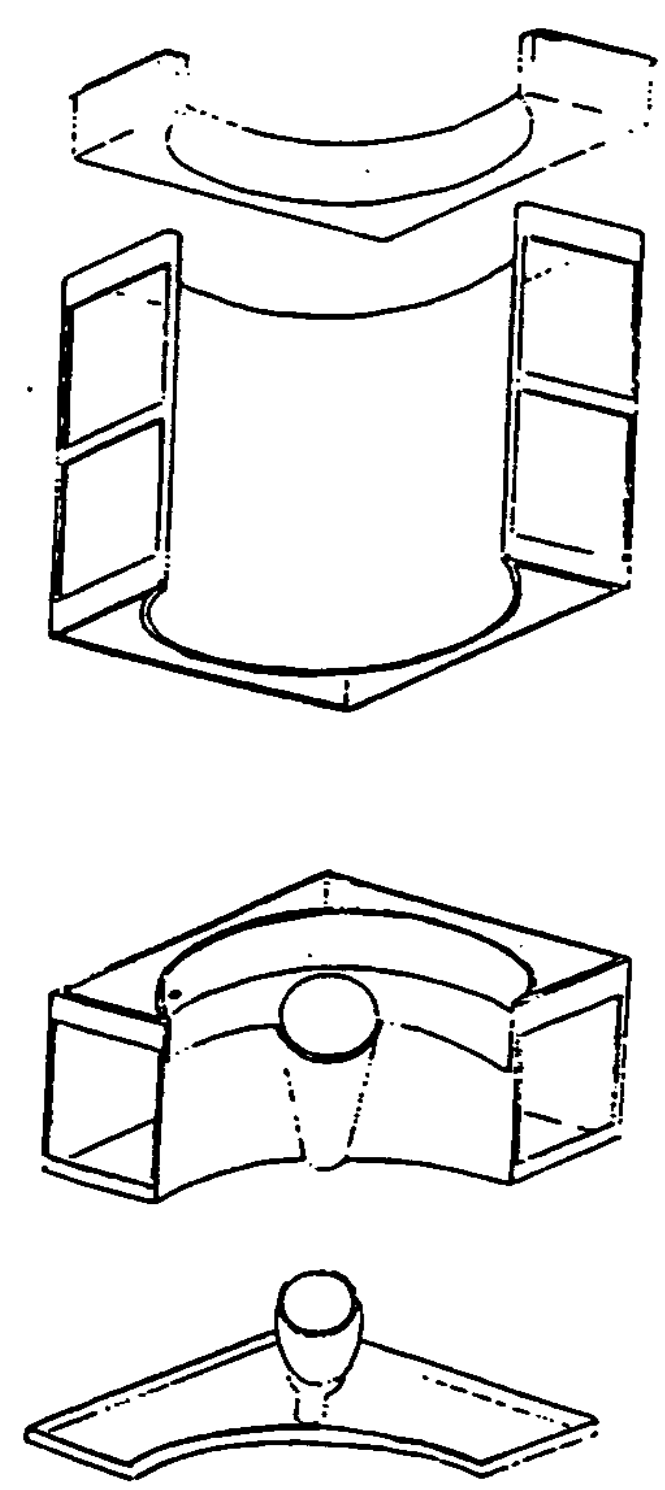

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/12795

A. CLASSIFICATION OF SUBJECT MATTER
IPC(7) :E04B 1/343
US CL :52/1, 64, 573.1
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
U.S. : 52/1, 64, 65, 67, 68, 69, 173.1, 573.1

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
NONE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 1,605,513 A (CONNERY) 02 November 1926, Figs. 5-8.	1-26
Y	US 3,812,631 A (CRUSE) 28 May 1974, Fig. 1.	1-26
Y	US 3,998,016 A (TING) 21 December 1976, Figs. 1, 8, and 26.	1-26
Y	US 4,688,364 A (FIEHLER) 25 August 1987, Fig. 1.	1-26
Y	US 5,129,204 A (PALUMBO) 14 July 1992, Figs. 1-4.	1-26
Y	US 5,640,823 A (BERGERON et al.) 24 June 1997, Figs. 2 and 3.	1-26

[X] Further documents are listed in the continuation of Box C. [ ] See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" documen of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search
02 OCTOBER 2000

Date of mailing of the international search report
24 OCT 2000

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231
Facsimile No. (703) 305-3230

Authorized officer
MICHAEL SAFAVI
Telephone No. (703) 308-2168

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/12795

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,743,063 A (BOOZER) 28 April 1998, Figs. 2-8, 14, and 16.	1-26